



# MAINTENANCE MANUAL 406-512 MHz RF ASSEMBLY 19D417075G9-G16 AND IF FILTER BOARD 19C320523G2

LB130032F  
(DF1107)  
(DF1118)  
(1M15)

## TABLE OF CONTENTS

DESCRIPTION .....	Page
DESCRIPTION .....	1
CIRCUIT ANALYSIS .....	1
OUTLINE DIAGRAM .....	2
SCHEMATIC DIAGRAMS	
RF Assembly .....	3
IF Filter Board .....	4
PARTS LIST AND PRODUCTION CHANGES .....	5 - 6

## DESCRIPTION

The RF Assembly uses five tuned helical resonators to provide front end RF selectivity with no gain. A UHS pre-amplifier assembly is available that can be used with the receiver to improve sensitivity.

Mixer board A303 uses the RF signal from the RF Assembly and the mixer injection frequency from the oscillator multiplier board to generate the IF frequency.

relatively free of harmonics (low in inter-modulation products).

In the mixer stage, RF from the helical resonators is coupled through L1 & C2 which matches the RF output to the gate of mixer Q501. Injection voltage from the multiplier-selectivity stages is applied to the source of the mixer. The 11.2 MHz mixer IF output signal is coupled from the drain of Q1 through Cable W1 to J501 on the IF Filter board.

### IF-FILTER

#### CRYSTAL FILTER

The output of A303-Q1 is coupled through a tuned circuit (L507 & C515) which matches the output to the input of the four-pole monolithic crystal filter. The highly-selective crystal filter (FL501 & FL502) provides the first portion of the receiver IF selectivity. The output of the filter is coupled through impedance-matching network L503 and C511 to the IF amplifier.

**Service Note:** Variable capacitor C504 does not require adjustment when performing normal alignment. If the four-pole monolithic crystal filter is replaced, then adjustment of C504 is necessary for optimum IF response.

#### IF AMPLIFIER

If Amplifier Q501 is a dual-gate FET. The filter output is applied to Gate 1 of the amplifier, and the output is taken from the drain. The biasing on Gate 2 and the drain load determines the gain of the stage. The amplifier provides approximately 20 dB of IF gain. The output of Q501 is coupled through a network (L504 & C509) that matches the amplifier output to the crystal filter on the IFAS board. The output of the IF-Filter board is applied to the IFAS board through feed-through capacitor C325.

Supply voltage for the RF amplifier and IF-Filter board is supplied from the IFAS board through feed-through capacitor C326.

## CIRCUIT ANALYSIS

### RF ASSEMBLY

#### PRE-AMPLIFIER

The pre-amplifier is present only in UHS receivers, and uses a bi-polar transistor to provide approximately 10 dB gain.

RF from the antenna is link-coupled through helical resonator L2301 to the base of Class A pre-amplifier Q2301. L2301 matches the 50 ohm input to the base of Q2301. The amplified output is coupled through L2302, and connected through W2301 to J1 on Antenna Input Board A301. P2301 connects to J502 on the IF-Filter Board for regulated +10 Volt supply voltage.

#### ANTENNA INPUT A301A/A301B

An RF signal from the antenna or UHS pre-amplifier is applied to A301 which provides an AC ground between vehicle ground and receiver A-. Resistor R1 prevents a static charge from building up on the vehicle antenna. The output of A301 is coupled through five high Q helical resonators that provide the front end RF selectivity. The helicals are tuned to the incoming frequency by C301 through C305.

#### MIXER A304


The mixer uses a FET (Q1) as the active device. The FET mixer provides a high input impedance, high power gain and an output

GENERAL ELECTRIC COMPANY • MOBILE COMMUNICATIONS DIVISION  
WORLD HEADQUARTERS • LYNCHBURG, VIRGINIA 24502 U.S.A.


**GENERAL ELECTRIC**



RF ASSEMBLY  
BOTTOM VIEW

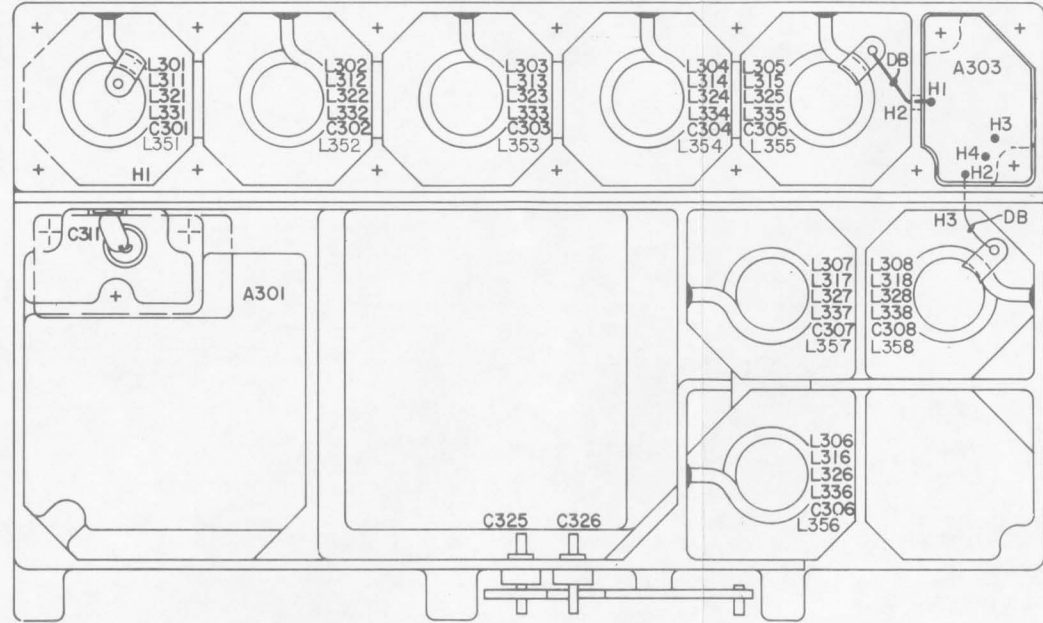


MIXER  
A304

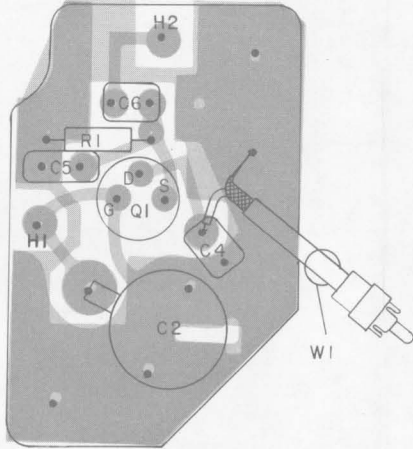


(19D429194, Sh. 2, Rev. 1)  
(19D429194, Sh. 3, Rev. 1)

IF-FILTER BOARD  
COMPONENT SIDE

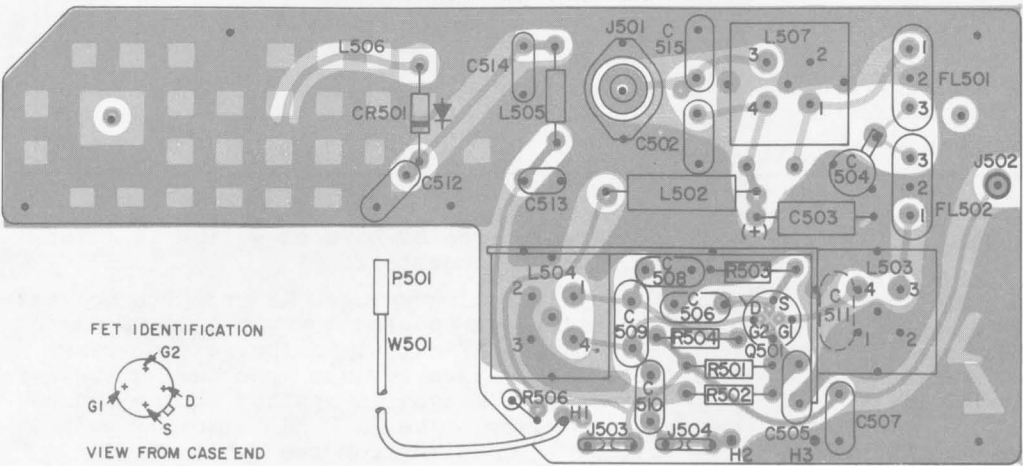


(19C320522, Sh. 2, Rev. 7)  
(19C320522, Sh. 3, Rev. 7)

UHS PRE-AMPLIFIER

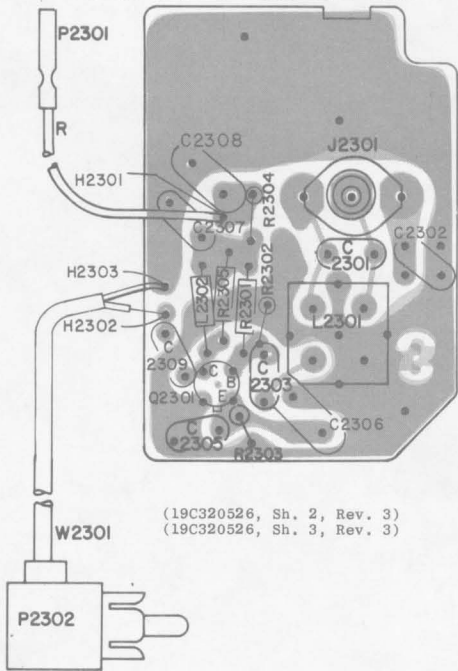


(19C320526, Sh. 2, Rev. 3)  
(19C320526, Sh. 3, Rev. 3)

LEAD IDENTIFICATION  
FOR Q2301




NOTE: LEAD ARRANGEMENT, AND NOT  
CASE SHAPE, IS DETERMINING  
FACTOR FOR LEAD IDENTIFICATION.  
TAB INDICATES EMITTER LEAD.

LEAD IDENTIFICATION  
FOR Q1




NOTE: LEAD ARRANGEMENT, AND NOT  
CASE SHAPE, IS DETERMINING  
FACTOR FOR LEAD IDENTIFICATION.  
TAB INDICATES EMITTER LEAD.



(19D423794, Rev. 7)

SOLDER SIDE

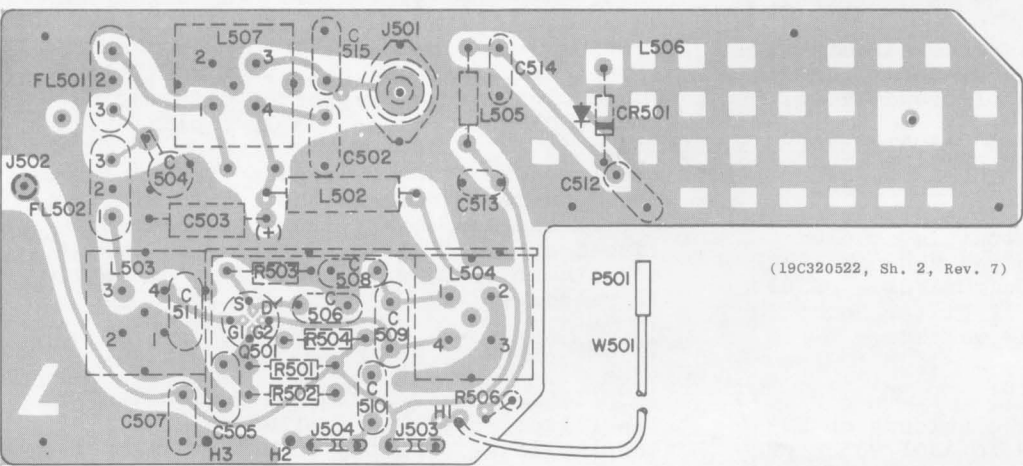


(19C320522, Sh. 2, Rev. 7)

OUTLINE DIAGRAM


406—512 MHz RF ASSEMBLY BOARD  
19D417075G9-G16 AND IF FILTER BOARD  
19C320523G2

A301A  
ANT INPUT  
(FLOATING GROUND)






(19B219941, Sh. 2, Rev. 0)  
(19B219941, Sh. 3, Rev. 0)

A301B  
ANT INPUT  
(NON-FLOATING GROUND)



A301C  
ANT INPUT  
(FLOATING GROUND)



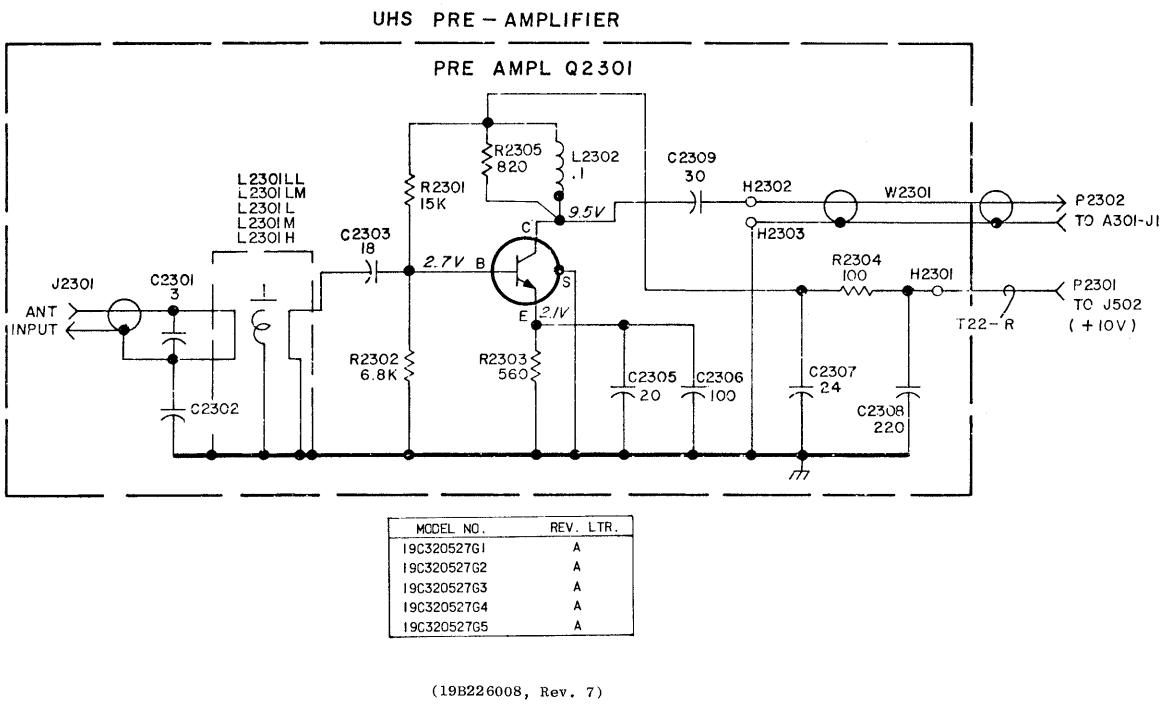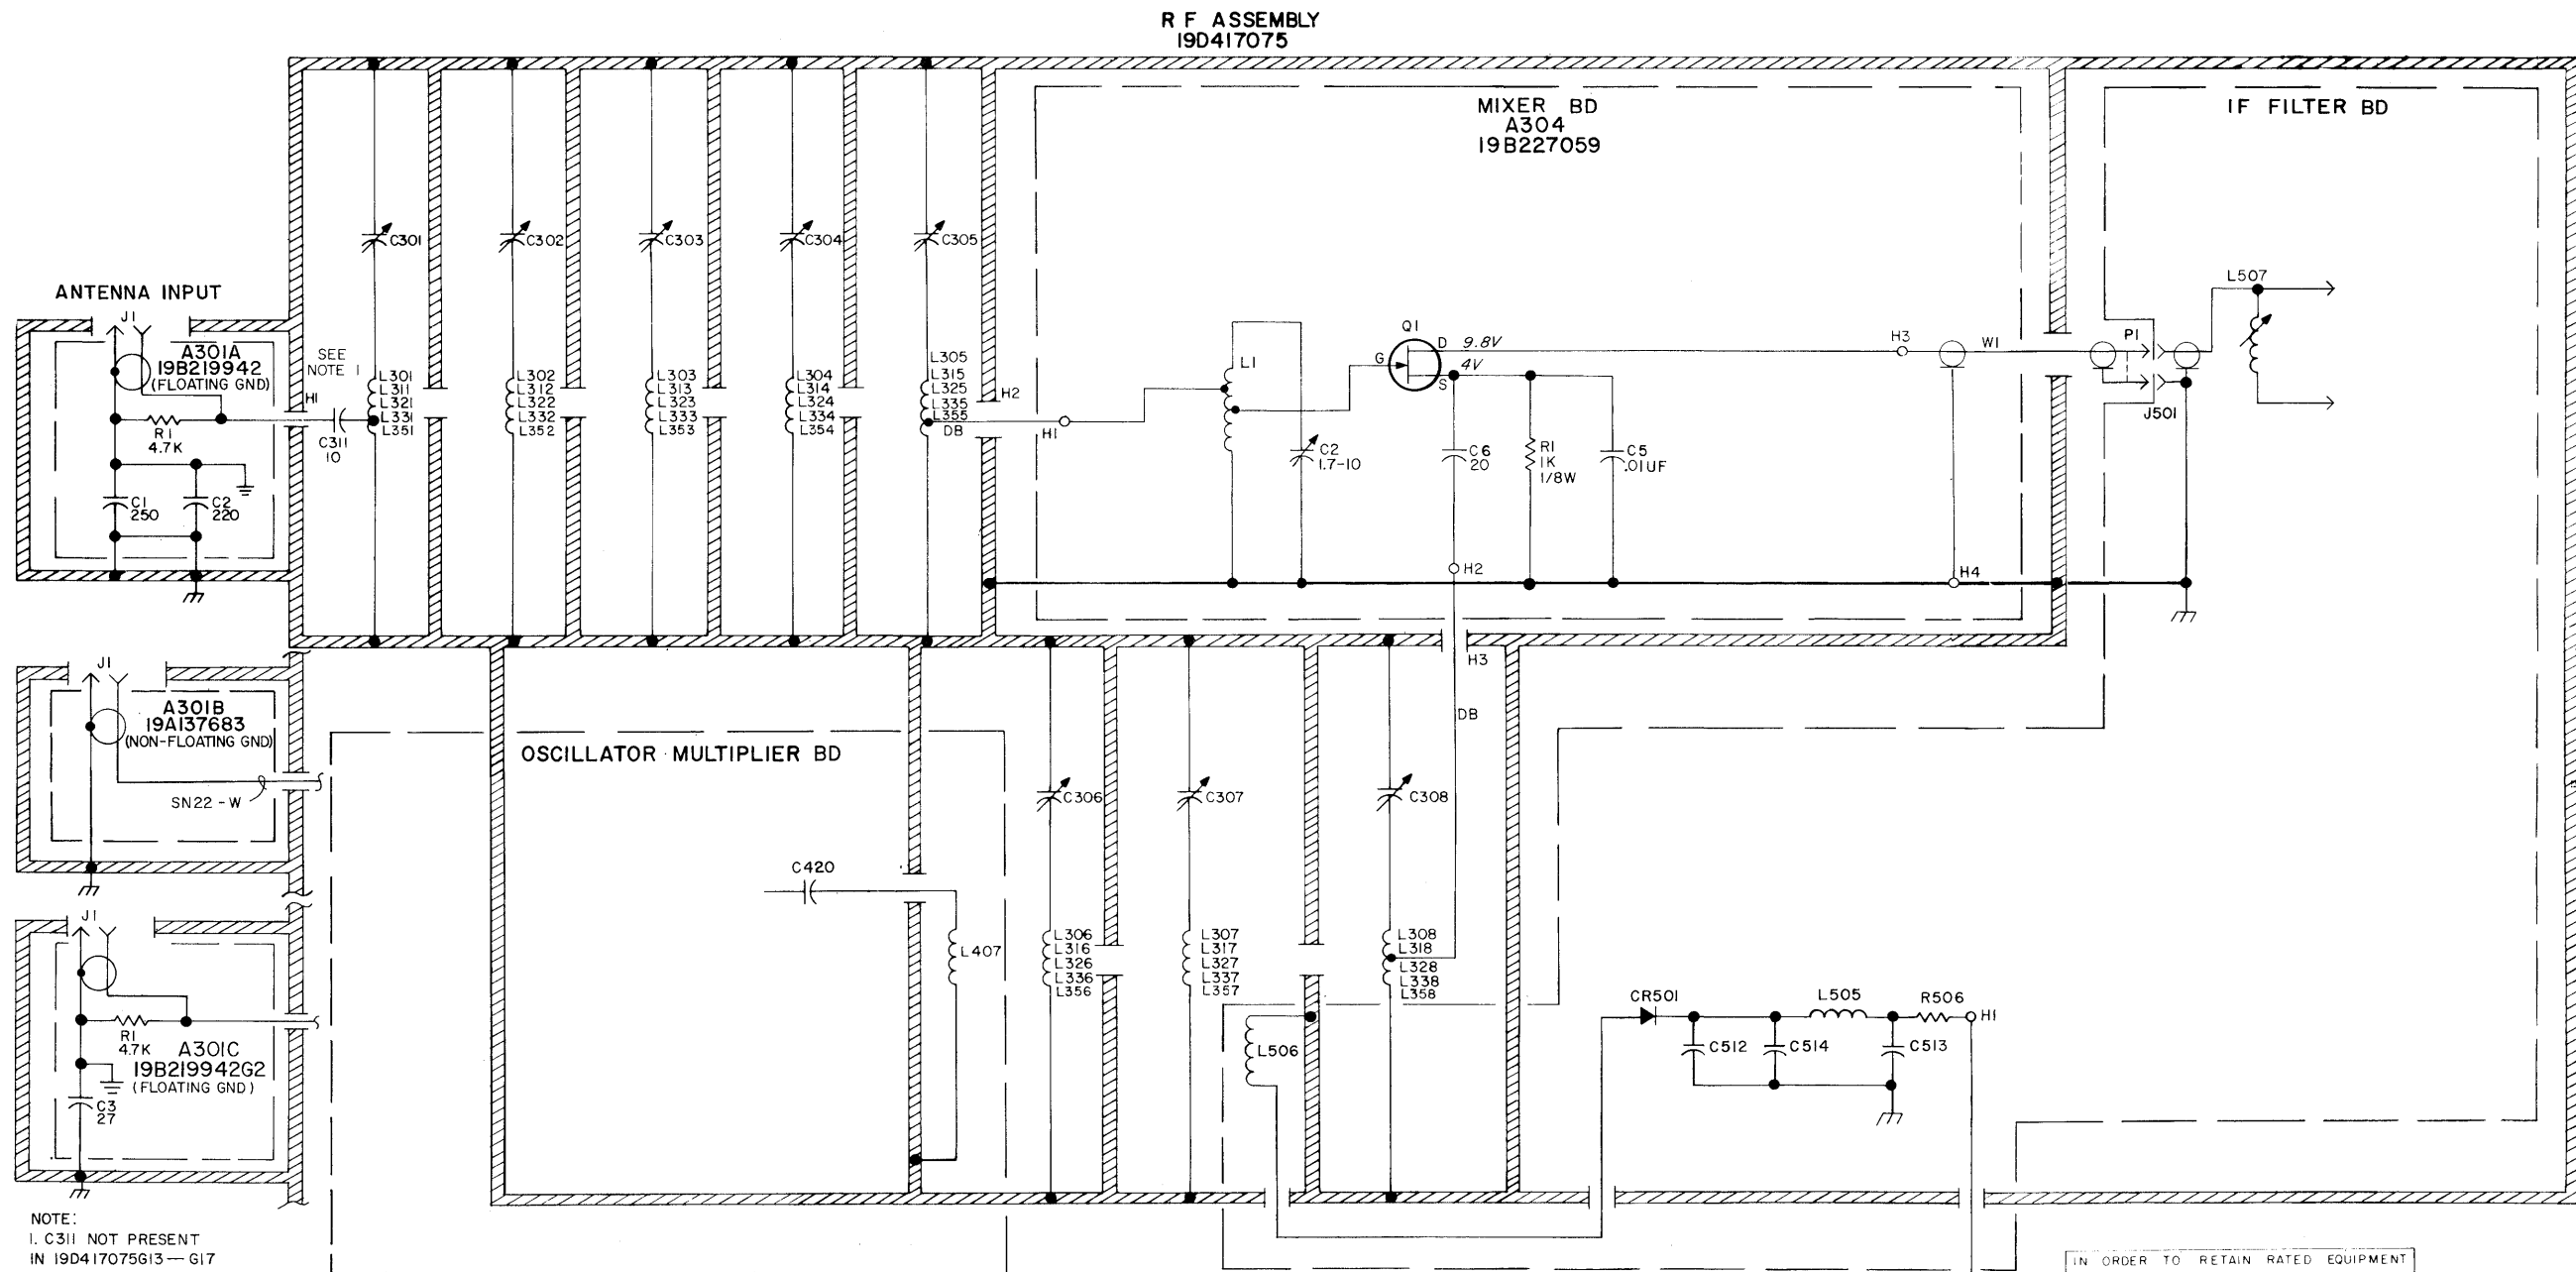

**VOLTAGE READINGS**  
VOLTAGE READINGS ARE TYPICAL READINGS  
MEASURED TO SYSTEM NEGATIVE (P903-10) WITH  
TEST SET MODEL 4EX3A11 OR A 20,000 OHM-  
PER-VOLT METER.

⏏ INDICATES A-  
⏏ INDICATES VEHICLE GROUND

RF ASSEMBLY	REV LTR	MIXER	REV LTR	ANTENNA INPUT	REV LTR	FREQ (MHZ)
19D417075G9	D	19B227059G2	-	19B219942G2	-	406-420 (LL)
19D417075G10	C	19B227059G2	-	19B219942G1	-	450-470 (L)
19D417075G11	C	19B227059G2	-	19B219942G1	-	470-494 (M)
19D417075G12	C	19B227059G2	-	19B219942G1	-	494-512 (H)
19D417075G13	A	19B227059G2	-	19A137683G2	-	406-420 (LL)
19D417075G14	A	19B227059G2	-	19A137683G2	-	450-470 (L)
19D417075G15	A	19B227059G2	-	19A137683G2	-	470-494 (M)
19D417075G16	A	19B227059G2	-	19A137683G2	-	494-512 (H)
19D417075G17	-	19B227059G2	-	19A137683G2	-	420-450 (LM)
19D417075G18	-	19B227059G2	-	19B219942G1	-	420-450 (LM)

COMPONENT VALUE TABLE					
COMP. DESIG.	LL	LM	LL	M	H
RF FREQ (MHZ)	406-420		450-470	470-494	494-512
L301-L308	X				
L311-L318			X		
L321-L328				X	
L331-L338					X
L351-L358		X			


IN ORDER TO RETAIN RATED EQUIPMENT  
PERFORMANCE, REPLACEMENT OF ANY  
SERVICE PART SHOULD BE MADE ONLY WITH  
A COMPONENT HAVING THE SPECIFICATIONS  
SHOWN ON THE PARTS LIST FOR THAT PART.

ALL RESISTORS ARE 1/4 WATT UNLESS  
OTHERWISE SPECIFIED AND RESISTOR  
VALUES IN OHMS UNLESS FOLLOWED BY  
K=1000 OHMS OR MEG=1,000,000 OHMS.  
CAPACITOR VALUES IN PICOFARADS (EQUAL  
TO MICROMICROFARADS) UNLESS FOLLOWED  
BY UF= MICROFARADS, INDUCTANCE VALUES  
IN MICROHENRYS UNLESS FOLLOWED BY  
MH= MILLIHENRYS OR H=HENRYS.

(19D423520, Rev. 8)

**SCHEMATIC DIAGRAM**  
**406—512 MHz RF ASSEMBLY BOARD**  
**19D417075G9-G16**

IF FILTER BD  
19C320523

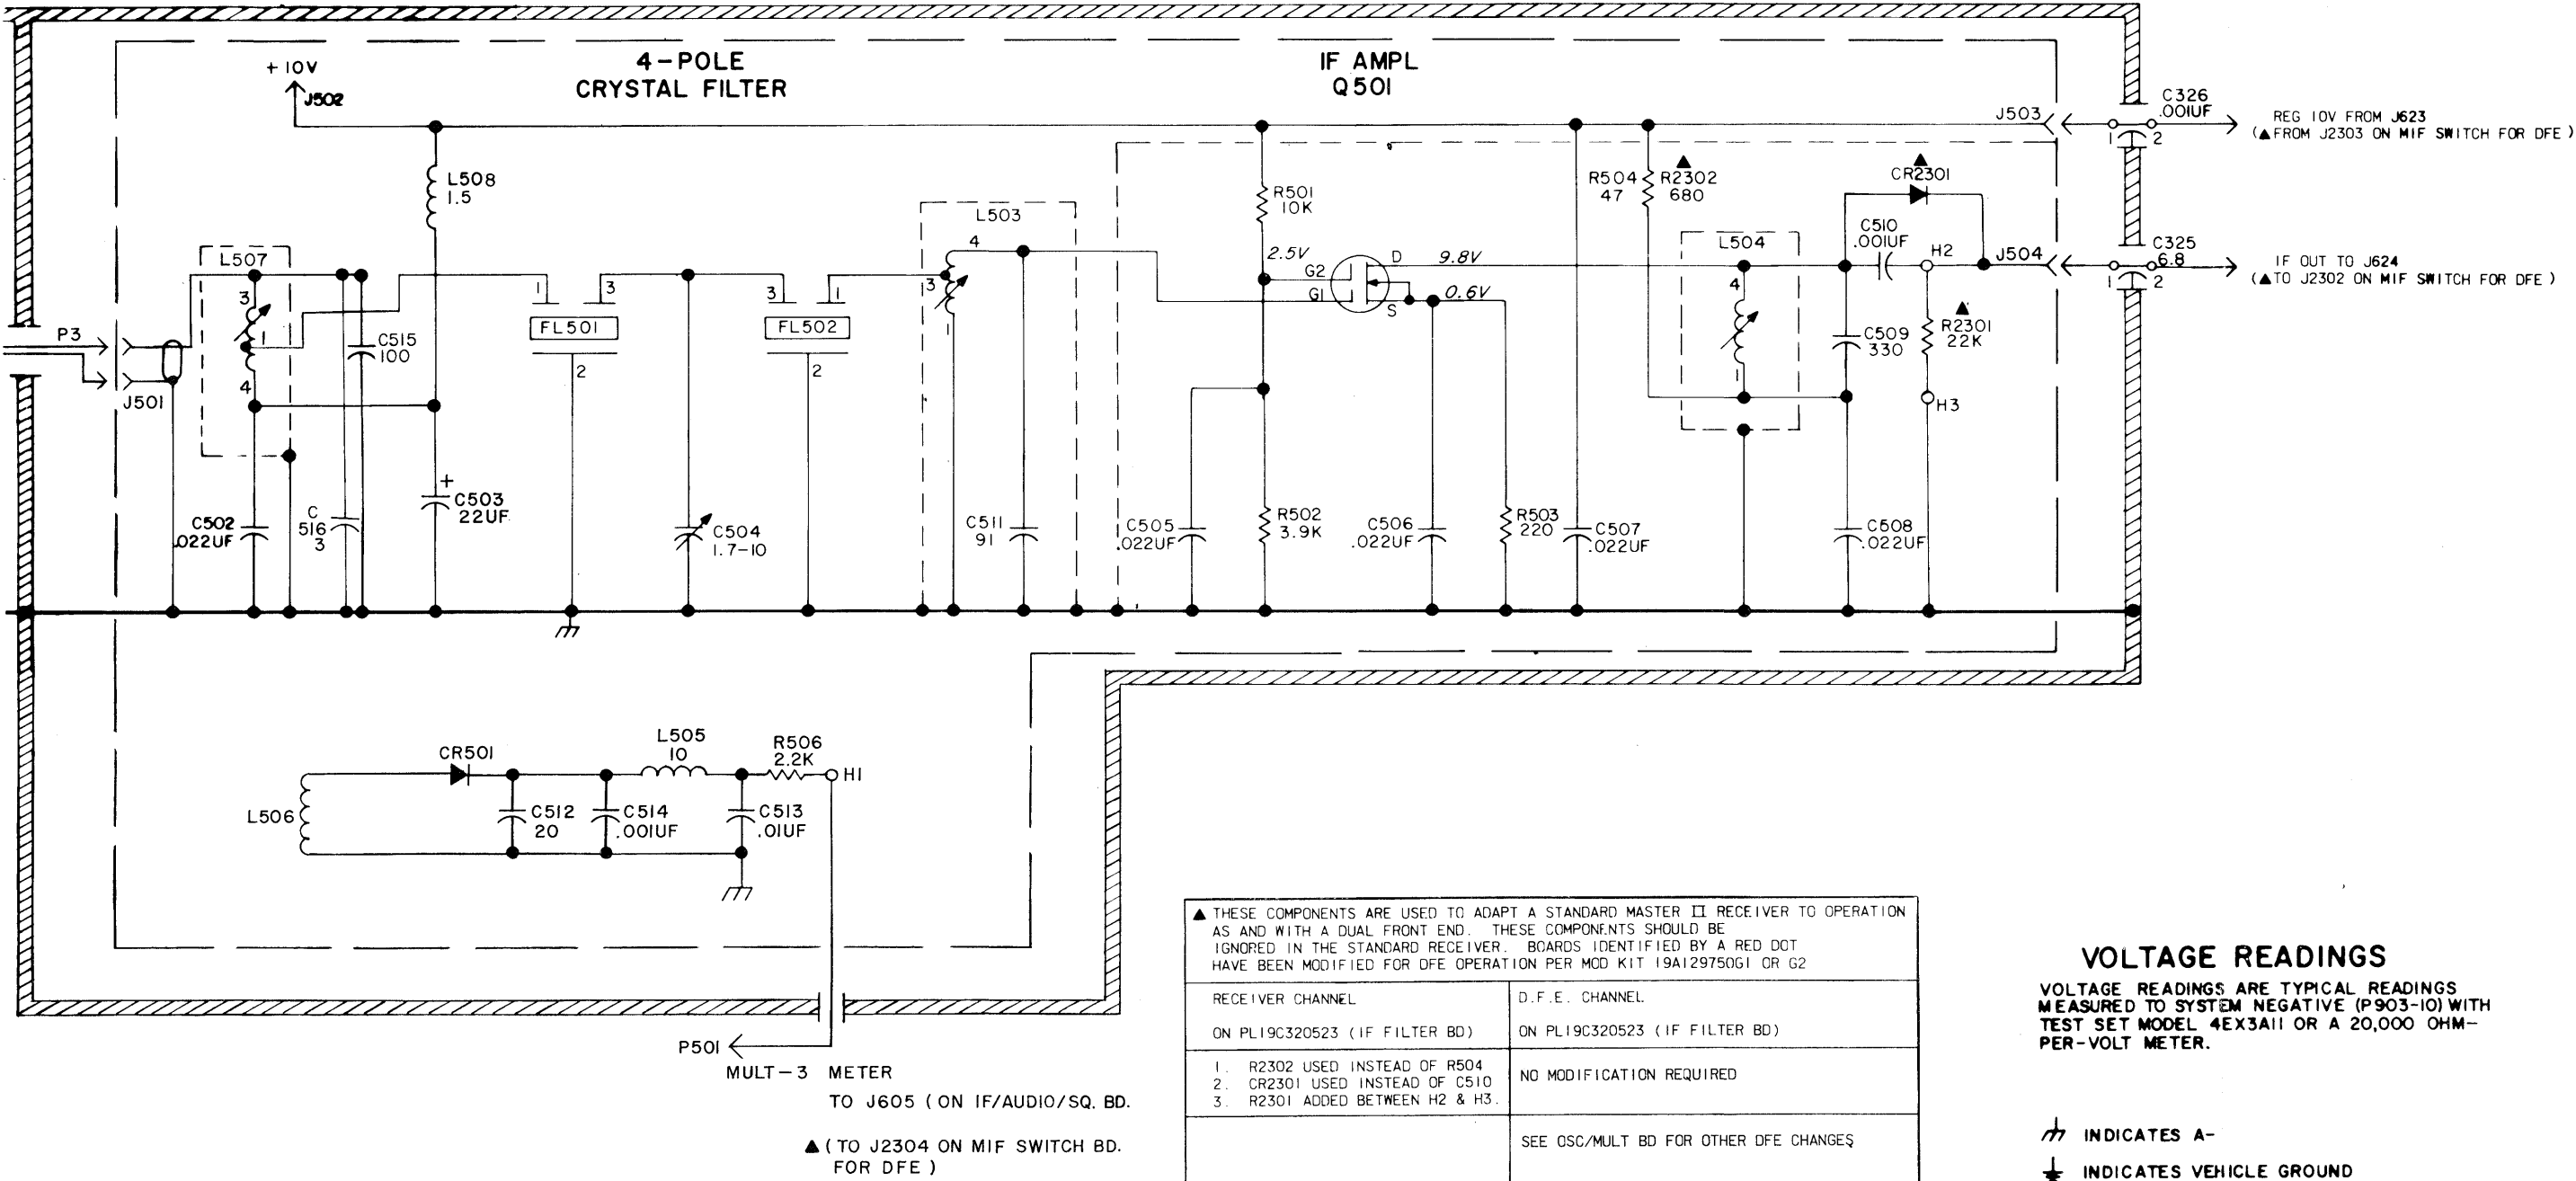

SCHEMATIC DIAGRAM

IF FILTER BOARD 19C320523G2

PARTS LIST

LB130033F

406-512 MHz RECEIVER RF ASSEMBLY  
IF-FILTER BOARD ASSEMBLY  
AND UHS PRE-AMPLIFIER

SYMBOL	GE PART NO.	DESCRIPTION
A301A* and A301C*		RF ASSEMBLY 19D417075G9 406-420 MHz FLOATING GRD 19D417075G10 420-470 MHz FLOATING GRD 19D417075G11 470-494 MHz FLOATING GRD 19D417075G12 494-512 MHz FLOATING GRD 19D417075G13 406-420 MHz NON FLOATING GRD 19D417075G14 420-470 MHz NON FLOATING GRD 19D417075G15 470-494 MHz NON FLOATING GRD 19D417075G16 494-512 MHz NON FLOATING GRD  ANTENNA INPUT BOARD A301A 19B219942G1 450-512 MHz (Deleted in G9 by REV D). A301C 19B219942G2 406-420 MHz (Added to G9 by REV D).
		----- CAPACITORS -----
C1	7484398P3	Silver mica: 250 pf $\pm 10\%$ , 500 VDCW; sim to Underwood Type J1HF.
C2	19A116679P220K	Mica: 220 pf $\pm 10\%$ , 250 VDCW.
C3	19A116656P27J0	Ceramic disc: 27 pf $\pm 5\%$ , 500 VDCW, temp coef 0 PPM.
		----- JACKS AND RECEPTACLES -----
J1	7104941P16	Connector, phono: Jack; sim to National Tel. Barrel Ceramic.
		----- RESISTORS -----
R1	19A700106P79	Composition: 4.7K ohms $\pm 5\%$ , 1/4 w.
A301B*		ANTENNA INPUT PLATE 19A137683G2 (Added to G13-G16 by REV A)
		----- JACKS AND RECEPTACLES -----
J1	7104941P20	Connector, jack: sim to National Tel.
A301B*		ANTENNA INPUT PLATE 19A137683G1 (Deleted in G13-G16 by REV A)
		----- JACKS AND RECEPTACLES -----
J1	7104941P20	Connector, jack: sim to National Tel.
		----- RESISTORS -----
R1	19A700106P79	Composition: 4.7K ohms $\pm 5\%$ , 1/4 w.
A303*		MIXER BOARD 19B227059G1 (Deleted by REV B)
		----- CAPACITORS -----
C1	19A116080P103	Polyester: 0.022 $\mu$ f $\pm 10\%$ , 50 VDCW.
C2	19B209351P1	Variable, ceramic: 2-10 pf, 200 VDCW, temp coef -350 +500 PPM/ $^{\circ}$ C; sim to Matsushita ECV-12W10X32.
C3	19A116656P20K0	Ceramic disc: 20 pf $\pm 10\%$ , 500 VDCW, temp coef 0 PPM.
C4*	19A116114P12	Ceramic: 3.3 pf $\pm 5\%$ , 100 VDCW; temp coef 0 PPM.  Earlier than REV A: Ceramic disc: 3 pf $\pm 1$ pf, 500 VDCW, temp coef 0 PPM.
		----- INDUCTORS -----
L1		(Part of printed wiring board 19D423518P1).

\*COMPONENTS ADDED, DELETED OR CHANGED BY PRODUCTION CHANGES.

SYMBOL	GE PART NO.	DESCRIPTION
		----- PLUGS -----
P1		(Part of W1).
		----- TRANSISTORS -----
Q1	19A134093P1	N Type, field effect: sim to Type 2N4391.
		----- RESISTORS -----
R1	3R151P102K	Composition: 1K ohms $\pm 10\%$ , 1/8 w.
		----- CABLES -----
W1	5491689P114	RF: approx 5-1/8 inches long.
A304*		MIXER BOARD 19B227059G2 (Added by REV B)
		----- CAPACITORS -----
C2	19A700012P1	Variable, ceramic: 2-10 pf, 200 VDCW, temp coef -350 +500 Parts/M/ $^{\circ}$ C; sim to Panasonic ECV-12W10X32.
C4*	19A116114P12	Ceramic: 3.3 pf $\pm 5\%$ , 100 VDCW; temp coef 0 PPM. Deleted in G9-G12 by REV C, in G13-G16 by REV A.
C5	19A116192P1	Ceramic: 0.01 $\mu$ f $\pm 20\%$ , 50 VDCW; sim to Erie 8121 SPECIAL.
C6	19A116114P39	Ceramic: 20 pf $\pm 5\%$ , 100 VDCW; temp coef 0 PPM.
		----- INDUCTORS -----
L1		(Part of printed board 19D429194P1).
		----- PLUGS -----
P1		(Part of W1).
		----- TRANSISTORS -----
Q1	19A134093P1	N Type, field effect; sim to Type 2N4391.
		----- RESISTORS -----
R1	3R151P102K	Composition: 1K ohms $\pm 10\%$ , 1/8 w.
		----- CABLES -----
W1	5491689P114	Cable, RF: approx 5-1/2 inches long.
		----- CAPACITORS -----
C301 thru C305	19C328755P3	Includes: Screw.
	19A143476G2	Nut: thd size No. 6-32.
C306 thru C308	19C328755P2	Includes: Screw.
	19A143476G2	Nut: thd size No. 6-32.
C311*	5496218P241	Ceramic disc: 10 pf $\pm 0.25$ pf, 500 VDCW, temp coef -80 PPM. Deleted in G13-G16 by REV A.
C325	19B209488P1	Ceramic, feed-thru: 6.8 pf $\pm 20\%$ , 500 VDCW; sim to Allen-Bradley Style FA5D.
C326	19B209488P2	Ceramic, feed-thru: 1000 pf $\pm 100\%$ -10%, 500 VDCW; sim to Allen-Bradley Style FA5D.
		----- INDUCTORS -----
L301	19B204938G37	Coil.
L302 thru L304	19B219944P1	Coil.
L305	19B204938G33	Coil.
L306 and L307	19B219944P5	Coil.
L308	19B204938G41	Coil.
L311	19B204938G38	Coil.

SYMBOL	GE PART NO.	DESCRIPTION
L312 thru L314	19B219944P2	Coil.
L315	19B204938G34	Coil.
L316 and L317	19B219944P6	Coil.
L318	19B204938G42	Coil.
L321	19B204938G39	Coil.
L322 thru L324	19B219944P3	Coil.
L325	19B204938G35	Coil.
L326 and L327	19B219944P7	Coil.
L328	19B204938G43	Coil.
L331	19B204938G40	Coil.
L332 thru L334	19B219944P4	Coil.
L335	19B204938G36	Coil.
L336 and L337	19B219944P8	Coil.
L338	19B204938G44	Coil.
		IF FILTER BOARD 19C320523G2
		----- CAPACITORS -----
C502	19A116080P103	Polyester: 0.022 $\mu$ f $\pm 10\%$ , 50 VDCW.
		----- TRANSISTORS -----
C503	5496267P10	Tantalum: 22 $\mu$ f $\pm 20\%$ , 15 VDCW; sim to Sprague Type 150E.
C504	19A700012P1	Variable, ceramic: 2 to 10 pf, 200 VDCW, temp +500% -350 Parts/M/ $^{\circ}$ C; sim to Panasonic ECV-12W10X32.
C505 thru C508	19A116080P3	Polyester: 0.022 $\mu$ f $\pm 20\%$ , 50 VDCW.
C509	5490309P139	Silver mica: 330 pf $\pm 10\%$ , 500 VDCW; sim to Electro Motive Type DM-15.
C510	19A116655P19	Ceramic disc: 1000 pf $\pm 20\%$ , 1000 VDCW; sim to RMC Type JF Discap.
C511		(Part of L503).
C512	19A116656P20K0	Ceramic disc: 20 pf $\pm 10\%$ , 500 VDCW, temp coef 0 PPM.
C513	19A116080P101	Polyester: 0.01 $\mu$ f $\pm 10\%$ , 50 VDCW.
C514	19A116653P20	Ceramic disc: 1000 pf $\pm 10\%$ , 1000 VDCW; sim to RMC Type JF Discap.
C515	5490008P27	Silver mica: 100 pf $\pm 5\%$ , 500 VDCW; sim to Electro Motive Type DM-15.
C516*	19A116656P3K0	Ceramic disc: 3 pf $\pm 1$ pf, 500 VDCW, temp coef 0 PPM. Added by REV A.
		----- DIODES AND RECTIFIERS -----
CR501	19A116052P1	Silicon, hot carrier: Fwd. drop .350 volts max.
		----- FILTERS -----
FL501	19B219573G7	Crystal, freq: Resonator A: 11,200000 KHz, Resonator B: 11,196024 KHz.
FL502		(Part of FL501).
		----- JACKS AND RECEPTACLES -----
J501	19A130924G1	Receptacle, coaxial: sim to Cinch 14H11613.
J502	4033513P1	Contact, electrical: sim to Bead Chain L93-4.
J503 and J504	19A116975P1	Receptacle, wire spring.

(Cont'd on Page 6)

SYMBOL	GE PART NO.	DESCRIPTION
----- INDUCTORS -----		
L502*	7488079P48	Choke, RF: 27.0 $\mu$ h $\pm$ 10%, 1.40 ohms DC res max; sim to Jeffers 4422-9K. Deleted by REV A.
L503	19C320141G4	Coil. Includes:
	5493185P9	Tuning slug.
L504	19C320141G29	Coil. Includes:
	5493185P9	Tuning slug.
L505	19A700024P25	Coil, RF: 10.0 $\mu$ h $\pm$ 10%, 3.70 ohms DC res max.
L506		(Part of printed board 19C320522P1).
L507	19C321810G1	Coil.
L508*	19A700000P114	Choke, RF: 1.5 $\mu$ h $\pm$ 10%, 0.28 ohms DC res max.
----- PLUGS -----		
P501		(Part of W501).
----- TRANSISTORS -----		
Q501	19A116818P1	N Channel, field effect; sim to Type 3N187.
----- RESISTORS -----		
R501	19A700106P87	Composition: 10K ohms $\pm$ 5%, 1/4 w.
R502	19A700106P77	Composition: 3.9K ohms $\pm$ 5%, 1/4 w.
R503	19A700107P47	Composition: 220 ohms $\pm$ 5%, 1/4 w.
R504	19A700106P31	Composition: 47 ohms $\pm$ 5%, 1/4 w.
R506	19A700106P71	Composition: 2.2K ohms $\pm$ 5%, 1/4 w.
----- CABLES -----		
W501	19A129947G7	Cable: orange, No. 22 stranded, approx 7-1/2 inches, includes (P501).
UHS RF PRE-AMPLIFIER 19C320527G1 406-420 MHz (LL) 19C320527G2 450-470 MHz (L) 19C320527G3 470-494 MHz (M) 19C320527G4 494-512 MHz (H) 19C320527G5 420-450 MHz (LM)		
----- CAPACITORS -----		
C2301	19A116656P3J8	Ceramic disc: 3 pf $\pm$ 0.1 pf, 500 VDCW, temp coef -80 PPM.
C2302*	19A116679P220K	Mica: 220 pf $\pm$ 10%, 250 VDCW. Deleted by REV A.
C2302A*	19A134666P2	Silver mica: 22 pf $\pm$ 5%, 500 VDCW; sim to Electro Motive Type DM154CR. Added to G1 & G5 by REV A.
C2302B*	19A134666P1	Silver mica: 18 pf $\pm$ 5%, 500 VDCW; sim to Electro Motive Type DM154CR. Added to G2-G4 by REV A.
C2303	19A116656P18J8	Ceramic disc: 18 pf $\pm$ 5%, 500 VDCW, temp coef -80 PPM.
C2305	19A116656P20K0	Ceramic disc: 20 pf $\pm$ 10%, 500 VDCW, temp coef 0 PPM.
C2306*	5490008P127	Silver mica: 100 pf $\pm$ 10%, 500 VDCW; sim to Electro Motive Type DM-15.
		Earlier than REV A:
	19A116679P100K	Mica: 100 pf $\pm$ 10%, 250 VDCW.
C2307*	19A116656P24J0	Ceramic disc: 24 pf $\pm$ 5%, 500 VDCW; temp coef 0 PPM.
		Earlier than REV A:
	19A116679P220K	Mica: 220 pf $\pm$ 10%, 250 VDCW.
C2308	5490008P135	Silver mica: 220 pf $\pm$ 10%, 500 VDCW; sim to Electro Motive Type DM-15.
		Earlier than REV A:
	19A116679P220K	Mica: 220 pf $\pm$ 10%, 250 VDCW.
C2309	19A116656P30J8	Ceramic disc: 30 pf pf $\pm$ 5%, 500 VDCW, temp coef -80 PPM.
C2310*	19A116656P20K0	Ceramic disc: 20 pf $\pm$ 10%, 500 VDCW, temp coef 0 PPM. Deleted by REV A.

SYMBOL	GE PART NO.	DESCRIPTION
----- JACKS AND RECEPTACLES -----		
J2301	19A130924G1	Receptacle, coaxial: sim to Cinch 14H11613.
----- INDUCTORS -----		
L2301LL	19D413078G3	Helical resonator.
L2301L	19D413078G5	Helical resonator.
L2301M	19D413078G6	Helical resonator.
L2301H	19D413078G7	Helical resonator.
L2301LM	19D413078G9	Helical resonator.
L2302*	19B209420P101	Coil, RF: 0.10 $\mu$ h $\pm$ 10%, 0.08 ohms DC res max; sim to Jeffers 4416-1K.
		Earlier than REV A:
	19A129716G4	Coil.
----- PLUGS -----		
P2301	4029840P2	Contact, electrical: sim to Amp 42827-2.
P2302		(Part of W2301).
----- TRANSISTORS -----		
Q2301	19A116859P2	Silicon, NPN.
----- RESISTORS -----		
R2301	19A700106P91	Composition: 15K ohms $\pm$ 5%, 1/4 w.
R2302	19A700106P83	Composition: 6.8K ohms $\pm$ 5%, 1/4 w.
R2303	19A700106P57	Composition: 560 ohms $\pm$ 5%, 1/4 w.
R2304	19A700106P39	Composition: 100 ohms $\pm$ 5%, 1/4 w.
R2305*	19A700106P61	Composition: 820 ohms $\pm$ 5%, 1/4 w. Added by REV A.
----- CABLES -----		
W2301	5491689P94	RF: approx 3 inches long. Includes P2302.
----- MISCELLANEOUS -----		
	19E501121G1	Casting, RF Circuit.
	19B227101G1	Cover, RF Circuit.
	19B209209P306	Tap screw, Phillips Pozidriv®. No. 6-32 x 3/8. (Secures RF Circuit Cover).
	19C328755P3	Screw. (Part of C301-C305).
	19C328755P2	Screw. (Part of C306-C308).
	19A143476G2	Nut: thd size No. 6-32. (Part of C301-C308).
	4031594P1	Insulator. (Used with C504 on IF Filter Board).
	19B219470P2	Shield. (Used with IF Filter Board).
	19A129424G1	Can. (Used with L401-L403, L501, L503, L504).
	19A127060P2	Can. (Used with L2301).
	4035306P59	Washer, fiber. (Used with FL5Q1, FL502).
	4035306P23	Washer, fiber. (Used with J501, J2301).

PRODUCTION CHANGES

Changes in the equipment to improve performance or to simplify circuits are identified by a "Revision Letter", which is stamped after all the model number of the unit. The revision stamped on the unit includes all previous revisions. Refer to the Parts List for descriptions of parts affected by these revisions.

REV. A - RF Assembly 19D417075G9-12


To improve receiver sensitivity. Changed C4.

REV. B - RF Assembly 19D417075G9-12


To incorporate new mixer board. Replaced A303 (19B227059G1) with A304 (19B227059G2).

Schematic Diagram Was:

R F ASSEMBLY  
19D417075

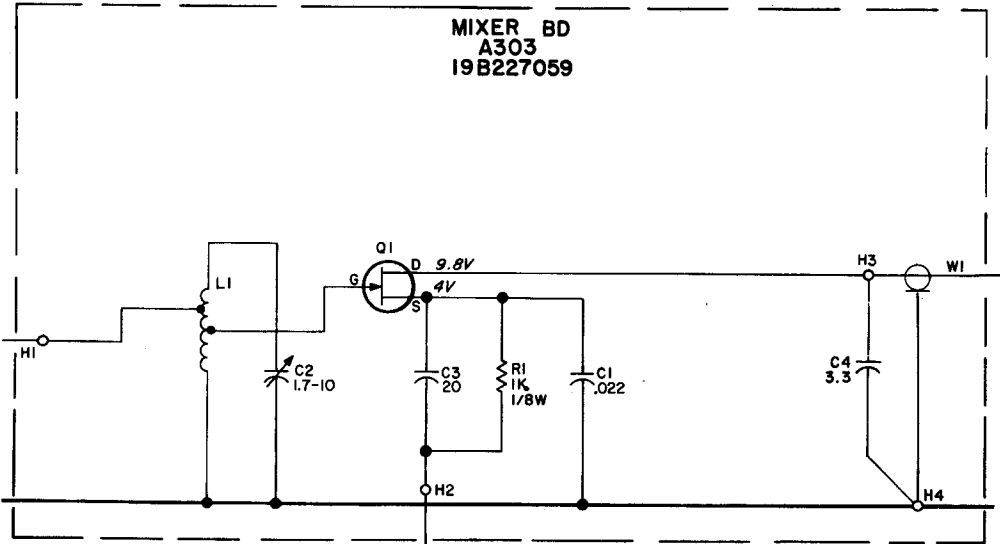

Outline Diagram Was:

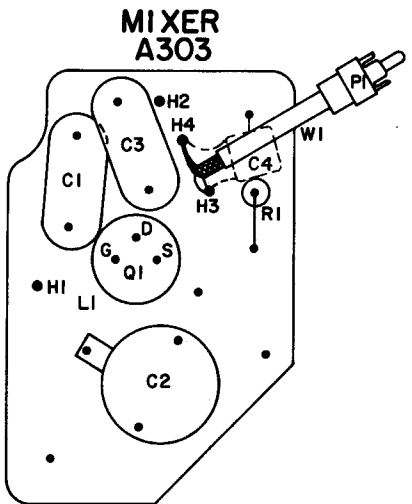

REV. A - IF-Filter Board 19C320523G2

To improve operation. Replaced L502 with L508, added C516.

REV. A - RF Assembly 19D417075G13-G16

REV. C - RF Assembly 19D417075G9-G12

To improve sensitivity. Deleted A304-C4.

REV. D - RF Assembly 19D417075G9

To improve receiver sensitivity in 406 to 420 MHz range. Added A301C.

REV. A - UHS Pre-Amplifier

To incorporate new cb11 (L2302). Changed L2302, C2302, C2306, C2307 and C2308. Deleted C2310 and added R2305.