

CUSTOM **MVP** MAINTENANCE MANUAL

406-512 MHz, 20-WATT TRANSMITTER

(DF3164, THIS SHEET ONLY)

MAINTENANCE MANUAL LB130154C

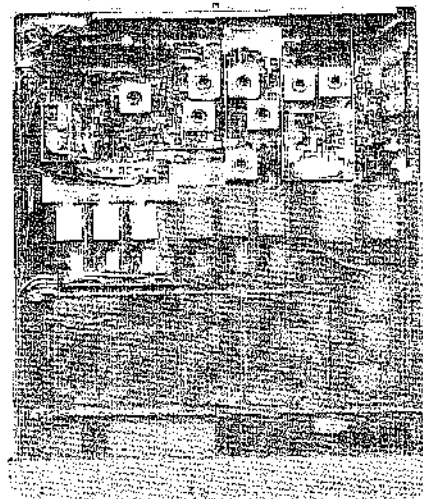
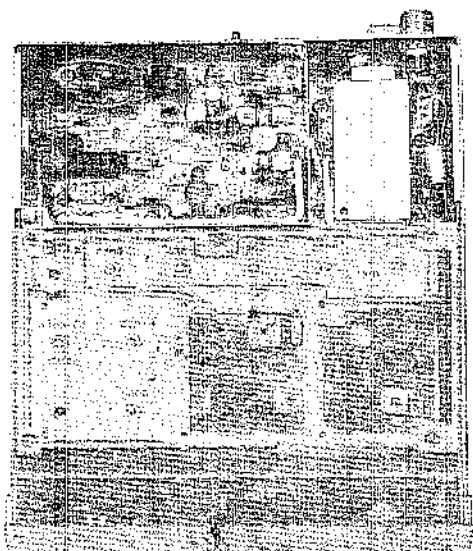


TABLE OF CONTENTS

SPECIFICATIONS	ii
DESCRIPTION AND MAINTENANCE	LB130155 (DF3164)
EXCITER	LB130060 (DF3165)
POWER AMPLIFIER	LB130156 (DF3174)

Custom MVP TRANSMITTER

SPECIFICATIONS*

FCC FILING NO.	KT-135-A (5 PPM) KT-136-C (2 PPM)	
POWER OUTPUT	20 Watts Adjustable from 10 to 20 Watts (406-420 MHz) Adjustable from 10 to 20 Watts (450-494 MHz) Adjustable from 10 to 15 Watts (420-450 MHz) Adjustable from 10 to 15 Watts (494-512 MHz)	
CRYSTAL MULTIPLICATION FACTOR	36	
FREQUENCY STABILITY		
Crystal Module	±0.0005%	
ICOM	±0.0002%	
SPURIOUS AND HARMONIC EMISSION	At least 70 dB below rated power output	
MODULATION	Adjustable from 0 to ±5 kHz swing with instantaneous modulation limiting.	
MODULATION SENSITIVITY	75 to 120 Millivolts	
AUDIO FREQUENCY CHARACTERISTICS	Within +1 to -3 dB of a 6 dB/octave pre-emphasis from 300 to 3000 Hz per EIA standards. Post limiter filter per FCC and EIA.	
DISTORTION	Less than 5% (300 to 3000 Hz)	
DEVIATION SYMMETRY	0.6 kHz maximum	
MAXIMUM FREQUENCY SPREAD:		
	Full Specifications	1 dB Degradation
406-470 MHz	5.0 MHz	9.00 MHz
470-494 MHz	5.50 MHz	9.00 MHz
494-512 MHz	6.0 MHz	9.75 MHz
DUTY CYCLE	EIA 20% Intermittent	
RF OUTPUT IMPEDANCE	50 ohms	

* These specifications are intended primarily for the use of the serviceman. Refer to the appropriate Specification Sheet for the complete specifications.

WARNING

Although the highest DC voltage supplied to the transmitter is +12 VDC, high currents can possibly heat metal objects such as tools, rings, watchbands, etc., enough to cause burns. Be careful when working near energized circuits!

High-level RF energy in the transmitter Power Amplifier assembly can cause RF burns upon contact. Keep away from these circuits when the transmitter is energized!

GENERAL ELECTRIC COMPANY • MOBILE COMMUNICATIONS DIVISION
WORLD HEADQUARTERS • LYNCHBURG, VIRGINIA 24502 U.S.A.

GENERAL  ELECTRIC*
U.S.A.