


# MAINTENANCE MANUAL

CHANNEL GUARD ENCODER/DECODER 19C327626G1

CHANNEL GUARD ENCODE ONLY 19C327626G2

CHANNEL GUARD DECODE ONLY 19C327626G3

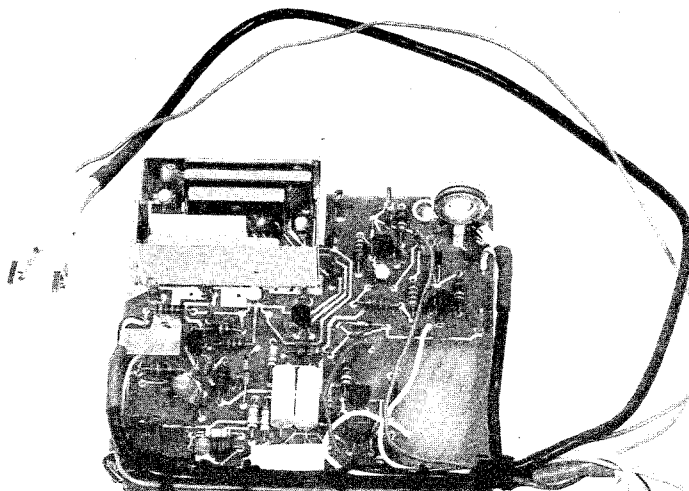

## SPECIFICATIONS \*

Tone Frequencies	71.9 Hz to 203.5 Hz
Frequency Stability	$\pm 0.5\%$
Temperature Range	-30°C to +60°C (-22°F to +140°F)
Power Requirements	$\pm 10.0$ VDC, 35 mA

\*These specifications are intended primarily for the use of the serviceman. Refer to the appropriate Specification Sheet for the complete specifications.

## TABLE OF CONTENTS

SPECIFICATIONS.....	Cover
DESCRIPTION.....	1
OPERATION.....	1
CIRCUIT ANALYSIS.....	1
FSSA.....	1
Tone Network.....	1
Encode.....	1
Decode.....	2
OUTLINE DIAGRAM	
Channel Guard.....	4
SCHEMATIC DIAGRAMS (Includes Parts Lists and Production Changes)	
Channel Guard Encoder/Decoder 19C327626G1.....	5-6
Channel Guard Encode Only 19C327626G2.....	7-8
Channel Guard Decode Only 19C327626G3.....	9-10
TROUBLESHOOTING PROCEDURES	
Encode.....	12
Decode.....	13
INSTALLATION INSTRUCTIONS.....	14
ILLUSTRATIONS	
Figure 1 - Gain vs Frequency.....	1
Figure 2 - Typical Versatone Network.....	1
Figure 3 - Typical Phase Inverting Amplifier Circuit.....	2
Figure 4 - Typical Encode Limiter Circuit.....	2
Figure 5 - Typical Low Pass Filter.....	2
Figure 6 - Typical Decode Limiter Circuit.....	3
Figure 7 - Typical Decode Amplifier and Threshold Detector Circuit.....	3

## WARNING

Although the highest DC voltage in the unit is supplied by the vehicle battery, high current may be drawn under short circuit conditions. These currents can possibly heat metal objects such as tools, rings, watchbands, etc. enough to cause burns. Be careful when working near energized circuits.

## DESCRIPTION

Channel Guard 19C327626 is a continuous tone encoder/decoder for operation on tone frequencies in the 71.9 Hz to 203.5 Hz range. The encoder provides tone-coded modulation to the transmitter. The decoder operates in conjunction with the receiver to inhibit all calls that are not tone coded with the proper Channel Guard frequency.

The Channel Guard circuit consists of discrete components providing PTT switch and receiver mute switch; and four thick-film integrated circuit modules consisting of Decode Module U1001, Encode Module U1002, Frequency Switchable Selective Amplifier (FSSA) AR1001 and plug-in Versatone Network FL1001.

Three models of the Channel Guard board are available. The 19C327626G1 board provides single-tone encode/decode capability. The 19C327626G2 board (Option 1918) is for single-tone encode only applications. The 19C327626G3 board (Option 1919) is for single-tone decode only applications.

For a functional diagram of the Channel Guard Encoder/Decoder refer to the troubleshooting procedures.

Typical diagrams of the Versatone Network, Phase Inverting Amplifier, Encode Limiter, Low Pass Filter, Decode Limiter, Amplifier and Threshold detector are provided in Figures 2 through 7. References to symbol numbers mentioned in the following text are found on the Schematic Diagram, Outline Diagram, and Parts List.

## OPERATION

A Channel Guard MONITOR switch (S702), located on the control panel of the radio, controls the operation of the Channel Guard decode circuitry. When the switch is moved to the MON position, the Channel Guard decode function is disabled, allowing all calls to be heard. The encode function is controlled by the PTT switch and is enabled only when the PTT switch is operated. All transmitted calls are tone coded with the Channel Guard frequency.

## CIRCUIT ANALYSIS

### Frequency Switchable Selective Amplifier

Frequency Switchable Selective Amplifier (FSSA) AR1001 is a highly stable active bandpass filter for the 71.9 Hz to 203.5 Hz frequency range. The selectivity of the filter is shifted across the bandpass frequency range by switching Versatone Networks in the filter circuit (See Figure 1).

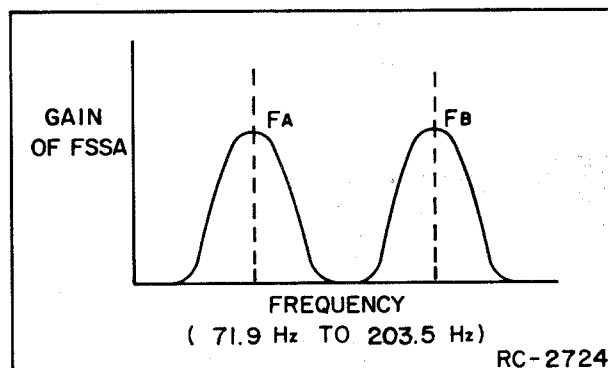


Figure 1 - Gain vs Frequency

In Figure 1, the gain of the FSSA is shown as a function of the tone frequency. The Tone Frequency is determined by the Tone Network connected in the FSSA circuit. When Tone Network A is in the circuit, the maximum gain occurs at FA. When Tone Network B is in the circuit, the maximum gain occurs in FB.

### Tone Network

Versatone Network FL1001 is a precision resistor network with associated switching transistors. A typical Versatone Network is shown in Figure 2. Pins 3, 4 and 5 of the network are connected to ground.

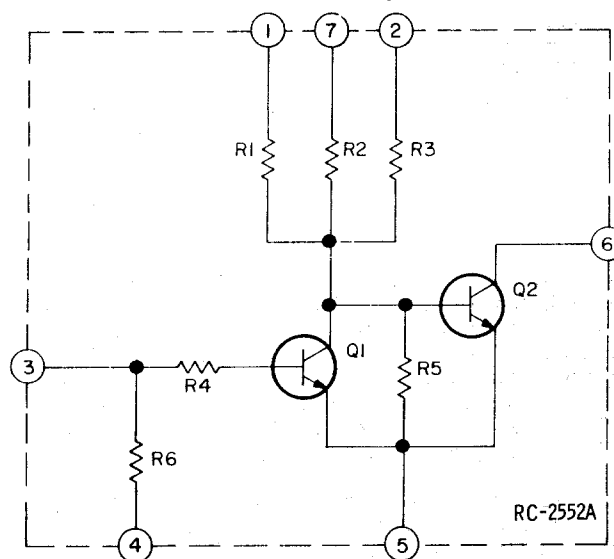


Figure 2 - Typical Versatone Network

### Encode

When PTT switch is operated the Channel Guard encode tone is generated by

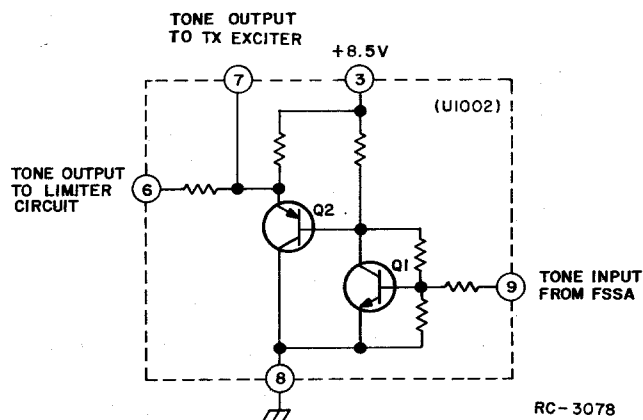


Figure 3 - Typical Phase Inverting Amplifier

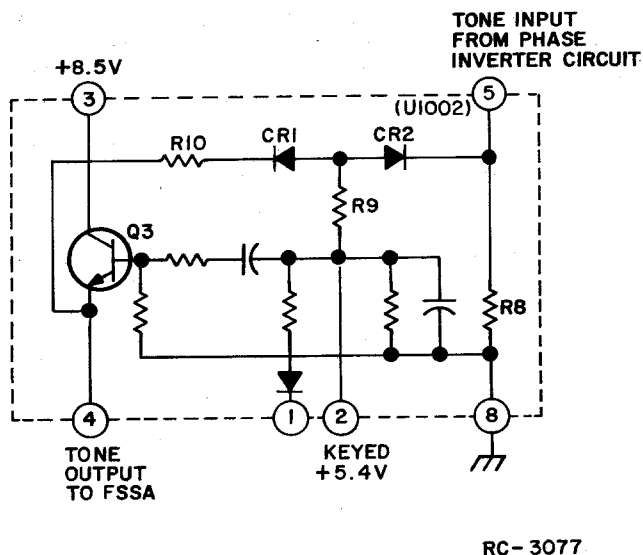


Figure 4 - Typical Encode Limiter Circuit

coupling the output of FSSA bandpass filter AR1001 back to its input through a phase inverting amplifier circuit and a limiter circuit. The output of the FSSA is coupled from AR1001-1 to the input of the phase inverting amplifier at U1002-9. A typical phase inverting amplifier circuit is shown in Figure 3.

Amplifier Q1 provides 180° phase shift of the tone frequency at the output of emitter follower Q2. The output of the phase inverting amplifier circuit is coupled from U1002-6 to the input of the limiter circuit at U1002-5. A typical limiter circuit is shown in Figure 4.

Limiting network CR1, CR2, R8, R9 and R10 sets the tone output coupled from

U1002-4 to the input of the FSSA (AR1001-12) at 53 milli-volts peak to peak.

The limiter circuit is also used as an encode switch. Keying the transmitter applies +5.4 Volts to U1002-2. This forward biases Limiter diodes CR1 and CR2 and momentarily turns Q3 on. Forward biasing CR1 and CR2 allows the circuit to oscillate. Momentarily turning Q3 on starts the circuit oscillating. The tone frequency is determined by the tone network connected in the FSSA circuit.

The tone output of the encoder circuit is taken from U1002-7 and coupled through tone output amplifier Q1002 and modulation adjustment R1015 to the transmitter exciter.

### Decode

Audio, containing the correct frequency from P1006-4 (Volume Hi), is coupled to Pin 1 of Decode Module J1001. Pin 1 of U1001 is the input of an active, three stage, low pass filter. The low pass filter attenuates frequencies over 205 Hz. A typical low pass filter is shown in Figure 5. The output of the low pass filter at U1001-15 is applied to U1001-14. U1001-14 is the input of a limiter circuit, limiting the output at U1001-13 to 55 millivolts peak to peak. A typical limiter circuit is shown in Figure 6. The output from the limiter is coupled to Pin 12 of FSSA AR1001. Since the tone is the proper frequency the FSSA will allow it to pass. The output of the FSSA is coupled from AR1001-1 to U1001-3. U1001-3 is the input to an amplifier circuit. The output of the amplifier at U1001-4 is coupled to the input of a threshold detector at U1001-6. A typical amplifier and threshold detector circuit is shown in Figure 7. When a tone is present, Q6 will conduct causing Q7 to conduct and +8.5 VDC to appear on the output of the threshold detector circuit (U1001-10).

In the decode mode, when the tone decoder in U1001 detects the channel guard


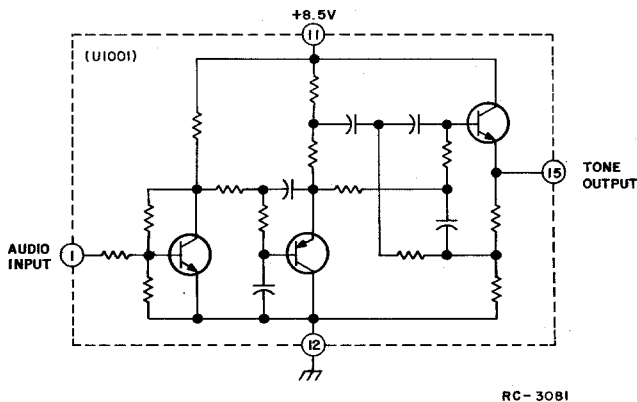


Figure 5 - Typical Low Pass Filter

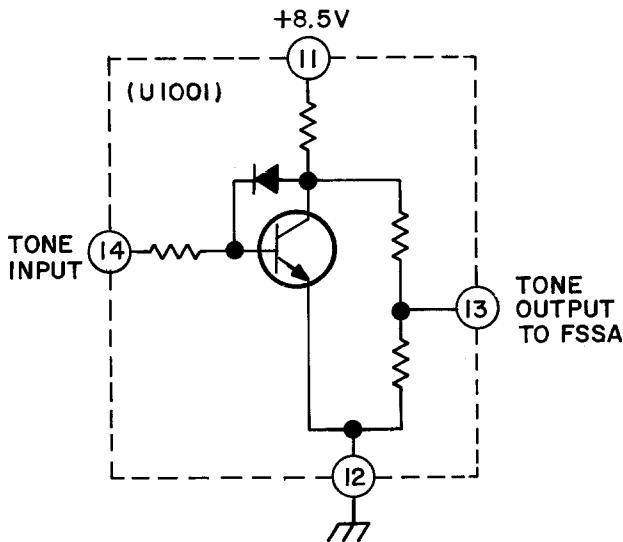


RC-3080

Figure 6 - Typical Decode Limiter Circuit

frequency, Q1003 turns Q1004 off. This unmutes the receiver audio. In the squelch mode, Q1004 is operating, grounding the RX MUTE lead and muting the receiver audio.

Audio from the SAS board is connected to the tone reject filter via P1006-3. The tone reject filter is an active filter composed of Q1005 and Q1006. All frequencies from 70 to 204 Hz are rejected by the filter, while passing all other audio frequencies via P1006-2 back to the SAS audio circuits.

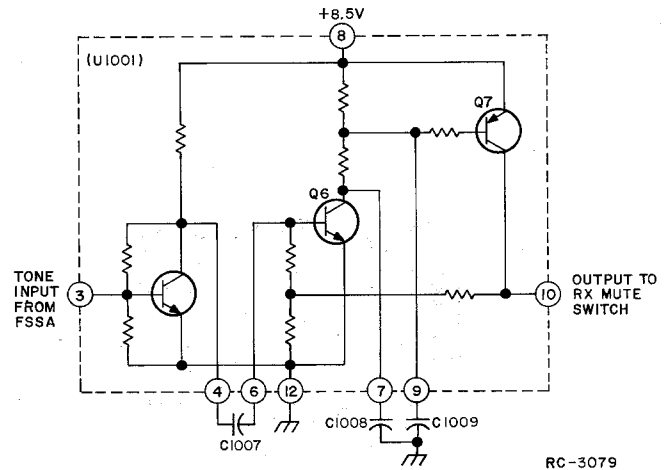


RC-3079

Figure 7 - Typical Amplifier &amp; Threshold Detector Circuit

STANDARD TONE FREQUENCIES (Hz)				
71.9	88.5	107.2	131.8	162.2
74.4	91.5	110.9	136.5	167.9
77.0	94.8	114.8	141.3	173.8
79.7	97.4	118.8	146.2	179.9
82.5	100.0	123.0	151.4	186.2
85.4	103.5	127.3	156.7	192.8
				203.5

GENERAL ELECTRIC COMPANY • MOBILE COMMUNICATIONS DIVISION  
WORLD HEADQUARTERS • LYNCHBURG, VIRGINIA 24502 U.S.A.

**GENERAL ELECTRIC**  
U.S.A.



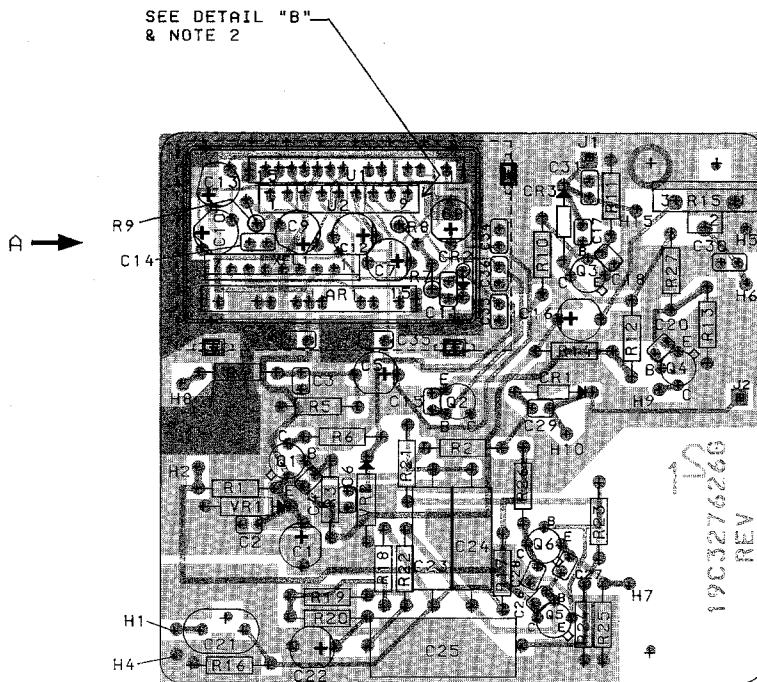


(19B227845, Sh. 1, Rev. 1)  
(19B227845, Sh. 2, Rev. 2)

NOTES:

1. PARTIAL REFERENCE DESIGNATIONS ARE SHOWN.  
FOR COMPLETE DESIGNATION, PREFIX WITH  
1000 SERIES.  
EXAMPLE: C1-C1001, R1-R1001....ETC.
2. U2 CAN BE INSTALLED BACKWARDS.  
ORIENT WITH PINS OFFSET AS SHOWN.


CONNECTION CHART					
FROM	TO	WIRE	TERMINATION	GR. 4	GR. 5
H2	P6-6	SF24-R		1	1
H1	P6-3	N22SJ-WG		1	1
H4	P6-1	SHIELD		1	1
H8	P6-4	N22SJ-WBK		1	1
	P6-1	SHIELD		1	1
H7	P6-2	SF24-W		1	1
H9	P6-5	SF24-Y		1	1
H15	LET. HANG	SF24-G		1	1
H10	LET. HANG	SF24-BR	P11	1	1
H6	LET. HANG	N22SJ-WR		1	1
H5		SHIELD		1	1
H15	LET. HANG	SF24-G			1

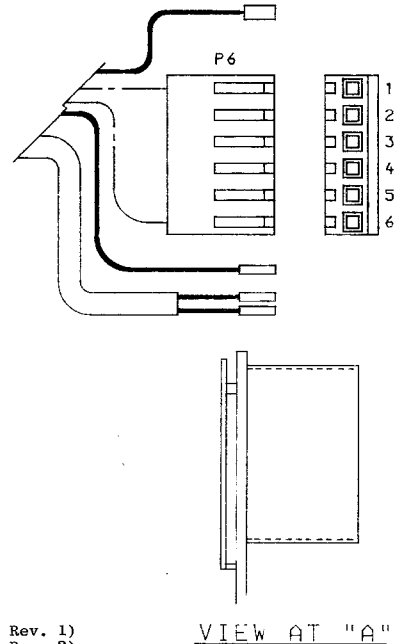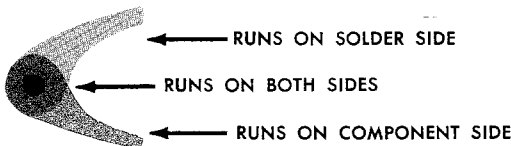

TABS TO BE CUT OFF  
BOTH ENDS OF CAN (U2 ONLY)  
FLUSH WITHIN .020.

DETAIL "B"

LEAD IDENTIFICATION  
FOR Q1-Q6



NOTE: LEAD ARRANGEMENT, AND NOT  
CASE SHAPE, IS DETERMINING  
FACTOR FOR LEAD IDENTIFICATION.

(19C327628, Rev. 4)

## OUTLINE DIAGRAM

CHANNEL GUARD 19C327626G1-G3

PARTS LIST

LBI30371C

CHANNEL GUARD  
SINGLE TONE ENCODE/DECODE  
19C327626G1

SYMBOL	GE PART NO.	DESCRIPTION
AR1001	19D417833G1	Selective Amplifier. Thick film hybrid.
----- CAPACITORS -----		
C1001	19A134202P6	Tantalum: 22 $\mu$ f $\pm$ 20%, 15 VDCW.
C1002 and C1003	19A116192P2	Ceramic: 470 pf $\pm$ 20%, 50 VDCW; sim to Erie 8111-A050-W5R-471M.
C1004	19A116192P13	Ceramic: 1000 pf $\pm$ 10%, 50 VDCW; sim to Erie 8121-A050-W5R-102K.
C1005	19A134202P12	Tantalum: 0.47 $\mu$ f $\pm$ 20%, 35 VDCW.
C1006	19A116192P2	Ceramic: 470 pf $\pm$ 20%, 50 VDCW; sim to Erie 8111-A050-W5R-471M.
C1007	19A134202P14	Tantalum: 1 $\mu$ f $\pm$ 20%, 35 VDCW.
C1008	19A134202P12	Tantalum: 0.47 $\mu$ f $\pm$ 20%, 35 VDCW.
C1009	19A134202P14	Tantalum: 1 $\mu$ f $\pm$ 20%, 35 VDCW.
C1010	19A134202P5	Tantalum: 3.3 $\mu$ f $\pm$ 20%, 15 VDCW.
C1011	19A116192P2	Ceramic: 470 pf $\pm$ 20%, 50 VDCW; sim to Erie 8111-A050-W5R-471M.
C1012 and C1013	19A134202P5	Tantalum: 3.3 $\mu$ f $\pm$ 20%, 15 VDCW.
C1014	19A116114P7068	Ceramic: 120 pf $\pm$ 5%, 100 VDCW; temp coef -750 PPM.
C1015	19A116192P2	Ceramic: 470 pf $\pm$ 20%, 50 VDCW; sim to Erie 8111-A050-W5R-471M.
C1016	19A134202P5	Tantalum: 3.3 $\mu$ f $\pm$ 20%, 15 VDCW.
C1017 and C1018	19A116192P2	Ceramic: 470 pf $\pm$ 20%, 50 VDCW; sim to Erie 8111-A050-W5R-471M.
C1019*	19A116192P2	Ceramic: 470 pf $\pm$ 20%, 50 VDCW; sim to Erie 8111-A050-W5R-471M. Deleted by REV A.
C1020	19A116192P2	Ceramic: 470 pf $\pm$ 20%, 50 VDCW; sim to Erie 8111-A050-W5R-471M.
C1021	19A116080P6	Polyester: 0.068 $\mu$ f $\pm$ 20%, 50 VDCW.
C1022	19A134202P10	Tantalum: 0.22 $\mu$ f $\pm$ 20%, 35 VDCW.
C1023 and C1024	19C300075P33001G	Polyester: 0.033 $\mu$ f $\pm$ 2%, 100 VDCW; sim to GE Type 61F.
C1025	19C300075P68001G	Polyester: 0.068 $\mu$ f $\pm$ 2%, 100 VDCW; sim to GE Type 61F.
C1026 thru C1029	19A116192P2	Ceramic: 470 pf $\pm$ 20%, 50 VDCW; sim to Erie 8111-A050-W5R-471M.
C1030 thru C1036	19A116114P10044	Ceramic: 27 pf $\pm$ 5%, 100 VDCW; temp coef -3300 PPM.
----- DIODES AND RECTIFIERS -----		
CR1001 thru CR1003	19A115250P1	Silicon, fast recovery, 225 mA, 50 PIV.
----- JACKS AND RECEPTACLES -----		
J1001 and J1002	19A116779P1	Contact, electrical: sim to Molex 08-50-0404.
----- PLUGS -----		
P1006		Connector. Includes:
	19A116659P80	Printed board: sim to Molex 09-50-7061.
	19A116781P6	Contact, electrical: wire range No. 22-26 AWG; sim to Molex 08-50-0108. (Quantity 6).

SYMBOL	GE PART NO.	DESCRIPTION
P1011	19A116781P5	Contact, electrical: wire range No. 18-24 AWG; sim to Molex 08-50-0106. (Quantity 3).
	19A127042P2	Terminal, solderless: sim to Malco 12093-10.
		----- TRANSISTORS -----
Q1001 and Q1002	19A115852P1	Silicon, PNP; sim to Type 2N3906.
Q1003 thru Q1006	19A115910P1	Silicon, NPN; sim to Type 2N3904.
----- RESISTORS -----		
R1001	3R152P680J	Composition: 68 ohms $\pm$ 5%, 1/4 w.
R1002	3R152P203	Composition: 20K ohms $\pm$ 5%, 1/4 w.
R1003	3R152P562K	Composition: 5.6K ohms $\pm$ 10%, 1/4 w.
R1004	3R152P823J	Composition: 82K ohms $\pm$ 5%, 1/4 w.
R1005	3R152P103J	Composition: 10K ohms $\pm$ 5%, 1/4 w.
R1006	3R152P511J	Composition: 510 ohms $\pm$ 5%, 1/4 w.
R1007	3R152P104K	Composition: 100K ohms $\pm$ 10%, 1/4 w.
R1008	19C314256P22262	Metal film: 22.6K ohms $\pm$ 1%, 1/4 w.
R1010	3R152P563K	Composition: 56K ohms $\pm$ 10%, 1/4 w.
R1011*	3R152P223J	Composition: 22K ohms $\pm$ 5%, 1/4 w.
		Earlier than REV A:
	3R152P104K	Composition: 100K ohms $\pm$ 10%, 1/4 w.
R1012*	3R152P103J	Composition: 10K ohms $\pm$ 5%, 1/4 w.
		Earlier than REV A:
	3R152P333K	Composition: 33K ohms $\pm$ 10%, 1/4 w.
R1013*	3R152P622J	Composition: 6.2K ohms $\pm$ 5%, 1/4 w.
		Earlier than REV A:
	3R152P104K	Composition: 100K ohms $\pm$ 10%, 1/4 w.
R1014	3R152P272J	Composition: 2.7K ohms $\pm$ 5%, 1/4 w.
R1015	19B209358P106	Variable, carbon film: approx 300 to 10K ohms $\pm$ 10%, 0.25 w; sim to CTS Type X-201.
R1016	3R152P153J	Composition: 15K ohms $\pm$ 5%, 1/4 w.
R1017	3R152P103J	Composition: 10K ohms $\pm$ 5%, 1/4 w.
R1018	19C314256P21622	Metal film: 16.2K ohms $\pm$ 1%, 1/4 w.
R1019	19C314256P21472	Metal film: 14.7K ohms $\pm$ 1%, 1/4 w.
R1020	19C314256P21652	Metal film: 16.5K ohms $\pm$ 1%, 1/4 w.
R1021	19C314256P27321	Metal film: 7.3K ohms $\pm$ 1%, 1/4 w.
R1022	19C314256P21472	Metal film: 14.7K ohms $\pm$ 1%, 1/4 w.
R1023	3R152P201J	Composition: 200 ohms $\pm$ 5%, 1/4 w.
R1024	3R152P103J	Composition: 10K ohms $\pm$ 5%, 1/4 w.
R1025	3R152P102J	Composition: 1K ohms $\pm$ 5%, 1/4 w.
R1026	3R152P391J	Composition: 390 ohms $\pm$ 5%, 1/4 w.
R1027*	3R152P223J	Composition: 22K ohms $\pm$ 5%, 1/4 w. Added by REV A.
----- INTEGRATED CIRCUITS -----		
U1001	19D417763G1	Decoder. Thick film hybrid.
U1002	19C321133G1	Encoder. Thick film hybrid.
----- VOLTAGE REGULATORS -----		
VR1001	4036887P9	Zener: 500 mW, 8.5 v. nominal.
VR1002	4036887P5	Zener: 500 mW, 5.4 v. nominal.
VR1003*	4036887P2	Zener: 500 mW, 2.8 v. nominal. Deleted by REV A.
----- CABLES -----		
W1001		HARNESS ASSEMBLY 19C327626G4 (Includes P1006, P1011)
----- SOCKETS -----		
XFL1001	19C320299G1	Socket: 7 contacts.


SYMBOL	GE PART NO.	DESCRIPTION
----- MISCELLANEOUS -----		
	19B201074P304	Tap screw, Phillips POZIDRIV®. No. 6-32 x 1/4. (Panel mounting screws- Quantity 3).
	19A129811P2	Insulator. (Used with U1002).
	19B227839G1	Can. (Located over AR1001, FL1001, U1002).
	19B227844G1	Shield. (Located on solder side of board).
	19A116428P4	Contact, electrical: sim to AMP 86031-1 (Strip Form). (Secures shield - 3 places).
----- ASSOCIATED ASSEMBLIES -----		
----- TONE NETWORKS -----		
NOTE: When reordering give GE Part Number and specify exact frequency needed.		
FL1001	19C320291G1	Thick film hybrid: 71.9-203.5 Hz.

PRODUCTION CHANGES


Changes in the equipment to improve performance or to simplify circuits are identified by a "Revision Letter", which is stamped after the model number of the unit. The revision stamped on the unit includes all previous revisions. Refer to the Parts List for descriptions of parts affected by these revisions.

CHANNEL GUARD ENCODER/DECODER 19C327626G1, G3  
 REV. A - To improve channel guard decode switching action.  
 Changed R1011, R1012, R1013; deleted C1019 and VR1003;  
 added R1027.

OLD CIRCUIT WAS:

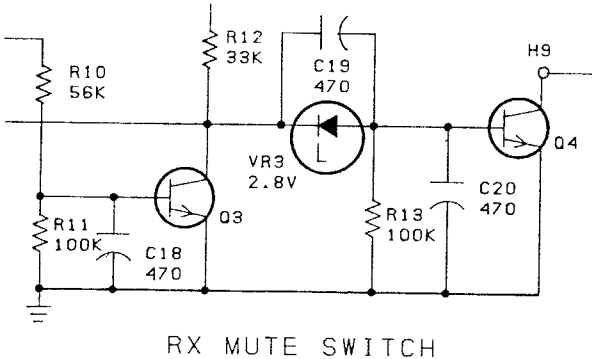

RX MUTE SWITCH

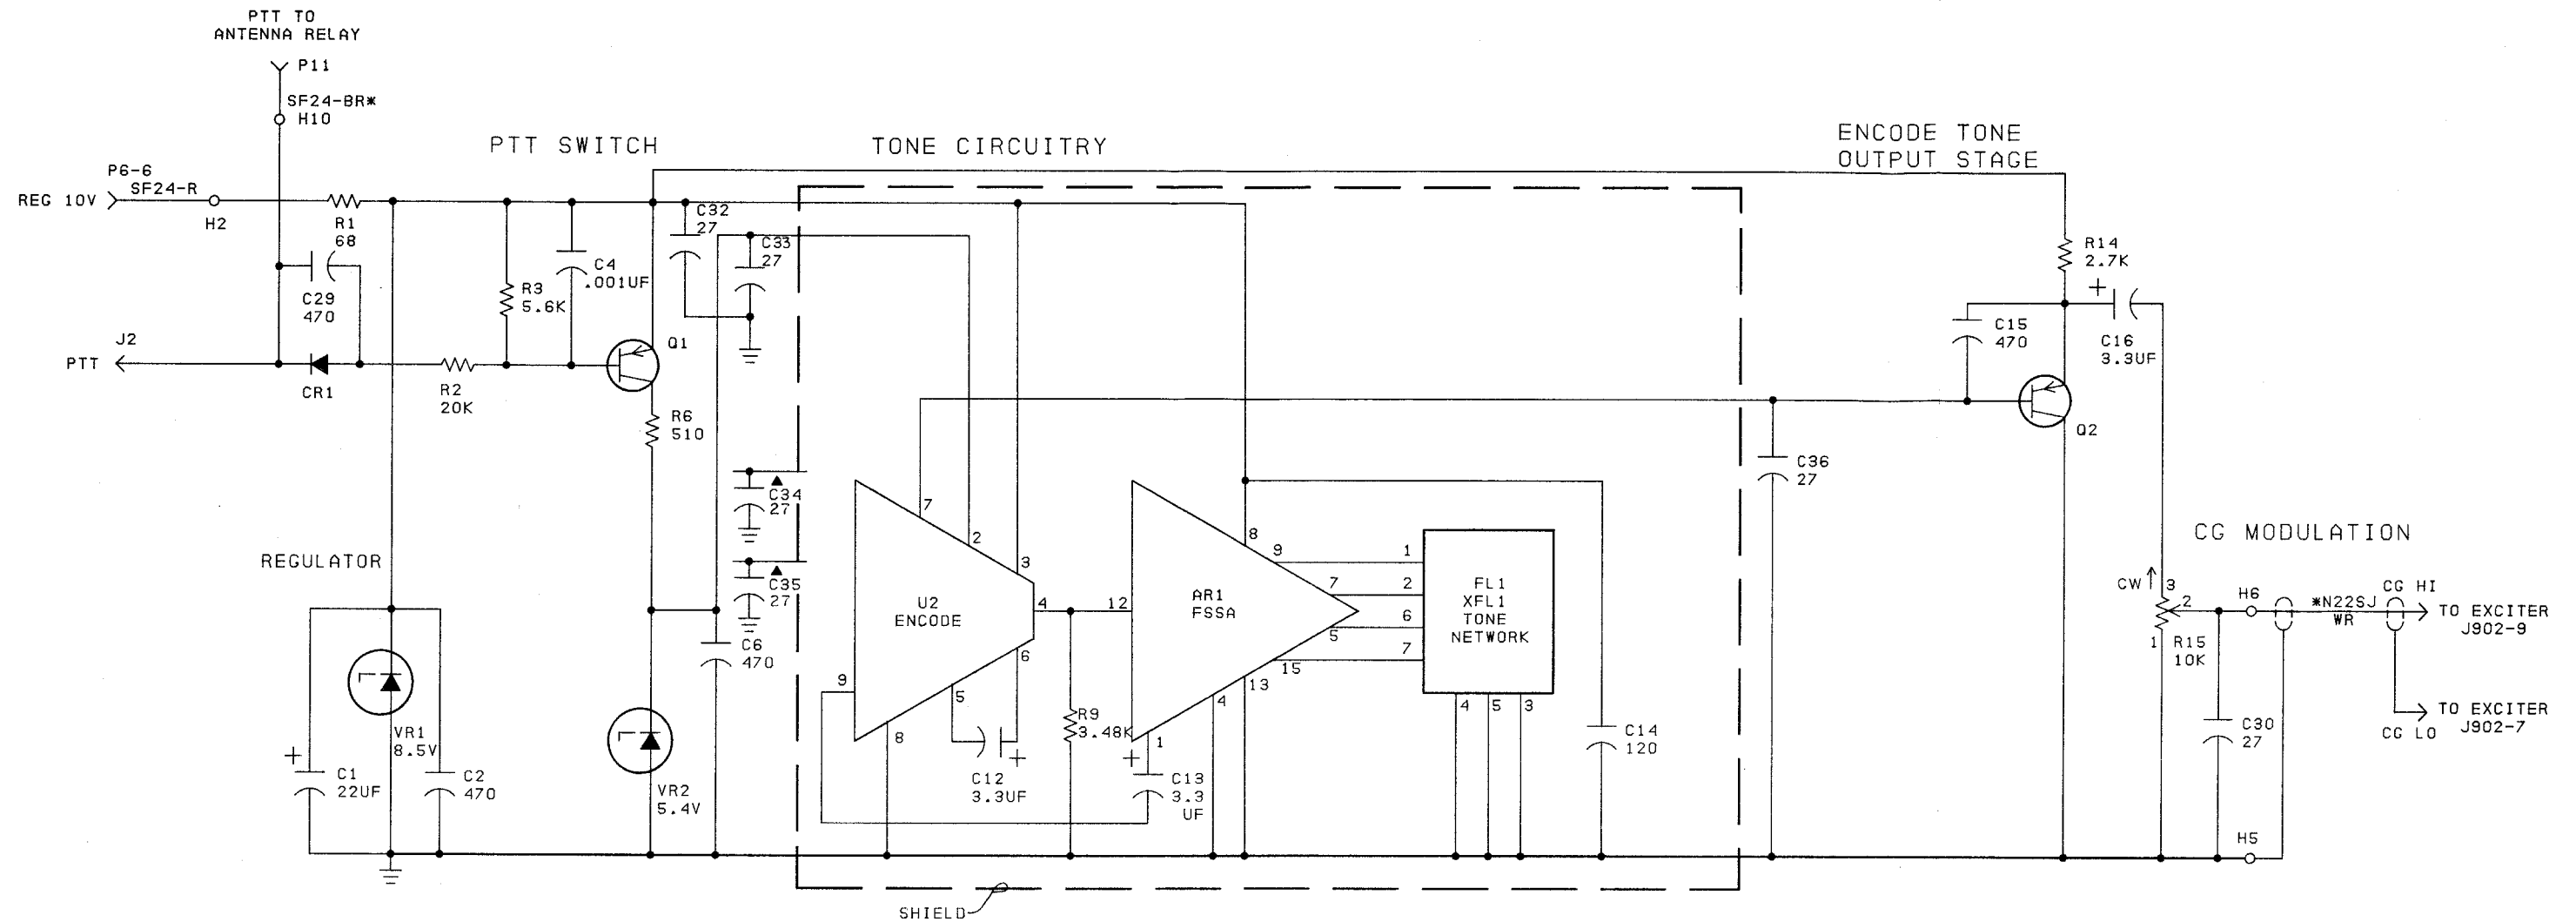

ALL RESISTORS ARE 1/4 WATT UNLESS OTHERWISE SPECIFIED AND RESISTOR VALUES IN OHMS UNLESS FOLLOWED BY K=1000 OHMS OR MEG=1,000,000 OHMS. CAPACITOR VALUES IN PICO FARADS (EQUAL TO MICROMICROFARADS) UNLESS FOLLOWED BY UF=MICROFARADS.

## NOTES:

1. PARTIAL REFERENCE DESIGNATIONS ARE SHOWN. FOR COMPLETE DESIGNATION PREFIX WITH 1000 SERIES. EXAMPLE: C1-C1001; R1-R1001.
2. \*PART OF W1002.
3. ▲C34 AND C35 ARE BY-PASS CAPACITORS.

IN ORDER TO RETAIN RATED EQUIPMENT PERFORMANCE, REPLACEMENT OF ANY SERVICE PART SHOULD BE MADE ONLY WITH A COMPONENT HAVING THE SPECIFICATIONS SHOWN ON THE PARTS LIST FOR THAT PART.

(19D424598, Rev. 0)

## SCHEMATIC DIAGRAM

CHANNEL GUARD ENCODE ONLY  
19C327626G2




## PARTS LIST

LBI30372B

CHANNEL GUARD  
SINGLE TONE ENCODE  
19C327626G2

SYMBOL	GE PART NO.	DESCRIPTION
AR1001	19D417833G1	Selective Amplifier. Thick film hybrid.
----- CAPACITORS -----		
CI001	19A134202P6	Tantalum: 22 $\mu$ f $\pm$ 20%, 15 VDCW.
CI002	19A116192P2	Ceramic: 470 pf $\pm$ 20%, 50 VDCW; sim to Erie 8111-A050-W5R-471M.
CI004	19A116192P13	Ceramic: 1000 pf $\pm$ 10%, 50 VDCW; sim to Erie 8121-A050-W5R-102K.
CI006	19A116192P2	Ceramic: 470 pf $\pm$ 20%, 50 VDCW; sim to Erie 8111-A050-W5R-471M.
CI012 and CI013	19A134202P5	Tantalum: 3.3 $\mu$ f $\pm$ 20%, 15 VDCW.
CI014	19A116114P7068	Ceramic: 120 pf $\pm$ 5%, 100 VDCW; temp coef -750 PPM.
CI015	19A116192P2	Ceramic: 470 pf $\pm$ 20%, 50 VDCW; sim to Erie 8111-A050-W5R-471M.
CI016	19A134202P5	Tantalum: 3.3 $\mu$ f $\pm$ 20%, 15 VDCW.
CI029	19A116192P2	Ceramic: 470 pf $\pm$ 20%, 50 VDCW; sim to Erie 8111-A050-W5R-471M.
CI030	19A116114P10044	Ceramic: 27 pf $\pm$ 5%, 100 VDCW; temp coef -3300 PPM.
CI032 thru CI036	19A116114P10044	Ceramic: 27 pf $\pm$ 5%, 100 VDCW; temp coef -3300 PPM.
----- DIODES AND RECTIFIERS -----		
CR1001	19A115250P1	Silicon, fast recovery, 225 mA, 50 PIV.
----- JACKS AND RECEPTACLES -----		
J1002	19A116779P5	Contact, electrical: sim to Molex 08-50-0414.
----- PLUGS -----		
P1006		Connector. Includes:
	19A116659P80	Printed board: 6 contacts; sim to Molex 09-50-7061.
	19A116781P6	Contact, electrical: wire range No. 22-26 AWG; sim to Molex 08-50-0108. (Quantity 2).
	19A116781P5	Contact, electrical: wire range No. 18-24 AWG; sim to Molex 08-50-0106. (Quantity 1).
P1011	19A127042P2	Terminal, solderless: sim to Malco 12093-10.
----- TRANSISTORS -----		
Q1001 and Q1002	19A115852P1	Silicon, PNP; sim to Type 2N3906.
----- RESISTORS -----		
R1001	3R152P680J	Composition: 68 ohms $\pm$ 5%, 1/4 w.
R1002	3R152P203K	Composition: 20K ohms $\pm$ 10%, 1/4 w.
R1003	3R152P562K	Composition: 5.6K ohms $\pm$ 10%, 1/4 w.
R1006	3R152P511J	Composition: 510 ohms $\pm$ 5%, 1/4 w.
R1009	19C314256P23481	Metal film: 3.48K ohms $\pm$ 1%, 1/4 w.
R1014	3R152P272J	Composition: 2.7K ohms $\pm$ 5%, 1/4 w.
R1015	19B208358P106	Variable, carbon film: approx 300 to 10,000 ohms $\pm$ 10%, 0.25 w; sim to CTS Type X-201.

SYMBOL	GE PART NO.	DESCRIPTION
----- INTEGRATED CIRCUITS -----		
U1002	19C321133G1	Encoder. Thick film hybrid.
----- VOLTAGE REGULATORS -----		
VR1001	4036887P9	Zener: 500 mW, 8.5 v. nominal.
VR1002	4036887P5	Zener: 500 mW, 5.4 v. nominal.
----- CABLES -----		
W1002		HARNESSE ASSEMBLY 19C327626G5 (Includes P1006, P1011)
----- SOCKETS -----		
XFL1001	19C320299G1	Socket: 7 contacts.
----- MISCELLANEOUS -----		
	19B201074P304	Tap screw, Phillips POZIDRIV®. No. 6-32 x 1/4. (Panel mounting screws- Quantity 3).
	19A129811P2	Insulator. (Used with U1002).
	19B227839G1	Can. (Located over A1001, FL1001, U1002).
	19B227844G1	Shield. (Located on solder side of board).
	19A116428P4	Contact, electrical: sim to AMP 86031-1 (Strip Form). (Secures shield - 3 places).
ASSOCIATED ASSEMBLIES		
----- TONE NETWORKS -----		
NOTE: When reordering give GE Part Number and specify exact frequency needed.		
FL1001	19C320291G1	Thick film hybrid: 71.9-203.5 Hz.

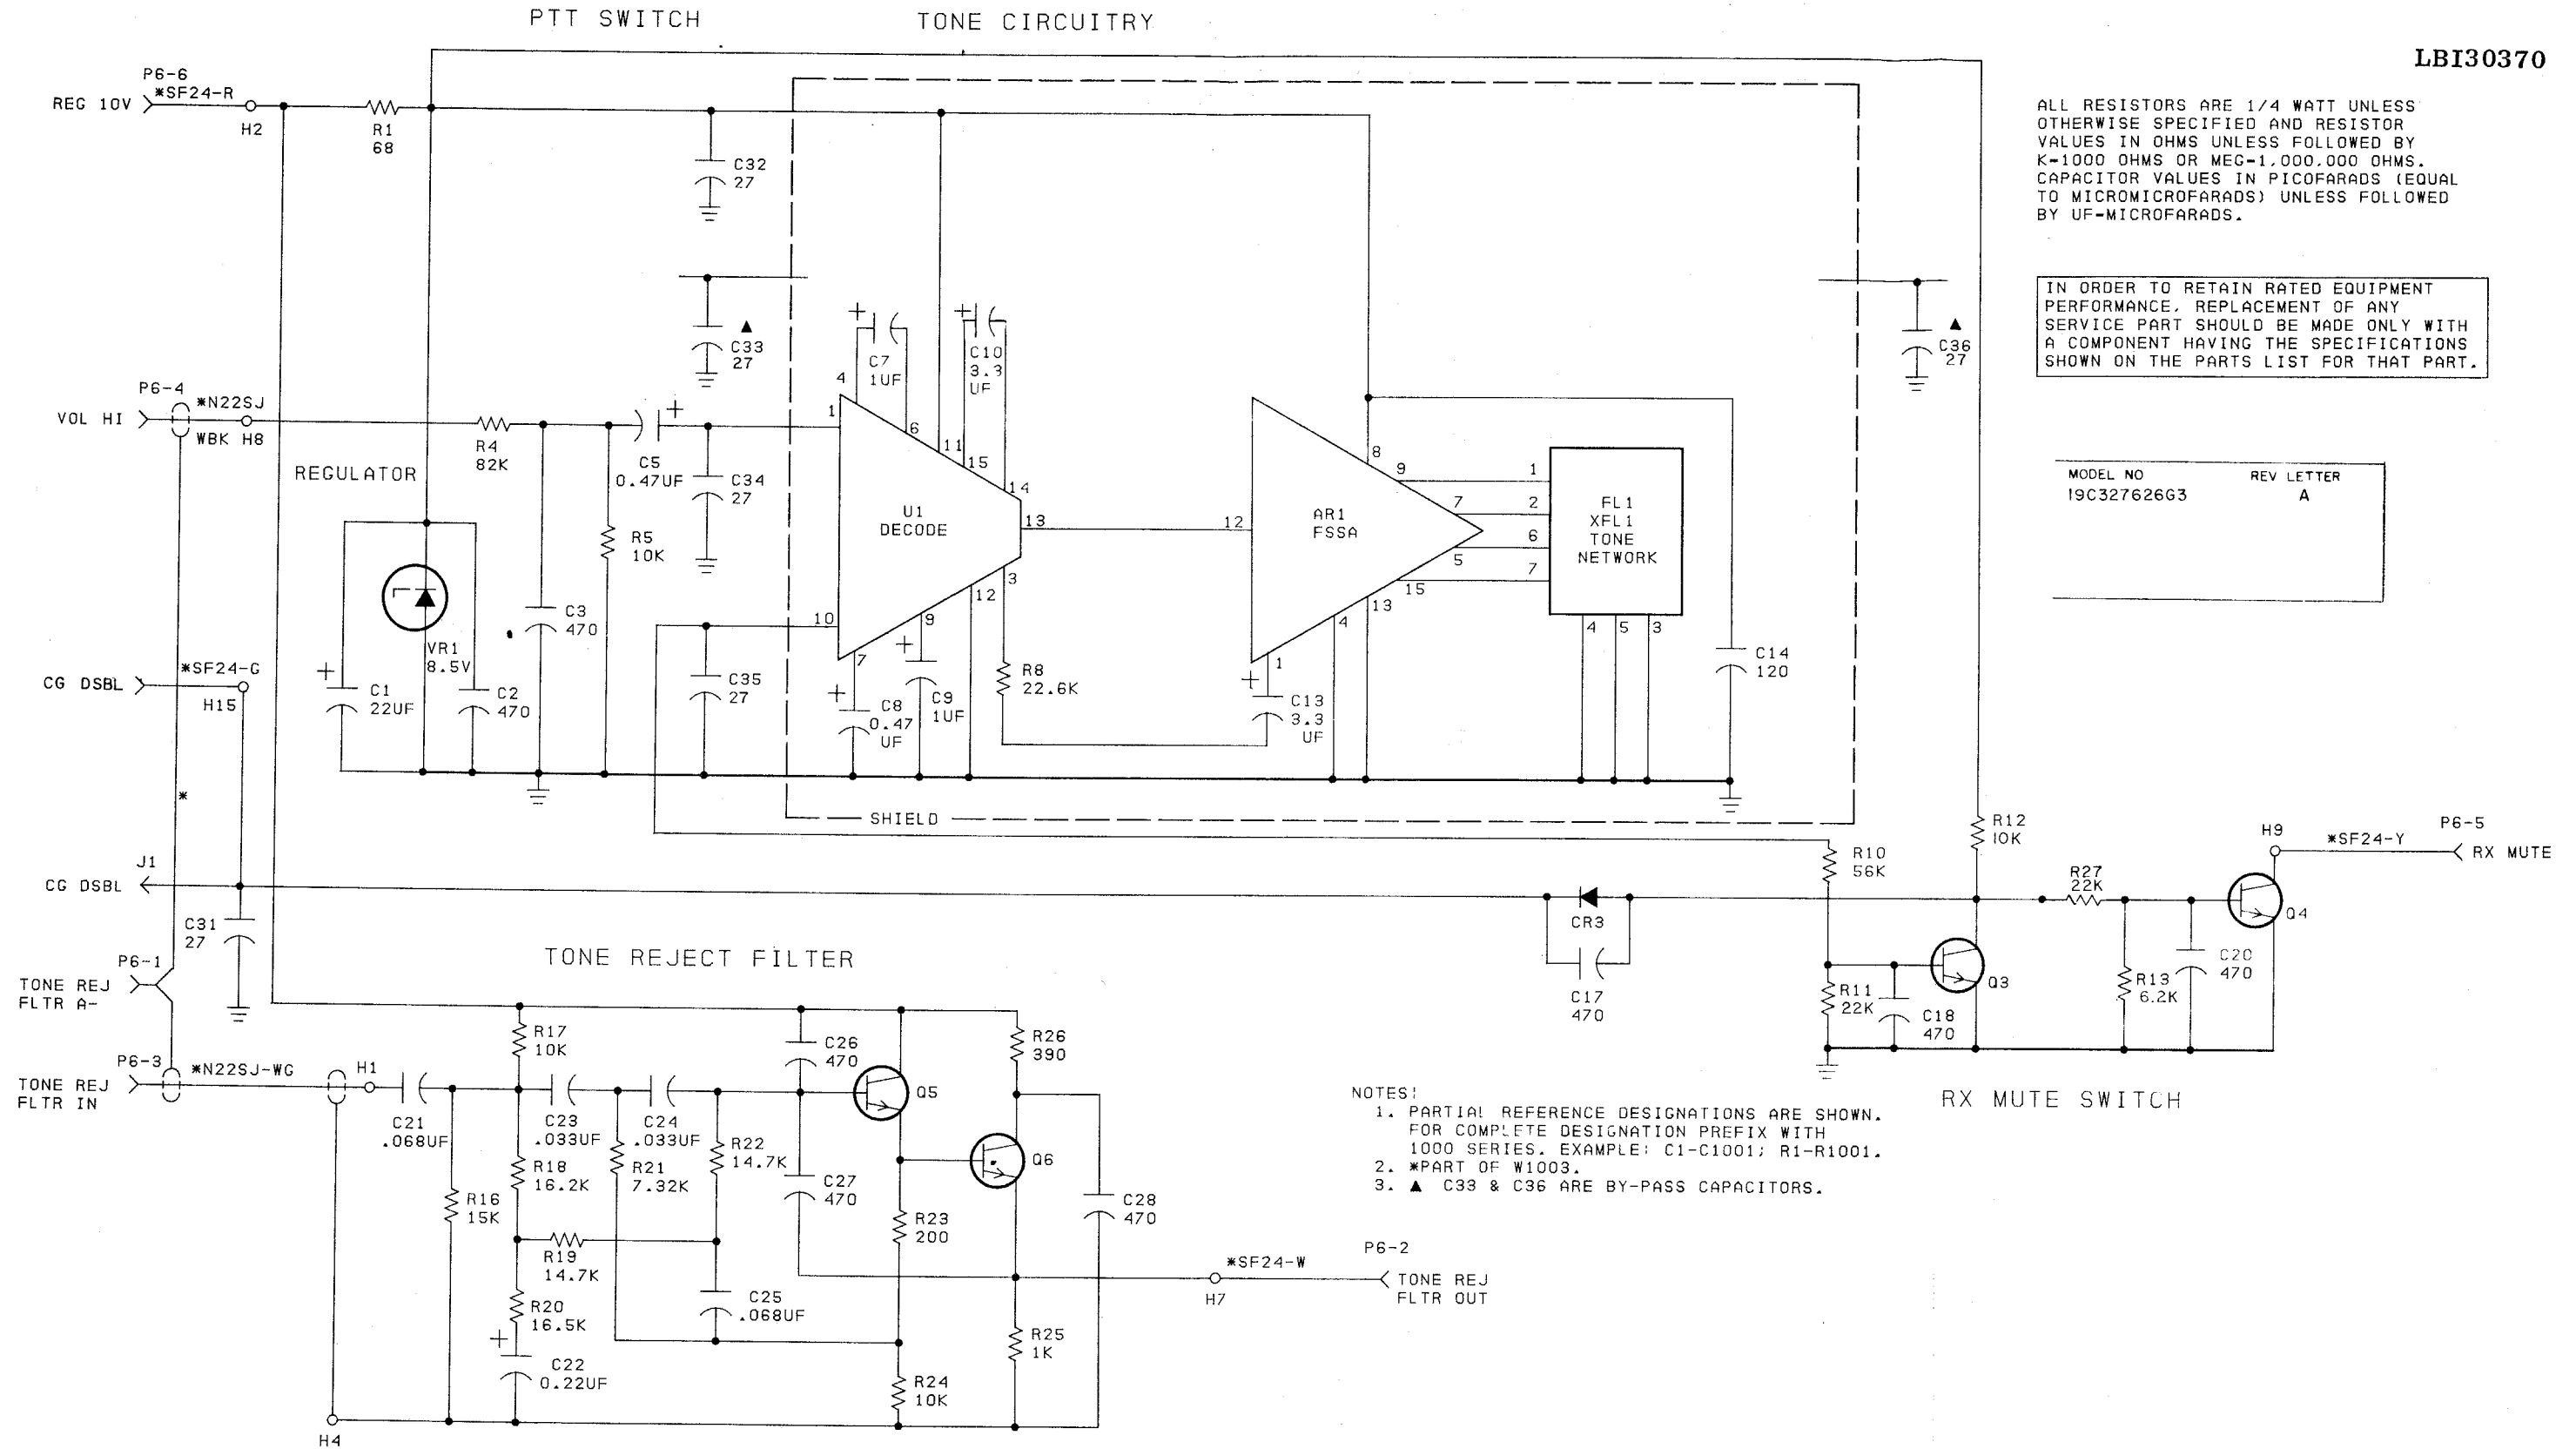

ALL RESISTORS ARE 1/4 WATT UNLESS OTHERWISE SPECIFIED AND RESISTOR VALUES IN OHMS UNLESS FOLLOWED BY K-1000 OHMS OR MEG-1,000,000 OHMS. CAPACITOR VALUES IN PICO FARADS (EQUAL TO MICROMICROFARADS) UNLESS FOLLOWED BY UF-MICROFARADS.

IN ORDER TO RETAIN RATED EQUIPMENT PERFORMANCE, REPLACEMENT OF ANY SERVICE PART SHOULD BE MADE ONLY WITH A COMPONENT HAVING THE SPECIFICATIONS SHOWN ON THE PARTS LIST FOR THAT PART.

SCHEMATIC DIAGRAM

CHANNEL GUARD DECODE ONLY  
19C327626G3

## PARTS LIST

LBI30373C

CHANNEL GUARD  
SINGLE TONE DECODE  
19C327626G3

SYMBOL	GE PART NO.	DESCRIPTION
AR1001	19D417833G1	Selective Amplifier. Thick film hybrid.
----- CAPACITORS -----		
C1001	19A134202P6	Tantalum: 22 $\mu$ f $\pm$ 20%, 15 VDCW.
C1002 and C1003	19A116192P2	Ceramic: 470 pf $\pm$ 20%, 50 VDCW; sim to Erie 8111-A050-W5R-471M.
C1005	19A134202P12	Tantalum: 0.47 $\mu$ f $\pm$ 20%, 35 VDCW.
C1007	19A134202P14	Tantalum: 1 $\mu$ f $\pm$ 20%, 35 VDCW.
C1008	19A134202P12	Tantalum: 0.47 $\mu$ f $\pm$ 20%, 35 VDCW.
C1009	19A134202P14	Tantalum: 1 $\mu$ f $\pm$ 20%, 35 VDCW.
C1010	19A134202P5	Tantalum: 3.3 $\mu$ f $\pm$ 20%, 15 VDCW.
C1013	19A134202P5	Tantalum: 3.3 $\mu$ f $\pm$ 20%, 15 VDCW.
C1014	19A116114P7068	Ceramic: 120 pf $\pm$ 5%, 100 VDCW; temp coef -750 PPM.
C1017 and C1018	19A116192P2	Ceramic: 470 pf $\pm$ 20%, 50 VDCW; sim to Erie 8111-A050-W5R-471M. Deleted by REV A.
C1019*	19A116192P2	Ceramic: 470 pf $\pm$ 20%, 50 VDCW; sim to Erie 8111-A050-W5R-471M. Deleted by REV A.
C1020	19A116192P2	Ceramic: 470 pf $\pm$ 20%, 50 VDCW; sim to Erie 8111-A050-W5R-471M.
C1021	19A116080P6	Polyester: 0.068 $\mu$ f $\pm$ 20%, 50 VDCW.
C1022	19A134202P10	Tantalum: 0.22 $\mu$ f $\pm$ 20%, 35 VDCW.
C1023 and C1024	19C300075P33001G	Polyester: 33,00.033 $\mu$ f $\pm$ 2%, 100 VDCW; sim to GE Type 61F.
C1025	19C300075P68001G	Polyester: 0.068 $\mu$ f $\pm$ 2%, 100 VDCW; sim to GE Type 61F.
C1026 thru C1028	19A116192P2	Ceramic: 470 pf $\pm$ 20%, 50 VDCW; sim to Erie 8111-A050-W5R-471M.
C1031 thru C1036	19A116114P10044	Ceramic: 27 pf $\pm$ 5%, 100 VDCW; temp coef -3300 PPM.
----- DIODES AND RECTIFIERS -----		
CR1003	19A115250P1	Silicon, fast recovery, 225 mA, 50 PIV.
----- JACKS AND RECEPTACLES -----		
J1001	19A116779P1	Contact, electrical: sim to Molex 08-50-0404.
----- PLUGS -----		
P1006		Connector. Includes:
	19A116659P80	Printed board: 6 contacts; sim to Molex 08-50-7061.
	19A116781P6	Contact, electrical: wire range No. 22-26 AWG; sim to Molex 08-50-0108. (Quantity 5).
	19A116781P5	Contact, electrical: wire range No. 18-24 AWG; sim to Molex 08-50-0106. (Quantity 2).
----- TRANSISTORS -----		
Q1003 thru Q1006	19A115910P1	Silicon, NPN; sim to Type 2N3904.

SYMBOL	GE PART NO.	DESCRIPTION
----- RESISTORS -----		
R1001	3R152P680J	Composition: 68 ohms $\pm$ 5%, 1/4 w.
R1004	3R152P823J	Composition: 82K ohms $\pm$ 5%, 1/4 w.
R1005	3R152P103J	Composition: 10K ohms $\pm$ 5%, 1/4 w.
R1008	19C314256P22262	Metal film: 22.6K ohms $\pm$ 1%, 1/4 w.
R1010	3R152P563K	Composition: 56K ohms $\pm$ 10%, 1/4 w.
R1011*	3R152P223J	Composition: 22K ohms $\pm$ 5%, 1/4 w. Earlier than REV A:
	3R152P104K	Composition: 100K ohms $\pm$ 10%, 1/4 w.
R1012*	3R152P103J	Composition: 10K ohms $\pm$ 5%, 1/4 w. Earlier than REV A:
	3R152P333K	Composition: 33K ohms $\pm$ 10%, 1/4 w.
R1013*	3R152P622J	Composition: 6.2K ohms $\pm$ 5%, 1/4 w. Earlier than REV A:
	3R152P104K	Composition: 100K ohms $\pm$ 10%, 1/4 w.
R1016	3R152P153J	Composition: 15K ohms $\pm$ 5%, 1/4 w.
R1017	3R152P103J	Composition: 10K ohms $\pm$ 5%, 1/4 w.
R1018	19C314256P21622	Metal film: 16.2K ohms $\pm$ 1%, 1/4 w.
R1019	19C314256P21472	Metal film: 14.7K ohms $\pm$ 1%, 1/4 w.
R1020	19C314256P21652	Metal film: 16.5K ohms $\pm$ 1%, 1/4 w.
R1021	19C314256P27321	Metal film: 7.3K ohms $\pm$ 1%, 1/4 w.
R1022	19C314256P21472	Metal film: 14.7K ohms $\pm$ 1%, 1/4 w.
R1023	3R152P201J	Composition: 200 ohms $\pm$ 5%, 1/4 w.
R1024	3R152P103J	Composition: 10K ohms $\pm$ 5%, 1/4 w.
R1025	3R152P102J	Composition: 1K ohms $\pm$ 5%, 1/4 w.
R1026	3R152P391J	Composition: 390 ohms $\pm$ 5%, 1/4 w.
R1027*	3R152P223J	Composition: 22K ohms $\pm$ 5%, 1/4 w. Added by REV A.
----- INTEGRATED CIRCUITS -----		
U1001	19D417763G1	Decoder. Thick film hybrid.
----- VOLTAGE REGULATORS -----		
VR1001	4036887P9	Zener: 500 mW, 8.5 v. nominal.
VR1003	4036887P2	Zener: 500 mW, 2.8 v. nominal.
----- CABLES -----		
W1003		HARNESSE ASSEMBLY 19C327626G6 (Includes P1006)
----- SOCKETS -----		
XFL1001	19C320299G1	Socket: 7 contacts.
----- MISCELLANEOUS -----		
	19B201074P304	Tap screw, Phillips POZIDRIV®. No. 6-32 x 1/4. (Panel mounting screws- Quantity 3).
	19B227839G1	Can. (Located over AR1001, FL1001).
	19B227844G1	Shield. (Located on solder side of board).
	19A116428P4	Contact, electrical: sim to AMP 86031-1 (Strip Form). (Secures shield- 3 places).
----- ASSOCIATED ASSEMBLIES -----		
----- TONE NETWORKS -----		
FL1001	19C320291G1	Thick film hybrid: 71.9-203.5 Hz.  NOTE: When reordering give GE Part Number and specify exact frequency needed.


## PRODUCTION CHANGES

Changes in the equipment to improve performance or to simplify circuits are identified by a "Revision Letter", which is stamped after the model number of the unit. The revision stamped on the unit includes all previous revisions. Refer to the Parts List for descriptions of parts affected by these revisions.

CHANNEL GUARD ENCODER/DECODER 19C327626G1, G3

REV. A - To improve channel guard decode switching action.  
Changed R1011, R1012, R1013; deleted C1019 and VR1003;  
added R1027.



OLD CIRCUIT WAS:

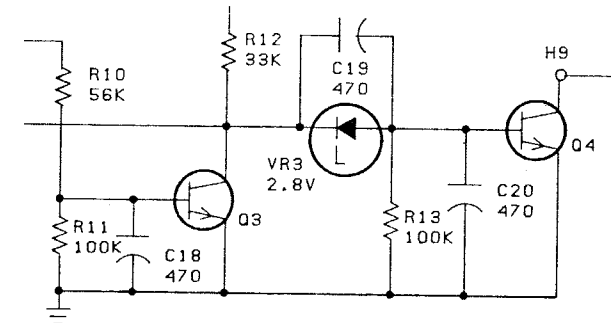

RX MUTE SWITCH

TROUBLESHOOTING

SYMPTOM	PROCEDURE
Unit will not encode.	<ol style="list-style-type: none"><li>1. Check for 3.1 VDC at (A).</li><li>2. If reading is correct, check Mod. Adj. R1015 then check the transmitter oscillator module.</li><li>3. If reading is not correct check voltage readings on connections between the tone network FL1001 and AR1001.</li><li>4. If the readings between the tone network and AR1001 are incorrect, insure good contact between the tone network and the network socket.</li><li>5. If readings are correct check readings at (B) through (D).</li></ol>

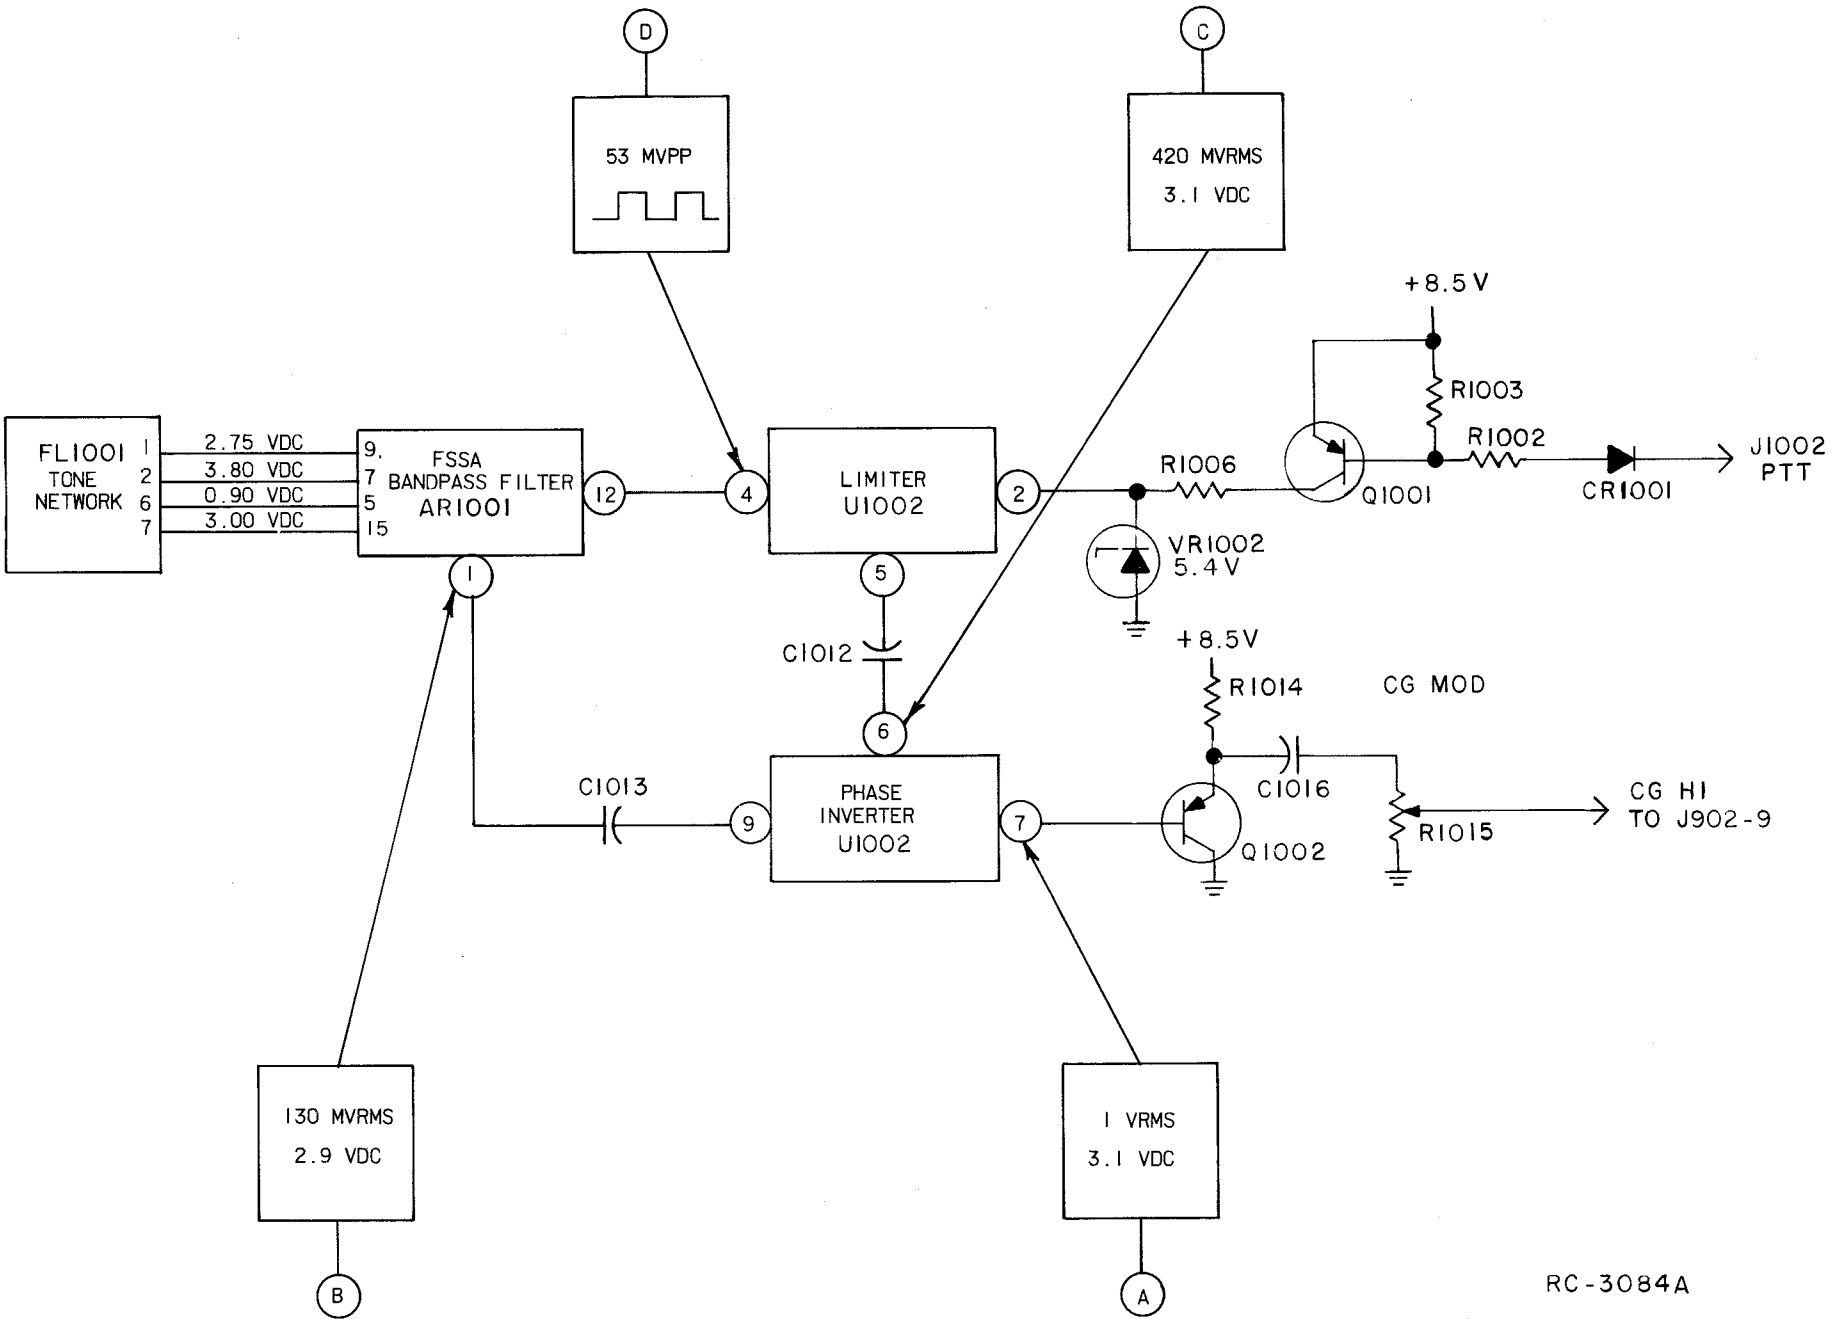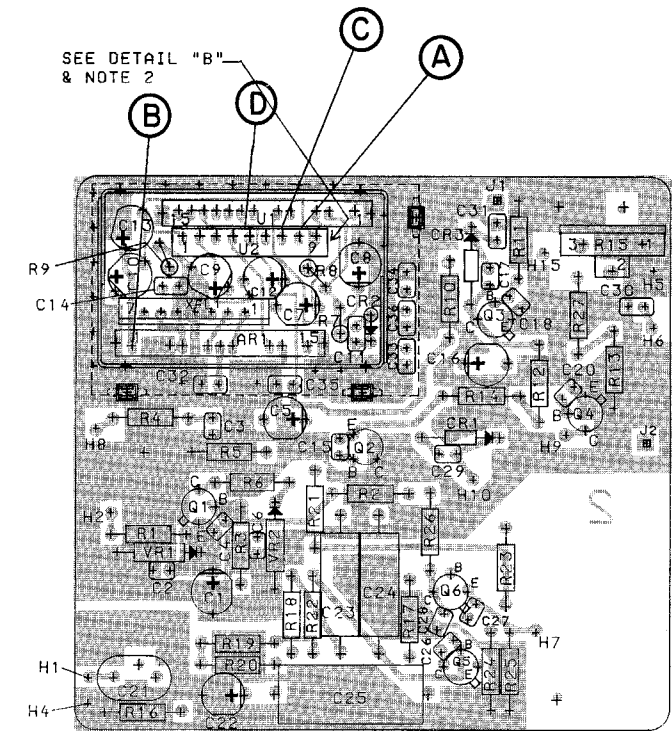

RC-3084A

(RC-3096)  
(19C327628, Rev. 4)  
(19B227845, Sh. 2, Rev. 2)

TROUBLESHOOTING PROCEDURE

ENCODER CHANNEL GUARD 19C327626