

TABLE OF CONTENTS

DESCRIPTION	1
CIRCUIT ANALYSIS	1
OUTLINE DIAGRAM	3
SCHEMATIC DIAGRAM	5
PARTS LIST	6

DESCRIPTION

The 19D417385G1 Repeater Control Board is used in MASTR® II repeater control applications without Channel Guard. The board consists of the transmit keying function, a drop-out delay timer and a 3-minute limit timer. The 19D417385G2 Repeater Control Board is used in repeater stations with Channel Guard. This board consists of the transmit keying function, a drop-out delay timer, a 3-minute limit timer and a Channel Guard control circuit.

CIRCUIT ANALYSIS
Repeater Control Board 19D417385G1

The Repeater Control Board receives its input from the station Receiver Unsquelched Sensor (RUS). When the receiver is unsquelched, the Receiver Unsquelched Sensor Operating Switch (RUSOS) lead is grounded at the Audio Board. This ground forward biases CR11 on the Repeater Control Board, turning on Q4. Conduction of Q4 operates the 3-minute limit timer is used.

The 3-minute limit timer is required by the FCC in certain applications to automatically shut off the transmitter after a maximum of three minutes continuous operation. The timer prevents the transmitter from accidentally "locking on" and tying up the channel.

Transistors Q1 and Q2 operate as an astable multivibrator, pulsing Q3 on and off. The pulsing of Q3 charges C3 in stair-step fashion until the charge applied to U1, terminal 6, is equal to 2/3 of the Vcc voltage applied to U1-8. U1 is a monolithic timing circuit with a comparator between

the Vcc input (terminal 8) and the threshold input (terminal 6). When the compared voltage is equal to 2/3 of Vcc, the flip-flop in U1 is operated, providing a high at the output (terminal 3). At the end of the timing period, determined by the setting of R8, a discharge path for C3 is provided at terminal 7 of U1.

The drop-out delay timer decreases the number of transmitter "ON-OFF" cycles by keeping the transmitter keyed for a predetermined delay period after the receiver squelches. The delay period can be set for 0.5 to 8 seconds. Unsquelching the receiver at any time during the delay period keeps the transmitter operating without interruption. After the delay time lapses, and no signal is applied to the receiver, the transmitter keying circuit is de-energized and the transmitter turns off.

When terminal 3 of U1 goes high, Q10 is turned on. Conduction of Q10 provides the threshold voltage to operate U2. This timer functions in the same manner as described for U1, with the timing period determined by the setting of R14. The high at terminal 3 of U1 forward biases CR2 and CR6, operating Q5. Conduction of Q5 applies ground through the REPEATER DISABLE service switch S1 to the REPEATER PTT lead D3 to key the transmitter. The high at terminal 3 of U2 forward biases CR3 and CR6, also keying the transmitter. When a remote REPEATER DISABLE function is provided in the system, a ground is applied to terminal A4 on the Repeater Control Board when the function is selected. This ground is applied to the base of Q5, preventing the transistor from conducting and preventing the transmitter from being keyed.

Repeater Control Board 19D417385G2

The 19D417385G2 Repeater Control Board is required in repeater stations with Channel Guard. The CG DET OUTPUT lead (A3) on the Repeater Control Board is connected to the Channel Guard Board in the station receiver. When the Channel Guard is squelched, ground is applied to A3 and to the base of Q7. The transistor is held off, permitting Q8 to conduct. Conduction of Q8 applies ground to the RX 1 MUTE lead (A6) to keep the receiver squelched. If a signal modulated with the correct Channel Guard tone is received, Q7 is allowed to conduct. Conduction of Q7 turns Q8 off, removing the ground from A6 and unsquelching the receiver.

The RUS lead (D12) on the Repeater Control Board is at ground potential when the receiver is squelched. CR12 is forward biased, as well as CR8, preventing Q6 from conducting. The high at the collector of Q6 prevents Q4 from conducting. When the receiver unsquelches, CR8 and CR12 are





turned off. Q6 is turned on, allowing Q4 to conduct and operate the timing circuits.

When the Channel Guard modulated signal is no longer present, the CG DET OUTPUT lead (A3) goes low, forward biasing CR8 and turning off Q6. This eliminates the squelch tail. Q7 is also turned off, permitting Q8 to conduct and mute the receiver. The RUS lead (D12) now goes to ground, forward biasing CR12 to hold Q6 off.

A ground applied to the CG MONITOR lead A7 will forward bias CR14 and turn Q8 off. This will allow the station receiver to operate only on noise squelch so that all transmissions will be monitored at the local or remote points. The repeater transmitter, however, will still be Channel Guard protected. This GC MONITOR ground may be originated at the MASTR Local Controller (in Local/Repeat Combinations) or at the Remote Control Board (in Remote/Repeat combinations).



GENERAL ELECTRIC COMPANY • MOBILE COMMUNICATIONS DIVISION
WORLD HEADQUARTERS • LYNCHBURG, VIRGINIA 24502 U.S.A.

GENERAL  ELECTRIC*
U.S.A.

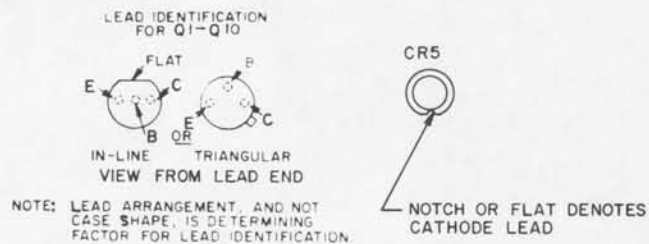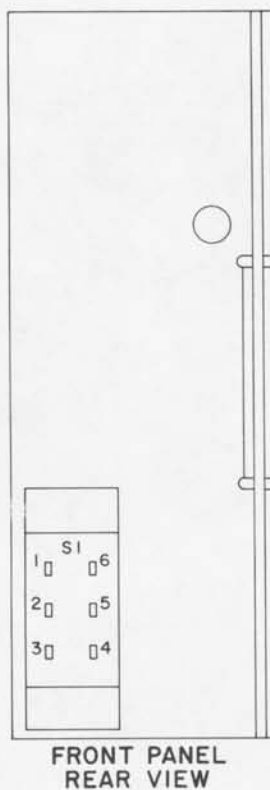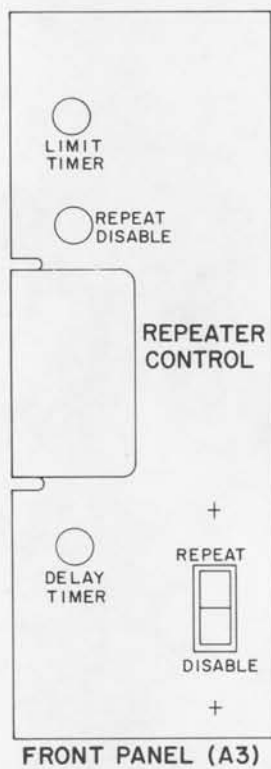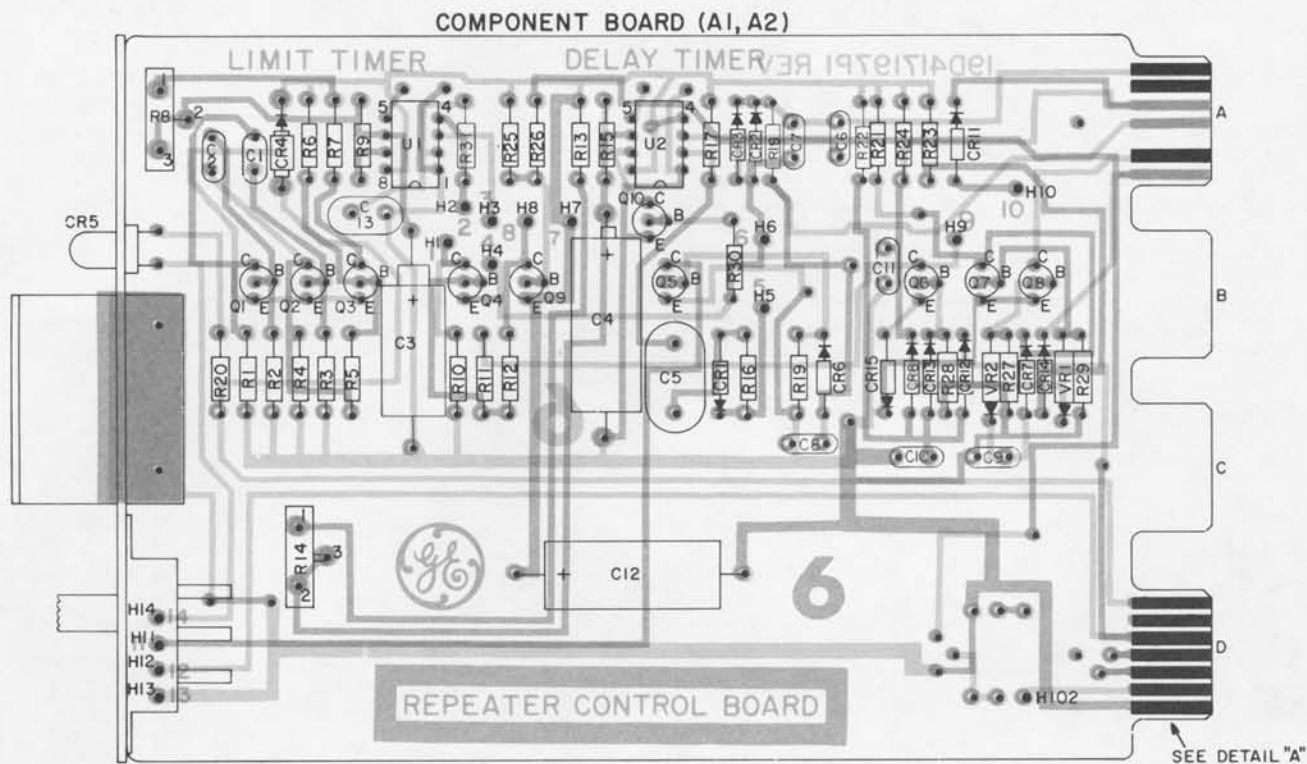

SEE WIRING DIAGRAM FOR THE FOLLOWING CONNECTIONS

FROM	TO	GROUP
H1	H2	1 & 2
H3	H4	1 & 2
H5	H6	1 & 2
H7	H8	1 & 2
H9	H10	1



(19D423180, Rev. 5)
(19D417197, Sh. 2, Rev. 6)
(19D417197, Sh. 3, Rev. 6)

OUTLINE DIAGRAM

REPEATER CONTROL BOARD
19D417385G1 & G2


ALL RESISTORS ARE 1/4 WATT UNLESS OTHERWISE SPECIFIED AND RESISTOR VALUES IN OHMS UNLESS FOLLOWED BY K=1000 OHMS OR MEG=1,000,000 OHMS. CAPACITOR VALUES IN PICO FARADS (EQUAL TO MICROFARADS) UNLESS FOLLOWED BY UF= MICROFARADS. INDUCTANCE VALUES IN MICROHENRYS UNLESS FOLLOWED BY MH= MILLIHENRYS OR H=HENRYS.

IN ORDER TO RETAIN RATED EQUIPMENT PERFORMANCE, REPLACEMENT OF ANY SERVICE PART SHOULD BE MADE ONLY WITH A COMPONENT HAVING THE SPECIFICATIONS SHOWN ON THE PARTS LIST FOR THAT PART.

SEE APPLICABLE PRODUCTION CHANGE SHEETS IN INSTRUCTION BOOK SECTION DEALING WITH THIS UNIT, FOR DESCRIPTION OF CHANGES UNDER EACH REVISION LETTER.

THIS ELEM DIAG APPLIES TO

MODEL NO	REV LETTER
PL19D417385G1	
PL19D417385G2	
PL19D417198G1	C
PL19D417198G2	D

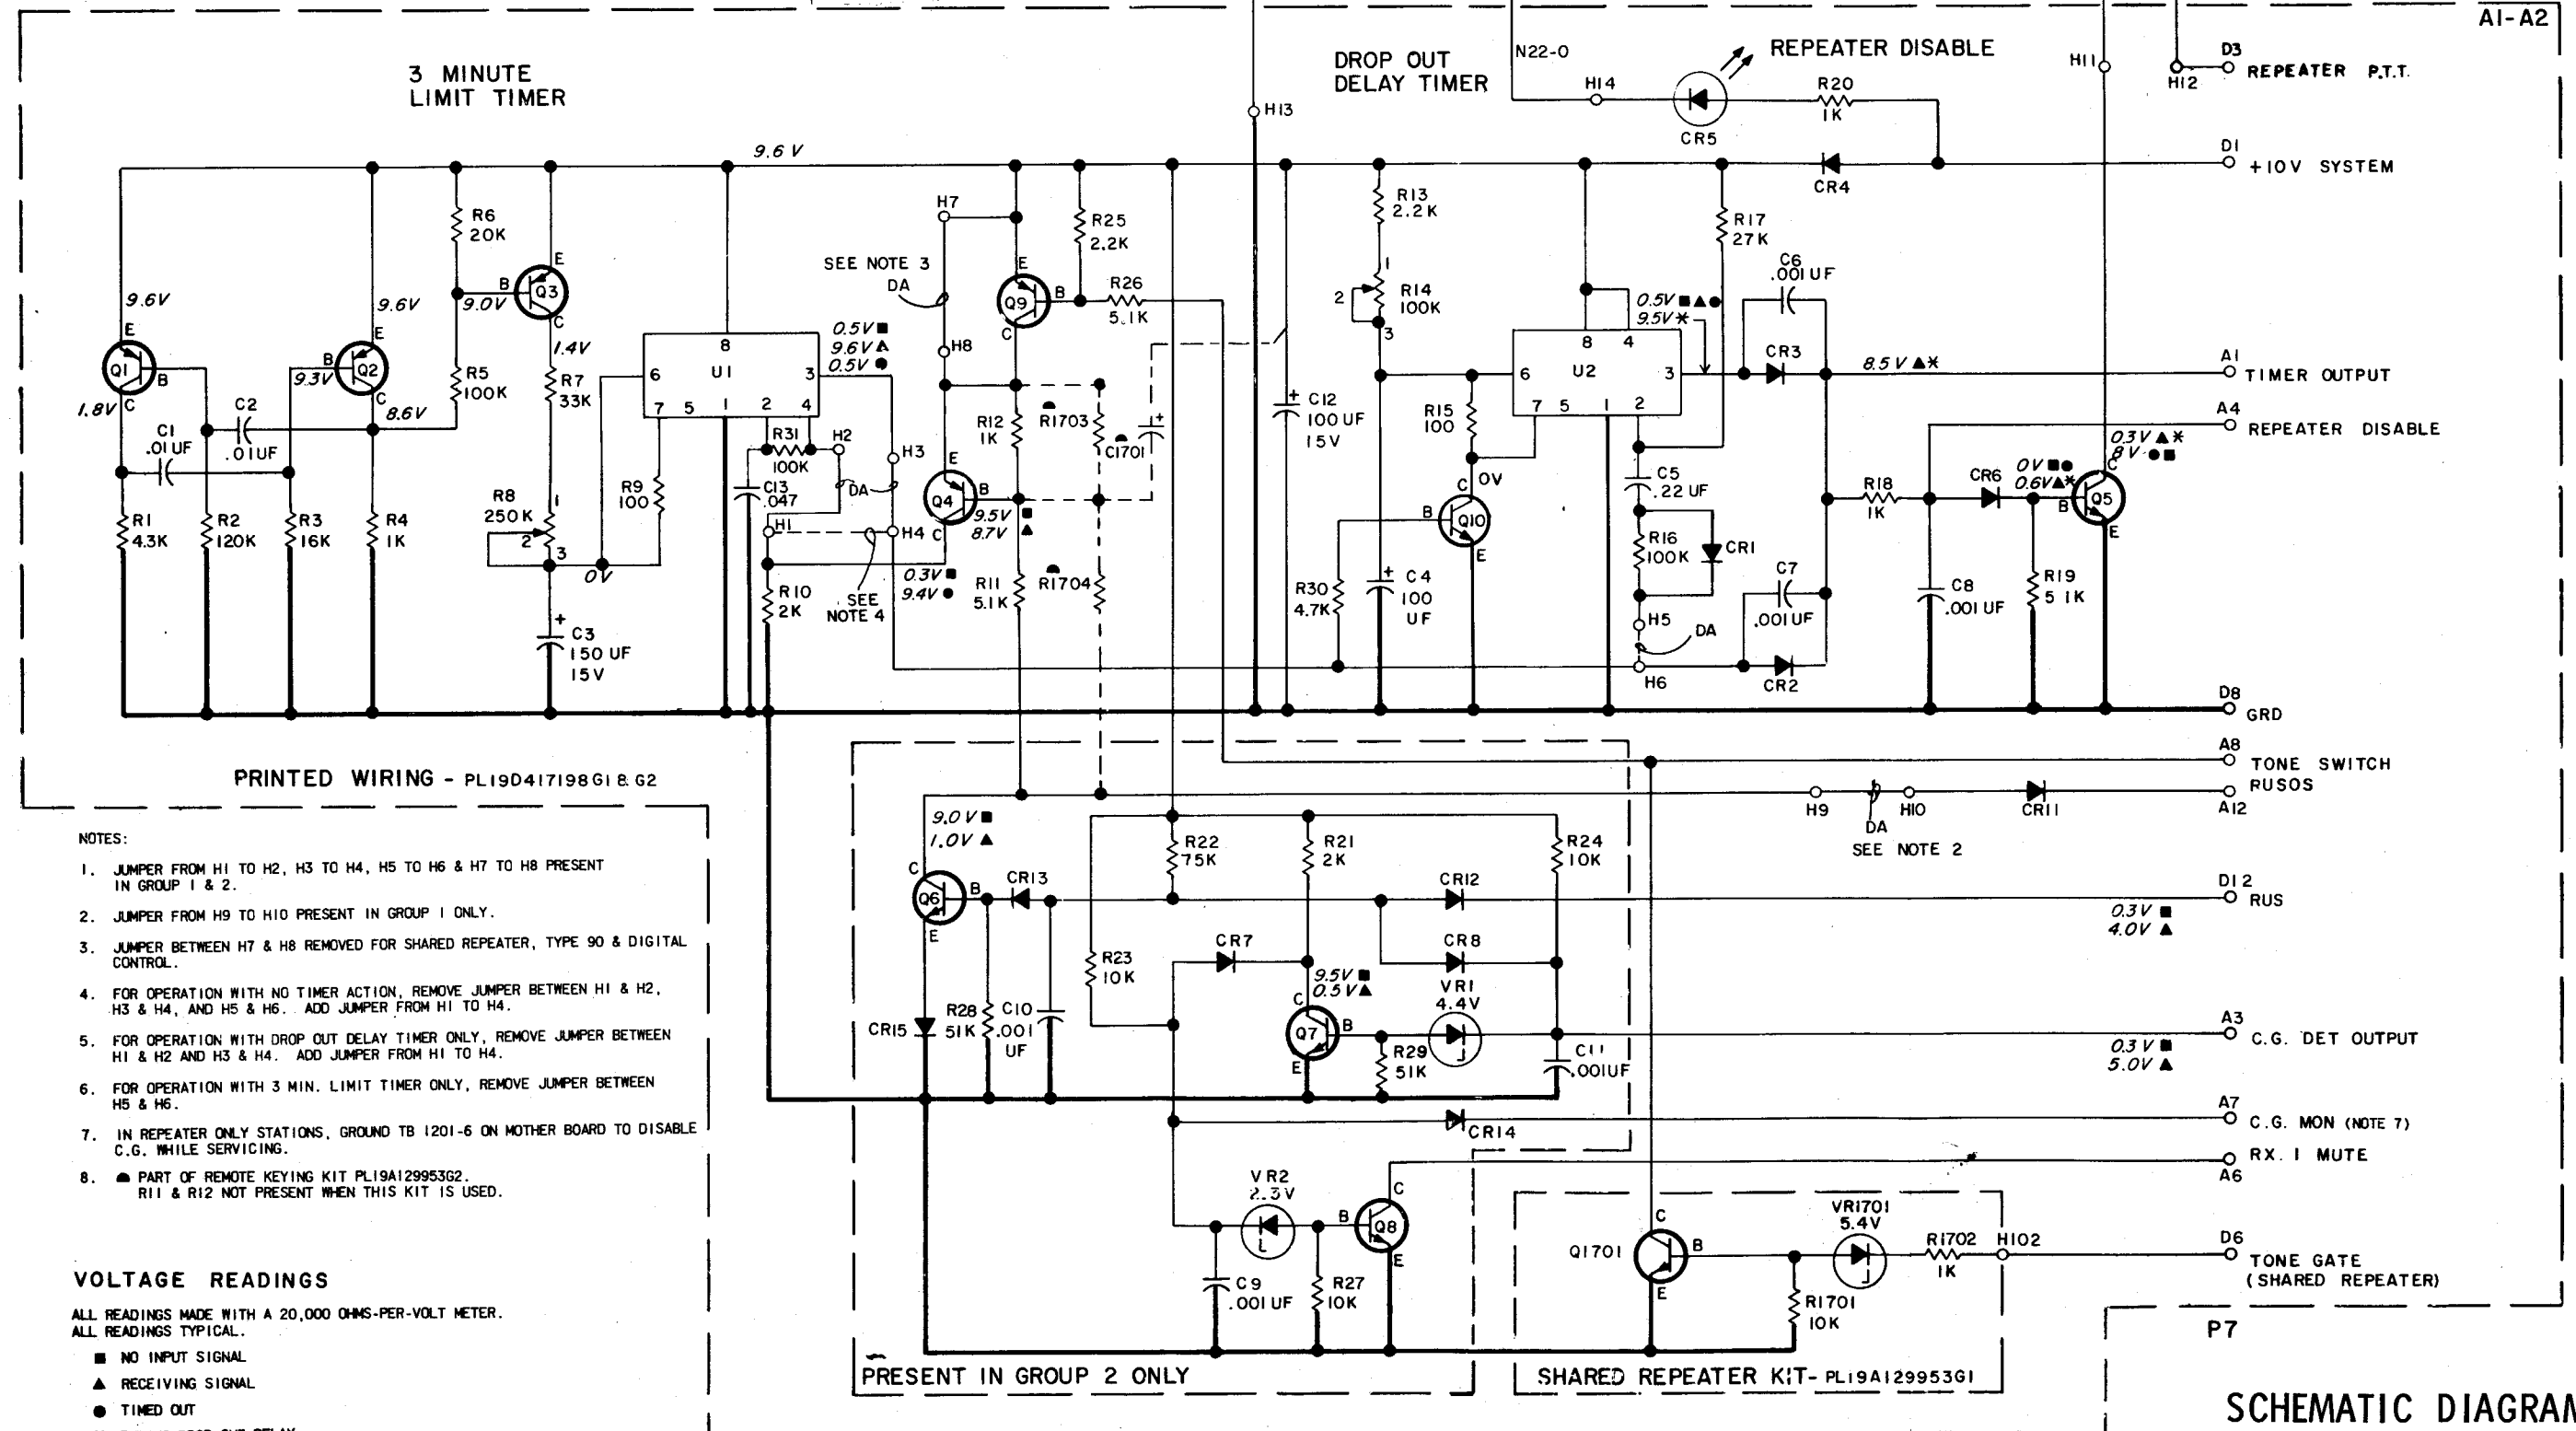

SCHEMATIC DIAGRAM

REPEATER CONTROL BOARD
19D417385G1 & G2

(19D417201, Rev. 10)

PARTS LIST

LBI4812B

REPEATER CONTROL BOARD
19D417385G1, G2

SYMBOL	GE PART NO.	DESCRIPTION
A1 and A2		COMPONENT BOARD 19D417198G1, G2
----- CAPACITORS -----		
C1 and C2	19A116080P101	Polyester: 0.01 μ f \pm 10%, 50 VDCW.
C3	19B200240P3	Tantalum: 150 μ f \pm 20%, 15 VDCW.
C4	19A115680P7	Electrolytic: 100 μ f \pm 50% -10%, 15 VDCW; sim to Mallory Type TTX.
C5	19A116080P9	Polyester: 0.22 μ f \pm 20%, 50 VDCW.
C6 thru C11	5494481P111	Ceramic disc: 1000 pf \pm 20%, 1000 VDCW; sim to RMC Type JF Discap.
C12	19A115680P7	Electrolytic: 100 μ f \pm 50% -10%, 15 VDCW; sim to Mallory Type TTX.
C13*	19A116080P105	Polyester: 0.047 μ f \pm 10%, 50 VDCW. Added by REV A.
C14* and C15*	19A116080P101	Polyester: 0.01 μ f \pm 10%, 50 VDCW. Added to G1 by REV B: Added to G2 by REV C: Deleted in G1 by REV C: Deleted in G2 by REV D:
----- DIODES AND RECTIFIERS -----		
CR1 thru CR3	19A115250P1	Silicon, fast recovery, 225 mA, 50 PIV.
CR4	4037822P1	Silicon, 1000 mA, 400 PIV.
CR5	19A134354P6	Diode, optoelectronic: red; sim to Hew. Packard 5082-4650.
CR6 thru CR8	19A115250P1	Silicon, fast recovery, 225 mA, 50 PIV.
CR11 thru CR15	19A115250P1	Silicon, fast recovery, 225 mA, 50 PIV.
----- PLUGS -----		
P7		(Part of printed board 19D417197P1).
----- TRANSISTORS -----		
Q1 thru Q4	19A115768P1	Silicon, PNP; sim to Type 2N3702.
Q5 thru Q8	19A115889P1	Silicon, NPN.
Q9	19A115768P1	Silicon, PNP; sim to Type 2N3702.
Q10	19A115910P1	Silicon, NPN; sim to Type 2N3904.
----- RESISTORS -----		
R1	3R152P432J	Composition: 4.3K ohms \pm 5%, 1/4 w.
R2	3R152P124J	Composition: 120K ohms \pm 5%, 1/4 w.
R3	3R152P163J	Composition: 16K ohms \pm 5%, 1/4 w.
R4	19A700106P63	Composition: 1K ohms \pm 5%, 1/4 w.
R5	19A700106P111	Composition: 100K ohms \pm 5%, 1/4 w.
R6	3R152P203J	Composition: 20K ohms \pm 5%, 1/4 w.
R7	19A700106P99	Composition: 33K ohms \pm 5%, 1/4 w.

SYMBOL	GE PART NO.	DESCRIPTION
R8	19B209358P110	Variable, carbon film: approx 7K to 250K ohms \pm 20%, 0.25 w; sim to CTS Type X-201.
R9	19A700106P39	Composition: 100 ohms \pm 5%, 1/4 w.
R10	3R152P202J	Composition: 2K ohms \pm 5%, 1/4 w.
R11	3R152P512K	Composition: 5.1K ohms \pm 10%, 1/4 w.
R12	19A700106P63	Composition: 1K ohms \pm 5%, 1/4 w.
R13	19A700106P71	Composition: 2.2K ohms \pm 5%, 1/4 w.
R14	19B209358P109	Variable, carbon film: approx 3K to 100K ohms \pm 20%, 0.25 w; sim to CTS Type X-201.
R15	19A700106P39	Composition: 100 ohms \pm 5%, 1/4 w.
R16	3R152P104K	Composition: 100K ohms \pm 10%, 1/4 w.
R17	3R152P273K	Composition: 27K ohms \pm 10%, 1/4 w.
R18	19A700106P63	Composition: 1K ohms \pm 5%, 1/4 w.
R19	3R152P512K	Composition: 5.1K ohms \pm 10%, 1/4 w.
R20	19A700106P63	Composition: 1K ohms \pm 5%, 1/4 w.
R21	19A700106P71	Composition: 2.2K ohms \pm 5%, 1/4 w.
R22	3R152P153J	Composition: 15K ohms \pm 5%, 1/4 w.
R23 and R24	19A700106P87	Composition: 10K ohms \pm 5%, 1/4 w.
R25	19A700106P71	Composition: 2.2K ohms \pm 5%, 1/4 w.
R26	3R152P512J	Composition: 5.1K ohms \pm 5%, 1/4 w.
R27	19A700106P87	Composition: 10K ohms \pm 5%, 1/4 w.
R28 and R29	3R152P513J	Composition: 51K ohms \pm 5%, 1/4 w.
R30	19A700106P79	Composition: 4.7K ohms \pm 5%, 1/4 w.
R31*	19A700106P111	Composition: 100K ohms \pm 5%, 1/4 w. Added by REV A.
----- INTEGRATED CIRCUITS -----		
U1 and U2	19A116968P1	Linear, Dual In Line 8 Pin Mini Dip Package; sim to Signetics NE555V.
----- VOLTAGE REGULATORS -----		
VR1	4036887P4	Zener: 500 mW, 4.4 v. nominal.
VR2	4036887P1	Zener: 500 mW, 2.3 v. nominal.
A3		FRONT PANEL 19C320791G1
----- SWITCHES -----		
S1	19B209261P8	Slide: DPDT, 2 poles, 2 positions, .5 amp VDC or 3 amps VAC at 125 v; sim to Switchcraft 46206L.
----- MISCELLANEOUS -----		
	19B219690G1	Handle assembly.

PRODUCTION CHANGES

Changes in the equipment to improve performance or to simplify circuits are identified by a "Revision Letter," which is stamped after the model number of the unit. The revision stamped on the unit includes all previous revisions. Refer to the Parts List for descriptions of parts affected by these revisions.

- REV. A - Component Board 19D417198G1, G2
To stop the transients from resetting the timer. Added C13 & R31.
- REV. B - Component Board 19D417198G2
To make sure the repeater keys only when the RUS and Chan. Gd. are present. Changed R22.
- REV. B - 19D417198G1
- REV. C - 19D417198G2
To prevent RF from making the 3 minute timer erratic. Added C14 and C15.
- REV. C - 19D417198G1
- REV. D - 19D417198G2
To stop timer from oscillating. Removed C14 and C15.