




## ***GE Mobile Communications***

---

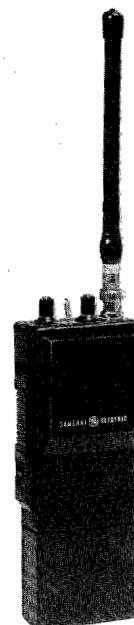

### **MPI PERSONAL RADIO**

403-512 MHz  
PERSONAL RADIO  
2/4 WATTS

---

**Maintenance Manual**

## TABLE OF CONTENTS

|  |       |
|--|-------|
| COMBINATION NOMENCLATURE .....           | iii   |
| SPECIFICATIONS .....                     | iv    |
| DESCRIPTION .....                        | 1     |
| OPERATION .....                          | 1     |
| CHARGERS .....                           | 1     |
| BATTERY PACK REPLACEMENT .....           | 2     |
| CIRCUIT ANALYSIS                         |       |
| Transmitter .....                        | 2     |
| T/R Board .....                          | 2     |
| Receiver .....                           | 4     |
| Voltage Regulator and T/R Switches ..... | 6     |
| DISASSEMBLY .....                        | 6     |
| SERVICE SHEET .....                      | 7     |
| TROUBLESHOOTING PROCEDURE .....          | 8     |
| TRANSMITTER ALIGNMENT PROCEDURE .....    | 9     |
| RECEIVER ALIGNMENT PROCEDURE .....       | 10    |
| MECHANICAL LAYOUT .....                  | 11,12 |
| OUTLINE DIAGRAM .....                    | 13,14 |
| SCHEMATIC DIAGRAM .....                  | 15-19 |
| PARTS LIST .....                         | 20-24 |

## COMBINATION NOMENCLATURE

| DIGITS 1&2       | DIGIT 3                  | DIGIT 4                 | DIGIT 5                 | DIGIT 6            | DIGIT 7                   | DIGIT 8               | DIGIT 9              |
|------------------|--------------------------|-------------------------|-------------------------|--------------------|---------------------------|-----------------------|----------------------|
| Product Code     | Package                  | TX Frequency Range      | RX Frequency Range      | Channel Spacing    | RF Power Output           | Max. Channel Capacity | Control              |
| <b>P5</b><br>MPI | <b>C</b><br>Local/Remote | <b>M</b><br>403-425 MHz | <b>M</b><br>403-425 MHz | <b>5</b><br>25 KHz | <b>5</b><br>1.7-3.8 Watts | <b>B</b><br>2 Tx-2 Rx | <b>E</b><br>Standard |
|                  |                          | <b>N</b><br>420-450 MHz | <b>N</b><br>420-450 MHz |                    | <b>6</b><br>3.9-6.4 Watts | <b>C</b><br>2 Tx-1 Rx |                      |
|                  |                          | <b>R</b><br>450-470 MHz | <b>R</b><br>450-470 MHz |                    |                           | <b>D</b><br>1 Tx-2 Rx |                      |
|                  |                          | <b>S</b><br>470-494 MHz | <b>M</b><br>470-494 MHz |                    |                           |                       |                      |
|                  |                          | <b>T</b><br>489-512 MHz | <b>T</b><br>489-512 MHz |                    |                           |                       |                      |

RC5121

## STRUCTURED OPTIONS

|                             |                             |                                     |                              |                    |                       |                     |                    |
|-----------------------------|-----------------------------|-------------------------------------|------------------------------|--------------------|-----------------------|---------------------|--------------------|
| <b>A</b><br>Option TX Xtals | <b>B</b><br>Option RX Xtals | <b>C</b><br>Option                  | <b>D</b><br>Option           | <b>E</b><br>Option | <b>F</b><br>Option    | <b>H</b><br>Option  | <b>K</b><br>Alt IF |
| <b>A</b><br>1 Xtal          | <b>A</b><br>1 Xtal          | <b>O</b><br>None                    | <b>O</b><br>None             | <b>O</b><br>None   | <b>O</b><br>None      | <b>O</b><br>None    | <b>O</b><br>None   |
| <b>B</b><br>2 Xtals         | <b>B</b><br>2 Xtals         | <b>2</b><br>1 Tone Enc CG           | <b>L</b><br>T-99 Ind.        | <b>I</b><br>DTMF   | <b>4</b><br>Int. Safe | <b>A</b><br>CGE UHF | <b>3</b><br>Alt IF |
| <b>O</b><br>No Xtals        | <b>O</b><br>No Xtals        | <b>U</b><br>1 Tone/Enc DCG          | <b>M</b><br>T-99 Ind.-Group  |                    |                       | <b>B</b><br>CGE HB  |                    |
|                             |                             | <b>4</b><br>1 Code Enc. DCG.        | <b>N</b><br>T-99 Ind. CG Enc |                    |                       |                     |                    |
|                             |                             | <b>D</b><br>1 Code Enc/ Dcc DCG     |                              |                    |                       |                     |                    |
|                             |                             | <b>R</b><br>1 Tone CG Enc w/Switch  |                              |                    |                       |                     |                    |
|                             |                             | <b>S</b><br>1 Tone DCG Enc w/Switch |                              |                    |                       |                     |                    |

RC4345A Sheet 2

**TYPICAL SPECIFICATIONS\***  
**SYSTEM**

**FCC IDENTIFICATION NUMBER**

2-WATT  
4-WATT

AXA9MZTR102A-450-512 MHz  
AXA9MZTR121A-450-470 MHz  
AXA9MZTR121B-470-494 MHz  
AXA9MZTR121C-489-512 MHz

**FREQUENCY RANGE**

403-512 MHz

**BATTERY DRAIN (MAXIMUM)**

Receiver  
Standby  
Rated Audio

15 milliamperes  
150 milliamperes

Transmitter

800 milliamperes @ 7.5 Volts (2-Watt)  
1250 milliamperes @ 10 Volts (4-Watt)  
7.81 on 4-Watt

**TEMPERATURE RANGE**

-30°C (-22°F) to +60°C (140°F)

**DIMENSIONS (EIA) LESS ACCESSORIES  
(H X W X D)**

7.11 x 2.59 x 1.46 inches  
(180.5 x 65.7 x 37.1 millimeters)

**WEIGHT, WITH ANTENNA**

2-Watt 455 grams (16 ounces)  
4-Watt 492 grams (17.3 ounces)

**BATTERY LIFE**

At 5% - 5% - 90% Duty Cycle  
At 2% - 8% - 90% Duty Cycle

|               |               |
|---------------|---------------|
| <u>2-Watt</u> | <u>4-Watt</u> |
| 8 hours       | 6.5 hours     |
| 12 hours      | 11 hours      |

| <u>TRANSMITTER</u>                                 |   |                    |                    |
|--|---|--------------------|--------------------|
| POWER OUTPUT                                       | 2 Watts/4 Watts   |                    |                    |
| FREQUENCY STABILITY                                | 0.0005%   |                    |                    |
| CONDUCTED SPURIOUS<br>AND HARMONIC EMISSION        | -16 dBm   |                    |                    |
| RATED SYSTEM DEVIATION                             | ±5 kHz  |                    |                    |
| FM HUM & NOISE                                     | Greater than 50 dB  |                    |                    |
| AUDIO FREQUENCY<br>CHARACTERISTICS<br>FCC and EIA. | Frequency Response per EIA RS<br>316-B. Post limiter filter per |                    |                    |
| DISTORTION   | Less than 5% (300 to 3000 Hz)                                   |                    |                    |
| DEVIATION SYMMETRY                                 | 1.0 kHz maximum   |                    |                    |
|  | <u>NO</u>   | <u>1 dB</u>        | <u>3 dB</u>        |
|  | <u>DEGRADATION</u>  | <u>DEGRADATION</u> | <u>DEGRADATION</u> |
| MAXIMUM FREQUENCY SPREAD                           | 7 MHz   | 9 MHz              | 10 MHz             |
| RF OUTPUT IMPEDANCE                                | 50 ohms   |                    |                    |

| <u>RECEIVER</u>                      |   |                    |                    |
|--------------------------------------|---|--------------------|--------------------|
| AUDIO OUTPUT (to 8.0<br>ohm speaker) | 500 milliwatts (less than 5%<br>distortion) |                    |                    |
| SENSITIVITY                          | 12 dB SINAD<br>20 dB Quieting               |                    |                    |
|                                      | 0.35 uV<br>0.50 uV                          |                    |                    |
| FREQUENCY STABILITY                  | 0.0005%                                     |                    |                    |
| SELECTIVITY                          | EIA Two-Signal Method                       |                    |                    |
|                                      | -70 dB @ ±25 kHz                            |                    |                    |
| SPURIOUS RESPONSE                    | -60 dB                                      |                    |                    |
| INTERMODULATION                      | -65 dB                                      |                    |                    |
| MODULATION ACCEPTANCE                | ±6.7 kHz                                    |                    |                    |
| SQUELCH SENSITIVITY                  | <6 dB SINAD                                 |                    |                    |
| FREQUENCY RESPONSE                   | EIA RS 316-B                                |                    |                    |
|                                      | <u>NO</u>                                   | <u>3 dB</u>        | <u>6 dB</u>        |
|                                      | <u>DEGRADATION</u>                          | <u>DEGRADATION</u> | <u>DEGRADATION</u> |
| MAXIMUM FREQUENCY SPREAD             | 2 MHz                                       | 4 MHz              | 6 MHz              |
| RF INPUT IMPEDANCE                   | 50 ohms                                     |                    |                    |

\* These specifications are intended primarily for use of the serviceman. Refer to the appropriate Specifications Sheet for the complete specifications.

## DESCRIPTION

General Electric MPI Personal radios are extremely compact, high performance two-way FM radios designed for operation in the 403-512 MHz range. The lightweight radio utilizes both discrete components and Integrated Circuit modules (IC's).

All operating controls except the Push-To-Talk (PTT) switch and frequency select switch are conveniently located on the top of the radio. The frequency select and PTT switches are located on the side of the radio. An earphone jack, located above the PTT switch, is used with an earphone to provide message privacy, or to permit the operator to receive messages in noisy locations.

An external microphone jack is located next to the earphone jack. This permits the transmitter to be keyed and messages transmitted using the external microphone.

Power for the radio is supplied by a rechargeable nickel-cadmium battery pack that fits in the bottom front section of the case. The battery pack can be recharged either in or out of the radio.

Test Adaptor 4EX12A12 is available to provide audio connections for servicing the transmitter and receiver.


## OPERATION

If the radio is equipped with an option switch, disable the option before adjusting the radio by placing the switch in the OFF or MONITOR position. After adjusting the radio, place the option switch back in the CG OR T99 position (See Figure 1).

## ADJUSTING THE RADIO

To Receive a Message:

1. Turn the OFF-VOLUME control about half way to the right.



2. Disable any option by placing the option control toggle switch (if present) in the OFF or MONITOR POSITION.
3. Turn the SQUELCH (SQ) control to the right as far as possible. A hissing sound will be heard from the speaker.
4. Adjust the VOLUME control until the hissing sound is easily heard but not annoyingly loud.
5. Turn the SQUELCH control slowly to the left until the hissing noise just stops. This adjustment is very important as it eliminates annoying noise when no one is calling you. It also determines how sensitive your radio will be to incoming calls.
6. In two-frequency units, select the proper frequency. You are now ready to receive messages from other radios in your system.

To Send a Message:

1. Turn on the radio as directed in the "To Receive a Message" section.
2. In two-frequency units, select the proper frequency. Then listen to make sure that no one is using the channel.
3. Hold the radio so that the antenna is vertical. Then, press the Push-To-Talk (PTT) bar and speak directly into the microphone in a clear and distinctive voice. Always release the PTT bar as soon as you stop talking. You cannot receive messages while the PTT bar is pressed.

## CHARGERS

Three battery chargers are available for recharging the Nickel-Cadmium battery pack. For specific instructions, refer to the applicable operating instruction or maintenance manual.

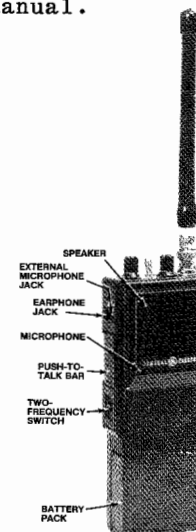
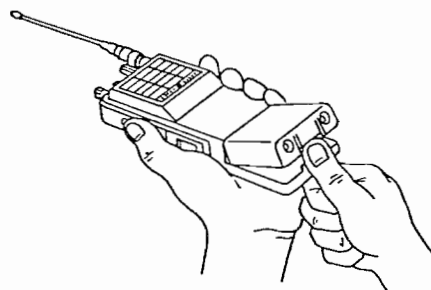


Figure 1 - Operating Controls

## BATTERY PACK REPLACEMENT

To remove the battery pack from the radio:

1. Turn the radio OFF.
2. Place thumb on bottom of battery pack and press battery pack to-ward the top of radio as shown.
3. Then push bottom of battery pack away from the radio.

**WARNING**

Do not dispose of battery packs or batteries by burning. To do so may cause an explosion.

## OSCILLATOR CRYSTAL REPLACEMENT

Crystals Y1, Y2, Y4, and Y5 are plug-in types for ease of replacement. Note that one lead is grounded to the crystal can. This lead must be plugged into the socket which is connected to the ground plane of the Transmit/Receive Board.

## CIRCUIT ANALYSIS

## TRANSMITTER

The Transmitter is a crystal-controlled, frequency modulated transmitter for one- or two-frequency operation in the 403-512 MHz bands. The transmitter utilizes discrete components to provide a minimum RF power output of two watts. The transmitter consists of the following assemblies.

- Audio Board - with the microphone amplifier/limiter, post-limiter filter and oscillator compensator circuits.
- Transmit/Receive (TR) Board - Oscillator, Multiplier stages, amplifier, driver and PA stages, TR switch, and low-pass filter.

All supply voltages for the transmitter are provided by the battery and the Regulator. The different transmitter voltages required are shown in the following chart:

| Voltage                     | Used For   |
|-----------------------------|--|
| Continuous<br>10/7.5 Volts  | Post-limiter filter,<br>driver and PA circuits         |
| Switched TX<br>10/7.5 Volts | Multipliers, 1st amplifier,<br>and driver base voltage |
| Switched TX<br>5.4 Volts    | Mic amp/limiter, microphone<br>and oscillator          |
| Regulated<br>5.4 Volts      | Compensator and modulator<br>circuits                  |

References to symbol numbers mentioned in the following text are found on the Schematic Diagrams, Outline Diagrams and Parts List. A block diagram of the complete transmitter and receiver is shown in Figure 2.

## AUDIO CIRCUITS

Audio from the microphone is applied to a 6 dB pre-emphasis network (R16, D1, C15 and C18) and then to amplifier-limiters Q3 and Q4. The output of Q4 is applied to the post-limiter filter consisting of Q6, Q7, Q8 and associated circuitry.

The output of the post-limiter filter is coupled through C30 and the modulation circuitry to transmitter oscillator Q15.

A compensator circuit (Q9 and R36 through R40) provides frequency compensation at low temperatures for the transmitter and receiver oscillators.

## T/R BOARD

## OSCILLATOR

The temperature compensating DC voltage and audio is applied to FM modulators D6 and D7 through MOD ADJ controls R67 and R73. The modulator varactor varies the transmit frequency at the audio rate applied from the audio board.

Q15, Y4, Y5 and associated circuitry comprise a Colpitts oscillator. The transmit oscillator is adjusted to the assigned operating frequency by L39 and L42. The oscillator output is applied to buffer Q14. Channel 1 or Channel 2 is selected by S2.



Figure 2 - Block Diagram

L37 in the collector circuit of Q15 is tuned to the second harmonic. L36 provides additional filtering before multiplier/buffer stages Q13 and Q14. Drive to the multiplier/buffer stages can be monitored at J10 (TP4).

#### MULTIPLIERS

The output of Q13 is tuned to the fourth harmonic by L34 and L35, and applied to the base of multiplier Q12.

The output of multiplier Q12 is tuned to the eighth harmonic by C78 and C81. The emitter voltage of Q12 can be monitored at J9 (TP5).

#### AMPLIFIERS AND PA

Following Q12 is Class B amplifier Q11. Emitter voltage can be monitored at J8 (TP6). The output of Q11 is tuned by C70 to provide maximum drive to Q10. The output of Q10 is applied to the base of PA transistor Q9. C63 is tuned to provide impedance matching to the PA stage.

A collector feed network consisting of L19, L20, L24, L25, C57, C61, C66, C68, R44 and R47 acts as a stabilizing and decoupling network for Q9 and Q10.

Power adjust control C56 is used to set the output power at two watts. The PA output is applied to the antenna switch.

#### ANTENNA SWITCH

The solid state antenna switch consists of A1-D1, C1, C2, L1 and D1 on the TR board. The circuit acts as a 1/4-wave line simulator.

Keying the transmitter applies approximately 1.6 volts to the anode of A1-D1, forward biasing the diode. When A1-D1 is forward biased, the 1/4-wave line appears as an open circuit to the RF output of the transmitter. This allows the transmitter output to be coupled through the low-pass filter to the antenna. L17, C102 and R43 provide bias and decoupling for the antenna switch.

The antenna switch acts as a 50-ohm line in the receiver mode (A1-D1 not forward biased).

#### RECEIVER

The receiver is a dual conversion, superheterodyne FM receiver designed for one or two-frequency operation in the 403-512 MHz frequency range. A regulated 5.4 volts is used for all receiver stages

except for the audio PA IC, receiver RF amplifier and mixer which operate from the 7.5 volt battery.

The receiver has intermediate frequencies of 21.4 MHz and 455 kHz. Adjacent channel selectivity is obtained by using three band-pass filters: (2) 21.4 MHz two-pole crystal filters and a 455 kHz ceramic filter.

All of the receiver circuitry except the audio PA and oscillator compensator is mounted on the transmitter/receiver (TR) board. The receiver consists of:

- Receiver Front End
- 21.4 MHz 1st IF circuitry
- 1st and 2nd Oscillators
- 455 kHz 2nd IF circuitry with FM Detector
- Audio PA Circuitry
- Squelch Circuitry

#### RECEIVER FRONT END

An RF signal from the antenna is coupled through the low-pass filter, antenna switch, and image filter to the emitter of RF amplifier Q1. The image filter consists of C3, C4, C5, C108 and L2.

The output of Q1 is coupled through two tuned circuits that provide most of the front end selectivity. The tuned circuits are L3, R4, C8 and C9, L4 and L5.

#### OSCILLATOR AND MULTIPLIER

Q3, Y1, D2 and associated circuitry make up a Colpitts oscillator. The frequency is controlled by a third mode crystal operated at one ninth of the required injection frequency. Voltage-variable capacitor D2, L48 and Y1 are connected in series to provide compensation capability. The compensation voltage used to control the transmitter oscillators is applied to D2 to maintain stability. L48 is adjustable to set the oscillator frequency. R8 is in parallel with Y1 to insure operation on the third overtone of the crystal.

The oscillator output is coupled through two tuned circuits (L12-C25 and L13) to the base of tripler Q4. C25 and L13 are tuned to the third harmonic of the oscillator frequency. The output of tripler Q4 is coupled to the gate of first mixer Q2 through two tuned circuits (L14 and L15). L14 and L15 are tuned to



the operating frequency minus 21.4 MHz which is the ninth multiple of the crystal frequency.

The DC level of the oscillator can be monitored at J6 (TP1). The meter reading at this point is typically 5.2 volts. The DC level of tripler Q4 can be measured at J7 (TP2). This meter reading is typically 5.2 volts.

#### 1ST MIXER AND IF FILTER

The 1st mixer uses a FET (Q2) as the active device. The FET mixer provides a high input impedance, high power gain and an output relatively free of intermodulation products).

In the mixer RF from the front end filter is applied to the gate of the mixer. Injection voltage from the multiplier stages is also applied to the gate of the mixer. The 21.4 MHz mixer 1st IF output signal is coupled from the drain of Q2 to crystal filters Z1 and Z2. Tuneable capacitor C12 is used to match the mixer output to the input of Z1.

The highly-selective crystal filter provides the first portion of the receiver IF selectivity. The output of the filter is coupled through R20 to the 1st IF amplifier.

Supply voltage for the RF amplifier and 1st mixer can be metered at J5 (TP3). The meter reading is typically 7.4 volts.

#### 1ST AND 2ND IF AND DETECTOR STAGES

The 21.4 MHz IF output of the crystal filters is applied to the base of IF amplifier Q5. The amplifier provides approximately 12 dB of IF gain. The output of Q5 is coupled through C35 to the input of the 2nd Mixer IC.

U1A and associated circuitry consists of the 2nd oscillator and mixer. The crystal for the oscillator is Y3. The oscillator operates at 20.945 MHz for low side injection of the 2nd IF (standard), or 21.855 MHz for high side injection for those radios determined to be operating on a tweet frequency. This frequency is mixed with the 21.4 MHz input to provide the 455 kHz 2nd IF frequency.

The output of U1A is coupled through ceramic filter Z3 which provides the 455 kHz selectivity. The filter output is applied to U1B.

U1B and associated circuitry consists of an IF amplifier, 455 kHz limiter and a quadrature type FM detector. L10 is the quadrature detector coil. Volume control R38 is used to set the audio

output level to the audio amplifier. R37 and C48 provide a low pass filter to remove 455 kHz from the audio.

#### AUDIO AND SQUELCH CIRCUITS

##### Audio

Audio from the VOLUME arm is coupled through a twin-T Channel Guard notch filter that consists of Q1 and associated circuitry. The filter attenuates any audio frequency below 211 Hz.

The audio output from the filter is coupled through receiver muting switch Q10 to audio amplifier U1. Q10 is turned on in the receive mode to pass the audio. The 500 milliwatt audio output of U1 is coupled through C10 to the speaker and earphone jack.

A 6 dB/octave de-emphasis is provided by C12, C6 and R10 in the audio feedback path. R7 and C5 provide additional de-emphasis at higher frequencies.

##### Squelch

The squelch circuit operates on the noise components contained in the FM detector output. The output of U1B is applied to a high-pass filter consisting of U1C, and associated circuitry. The output of U1C is noise in a band around 8 kHz.

With no RF signal present, the noise is rectified by D4 and a negative voltage is applied to the input of U1D, keeping it turned off and the receiver muted.

Pressing the PTT switch also forward biases clamping diode D5, keeping U1D input bias at the correct standby voltage in the transmit mode.

#### RECEIVER SWITCH

Releasing the PTT switch turns off the transmitter switches and turns on receiver switch Q16. This applies 5.4 volts to the receiver oscillators, IF amplifier, audio and squelch stages.

When an RF signal is received (receiver unsquelches), no noise is rectified by D4 and the input voltage at pin 12 of U1D rises to approximately +1 volt. This positive voltage turns on U1D, causing the output at U1D-14 to go positive, turning on buffer Q6. When turned on, the collector voltage of Q6 goes low, turning on PNP audio board squelch switch Q2. Turning on Q2 applies 7.5 volts to audio amplifier U1. This turns on U1 so that audio is heard at the speaker.

## VOLTAGE REGULATOR AND TR SWITCHES

Turning on-off switch to the "on" position applies 7.5 volts to voltage regulator hybrid, U2. The hybrid provides a continuous, regulated 5.4-Volt output at U2-2.

## TRANSMITTER SWITCHES

Pressing the PTT switch turns on Q7 and Q8. When Q7 is turned on, 7.5 volts from the battery is applied to the transmitter multipliers and 1st amplifier stages. The 7.5 volts is also applied to the gate of receiver muting FET Q10. The positive voltage on the gate turns Q10 off and mutes the receiver in the transmit mode. The switched 7.5 volts is also applied to the base of RX 5.4 volt switch Q16, turning the switch off in the transmit mode.

## DISASSEMBLY

To remove the front cover for servicing, first remove the battery. Then remove the two screws at A and lift off the front cover (See Figure 3).

To gain access to the back of the TR board, remove the two screws at A and the screw at B and remove the front and back covers.

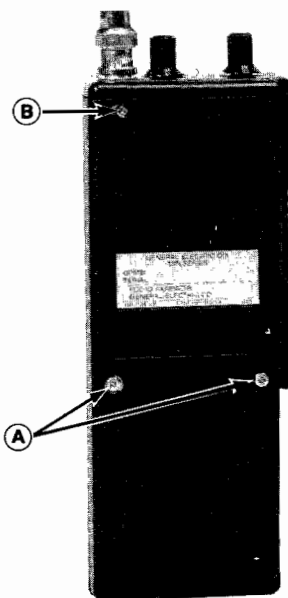


Figure 3 - Disassembly



**GE Mobile Communications**

General Electric Company  
Lynchburg, Virginia 24502

## CAUTION

Due to the excellent "drive" capability of the miniature TORX®-head screws, it is relatively easy to overtorque and damage the screws. The torque required for the screws is as follows:

1. 4 inch-pounds for the three M2.5 screws in the back cover.
2. 2 1/4 inch-pounds for the three M2 screws holding the accessory area cover plate (under the battery).

**DO NOT OVERTORQUE!**

If the radio is equipped with an option board, in addition to the above steps, the three screws holding the option cover must be removed.

## NOTE

The option board must be slightly raised to clear the option cover mounting boss before removing the back cover.

## CAUTION

Do not bend the thin option board material any more than necessary.

Replacement of chip capacitors should always be done with a temperature-controlled soldering iron, using a controlled temperature of 700°F (371°C). However, do NOT touch black metal film of the resistors or the ceramic body of capacitors with the soldering iron.

## NOTE

The metalized end terminations of the parts may be touched with the soldering iron without causing damage.

## REMOVING CHIP COMPONENTS

1. Grip the component with tweezers or needle nose pliers.
2. Alternately heat each end of the chip in rapid succession until solder flows, and then remove and discard the chip.
3. Remove excess solder with a vacuum solder extractor or Solder-wick®.
4. Carefully remove the epoxy adhesive and excess flux to prevent damage to the printed board.

## REPLACING CHIP COMPONENTS

1. Using as little solder as possible, "tin" one end of the component and one of the pads on the printed wiring board.
2. Place the "tinned" end of the component on the "tinned" pad on the board and simultaneously touch the component and the pad with a well "tinned" soldering iron while pressing the component down on the board.
3. Place the "tinned" soldering iron on the other end of the component and the pad simultaneously. Apply solder to the top of the end of the component until the solder starts to flow. Use as little solder as possible while getting a good joint.
4. After the component has cooled, remove all flux from the component and printed wiring board area with alcohol.

| HOLE | DESCRIPTION                         |
|------|-------------------------------------|
| 1    | PTT SWITCH GND                      |
| 2    | OPT. GND                            |
| 3    | OPT. SW. GND                        |
| 4    | OPT. 10V[+7.5V]*                    |
| 5    | PTT FROM OPT.                       |
| 6    | OPT. +5.4V REG.                     |
| 7    | DISCRIMINATOR OUTPUT                |
| 8    | OPT. MUTE                           |
| 9    | PTT OUTPUT TO OPTIONS               |
| 10   | PTT SWITCH (HOT)                    |
| 11   | CG TONE INPUT TO XMTR               |
| 12   | FROM OPT. TO OPT. SW. CONN.         |
| 13   | FROM OPT. SW. TO OPT. CONN.         |
| 14   | PTT OUTPUT FROM OPTIONS             |
| 15   | SQUELCH FROM OPTIONS                |
| 16   | TX 10V[+7.5V]*                      |
| 0    |                                     |
| 18   | JUMPER WIRE                         |
| 19   |                                     |
| 20   | GND. FOR RF CHOKE                   |
| 21   | OPTION SW GND FOR MIN LO VOL OPTION |

## TEST POINT CHART

| TP | FUNCTION            | TYPICAL V  |
|----|---------------------|------------|
| 1  | RX Injection Tuning | 5.2        |
| 2  | Rx Injection Tuning | 5.2        |
| 3  | RX Injection Tuning | 9.9V[7.4V] |
| 4  | TX Drive Tuning     | 0.4        |
| 5  | TX Drive Tuning     | 0.6        |
| 6  | TX Drive Tuning     | 0.8        |
| 7  | Battery Input       | 10V[7.5V]  |
| 8  | Ground              | 0          |

\* [] = Voltages in brackets are for 2-Watt Transmitters

4EX12A12 - Personal Radio Test Set  
(Does not include any interconnect cables)

19B234242G1 - Internal J4 Interconnect Cable (May be used with any MPI radio)

19B234242G2 - External Audio Jacks Interconnect Cable (Only used on units with remote mic capability)

Option 4120 - (Replaced TS 10 Service Tool Kit)

ST 2513 - Coil and Trim Pot Alignment Tool

ST 2521 - Oscillator Coil Alignment Tool

ST 2519 - Johanson Capacitor Alignment Tool (0.029" tip)

ST 2520 - Johanson Capacitor Alignment Tool (0.025" tip)

19A702672P1 - Battery Test Lead (Black)

19A702672P2 - Battery Test Lead (Red)

19B800747P3 - Audio Board Jumper Cable. Tin Contacts. (2 Required)

19B801406P57 - Audio Board Jumper Cable. Gold Contacts. (2 Cables Required)

19A144745G1 - Receiver Audio Test Cable

19B800968G1 - RF Probe Assembly

19D900773G1 - 7.5 Volt Dummy Battery Pack

19D900773G2 - 10 Volt Dummy Battery Pack

## Mechanical Tools:

ST 2307 - Spanner wrench for audio jacks

ST 2311 - Spanner wrench for volume & squelch controls

ST 0720 - Hex driver & assortment of 9 TORX bits

| SYMPTOM                         | PROCEDURE   |
|---------------------------------|---|
| No 10V[7.5V] Supply             | Check power connections and continuity of supply leads, and check fuse. If fuse is blown, check radio for shorts.   |
| Low 10V[7.5V] Supply            | Check for low or uncharged battery possibly with bad cell.  |
| No 5.4V Regulated Supply        | Check the 10V[7.5V] supply at pin 3 of regulator Q2. If a large standby current (i.e., >100 mA) is seen, check for a short to ground on the 5.4V output line.   |
| No Rx                           | Check the 5.4V regulated supply. Then check 5.4V switching transistor Q15.  |
| No Audio Output                 | Check audio board squelching transistor, Q2. If the audio amplifier U1 is properly biased on, inject a 50 mV RMS, 1 kHz signal into the preceding stages until the faulty stage is isolated as follows. This signal must be capacitively coupled from the audio generator using a 1 uF electrolytic capacitor to avoid shifting bias voltages. Sequentially inject signal into the following points on the audio board:<br>Pin 3 of U1, emitter of Q1, base of Q1, and P2-5 (volume control dependent). If the problem is not found on the audio board, check for recovered audio on the main board with an oscilloscope. Recovered audio should be seen at Pin 9 of U1, at Hole 7, and at Pin 3 of R40 (as well as the wiper depending upon position). |
| Low Audio                       | Measure supply voltage at Pin 6 of audio board IC (U1) and gate voltage of Q10. Verify that at least 150 mV (424 peak-to-peak) is present at Hole 7 when a strong RF signal is applied to the radio with standard test modulation. Check quad coil (L16) setting.   |
| Distorted Audio Output          | Apply a strong RF signal with standard test modulation and measure audio distortion into an 8 ohm dummy load (e.g., test adaptor box). Distortion should be less than 5% at 2 volts output at 1 kHz. If there is low electrical distortion and acoustical distortion is still present, listen with test box or swap front covers with another radio to test speaker.  |
| No or Incorrect Detector Output | Verify bias to Pins 4 and 8 of the main board IC, U1. Using a 50 ohm probe, inject a strong 10.7 MHz modulated signal into Pin 16 of U1. Recovered audio should be seen at Pin 9 and the level should vary with the setting of quad coil, L16. If none is seen, check the second oscillator for activity. At least 80 mV of RF should be seen on Pin 1 to ground.   |
| No 2nd Oscillator Activity      | Substitute a known good crystal for Y3. Check voltages on U1 pins 1 and 2.  |
| Radio Permanently Squelched     | Verify that main board IC, U1, is properly biased at Pins 4 and 8 and that quad coil L16 is correctly adjusted. The voltage at the Schmidt trigger input (U1 Pin 12) should rise and fall with the setting of R34. The output at pin 14 should switch bias on and off to the base of Q6 as the input threshold is crossed. The collector of Q6 should saturate and unsquelch the radio once the input (Pin 12) is above the threshold, approx. 0.8V.  |
| Radio Won't Squelch             | Verify that main board IC, U1, is properly biased at Pins 4 and 8 and that quad coil L16 is correctly adjusted. An oscilloscope should see high frequency (approx. 8 kHz) noise at the noise filter output, U1 pin 11. This noise should be seen at the wiper of R34 (dependent upon position) and should be negatively rectified by D4. The remainder of the squelch circuit is described under the "Radio Permanently Squelched" section.   |

| SYMPTOM                                     | PROCEDURE  |
|---|--|
| Poor or No Sensitivity                      | Verify that proper injection power is present and at the correct frequency, ( $f_o$ -10.7). This can be done by 50 ohm probe across L40. The power seen should be approximately 0 dBm. If OK, then use the 50 ohm probe with a signal generator to inject signal into various portions of the radio to isolate the bad section. Set the generator with standard modulation to the level and frequency indicated on the large service schematic and probe those points starting with the IC (U1) and moving forward to the antenna jack. In some cases parts must be adjusted for best sensitivity while probing. This is indicated on the schematic. Once the faulty stage is isolated, measure bias voltages.                         |
| No or Low Injection Power                   | Verify that tuning procedure has been done or tried. The oscillator string can be trouble shot by using a 50 ohm probe connected to a power meter capable of measuring power as low as -20 dBm. Probe the available power points to ground indicated on the large service schematic. The power seen should be approximately that shown on the schematic. Any adjustment needed during probing is indicated on the schematic. Start probing with the oscillator and proceed towards the mixer. Bias voltages are also shown on the schematic for both a running and non-running oscillator. To kill a running oscillator, place a .01 uF ceramic capacitor with short leads from the base to collector of the oscillator transistor Q3. |
| Receive Frequency Won't Adjust Properly     | Check compensator voltage at P3-2 and at varicap (D2 or D9). Check anode voltage of varicap.   |
| No Transmit 5.4V                            | Check the switching transistor Q14.  |
| Radio Won't Go Into Transmit Mode           | Verify that Hole 9 is going to ground when the PTT switch is pushed. If Channel Guard is present, first short Hole 9 and then Hole 5 to ground. Both operations should cause the radio to go into transmit mode unless a problem exists with the Channel Guard circuitry.  |
| Low or No Transmit Power                    | Check battery voltage when in transmit. Low or uncharged battery or shorted cell will be <7 volts. If the total transmit current is >500 mA, check the low pass filter and T/R switch. 1.6 VDC at C91 indicates that the radio is in the transmit mode. If the total transmit current is <100 mA, measure the base bias of Q13. Check for proper test point readings at TP4, TP5, TP6.   |
| High TP6                                    | 0.2 - 0.4 VDC indicates proper drive into Q11. 0.6 VDC indicates no drive. Check the bias voltages.  |
| Low TP5                                     | 0.7 - 0.9 VDC indicates proper drive into Q12. 0.5 VDC indicates no drive. Check the bias voltages.  |
| High TP4                                    | 0.3 - 0.5 VDC indicates proper drive from the oscillator. With no oscillator activity TP4 will be 0.7 VDC.   |
| Transmit Frequency Will Not Adjust Properly | Check the compensator voltage at P3-2. Check the anode voltage of the varicaps (D6 or D7).   |
| No Transmitter Deviation                    | Disconnect the front cover and connect the test box. Apply 600 mV to TX audio. Check the DC and Audio Voltages on the Audio Board as indicated on the service schematic during transmit. If values are as indicated, substitute another front cover to test the microphone.  |

## TROUBLESHOOTING PROCEDURE

TRANSMITTER ALIGNMENT

EQUIPMENT REQUIRED

1. Power Supply (10 Volts, 2 Am-pere).
2. 50 ohm Wattmeter with 50 ohm load
3. Audio Oscillator
4. Deviation Monitor
5. Frequency Counter
6. Digital Voltmeter
7. Tune-up Kit Option 4120 (con-tains coil tuning tools, dummy battery, audio board jumper cables, and a 50 ohm probe).
8. Test adaptor 4EX12A12 and cable 19B234242G1 (Option 2847).


PRELIMINARY STEPS AND ADJUSTMENTS

1. In addition to the antenna mounting bracket screw, the radio must be held tight against the back cover at the lower right corner near the negative battery terminal (e.g. use a 4-40 screw and nut).

2. Unplug the audio board and front cover from the main board.
3. Insert the dummy battery into the battery pack area and apply nominal battery voltage (7.5 or 10 Volts as required) to the RED terminal (BLACK terminal is ground) on dummy battery pack.
4. Pre-set the tuning slugs in L39 (and L42 in two-frequency radios) to the center of their tuning range. Next, set the slugs in coils L34 through L37 flush with the top of the coil form. Then set the arrows on the rotors of C70, C78 and C81 pointing to the rounded end of the capacitor.
5. All adjustments are made with the transmitter keyed and Chan-nel Guard enabled, if present.

NOTE

In two-frequency radios, switch to the highest frequency.

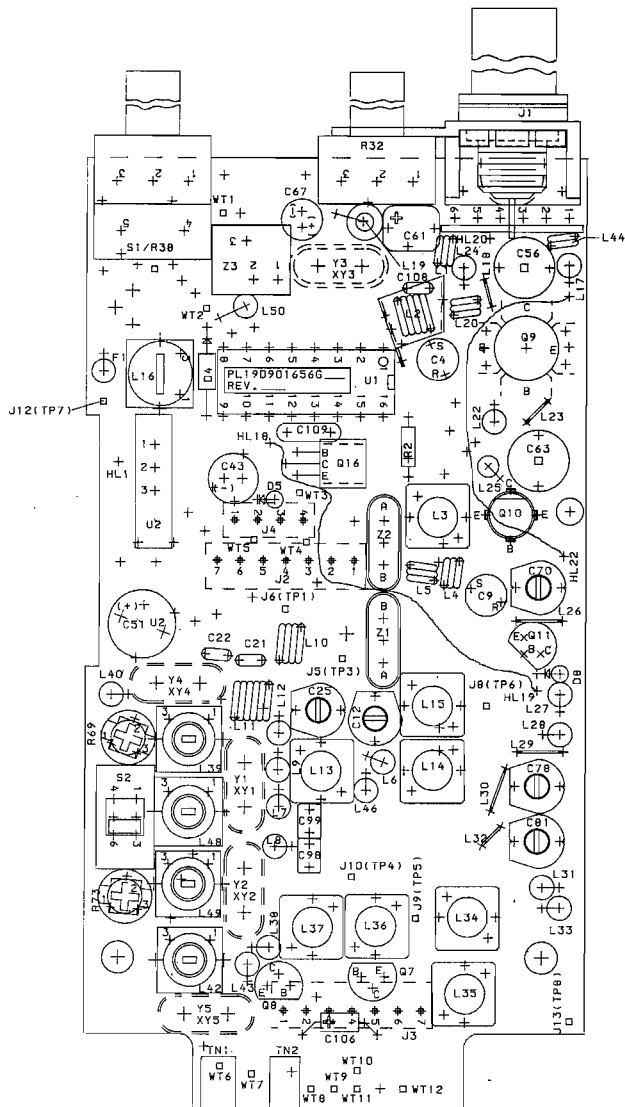

(19D901658, Rev. 5)

ALIGNMENT PROCEDURE

LB1-31496

| STEP                  | METERING POINT    | TUNING CONTROL | PROCEDURE  |
|-----------------------|-------------------|----------------|--|
| 1.                    | TP4               | L37 and L36    | Adjust L37 and L36 in that order for a dip in meter reading. Repeat if necessary.  |
| 2.                    | TP5               | L34 and L35    | Adjust L34 and L35 in that order for a peak in meter reading. Repeat if necessary.   |
| 3.                    | TP6               | C81 and C78    | Adjust C81 and C78 in that order for a peak meter reading. Repeat if necessary.  |
| 4.                    | Wattmeter         | C70, C63 C56   | Adjust C70, C63 and C56 in that order for maximum power output.  |
| 5.                    | Wattmeter         | C56            | Turn C56 in the direction that causes both the power and current to decrease, and ad-just C56 for an output of 2.2 Watts or 4.4 watts as applicable. <div>NOTE<br/>If the radio draws more than rated current, spread the turns on L44 and re-adjust C56 for maximum power output. Then repeat Step 5.</div>                 |
| FREQUENCY ADJUSTMENT  |                   |                |  |
| 6.                    | Frequency Counter | L39 and L42    | Plug the audio board onto the main board. In single frequency radios, adjust L39 for the proper frequency. In two frequency radios, switch to Channel 1 and adjust L39 for the proper frequency. Then switch to Channel 2 and adjust L42 for the proper frequency.   |
| MODULATION ADJUSTMENT |                   |                |  |
| 7.                    | Deviation Monitor | R69 and R73    | Connect the test adaptor with cable to J4 and switch to channel 1. Apply 600 milli-volts at 1 kHz to the test adaptor and adjust R69 for 4.5 kHz deviation with Channel Guard enabled, if present. In two-frequency radios, switch to channel 2 and adjust R73 for 4.5 kHz deviation with Channel Guard enabled, if present. |

ALIGNMENT PROCEDURE

TRANSMITTER

EQUIPMENT REQUIRED

- 1. 10-Volt Power Supply. (0.5 amps)
- 2. Floating terminal (non-grounded) multimeter with at least 3 1/2 digits and a 200 millivolt DC lowest range.
- 3. RF generator.
- 4. Distortion analyzer.
- 5. MPI Tune-up kit Option 4120 containing coil tuning tools, trimmer capacitor tuning tools, dummy battery, audio board jumper cables and a 50 ohm probe.
- 6. Test Adaptor 4EX12A12 and MPI Cable 19B234242G1 (Option 2849 for internal jack, or Option 4990 for jacks on side rail.

- the back cover at the lower right corner near the negative battery terminal or TP8 (e.g. use a 4-40 screw and nut).
- 2. Remove the front cover and unplug the Audio board from the main board. Then connect the audio board to the main board with the jumper cables.
  - 3. Insert the dummy battery into the battery pack area and apply nominal supply voltage (7.5 or 10 Volts as required). Volts to the RED terminal (BLACK terminal is ground) on dummy battery.
  - 4. Pre-set the tuning slugs in L3, L13, L14, L15, L48 and L49 to the top of the coil form. Then set the arrow on the rotor of C12 and C25 so that it points towards the rounded end of the capacitor.
  - 5. Disable Channel Guard, if present.

PRELIMINARY CHECKS AND ADJUSTMENTS

- 1. In addition to the antenna mounting bracket screw, the radio must be held tight against

NOTE

In two-frequency radios, all adjustments are made on the lowest frequency except as directed.


ALIGNMENT PROCEDURE


| STEP | METERING POINT                       | TUNING CONTROL               | PROCEDURE  |
|------|--------------------------------------|------------------------------|--|
| 1.   | Audio Output Jack (J1 on side panel) | L16                          | Set the Volume Control an audio level of approximately 1 Volt RMS to keep out of limiting. Using the 50 ohm probe, apply a strong modulated 21.4 MHz signal (>-50 dBm) to U1A-16 on T/R board and adjust L16 for maximum audio output. <div>NOTE<br/>If a 21.4 MHz generator is not available, adjust L16 for maximum noise.</div> |
| 2.   | J2-7 and TP1                         | L48 (Chan 1) or L49 (Chan 2) | For two frequency radios, select the lowest frequency. While measuring between J2-7 (regulator voltage) and TP1, adjust L48 or L49 for maximum meter reading (approximately 250 millivolts).   |
| 3.   | Audio Output Jack (J1 on side panel) | C25, C9 and L13              | Apply a strong (0 dBm) signal to the antenna jack. Adjust C25, C9 and L13 for best quieting. C25 will have more than two dips, so use only the stronger one. Then adjust C25 and L13 again for best quieting.  |
| 4.   | Audio Output Jack (J1 on side panel) | L14, L15, C4, L3 and C9      | Adjust L14, L15, C4, L3 and C9 in that order for best quieting. <div>NOTE<br/>If L15 does not tune properly (multiple dips, no dips, etc.), set the arrow on C12 towards the flat end of the capacitor.</div>  |

ALIGNMENT PROCEDURE

RECEIVER

| STEP | METERING POINT      | TUNING CONTROL   | PROCEDURE   |
|------|---------------------|------------------|---|
| 5.   | Distortion Analyzer | L48, L49 and C12 | Add 1 kHz tone modulation at 5 kHz deviation to the carrier. Leave the Volume control as in Step 1. Alternately adjust lowest frequency warp coil (L48 or L49) and C12 until no improvement in SINAD is seen. This will insure that the match to the crystal filters is properly adjusted, and that the carrier is centered in the pass band (zero beating isn't required). On 2 frequency radios switch to the other channel and adjust the other warp coil (L48 or L49) for best SINAD. |
| 6.   | Distortion Analyzer | C4               | On two-frequency radios, switch to the lowest frequency. Set the signal generator to the image frequency (42.8 MHz below the carrier frequency) and increase the RF level to approximately -60 dBm. Then adjust C4 for the amount of image rejection desired by degrading the quieting on SINAD. Then reset the signal generator to 3 kHz before doing any standard measurements.   |

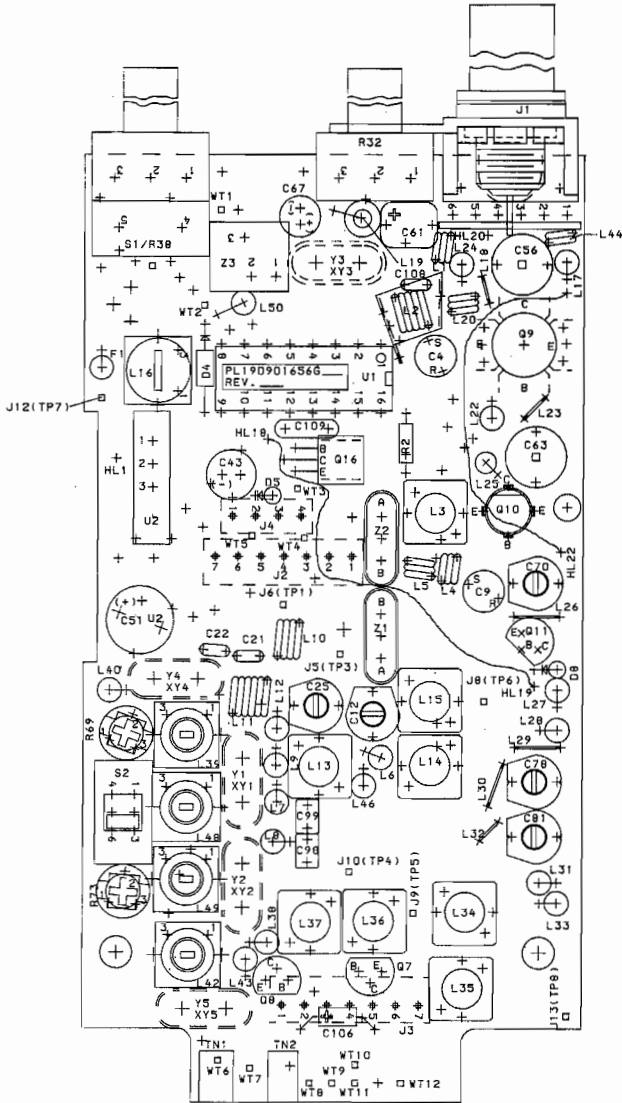

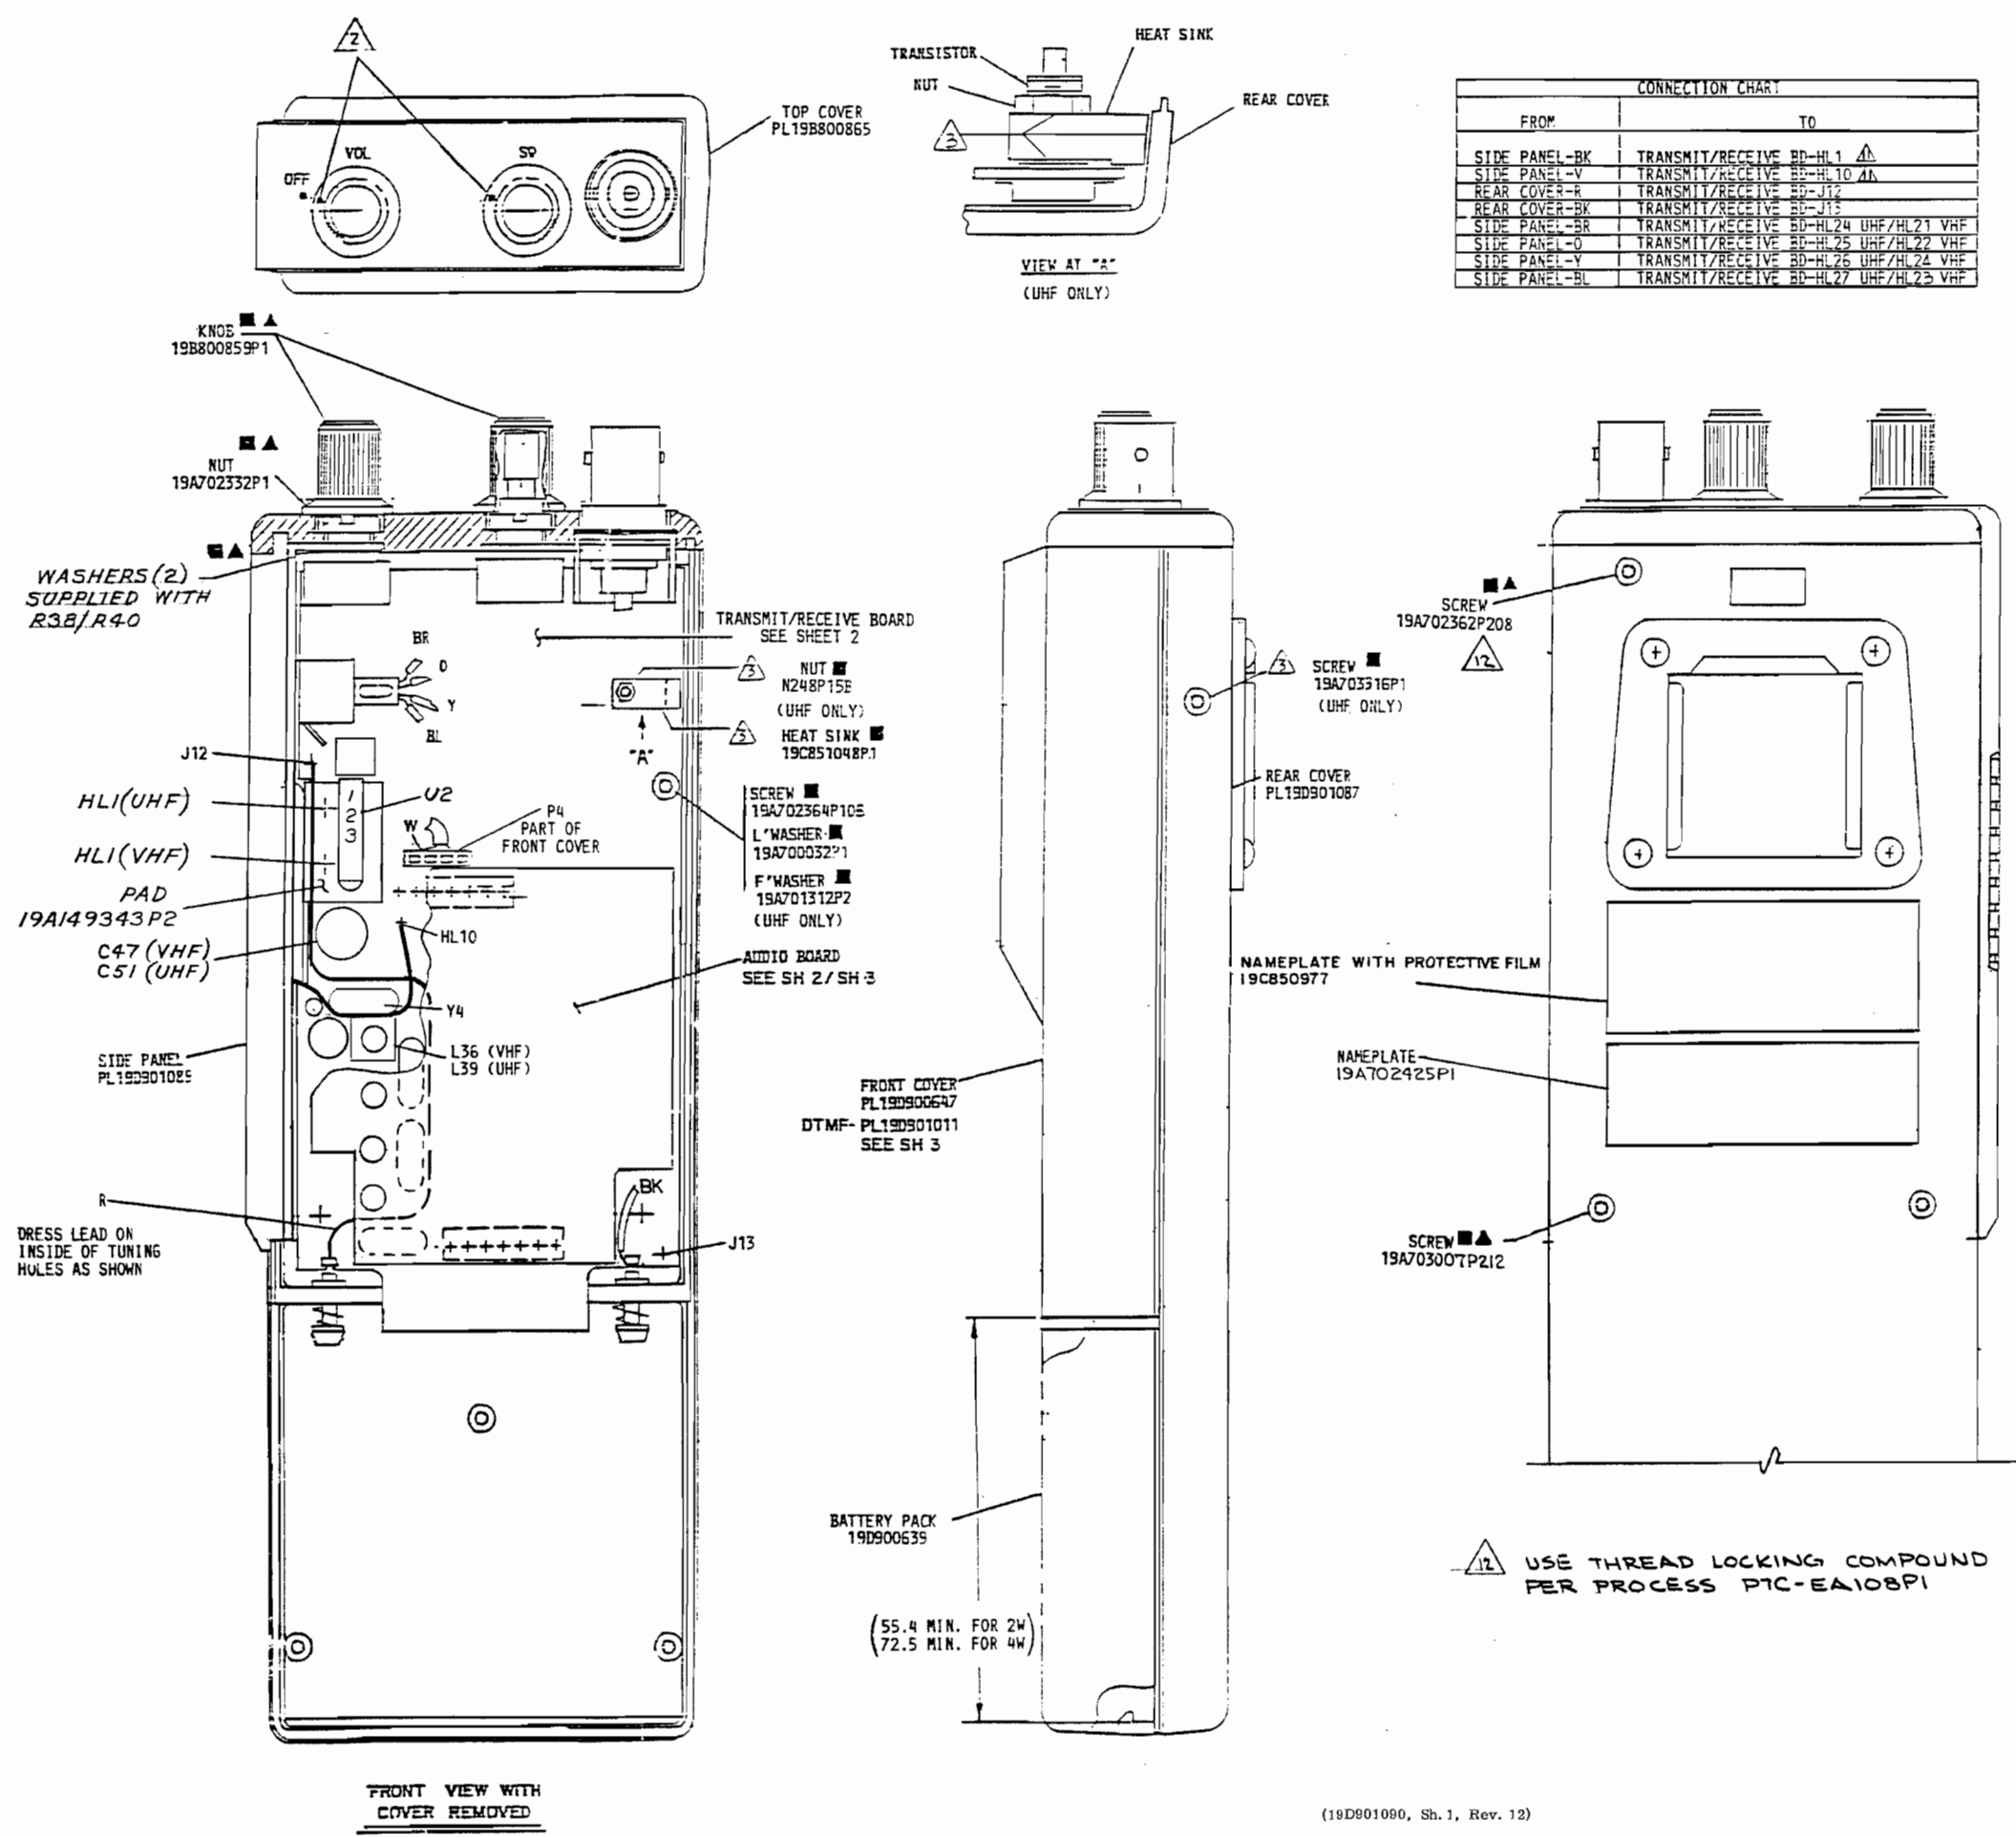

- 1 VHF SEE NOTES  $\Delta$  4  $\Delta$  5  $\Delta$  8
- 2 UHF SEE NOTE  $\Delta$  8
- 3 VHF - TWO FREQ TX & SINGLE FREQ RX SEE NOTES  $\Delta$  4  $\Delta$  6
- 4 UHF - TWO FREQ TX & SINGLE FREQ RX SEE NOTE  $\Delta$  6
- 5 DTMF SEE SH. #3
- 6 VHF - SINGLE FREQ TX & TWO FREQ RX SEE NOTES  $\Delta$  4  $\Delta$
- 7 UHF - SINGLE FREQ TX & TWO FREQ RX SEE NOTE  $\Delta$

- NOTES:
- ITEMS MARKED  $\blacksquare$  ARE PART OF HARDWARE KIT PL19A70237962 (UHF). ITEMS MARKED  $\blacktriangle$  ARE PART OF HARDWARE KIT PL19A70237963 (VHF).
  - ROTATE OFF/ON-VOL POT TO EXTREME COUNTER CLOCKWISE (OFF) POSITION. ASSEMBLE KNOB WITH INDICATOR MARK ALIGNED WITH MARK ON TOP COVER. ROTATE SQUELCH POT TO EXTREME COUNTER CLOCKWISE POSITION. ASSEMBLE KNOB WITH INDICATOR MARK IN APPROXIMATELY SAME POSITION AS THE OFF/ON-VOL KNOB.
  - APPLY SILICON GREASE (19A701337P1) PER 19A701431 BETWEEN MATING SURFACES OF HEAT SINK, NUT, TRANSISTOR AND REAR COVER. SCREW MUST BE TIGHTENED BEFORE NUT. NUT TIGHTENING TORQUE TO BE .3 N-M.
  - A. CUT RUN ON SOLDER SIDE OF TX/RX BOARD 19D901660G1 WHEN LOWEST TX FREQ. SPECIFIED IS BELOW 142 MHZ OR ON TX/RX BOARD 19D901660G2 WHEN LOWEST TX FREQ. SPECIFIED IS BELOW 162 MHZ AS SHOWN IN DETAIL "G" (SH. #2).  
B. CUT RUN ON SOLDER SIDE OF TX/RX BOARD 19D901660G2 WHEN HIGHEST RX FREQ. SPECIFIED IS BELOW 162 MHZ AS SHOWN IN DETAIL "G" (SH. #2).
  - A. WHEN NO TX CRYSTALS ARE SPECIFIED ON PRODUCTION TAG DO NOT CUT RUN SHOWN IN DETAIL "G" (SH. #2) PER NOTE 4.A.  
B. WHEN NO RX CRYSTALS ARE SPECIFIED ON PRODUCTION TAG DO NOT CUT RUN SHOWN IN DETAIL "G" (SH. #2) PER NOTE 4.B.
  - CUT RUN ON SOLDER SIDE OF TX/RX BOARD AND ADD JUMPERS AS SHOWN IN DETAIL "D" (SH. #2).
  - CUT RUN ON SOLDER SIDE OF TX/RX BOARD AND ADD JUMPERS AS SHOWN IN DETAIL "E" (SH. #2).
  - SWITCH STOP IS TO BE INSTALLED UNLESS 8TH DIGIT OF COMBINATION NUMBER IS 'C', 'D' OR CRYSTALS ARE INSTALLED IN CHANNEL 2-TX AND/OR RX.
  - SOLDER ALL ELECTRICAL CONNECTIONS.
  - ORIENT Y1, Y2, Y4 AND Y5 SO THAT DWG. NO. & FREQ. MARKING IS AT SIDE INDICATED. GROUND LEAD MUST BE IN POSITION AS INDICATED BY \* (SH. #2).

$\Delta$  12 USE THREAD LOCKING COMPOUND PER PROCESS P7C-EA108P1


MECHANICAL LAYOUT








**CAUTION**  
OBSERVE PRECAUTIONS  
FOR HANDLING  
ELECTROSTATIC  
SENSITIVE  
DEVICES




LEAD IDENTIFICATION FOR Q7, Q8 & Q16      LEAD IDENTIFICATION FOR Q11

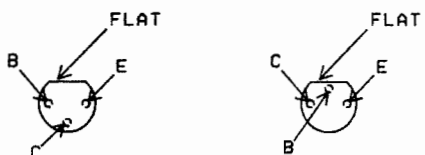

TOP VIEW      TOP VIEW  
NOTE: CASE SHAPE IS DETERMINING  
FACTOR FOR LEAD IDENTIFICATION.


OUTLINE DIAGRAM

TRANSMITTER/RECEIVER BOARD

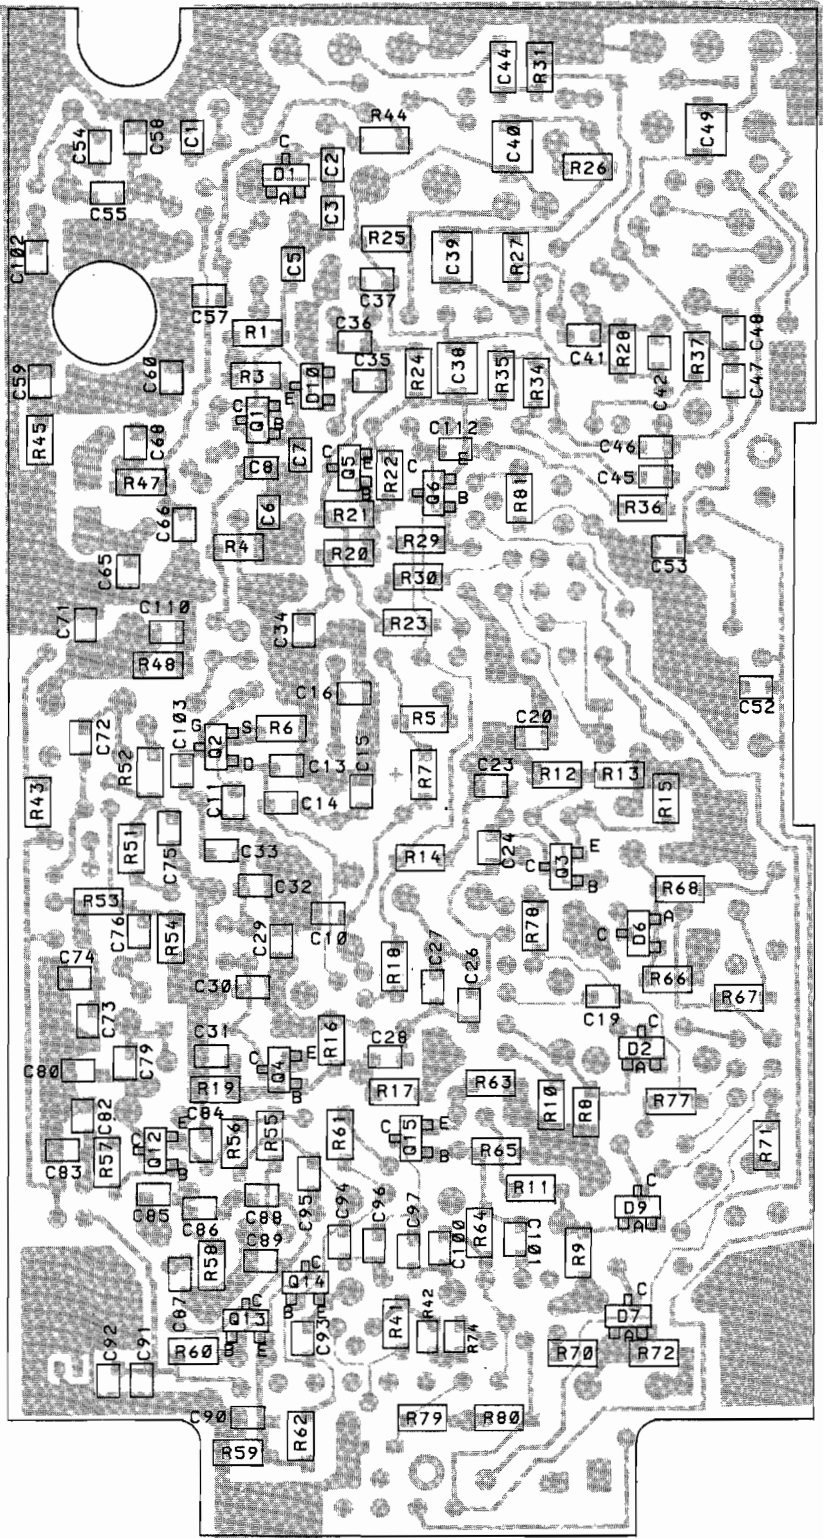


REAR VIEW

(19D901656, Sh. 1, Rev. 8)  
(19A704667, Sh. 2, Rev. 2)

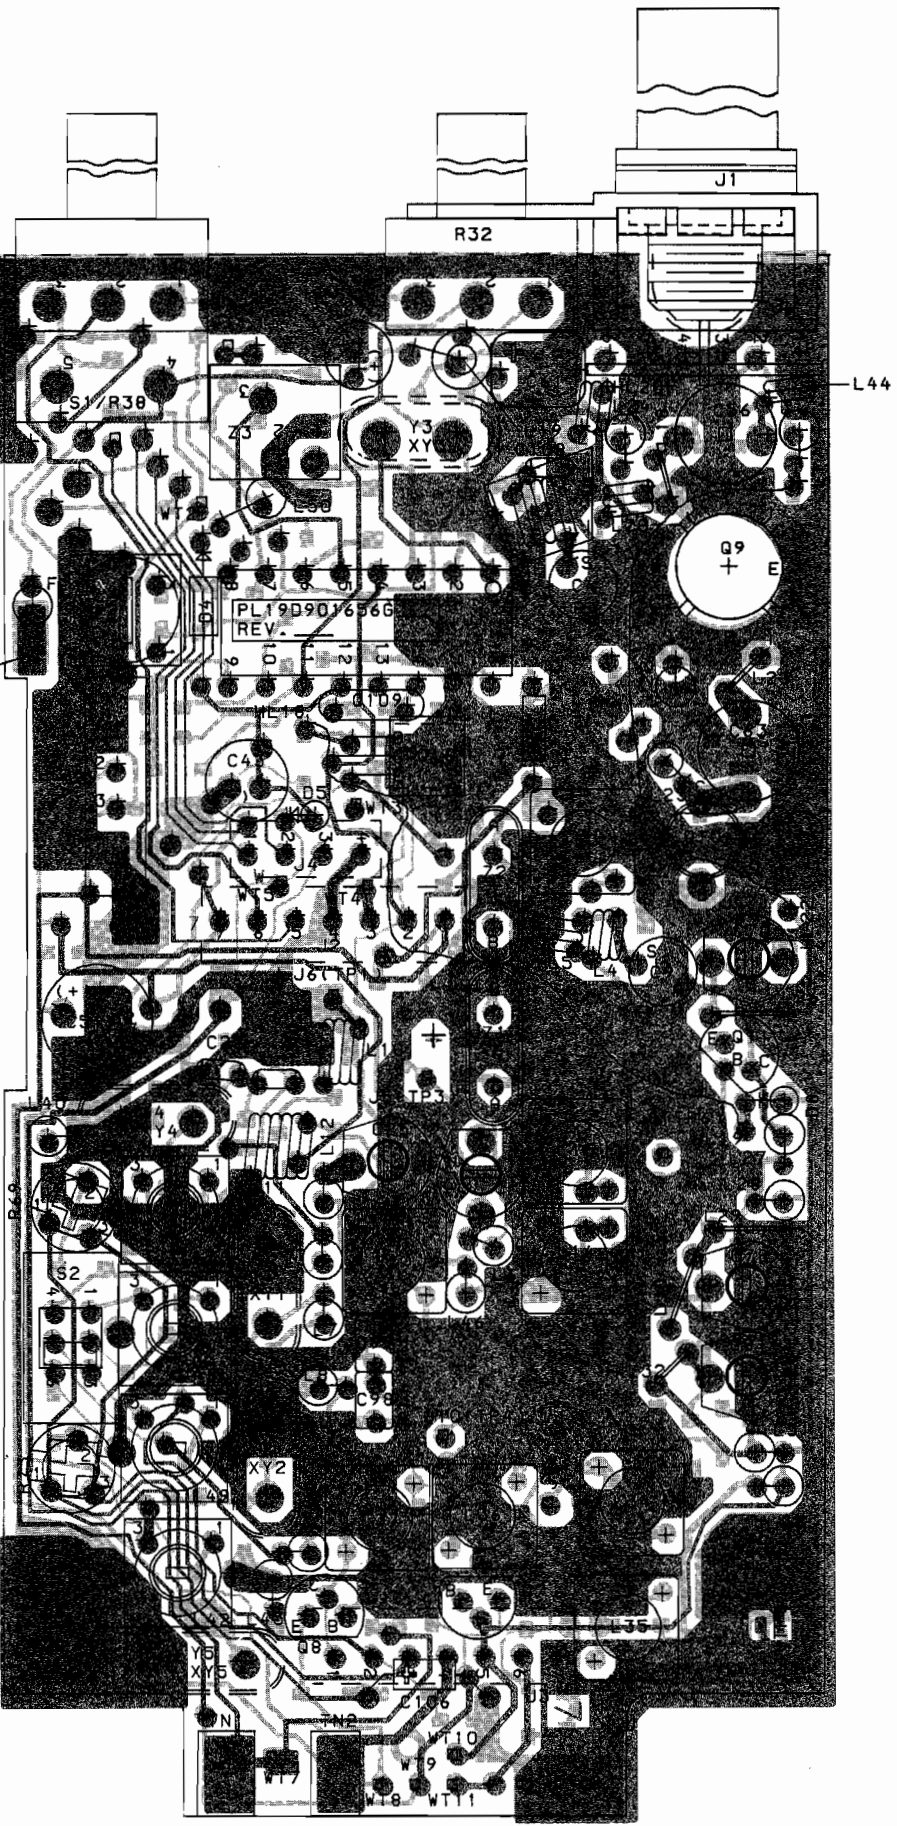


FRONT VIEW

(19D901658, Rev. 5)  
(19A704667, Sh. 1, Rev. 2)  
(19A704667, Sh. 2, Rev. 2)

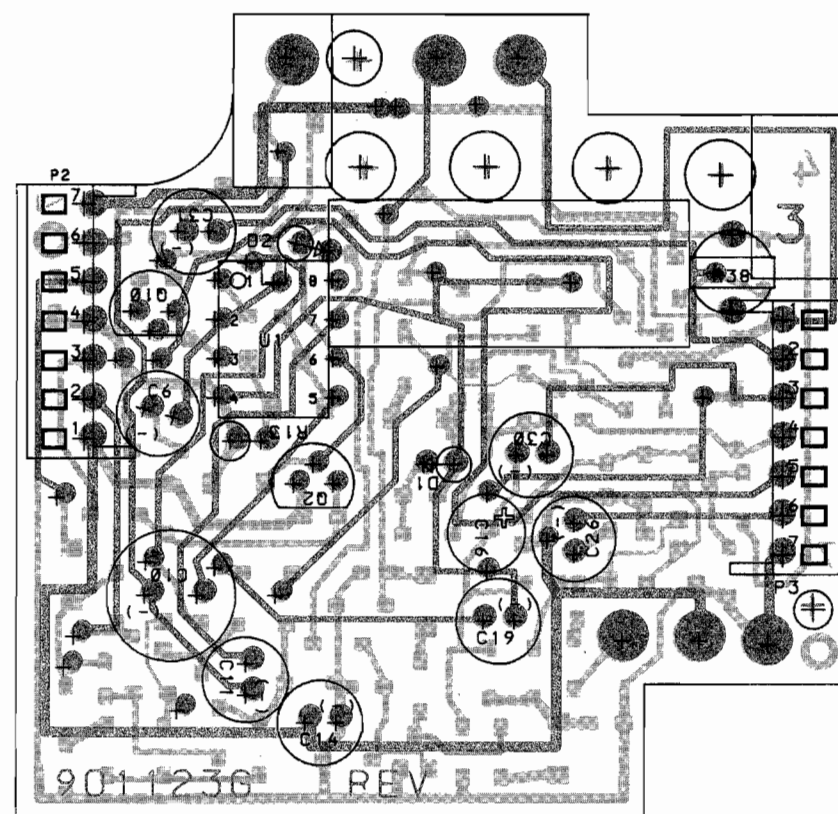

FRONT SIDE


(19D901124, Rev. 5)  
(19A703568, Sh. 1, Rev. 3)  
(19A703568, Sh. 2, Rev. 4)

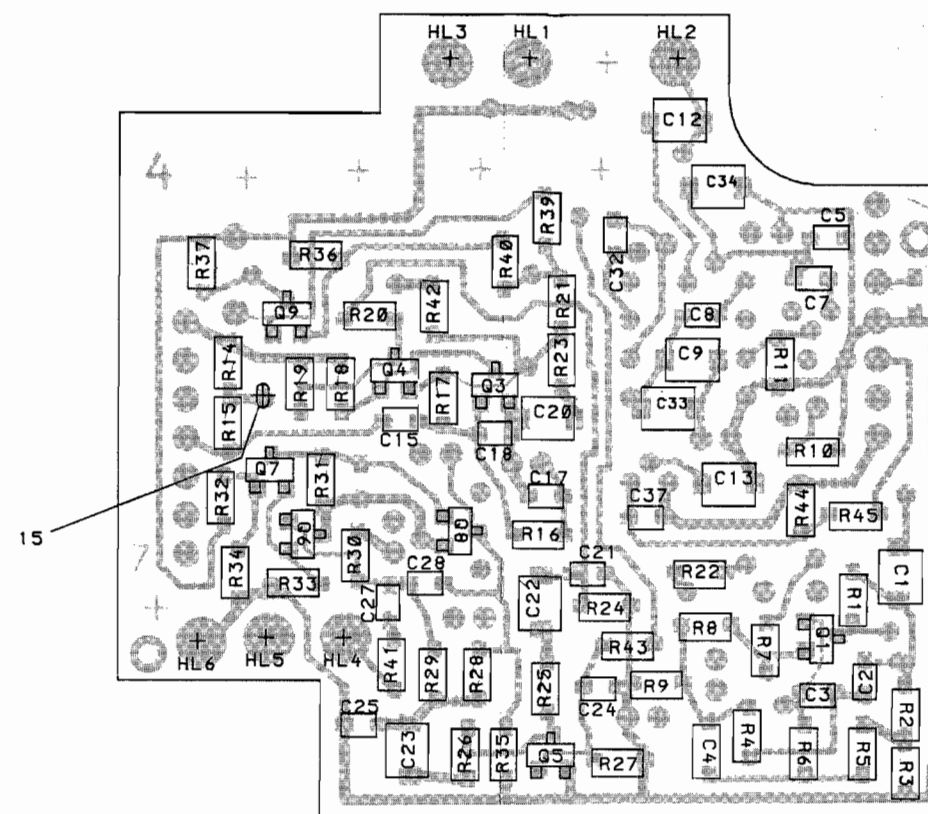

BACK SIDE

(19D901123, Rev. 7)  
(19A703568, Sh. 2, Rev. 4)


LEAD IDENTIFICATION  
FOR Q2



IN-LINE  
TOP VIEW

NOTE: CASE SHAPE IS DETERMINING  
FACTOR FOR LEAD IDENTIFICATION.


LEAD IDENTIFICATION  
FOR Q10




IN-LINE  
TOP VIEW

NOTE: CASE SHAPE IS DETERMINING  
FACTOR FOR LEAD IDENTIFICATION.

LEAD IDENTIFICATION  
FOR Q1, Q3 THRU Q9



TOP VIEW

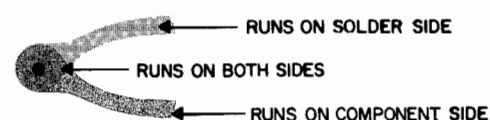

# OUTLINE DIAGRAM

AUDIO BOARD

## VOLTAGE READINGS:

VOLTAGE READINGS ARE TYPICAL VALUES MEASURED WITH A HIGH IMPEDANCE (100:10MΩ) MULTI-METER FROM THE INDICATED POINT TO GROUND. CONDITIONS FOR READINGS ARE INDICATED BY THE FOLLOWING KEY:

- R INDICATES VOLTAGES ARE TO BE MEASURED DURING RECEIVE MODE  
 T INDICATES MEASUREMENT DURING TRANSMIT  
 C INDICATES CONTINUOUS VOLTAGE ALWAYS PRESENT WHEN RADIO IS ON

VOLTAGE READINGS ARE FOR 4 WATT MPI UNITS UNLESS ENCLOSED IN BRACKETS WHICH INDICATES VOLTAGES MEASURED ON 2 WATT MPI UNITS. (EXAMPLE: [+7.5V])

## NOTES:

△ PART OF PWB.

3. \* IDENTIFIES "CHIP" COMPONENTS (EXAMPLE C57#) WHICH ARE LOCATED ON SOLDER SIDE OF PWB.

4. † FREQUENCY SENSITIVE COMPONENTS. SEE COMPONENT IDENTIFICATION CHART OR PARTS LIST. G1 PART VALUE SHOWN.


5. ALL CHIP RESISTORS ARE 1/8 WATT.  
 ALL OTHER RESISTORS ARE 1/8 WATT UNLESS OTHERWISE SPECIFIED.  
 RESISTOR VALUES IN Ω UNLESS FOLLOWED BY MULTIPLIER k OR M.  
 CAPACITOR VALUES IN F UNLESS FOLLOWED BY MULTIPLIER u, n OR p.  
 INDUCTANCE VALUES IN H UNLESS FOLLOWED BY MULTIPLIER m, u OR n.

△ CUT THIS RUN FOR C6/CCT OPTION.

| FREQUENCY SENSITIVE COMPONENTS |                          |                          |                          |                          |                          |
|--------------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| REF. NO.                       | G1 & G13<br>450-470 MHZ  | G2 & G14<br>470-494 MHZ  | G3 & G15<br>489-512 MHZ  | G4 & G16<br>403-425 MHZ  | G5 & G17<br>420-450 MHZ  |
| C1#                            | 5.6p                     | 5.6p                     | 5.6p                     | 6.8p                     | 5.6p                     |
| C2#                            | 6.8p                     | 6.8p                     | 3.9p                     | 8.2p                     | 6.8p                     |
| C3#                            | 2.7p                     | 2.7p                     | 2.7p                     | 3.3p                     | 3.3p                     |
| C4                             | 0.5-2.5p                 | 0.5-2.5p                 | 0.5-2.5p                 | 1-5p                     | 1-5p                     |
| C5#                            | 2.7p                     | 2.7p                     | 2.7p                     | 3.3p                     | 3.3p                     |
| C8#                            | 1.2p                     | 0.9p                     | 0.7p                     | 2.2p                     | 1.8p                     |
| C19#                           | 100p                     | 100p                     | 100p                     | 68p                      | 150p                     |
| C22                            | 68p                      | 68p                      | 68p                      | 120p                     | 120p                     |
| C23#                           | 22p                      | 15p                      | 15p                      | 30p                      | 24p                      |
| C24#                           | 3.3p                     | 4.7p                     | 4.7p                     | 4.7p                     | 4.7p                     |
| C27#                           | 15p                      | 12p                      | 13p                      | 22p                      | 18p                      |
| C30#                           | 2.7p                     | 1.8p                     | 1.8p                     | 3.3p                     | 2.7p                     |
| C32#                           | 3.3p                     | 2.7p                     | 2.7p                     | 4.3p                     | 3.9p                     |
| C54#                           | 10p                      | 8.2p                     | 8.2p                     | 12p                      | 12p                      |
| C55#                           | 3.9p                     | NONE                     | NONE                     | 8.2p                     | 5.6p                     |
| C58#                           | 15p                      | 10p                      | 8.2p                     | 15p                      | 15p                      |
| C59#                           | 39p                      | 36p                      | 33p                      | 47p                      | 43p                      |
| C60#                           | 39p                      | 36p                      | 33p                      | 47p                      | 43p                      |
| C65#                           | 15p                      | 12p                      | 6.8p                     | 24p                      | 22p                      |
| C71#                           | 10p                      | 10p                      | 8.2p                     | 15p                      | 10p                      |
| C85#                           | 39p                      | 39p                      | 39p                      | 43p                      | 39p                      |
| C86#                           | 22p                      | 22p                      | 22p                      | 33p                      | 24p                      |
| C87#                           | 39p                      | 33p                      | 33p                      | 51p                      | 43p                      |
| C89#                           | 10p                      | 10p                      | 8.2p                     | 12p                      | 12p                      |
| C93#                           | 39p                      | 39p                      | 39p                      | 43p                      | 39p                      |
| C94#                           | 18p                      | 18p                      | 18p                      | 27p                      | 22p                      |
| C95#                           | 47p                      | 47p                      | 47p                      | 56p                      | 47p                      |
| C96#                           | 2.7p                     | 2.7p                     | 2.2p                     | 3.3p                     | 2.7p                     |
| C97#                           | 30p                      | 27p                      | 27p                      | 39p                      | 36p                      |
| C108                           | 6.8p                     | 4.7p                     | 4.7p                     | 6.8p                     | 6.8p                     |
| C110#                          | 10p                      | 10p                      | NONE                     | 15p                      | 10p                      |
| L1                             | 2 1/2 TURNS<br>2.0mm ID  | 2 1/2 TURNS<br>1.78mm ID | 2 1/2 TURNS<br>1.78mm ID | 2 1/2 TURNS<br>2.2mm ID  | 2 1/2 TURNS<br>2.2mm ID  |
| L4 & L5                        | 2 1/2 TURNS<br>2.0mm ID  | 2 1/2 TURNS<br>2.0mm ID  | 2 1/2 TURNS<br>1.78mm ID | 2 1/2 TURNS<br>2.0mm ID  | 2 1/2 TURNS<br>2.0mm ID  |
| L7 & L8                        | 1u                       | 1u                       | 1u                       | 1.2u                     | 1.2u                     |
| L9                             | 680n                     | 680n                     | 560n                     | 1u                       | 820n                     |
| L11                            | 5 1/2 TURNS<br>3.04mm ID | 4 1/2 TURNS<br>3.04mm ID | 4 1/2 TURNS<br>3.04mm ID | 5 1/2 TURNS<br>3.04mm ID | 5 1/2 TURNS<br>3.04mm ID |
| L12                            | 150n                     | 120n                     | 120n                     | 150n                     | 150n                     |
| L38                            | 270n                     | 270n                     | 220n                     | 470n                     | 390n                     |
| L44                            | 1 1/2 TURNS<br>2.0mm ID  | 1 1/2 TURNS<br>1.52mm ID | 1 1/2 TURNS<br>1.52mm ID | 1 1/2 TURNS<br>2.0mm ID  | 1 1/2 TURNS<br>2.0mm ID  |
| L45                            | 3 3/4 TURNS<br>2.54mm ID | 3 3/4 TURNS<br>2.54mm ID | 3 3/4 TURNS<br>2.03mm ID | 3 3/4 TURNS<br>2.54mm ID | 3 3/4 TURNS<br>2.54mm ID |
| R15#                           | 560                      | 560                      | 560                      | 390                      | 390                      |
| R77#                           | 22k                      | 22k                      | 22k                      | 18k                      | 18k                      |
| R78#                           | 68k                      | 68k                      | 68k                      | 82k                      | 82k                      |
| R79#                           | 47k                      | 47k                      | 47k                      | 47k                      | 47k                      |
| R80#                           | 82k                      | 82k                      | 82k                      | 82k                      | 82k                      |

| DESCRIPTION                       | MODEL NO.      | REV LTR |
|-----------------------------------|----------------|---------|
| UHF 2W/4W MAIN BD 450-470 MHZ     | PL19D901656G1  | D       |
| UHF 2W/4W MAIN BD 470-494 MHZ     | PL19D901656G2  | D       |
| UHF 2W/4W MAIN BD 489-512 MHZ     | PL19D901656G3  | E       |
| UHF 2W/4W MAIN BD 403-425 MHZ     | PL19D901656G4  | D       |
| UHF 2W/4W MAIN BD 420-450 MHZ     | PL19D901656G5  | C       |
| UHF 2W/4W MAIN BD 450-470 MHZ     | PL19D901656G13 | B       |
| UHF 2W/4W MAIN BD 470-494 MHZ     | PL19D901656G14 | B       |
| UHF 2W/4W MAIN BD 489-512 MHZ     | PL19D901656G15 | C       |
| UHF 2W/4W MAIN BD 403-425 MHZ     | PL19D901656G16 | B       |
| UHF 2W/4W MAIN BD 420-450 MHZ     | PL19D901656G17 | A       |
| AUDIO BOARD (STANDARD)            | PL19D901123G1  | E       |
| AUDIO BOARD (W/DTMF PARTS)        | PL19D901123G2  | E       |
| AUDIO BOARD (STANDARD) (GOLD)     | PL19D901123G7  | A       |
| AUDIO BOARD (W/DTMF PARTS) (GOLD) | PL19D901123G8  | A       |
| BATTERY (7.5V)                    | PL19D900639G2  |         |
| BATTERY (10V)                     | PL19D900639G3  |         |
| REAR COVER (2 WATT)               | PL19D901087G4  |         |
| REAR COVER (4 WATT)               | PL19D901087G2  |         |
| SIDE PANEL                        | PL19D901089G1  |         |
| FRONT COVER (STANDARD)            | PL19D900647G1  |         |
| FRONT COVER (LICENSEE)            | PL19D900647G2  |         |
| FRONT COVER (STANDARD W/O METAL)  | PL19D900647G4  |         |
| FRONT COVER (STANDARD/DTMF)       | PL19D901011G1  |         |
| FRONT COVER (LICENSEE/DTMF)       | PL19D901011G2  |         |

PROBING POINTS FOR RECEIVER FRONT END AND TRANSMITTER  
(TUNE INDICATED PARTS FOR BEST READING):  
AVAILABLE POWER (PAVL) = PROBE CONN. TO PWR METER  
FOR USE AS A SENSOR.  
SINAD = PROBE USED WITH A GENERATOR  
AS A SIGNAL INJECTOR, APPROX.  
12 dB SINAD VALUE INDICATED.  
+ = MEASURED TO GROUND.

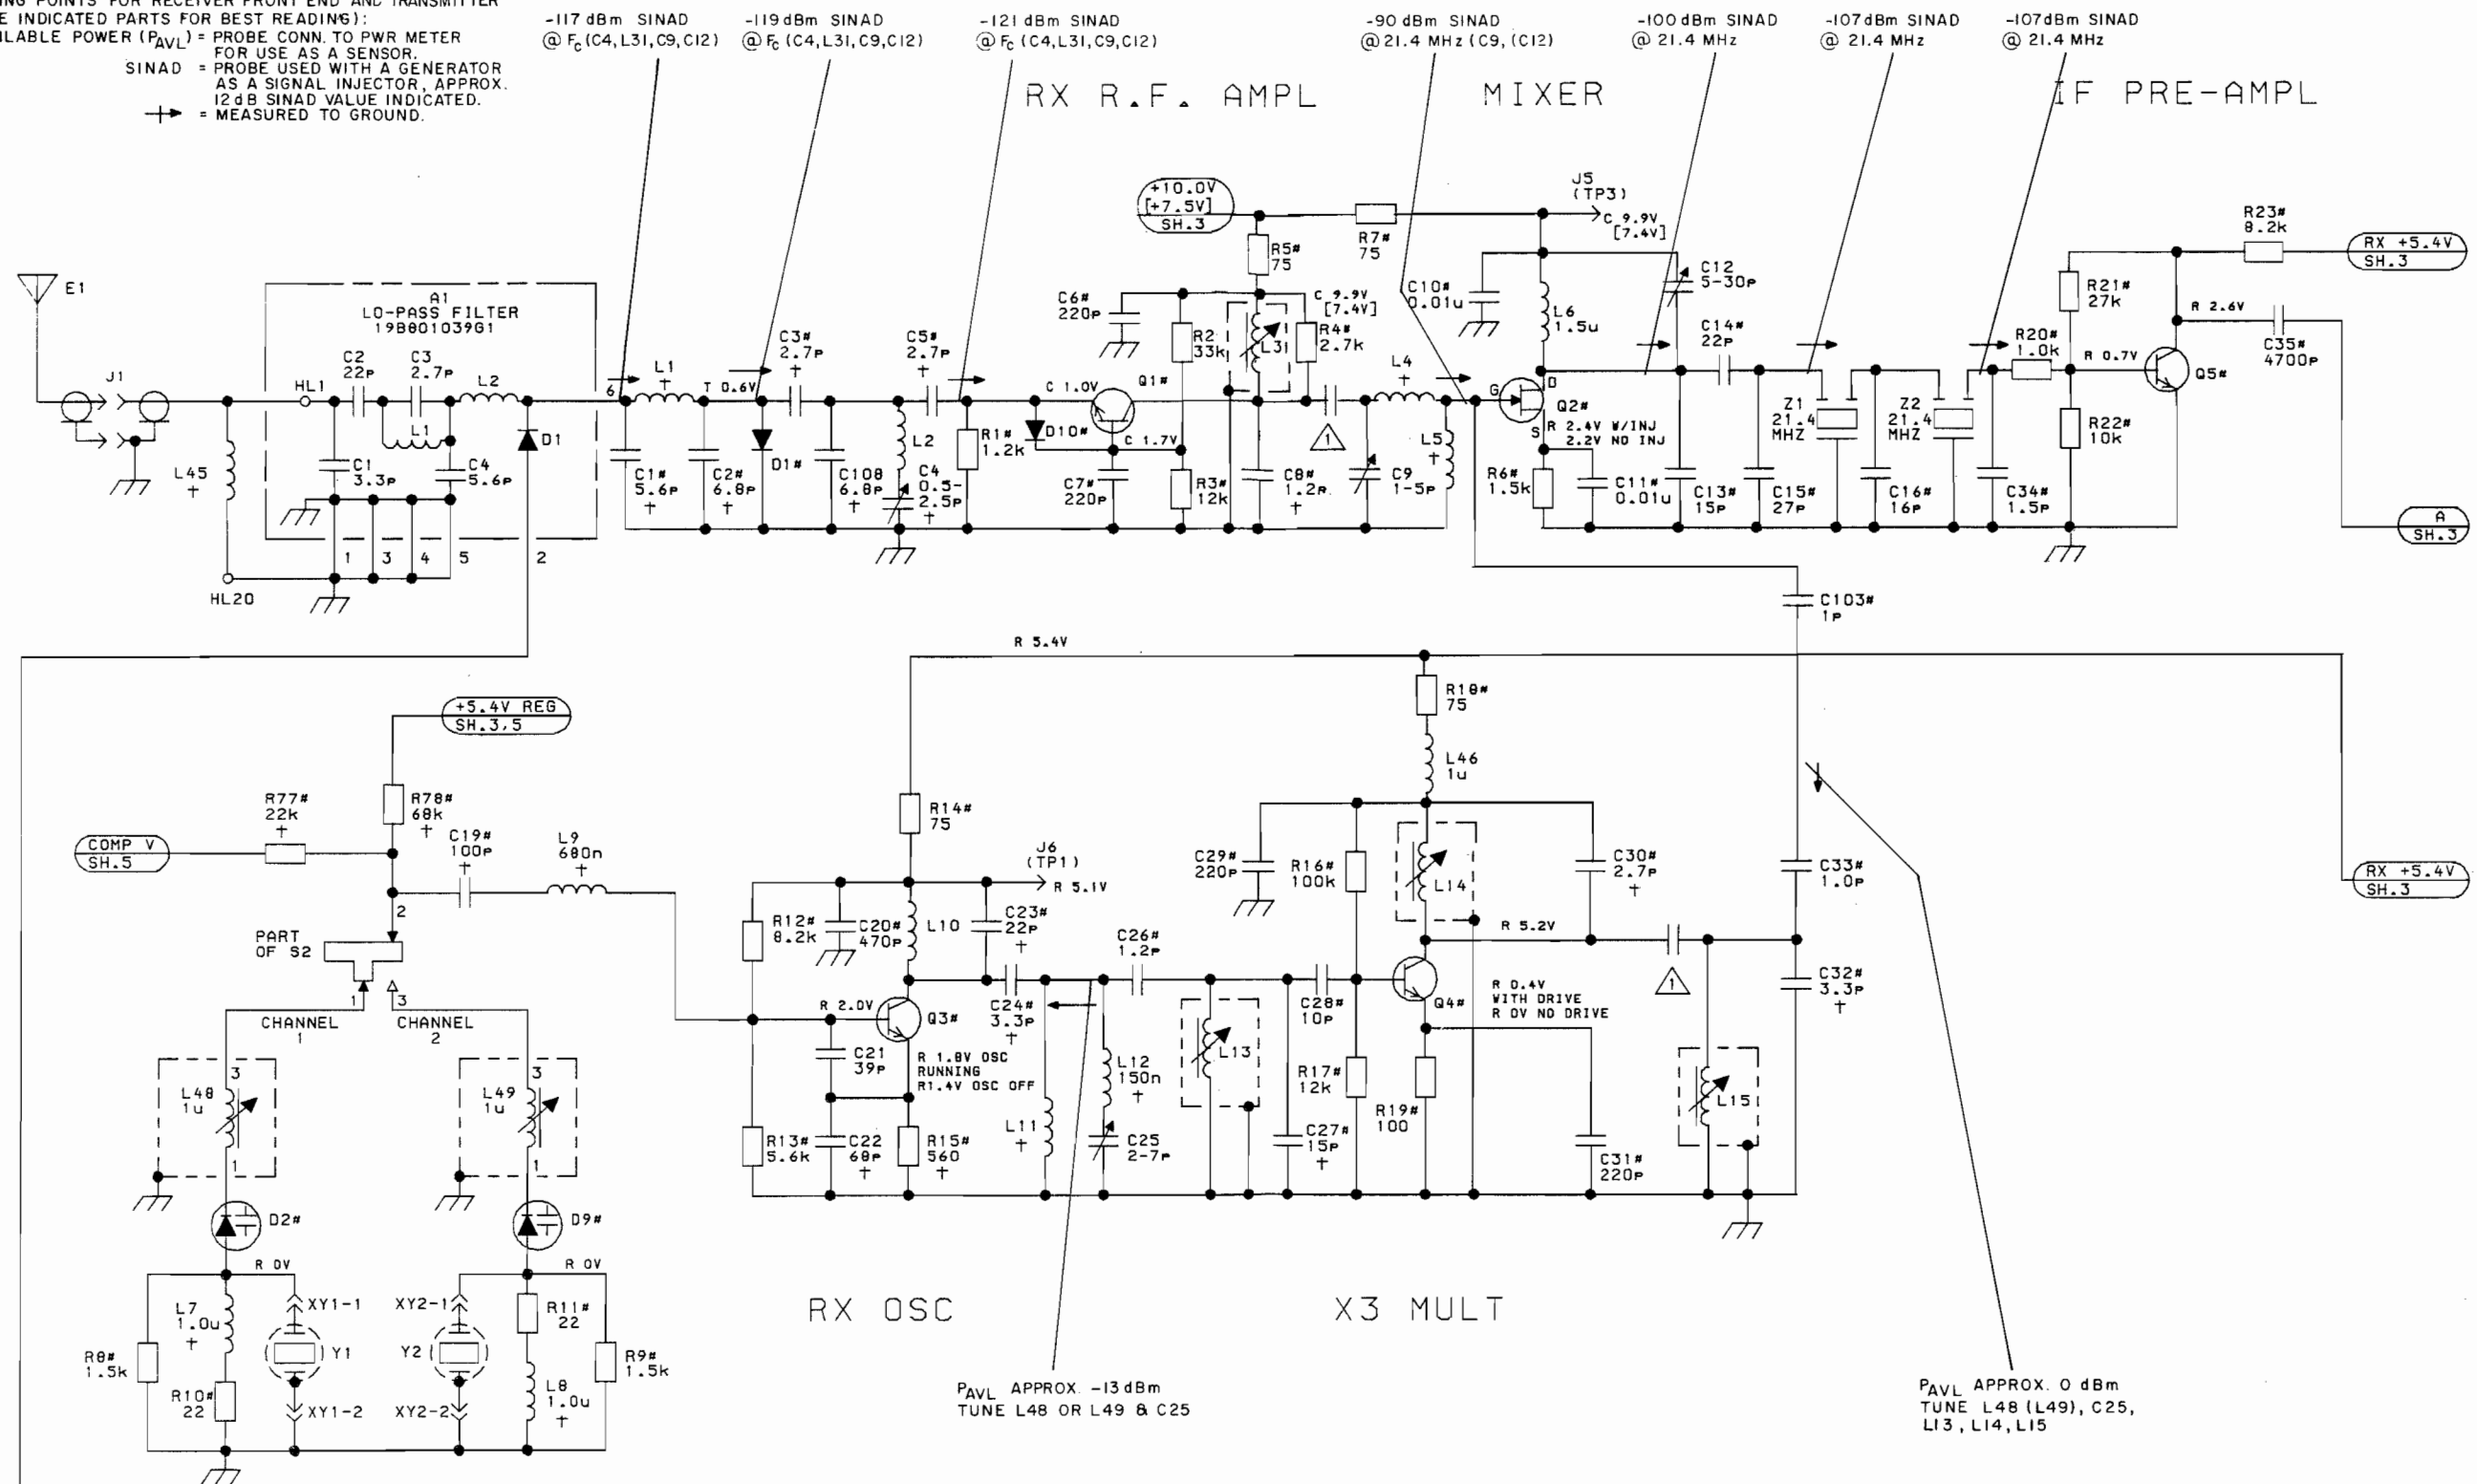

(19D901659, Sh. 2, Rev. 2)

RC4427 SH.2


# SCHEMATIC DIAGRAM

403-512 MHz RX


Sheet 2

16

Issue 2

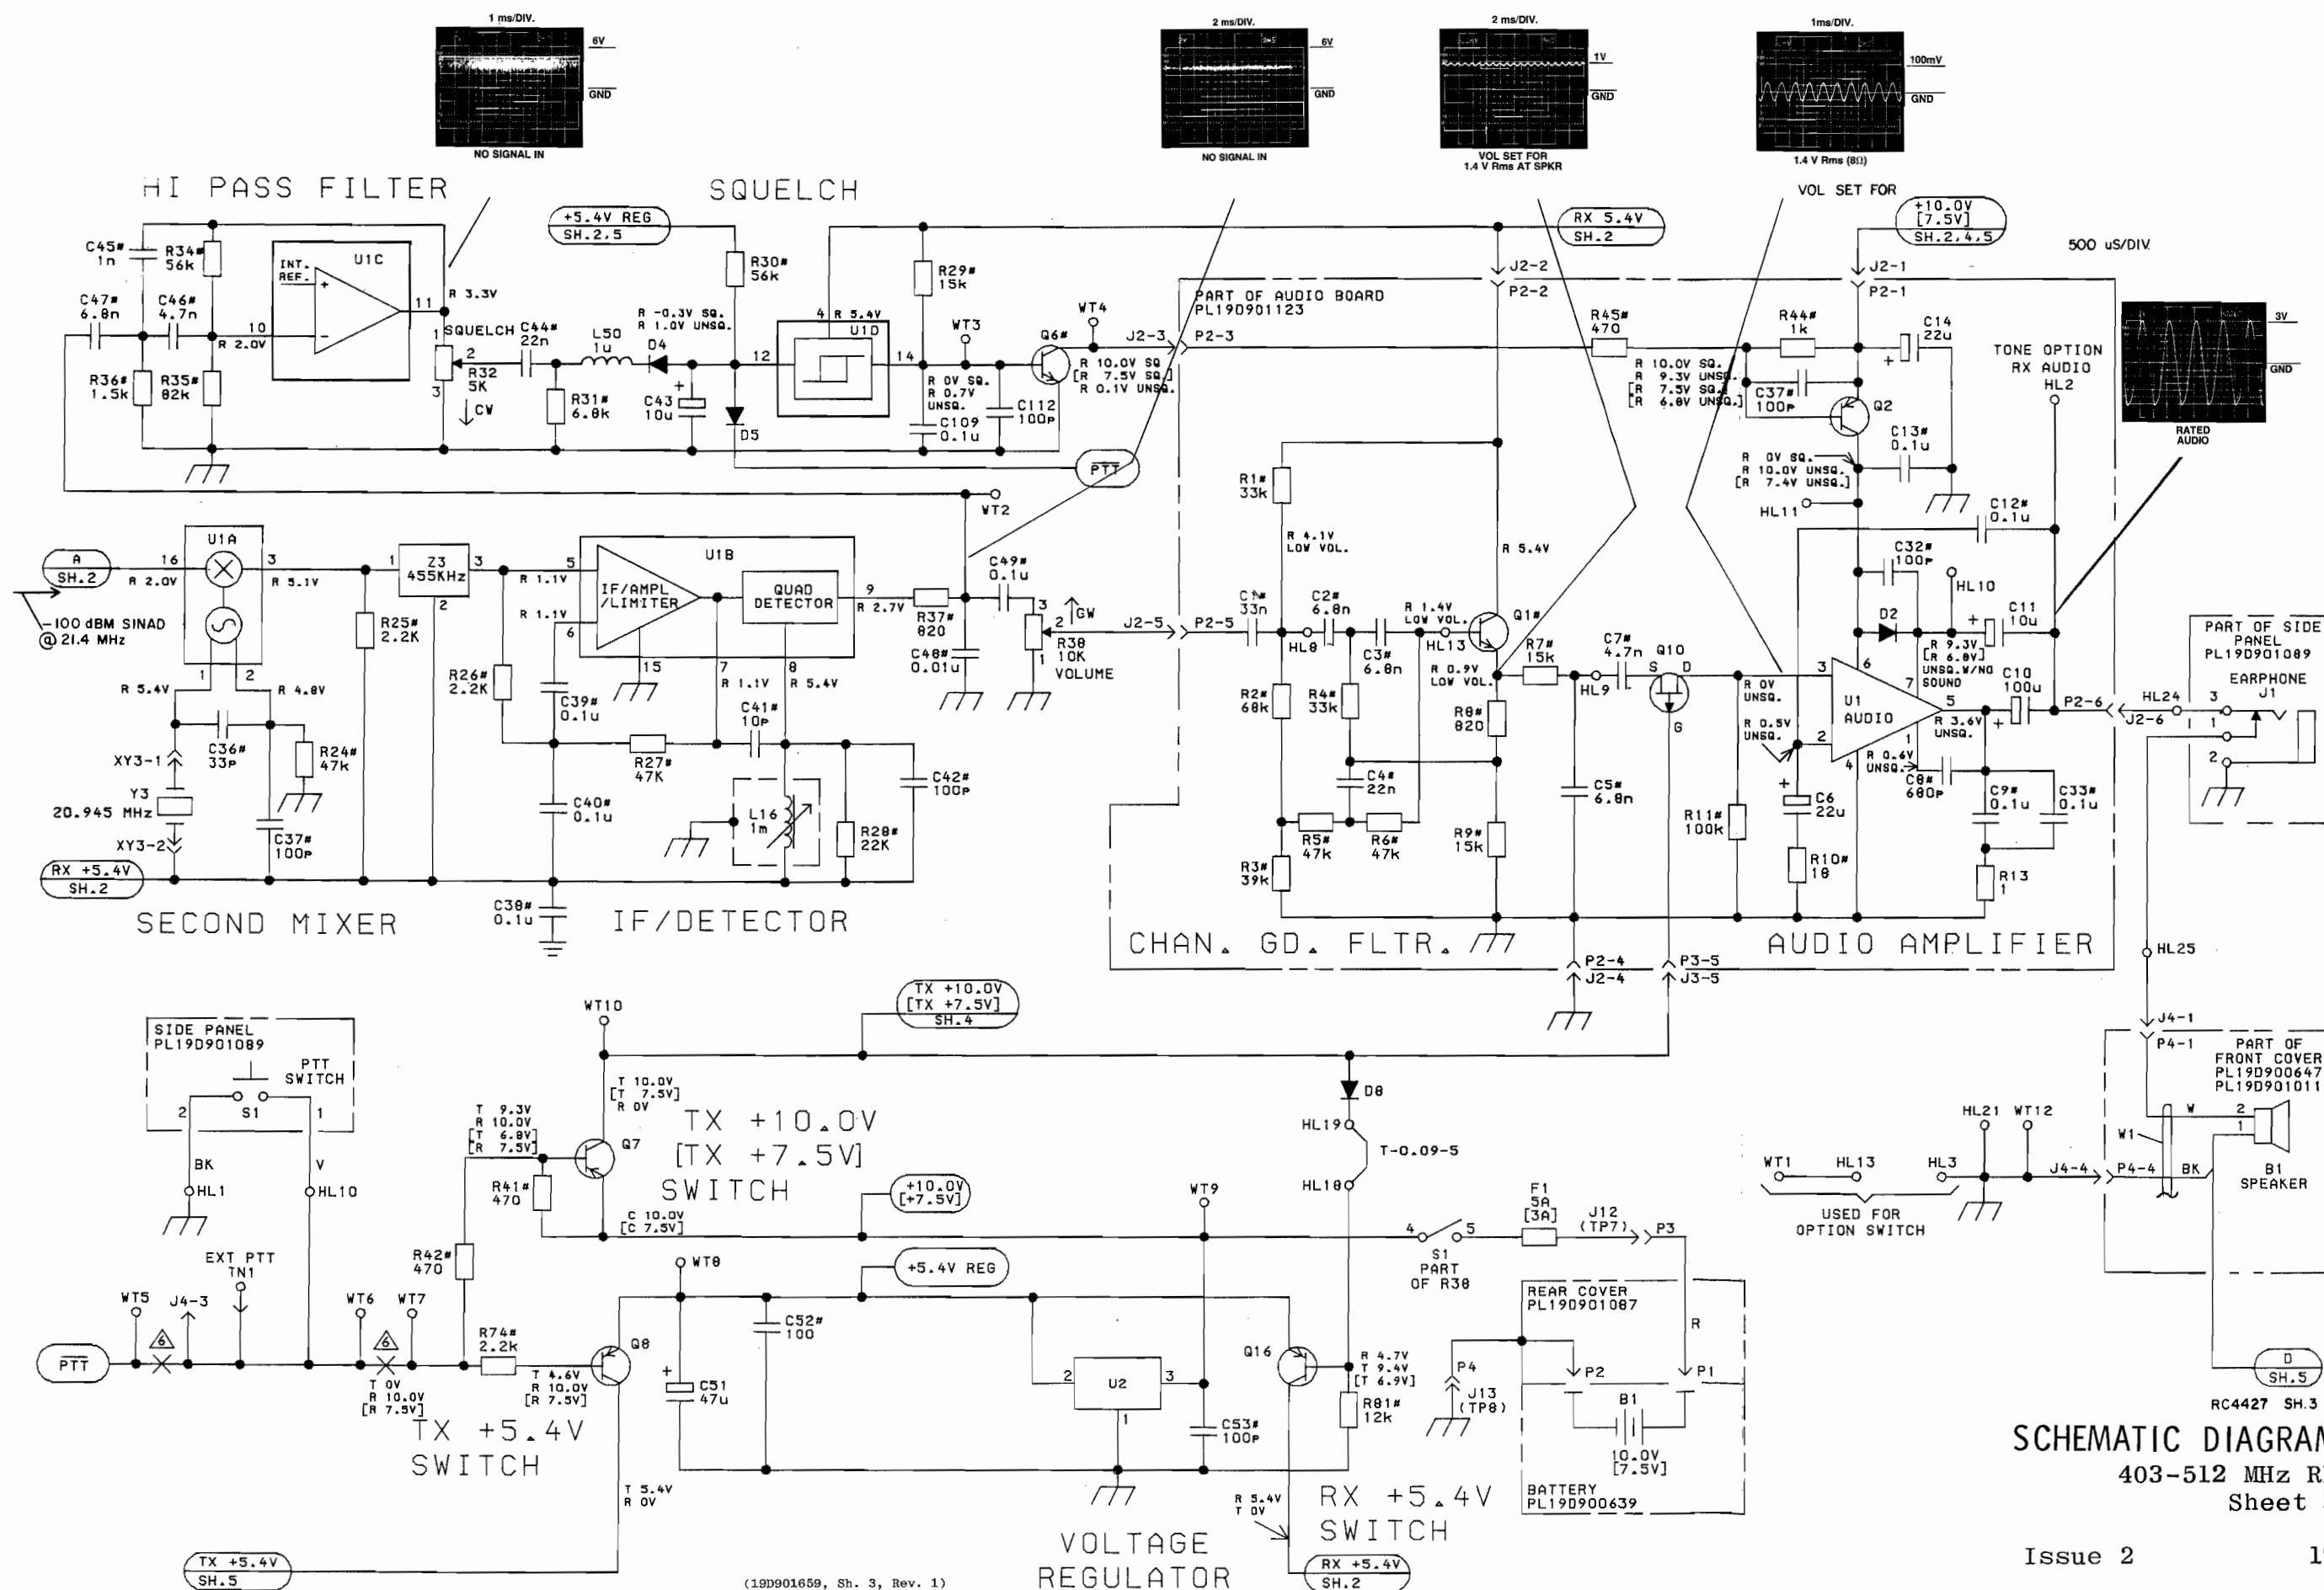



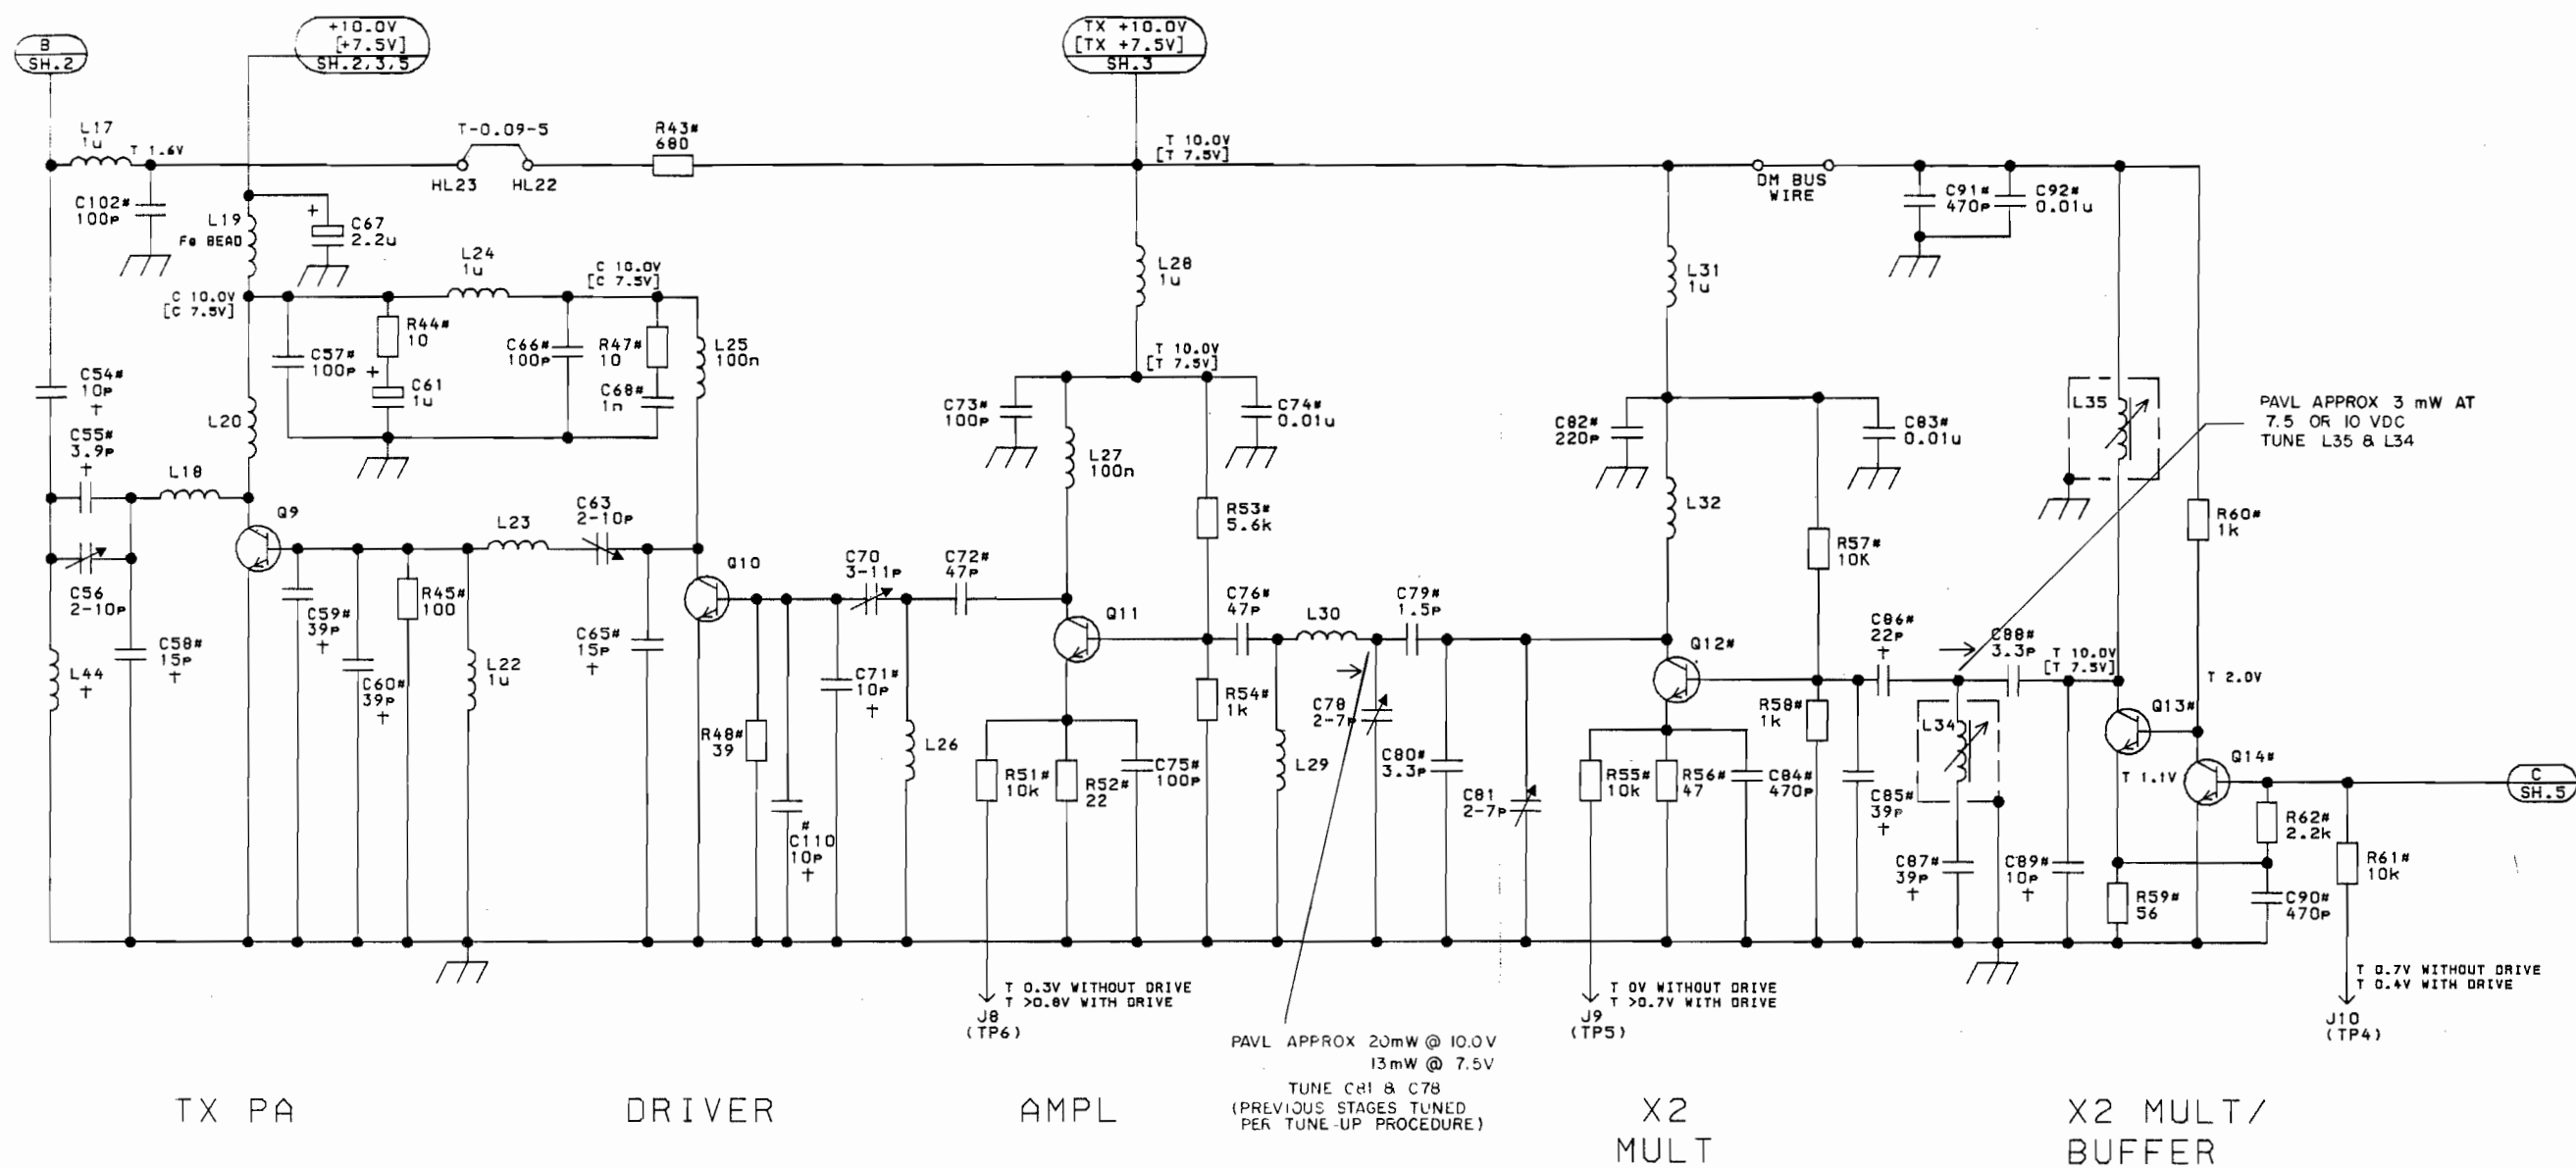


(19D901659, Sh. 4, Rev. 2)

RC4427 SH.4

## SCHEMATIC DIAGRAM

403-512 MHz TX  
Sheet 4

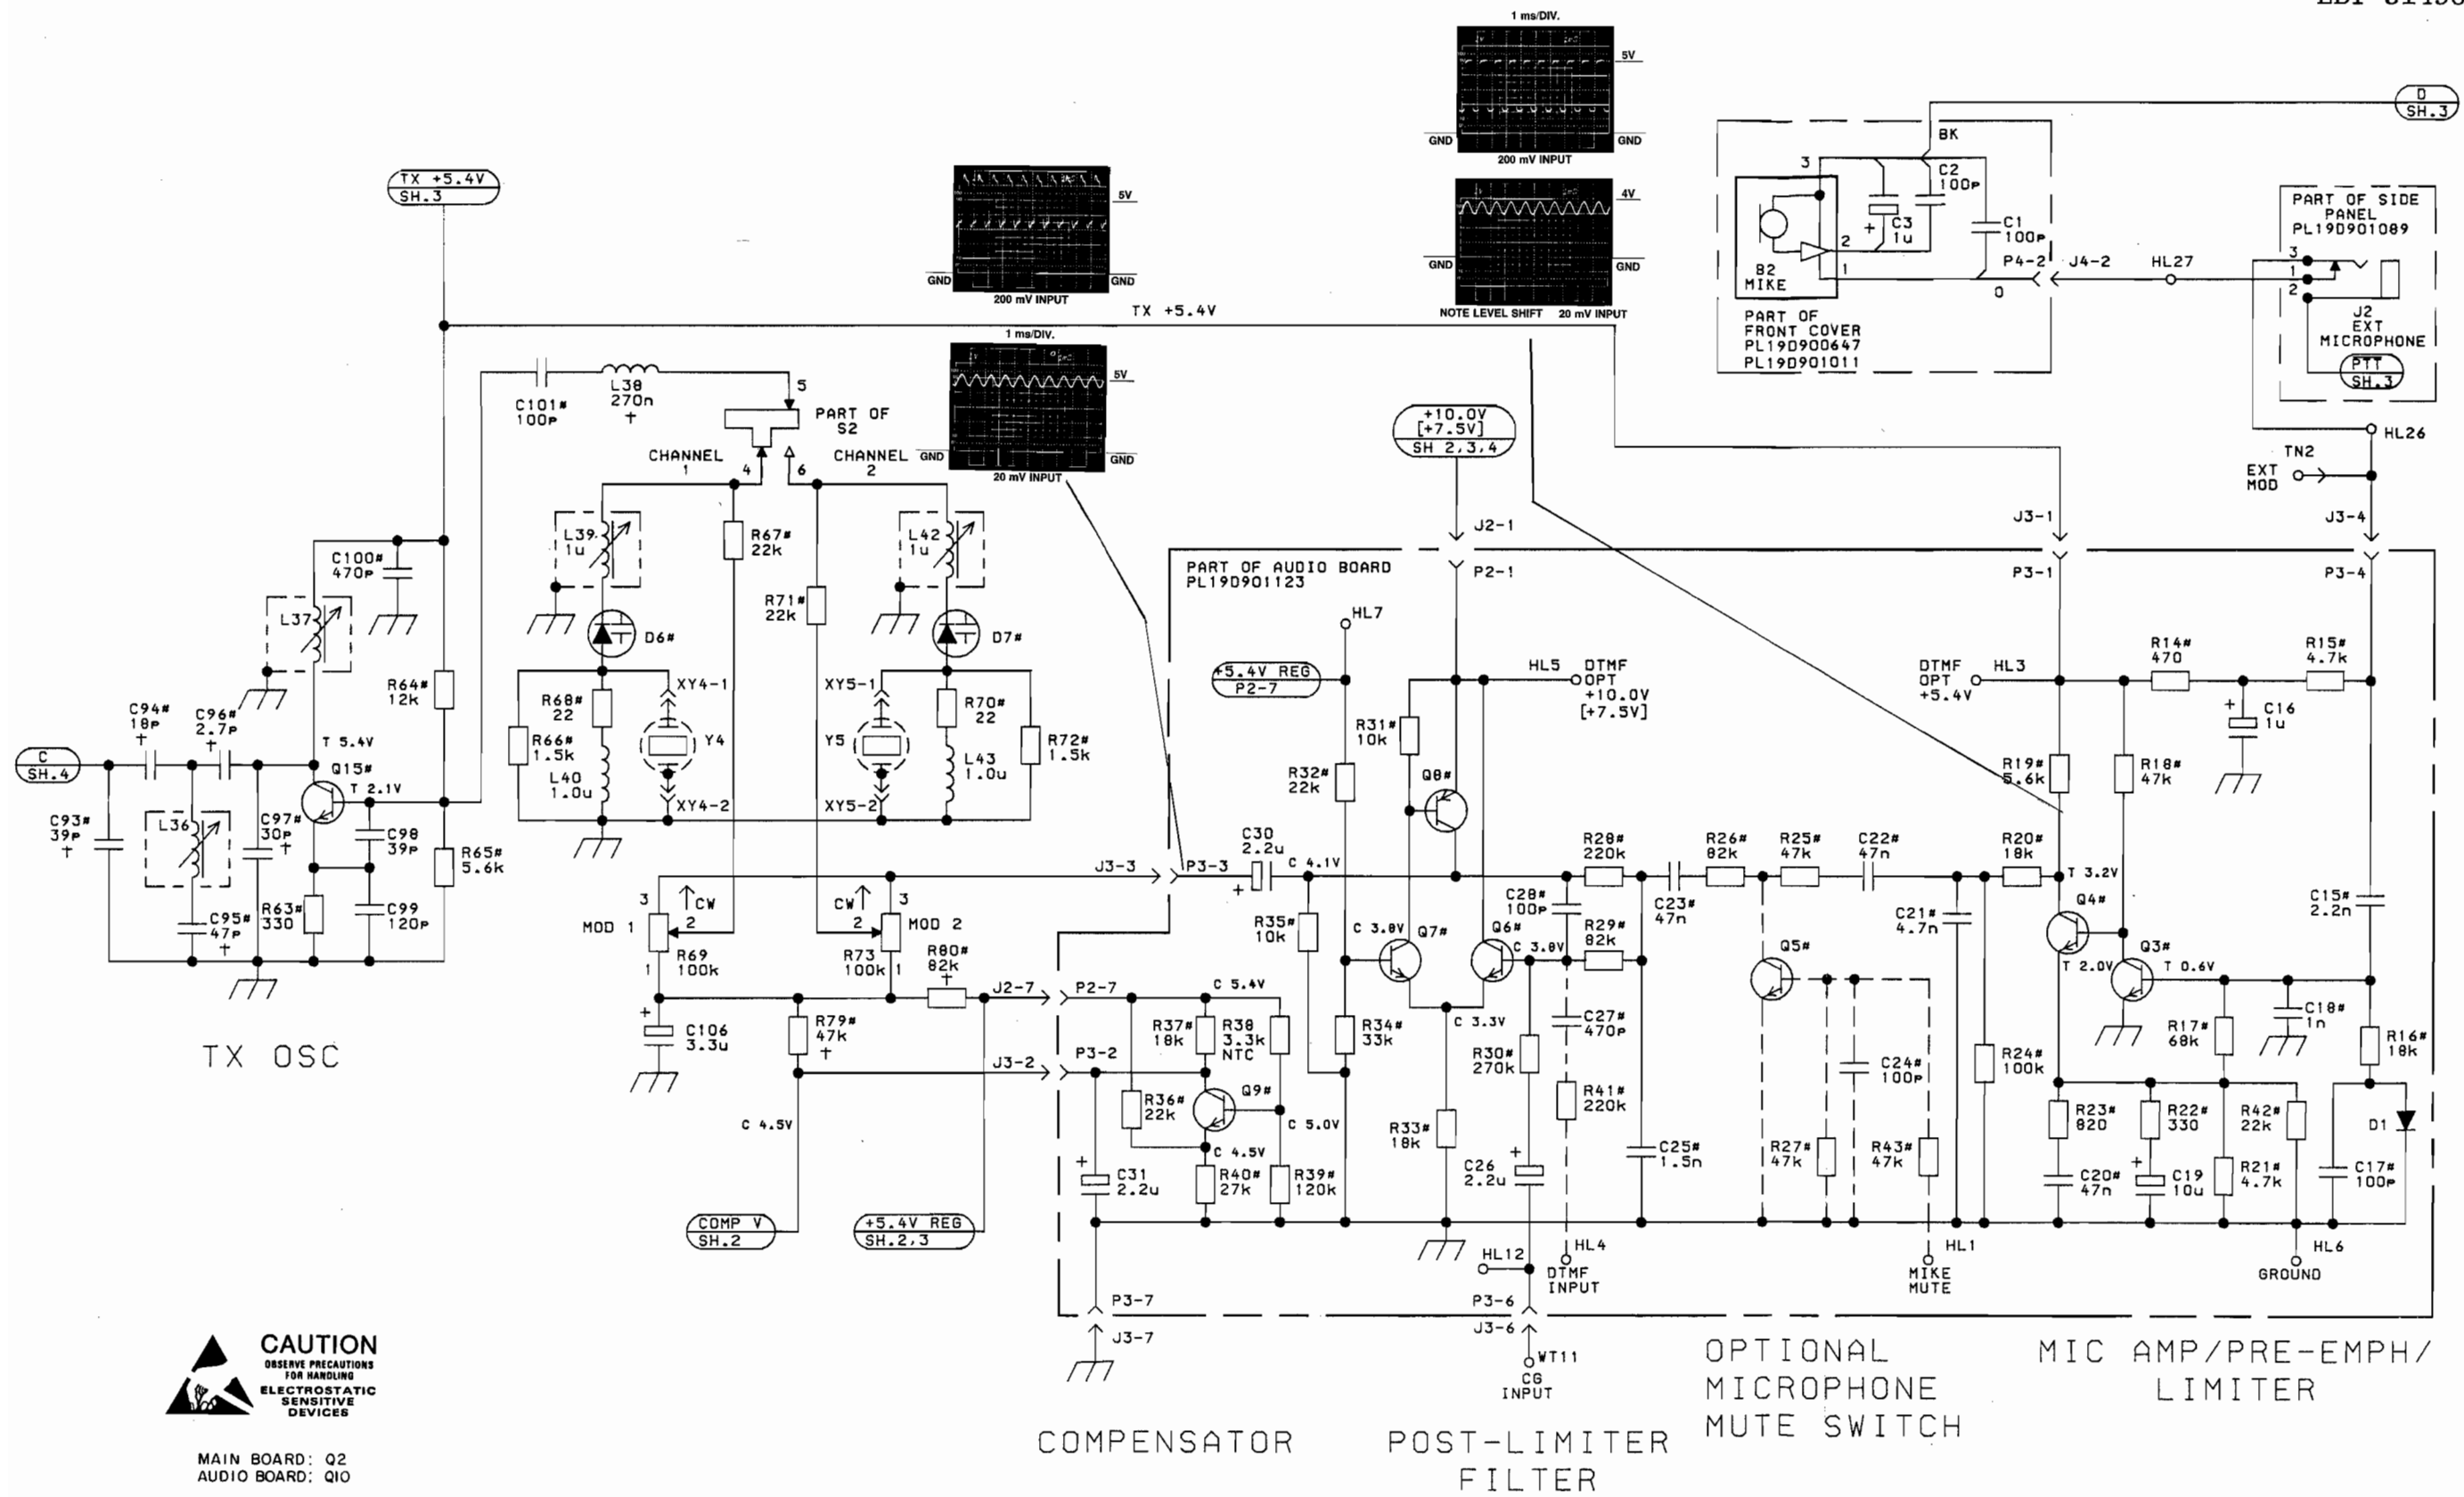

MAIN BOARD: Q2  
AUDIO BOARD: Q10

(19D901659, Sh. 5, Rev. 2)

RC4427 SH.5

# SCHEMATIC DIAGRAM

403-512 MHz TX  
Sheet 5

Issue 2

19

PARTS LIST

TRANSMIT/RECEIVE BOARD  
19D901656G1-G5, G13-G17  
ISSUE 3

| SYMBOL    | GE PART NO.   | DESCRIPTION   |
|-----------|---------------|---|
| A1        | 19A70219P14   | 19D901656G1 450-470 MHz<br>19D901656G2 470-494 MHz<br>19D901656G3 489-512 MHz<br>19D901656G4 403-425 MHz<br>19D901656G5 420-450 MHz<br>19D901656G13 450-470 MHz GOLD CONTACTS<br>19D901656G14 470-494 MHz GOLD CONTACTS<br>19D901656G15 489-512 MHz GOLD CONTACTS<br>19D901656G16 403-425 MHz GOLD CONTACTS<br>19D901656G17 420-450 MHz GOLD CONTACTS |
|           |               | NOTE: WHEN REPLACING BOARDS CARE SHOULD BE TAKEN TO ASSURE BOARDS WITH GOLD CONTACTS ARE NOT INTERMIXED WITH BOARDS HAVING TIN CONTACTS. REPLACE ONLY WITH SAME GRAP NUMBER AS ORIGINAL.  |
|           |               | FILTER BOARD<br>19B801039G1   |
|           |               | ----- CAPACITORS -----  |
|           |               | Ceramic: 3.3 pF $\pm 5\%$ , 100 VDCW, temp coef 0 PPM.  |
|           |               | Ceramic: 22 pF $\pm 10\%$ , 100 VDCW, temp coef 0 PPM.  |
|           |               | Ceramic: 2.7 pF $\pm 5\%$ , 100 VDCW, NPO.  |
|           |               | Ceramic: 5.6 pF $\pm 5\%$ , 100 VDCW, temp coef 0 PPM.  |
|           |               | ----- DIODES -----  |
|           |               | Silicon; sim to Hewlett Packard 5082-3188.  |
| L1        | 19A702472P3   | ----- INDUCTORS -----   |
|           |               | Coil.   |
| L2        | 19A702472P1   | Coil.   |
| C1        | 19A702061P11  | ----- CAPACITORS -----  |
|           |               | Ceramic: 6.8 pF $\pm 0.5$ pF, 50 VDCW, temp coef 0 $\pm 60$ PPM. (Used in G4 and G16).  |
|           |               | Ceramic: 5.6 pF $\pm 0.5$ pF, 50 VDCW, temp coef 0 $\pm 60$ PPM. (Used in G1-G3, G5, G13-15 and G17).   |
|           |               | Ceramic: 6.8 pF $\pm 0.5$ pF, 50 VDCW, temp coef 0 $\pm 60$ PPM. (Used in G1, G2, G5, G13, G14 and G17).  |
|           |               | Ceramic: 8.2 pF $\pm 0.5$ pF, 50 VDCW, temp coef 0 $\pm 60$ PPM. (Used in G4 and G16).  |
|           |               | Ceramic: 3.9 pF $\pm 25$ pF, 50 VDCW, temp coef 0 $\pm 120$ PPM. (Used in G3 and G15).  |
|           |               | Ceramic: 2.7 pF $\pm 25$ pF, 50 VDCW, temp coef 0 $\pm 120$ PPM. (Used in G1-G3 and G13-G15).   |
|           |               | Ceramic: 3.3 pF $\pm 25$ pF, 50 VDCW, temp coef 0 $\pm 120$ PPM. (Used in G4, G5, G16 and G17).   |
|           |               | Variable, ceramic: 0.5 to 2.5 pF, 150 VDCW; sim to Johanson 9620. (Used in G1-G3 and G13-G15).  |
|           |               | Variable, ceramic: 1 to 5 pF, 150 VDCW; sim to Johanson 9621. (Used in G4, G5, G16 and G17).  |
| C5        | 19A702061P906 | Ceramic: 2.7 pF $\pm 25$ pF, 50 VDCW, temp coef 0 $\pm 120$ PPM. (Used in G1-G3 and G13-G15).   |
|           |               | Ceramic: 3.3 pF $\pm 25$ pF, 50 VDCW, temp coef 0 $\pm 120$ PPM. (Used in G4, G5, G16 and G17).   |
| C6 and C7 | 19A702061P69  | Ceramic: 220 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM.  |
| C8        | 19A702061P902 | Ceramic: 1.2 pF $\pm 25$ pF, 50 VDCW, 0 $\pm 250$ PPM. (Used in G1 and G13).  |
| C8        | 19A702236P5   | Ceramic: 0.9 pF $\pm 1$ pF, 50 VDCW, 0 $\pm 30$ PPM. (Used in G2 and G14).  |
| C8        | 19A702236P3   | Ceramic: 0.7 pF $\pm 1$ pF, 50 VDCW, temp coef 0 $\pm 30$ PPM. (Used in G3 and G15).  |

| SYMBOL      | GE PART NO.   | DESCRIPTION  |
|-------------|---------------|--|
| C8          | 19A702061P905 | Ceramic: 2.2 pF $\pm 25$ pF, 50 VDCW, 0 $\pm 250$ PPM. (Used in G4 and G16).                         |
| C8          | 19A702061P904 | Ceramic: 1.8 pF $\pm 25$ pF, 50 VDCW, temp coef 0 $\pm 250$ PPM. (Used in G5 and G17).               |
| C9          | 19B800873P8   | Variable, ceramic: 1 to 5 pF, 150 VDCW; sim to Johanson 9621.  |
| C10 and C11 | 19A702052P14  | Ceramic: 0.01 uF $\pm 10\%$ , 50 VDCW.   |
| C12         | 19A702168P4   | Variable, ceramic: 5.2 to 30 pF, 100 VDCW, temp coef N750+300 PPM; sim to JFD DV2SN30D.              |
| C13         | 19A702061P21  | Ceramic: 15 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM.  |
| C14         | 19A702061P29  | Ceramic: 22 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM.  |
| C15         | 19A702061P33  | Ceramic: 27 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM.  |
| C16         | 19A702061P23  | Ceramic: 16 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM.  |
| C19         | 19A702061P61  | Ceramic: 100 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM. (Used in G1-G3 and G13-G15).          |
| C19         | 19A702061P53  | Ceramic: 68 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM. (Used in G4 and G16).                  |
| C19         | 19A702061P65  | Ceramic: 150 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM. (Used in G5 and G17).                 |
| C20         | 19A702061P77  | Ceramic: 470 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM.                                       |
| C21         | 19A700226P50  | Ceramic: 39 pF $\pm 5\%$ , 100 VDCW, temp coef 0 $\pm 750$ PPM. (Used in G1-G3, G5, G13-15 and G17). |
| C21         | 19A700227P50  | Ceramic: 39 pF $\pm 5\%$ , 100 VDCW, temp coef 0 $\pm 1500$ PPM. (Used in G4 and G16).               |
| C22         | 19A700229P68  | Ceramic: 120 pF $\pm 5\%$ , 100 VDCW, temp coef 0 $\pm 3300$ PPM. (Used in G5 and G17).              |
| C22         | 19A700228P59  | Ceramic: 68 pF $\pm 5\%$ , 100 VDCW, temp coef 0 $\pm 2200$ PPM. (Used in G1-G3 and G13-G15).        |
| C22         | 19A700228P68  | Ceramic: 120 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 2200$ PPM. (Used in G4 and G16).               |
| C23         | 19A702061P29  | Ceramic: 22 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM. (Used in G1 and G13).                  |
| C23         | 19A702061P21  | Ceramic: 15 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM. (Used in G2, G3, G14 and G15).         |
| C23         | 19A702061P35  | Ceramic: 30 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM. (Used in G4 and G16).                  |
| C23         | 19A702061P31  | Ceramic: 24 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM. (Used in G5 and G17).                  |
| C24         | 19A702061P907 | Ceramic: 3.3 pF $\pm 25$ pF, 50 VDCW, temp coef 0 $\pm 120$ PPM. (Used in G1 and G13).               |
| C24         | 19A702061P909 | Ceramic: 4.7 pF $\pm 25$ pF, 50 VDCW, temp coef 0 $\pm 60$ PPM. (Used in G2-G5 and G14-G17).         |
| C25         | 19A702168P1   | Variable, ceramic: 2 to 7 pF, 100 VDCW; sim to JFD DV2SN7A.  |
| C26         | 19A702061P902 | Ceramic: 1.2 pF $\pm 25$ pF, 50 VDCW, 0 $\pm 250$ PPM.   |
| C27         | 19A702061P21  | Ceramic: 15 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM. (Used in G1 and G13).                  |
| C27         | 19A702061P17  | Ceramic: 12 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM. (Used in G2 and G14).                  |
| C27         | 19A702061P19  | Ceramic: 13 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM. (Used in G3 and G15).                  |
| C27         | 19A702061P29  | Ceramic: 22 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM. (Used in G4 and G16).                  |
| C27         | 19A702061P25  | Ceramic: 18 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM. (Used in G5 and G17).                  |
| C28         | 19A702061P13  | Ceramic: 10 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM.  |
| C29         | 19A702061P69  | Ceramic: 220 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM.                                       |
| C30         | 19A702061P906 | Ceramic: 2.7 pF $\pm 25$ pF, 50 VDCW, temp coef 0 $\pm 120$ PPM. (Used in G1, G5, G13 and G17).      |
| C30         | 19A702061P904 | Ceramic: 1.8 pF $\pm 25$ pF, 50 VDCW, temp coef 0 $\pm 250$ PPM. (Used in G2, G3 and G14 and G15).   |
| C30         | 19A702061P907 | Ceramic: 3.3 pF $\pm 25$ pF, 50 VDCW, temp coef 0 $\pm 120$ PPM. (Used in G4 and G16).               |
| C31         | 19A702061P69  | Ceramic: 220 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM.                                       |

| SYMBOL       | GE PART NO.   | DESCRIPTION   |
|--------------|---------------|---|
| C32          | 19A702061P907 | Ceramic: 3.3 pF $\pm 25$ pF, 50 VDCW, temp coef 0 $\pm 120$ PPM. (Used in G1 and G13).          |
| C32          | 19A702061P906 | Ceramic: 2.7 pF $\pm 25$ pF, 50 VDCW, temp coef 0 $\pm 120$ PPM. (Used in G2, G3, G14 and G15). |
| C32          | 19A702236P16  | Ceramic: 4.3 pF $\pm 25$ pF, 50 VDCW, temp coef 0 $\pm 30$ PPM. (Used in G4 and G16).           |
| C32          | 19A702061P908 | Ceramic: 3.9 pF $\pm 25$ pF, 50 VDCW, temp coef 0 $\pm 120$ PPM. (Used in G5 and G17).          |
| C33          | 19A702236P6   | Ceramic: 1.0 pF $\pm 25$ pF, 50 VDCW, temp coef 0 $\pm 30$ PPM. (Used in G4, G5, G16 and G17).  |
| C33          | 19A702236P1   | Ceramic: 0.5 pF $\pm 1$ pF, 50 VDCW, temp coef 0 $\pm 30$ PPM. (Used in G1-G3 and G13-G15).     |
| C34          | 19A702061P903 | Ceramic: 1.5 pF $\pm 25$ pF, 50 VDCW, temp coef 0 $\pm 250$ PPM.                                |
| C35          | 19A702052P10  | Ceramic: 4700 pF $\pm 10\%$ , 50 VDCW.  |
| C36          | 19A702061P37  | Ceramic: 33 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM.                                   |
| C37          | 19A702061P61  | Ceramic: 100 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM.                                  |
| C38 thru C40 | 19A702052P26  | Ceramic: 0.1 uF $\pm 10\%$ , 50 VDCW.   |
| C41          | 19A702061P13  | Ceramic: 10 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM.                                   |
| C42          | 19A702061P61  | Ceramic: 100 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM.                                  |
| C43          | 19B800755P4   | Electrolytic: 10 uF $\pm 20\%$ , 16 VDCW.   |
| C44          | 19A702052P28  | Ceramic: 0.022 uF $\pm 10\%$ , 50 VDCW.   |
| C45          | 19A702052P105 | Ceramic: 1000 pF $\pm 5\%$ , 50 VDCW.   |
| C46          | 19A702052P110 | Ceramic: 4700 pF $\pm 5\%$ , 50 VDCW.   |
| C47          | 19A702052P112 | Ceramic: 6800 pF $\pm 5\%$ , 50 VDCW.   |
| C48          | 19A702052P14  | Ceramic: 0.01 uF $\pm 10\%$ , 50 VDCW.  |
| C49          | 19A702052P26  | Ceramic: 0.1 uF $\pm 10\%$ , 50 VDCW.   |
| C51          | 19A700003P9   | Tantalum: 47 uF $\pm 20\%$ , 6.3 VDCW.  |
| C52 and C53  | 19A702061P61  | Ceramic: 100 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM.                                  |
| C54          | 19A702236P25  | Ceramic: 10 pF $\pm 5$ pF, 50 VDCW, temp coef 0 $\pm 30$ PPM. (Used in G1 and G13).             |
| C54          | 19A702236P23  | Ceramic: 8.2 pF $\pm 25$ pF, 50 VDCW, temp coef 0 $\pm 30$ PPM. (Used in G2, G3, G14 and G15).  |
| C54          | 19A702236P28  | Ceramic: 12 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM. (Used in G4, G5, G16 and G17).    |
| C55          | 19A702236P15  | Ceramic: 3.9 pF $\pm 25$ pF, 50 VDCW, temp coef 0 $\pm 30$ PPM. (Used in G1 and G13).           |
| C55          | 19A702236P23  | Ceramic: 8.2 pF $\pm 25$ pF, 50 VDCW, temp coef 0 $\pm 30$ PPM. (Used in G4 and G16).           |
| C55          | 19A702236P19  | Ceramic: 5.6 pF $\pm 5$ pF, 50 VDCW, temp coef 0 $\pm 30$ PPM. (Used in G5 and G17).            |
| C56          | 19B800873P3   | Variable, ceramic: 2.5 to 10 pF, 150 VDCW; sim to Johanson 9611.                                |
| C57          | 19A702236P50  | Ceramic: 100 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM.                                  |
| C58          | 19A702236P30  | Ceramic: 15 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM. (Used in G4, G5, G16 and G17).    |
| C58          | 19A702236P25  | Ceramic: 10 pF $\pm 5$ pF, 50 VDCW, temp coef 0 $\pm 30$ PPM. (Used in G2 and G14).             |
| C58          | 19A702236P23  | Ceramic: 8.2 pF $\pm 25$ pF, 50 VDCW, temp coef 0 $\pm 30$ PPM. (Used in G3 and G15).           |
| C59          | 19A702236P40  | Ceramic: 39 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM. (Used in G1 and G13).             |
| C59          | 19A702236P39  | Ceramic: 36 pF $\pm 25$ pF, 50 VDCW, temp coef 0 $\pm 30$ PPM. (Used in G2 and G14).            |
| C59          | 19A702236P38  | Ceramic: 33 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM. (Used in G3 and G15).             |
| C59          | 19A702236P42  | Ceramic: 47 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM. (Used in G4 and G16).             |
| C59          | 19A702236P41  | Ceramic: 43 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM. (Used in G5 and G17).             |
| C60          | 19A702236P41  | Ceramic: 43 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM. (Used in G5 and G17).             |

\*COMPONENTS ADDED, DELETED OR CHANGED BY PRODUCTION CHANGES.



| SYMBOL | GE PART NO.  | DESCRIPTION  | SYMBOL        | GE PART NO.   | DESCRIPTION   | SYMBOL                     | GE PART NO.   | DESCRIPTION  | SYMBOL                          | GE PART NO.   | DESCRIPTION   |
|--------|--------------|--|---------------|---------------|---|----------------------------|---------------|--|---------------------------------|---------------|---|
| C60    | 19A702236P40 | Ceramic: 39 pF +5%, 50 VDCW, temp coef 0 ±30 PPM. (Used in G1 and G13).                      | C89           | 19A702061P13  | Ceramic: 10 pF +5%, 50 VDCW, temp coef 0 ±30 PPM. (Used in G1, G2, G13 and G14).                | C112                       | 19A702061P61  | Ceramic: 100 pF +5%, 50 VDCW, temp coef 0 ±30 PPM.             | L12                             | 19A700024P2   | Coil, RF: 120 nH ±10%. (Used in G2, G3, G14 and G15). |
| C60    | 19A702236P38 | Ceramic: 33 pF +5%, 50 VDCW, temp coef 0 ±30 PPM. (Used in G3 and G15).                      | C89           | 19A702061P12  | Ceramic: 8.2 pF ±0.5 pF, 50 VDCW, temp coef 0 ±60 PPM. (Used in G3 and G15).                    | - - - - - DIODES - - - - - |               |  |                                 |               |   |
| C60    | 19A702236P39 | Ceramic: 36 pF ±.25 pF, 50 VDCW, temp coef 0 ±30 PPM. (Used in G2 and G14).                  | C89           | 19A702061P17  | Ceramic: 12 pF +5%, 50 VDCW, temp coef 0 ±30 PPM. (Used in G4, G5, G16 and G17).                | D1                         | 19A700155P2   | Silicon; sim to Bat 18.  | L13                             | 19C850826P322 | Coil, RF: sim to Paul Smith SK-800-1.                 |
| C60    | 19A702236P42 | Ceramic: 47 pF +5%, 50 VDCW, temp coef 0 ±30 PPM. (Used in G4 and G16).                      | C90 and C91   | 19A702061P77  | Ceramic: 470 pF +5%, 50 VDCW, temp coef 0 ±30 PPM.  | D2                         | 19A700079P3   | Silicon; sim to BBY 31.  | L14                             | 19C850826P221 | Coil, RF: sim to Paul Smith SK-800-1.                 |
| C61    | 19A700003P4  | Tantalum: 1 uF ±20%, 35 VDCW.  | C92           | 19A702052P14  | Ceramic: 0.01 uF ±10%, 50 VDCW.   | D4 and D5                  | 19A702015P1   | Silicon; sim to IN458A.  | L15                             | 19C850826P211 | Coil, RF: sim to Paul Smith SK-800-1.                 |
| C63    | 19B800873P3  | Variable, ceramic: 2.5 to 10 pF, 150 VDCW; sim to Johanson 9611.                             | C93           | 19A702061P41  | Ceramic: 39 pF +5%, 50 VDCW, temp coef 0 ±30 PPM. (Used in G1-G3, G5, G13-G15 and G17).         | D6 and D7                  | 19A700079P3   | Silicon; sim to BBY 31.  | L16                             | 19A702213P1   | Coil, RF: 1.0 nH ±6%; sim to TOKO 126AN-A5318HM.      |
| C65    | 19A702236P28 | Ceramic: 12 pF +5%, 50 VDCW, temp coef 0 ±30 PPM. (Used in G2 and G14).                      | C93           | 19A702061P43  | Ceramic: 43 pF +5%, 50 VDCW, temp coef 0 ±30 PPM. (Used in G4 and G16).                         | D8                         | 19A702015P2   | Silicon; sim to IN458A.  | L17                             | 19A700024P13  | Coil, RF: 1.0 uH ±10%.                                |
| C65    | 19A702236P35 | Ceramic: 24 pF +5%, 50 VDCW, temp coef 0 ±30 PPM. (Used in G4 and G16).                      | C94           | 19A702061P25  | Ceramic: 18 pF +5%, 50 VDCW, temp coef 0 ±30 PPM. (Used in G1-G3 and G13-G15).                  | D9                         | 19A700079P3   | Silicon; sim to BBY 31.  | L18                             | 19A702988P1   | Coil.   |
| C65    | 19A702236P34 | Ceramic: 22 pF +5%, 50 VDCW, temp coef 0 ±30 PPM. (Used in G5 and G17).                      | C94           | 19A702061P33  | Ceramic: 27 pF +5%, 50 VDCW, temp coef 0 ±30 PPM. (Used in G4 and G16).                         | D10                        | 19A700155P2   | Silicon; sim to Bat 18.  | L19                             | 19A702473G1   | Coil.   |
| C65    | 19A702236P30 | Ceramic: 15 pF +5%, 50 VDCW, temp coef 0 ±30 PPM. (Used in G1, G3, G13 and G15).             | C94           | 19A702061P29  | Ceramic: 22 pF +5%, 50 VDCW, temp coef 0 ±30 PPM. (Used in G5 and G17).                         | - - - - - FUSES - - - - -  |               |  |                                 |               |   |
| C66    | 19A702236P50 | Ceramic: 100 pF +5%, 50 VDCW, temp coef 0 ±30 PPM.   | C95           | 19A702061P45  | Ceramic: 47 pF +5%, 50 VDCW, temp coef 0 ±30 PPM. (Used in G1-G3, G5, G13-G15 and G17).         | F1                         | 19A702169P9   | Enclosed link: rated 3 amps @ 125 v; sim to Littelfuse 255003. | L20                             | 19A702472P8   | Coil.   |
| C67    | 19A703324P2  | Electrolytic: 2.2 uF ±20%, 50 VDCW.  | C95           | 19A702061P49  | Ceramic: 56 pF +5%, 50 VDCW, temp coef 0 ±30 PPM. (Used in G4 and G16).                         | - - - - - JACKS - - - - -  |               |  |                                 |               |   |
| C68    | 19A702052P5  | Ceramic: 1000 pF ±10%, 50 VDCW.  | C96           | 19A702061P906 | Ceramic: 2.7 pF ±.25 pF, 50 VDCW, temp coef 0 ±120 PPM. (Used in G1, G2, G5, G13, G14 and G17). | J1                         | 19B801108G1   | Connector, coax: BNC Series, 500 VRMS.                         | L22                             | 19A700024P13  | Coil, RF: 1.0 uH ±10%.                                |
| C70    | 19A702168P2  | Variable, ceramic: 3 to 11 pF 100 VDCW, temp coef N450+300 PPM; sim to JFD DV28N11C.         | C96           | 19A702061P905 | Ceramic: 2.2 pF ±.25 pF, 50 VDCW, temp coef 0 ±250 PPM. (Used in G3 and G15).                   | J2 and J3                  | 19A703248P4   | Contact, electrical. (Quantity 7 each). (Groups 1-5).          | L23                             | 19A702472P3   | Coil.   |
| C71    | 19A702236P25 | Ceramic: 10 pF ±.5 pF, 50 VDCW, temp coef 0 ±30 PPM. (Used in G1, G2, G5, G13, G14 and G17). | C96           | 19A702061P907 | Ceramic: 3.3 pF ±.25 pF, 50 VDCW, temp coef 0 ±120 PPM. (Used in G4 and G16).                   | J4                         | 19A703248P1   | Contact, electrical. (Quantity 4).                             | L24                             | 19A700024P13  | Coil, RF: 1.0 uH ±10%.                                |
| C71    | 19A702236P30 | Ceramic: 15 pF +5%, 50 VDCW, temp coef 0 ±30 PPM. (Used in G4 and G16).                      | C97           | 19A702061P35  | Ceramic: 30 pF +5%, 50 VDCW, temp coef 0 ±30 PPM. (Used in G1 and G13).                         | J5 and J6                  | 19A703248P1   | Contact, electrical.   | L25                             | 19A700024P1   | Coil, RF: 100 nH ±10%, 0.08 ohms DC res max, 100 v.   |
| C71    | 19A702236P23 | Ceramic: 8.2 pF ±.25 pF, 50 VDCW, temp coef 0 ±30 PPM. (Used in G3 and G15).                 | C97           | 19A702061P33  | Ceramic: 27 pF +5%, 50 VDCW, temp coef 0 ±30 PPM. (Used in G2, G3, G14 and G15).                | J8                         | 19A703248P1   | Contact, electrical.   | L26                             | 19A702474P4   | Coil.   |
| C72    | 19A702061P45 | Ceramic: 47 pF +5%, 50 VDCW, temp coef 0 ±30 PPM.  | C97           | 19A702061P41  | Ceramic: 39 pF +5%, 50 VDCW, temp coef 0 ±30 PPM. (Used in G4 and G16).                         | J9                         | 19A703248P4   | Contact, electrical.   | L27                             | 19A700024P1   | Coil, RF: 100 nH ±10%, 0.08 ohms DC res max, 100 v.   |
| C73    | 19A702061P61 | Ceramic: 100 pF +5%, 50 VDCW, temp coef 0 ±30 PPM.   | C97           | 19A702061P39  | Ceramic: 36 pF +5%, 50 VDCW, temp coef 0 ±30 PPM. (Used in G5 and G17).                         | J10                        | 19A703248P1   | Contact, electrical.   | L28                             | 19A700024P13  | Coil, RF: 1.0 uH ±10%.                                |
| C74    | 19A702052P14 | Ceramic: 0.01 uF ±10%, 50 VDCW.  | C98           | 19A700227P50  | Ceramic: 39 pF +5%, 100 VDCW, temp coef 0 ±1500 PPM. (Used in G1, G4, G5, G13, G16 and G17).    | J12 and J13                | 19A703248P1   | Contact, electrical.   | L29 and L30                     | 19A702474P5   | Coil.   |
| C75    | 19A702061P61 | Ceramic: 100 pF +5%, 50 VDCW, temp coef 0 ±30 PPM.   | C98           | 19A700226P50  | Ceramic: 39 pF +5%, 100 VDCW, temp coef 0 ±750 PPM. (Used in G2 and G14).                       | L1                         | 19A702472P32  | Coil. (Used in G2, G3, G14 and G15).                           | L31                             | 19A700024P13  | Coil, RF: 1.0 uH ±10%.                                |
| C76    | 19A702061P45 | Ceramic: 47 pF +5%, 50 VDCW, temp coef 0 ±30 PPM.  | C98           | 19A700228P50  | Ceramic: 39 pF +5%, 50 VDCW, temp coef 0 ±2200 PPM. (Used in G3 and G15).                       | L1                         | 19A702472P33  | Coil. (Used in G4, G5, G16 and G17).                           | L32                             | 19A702474P1   | Coil.   |
| C78    | 19A702168P1  | Variable, ceramic: 2 to 7 pF, 100 VDCW; sim to JFD DV2SN7A.                                  | C99           | 19A700229P68  | Ceramic: 120 pF +5%, 100 VDCW, temp coef 0 ±3300 PPM. (Used in G1, G2, G13 and G14).            | L2                         | 19A702472P30  | Coil.  | L33                             | 19A700024P13  | Coil, RF: 1.0 uH ±10%.                                |
| C79    | 19A702061P3  | Ceramic: 1.5 pF ±0.5 pF, 50 VDCW, temp coef 0 ±250 PPM.                                      | C99           | 19A700227P68  | Ceramic: 120 pF +5%, 50 VDCW, temp coef 0 ±1500 PPM. (Used in G3 and G15).                      | L3                         | 19C850826P211 | Coil, RF: sim to Paul Smith SK-800-1.                          | L34 and L35                     | 19C850826P212 | Coil, RF: sim to Paul Smith SK-800-1.                 |
| C80    | 19A702061P7  | Ceramic: 3.3 pF ±0.5 pF, 50 VDCW, temp coef 0 ±120 PPM.                                      | C99           | 19A700228P68  | Ceramic: 120 pF +5%, 50 VDCW, temp coef 0 ±2200 PPM. (Used in G4 and G16).                      | L4 and L5                  | 19A702472P3   | Coil. (Used in G1, G2, G4, G5, G13, G14, G16 and G17).         | L36                             | 19C850826P612 | Coil, RF; sim to Paul Smith SK-800-1.                 |
| C81    | 19A702168P1  | Variable, ceramic: 2 to 7 pF, 100 VDCW; sim to JFD DV2SN7A.                                  | C99           | 19A700230P68  | Ceramic: 120 pF +5%, 50 VDCW, temp coef 0 ±4200 PPM. (Used in G5 and G17).                      | L6                         | 19A700024P15  | Coil, RF: 1.5 uH ±10%.   | L37                             | 19C850826P312 | Coil, RF: sim to Paul Smith SK-800-1.                 |
| C82    | 19A702061P69 | Ceramic: 220 pF +5%, 50 VDCW, temp coef 0 ±30 PPM.   | C100          | 19A702052P3   | Ceramic: 470 pF ±10%, 50 VDCW.  | L7 and L8                  | 19A700024P13  | Coil, RF: 1.0 nH ±10%. (Used in G1-G3 and G13-G15).            | L38                             | 19A700024P6   | Coil. (Used in G1, G2, G13 and G14).                  |
| C83    | 19A702052P14 | Ceramic: 0.01 uF ±10%, 50 VDCW.  | C101 and C102 | 19A702061P61  | Ceramic: 100 pF +5%, 50 VDCW, temp coef 0 ±30 PPM.  | L9                         | 19A700024P14  | Coil, RF: 1.2 uH ±10%. (Used in G4, G5, G16 and G17).          | L38                             | 19A700024P5   | Coil, RF: 220 nH ±10%. (Used in G3 and G15).          |
| C84    | 19A702061P77 | Ceramic: 470 pF +5%, 50 VDCW, temp coef 0 ±30 PPM.   | C103          | 19A702236P6   | Ceramic: 1.0 pF ±.25 pF, 50 VDCW, temp coef 0 ±30 PPM.  | L10                        | 19A702472P32  | Coil. (Used in G3 and G15).                                    | L38                             | 19A700024P9   | Coil, RF: 470 nH ±10%. (Used in G4 and G16).          |
| C85    | 19A702061P41 | Ceramic: 39 pF +5%, 50 VDCW, temp coef 0 ±30 PPM. (Used in G1-G3, G5, G13-G15 and G17).      | C106          | 19B800650P15  | Tantalum: 3.3 uF ±20%, 10 VDCW.   | L11                        | 19A702472P26  | Coil. (Used in G1, G4, G5, G13, G16 and G17).                  | L38                             | 19A700024P8   | Coil, RF: 390 nH ±10%. (Used in G5 and G17).          |
| C85    | 19A702061P43 | Ceramic: 43 pF +5%, 50 VDCW, temp coef 0 ±30 PPM. (Used in G4 and G16).                      | C108          | 19A700219P18  | Ceramic: 4.7 pF +5%, 100 VDCW, temp coef 0 PPM. (Used in G2, G3, G14 and G15).                  | L12                        | 19A702472P25  | Coil. (Used in G2, G3, G14 and G15).                           | L39                             | 19A703602G1   | Coil, RF. Includes 19B800827P24 tuning slug.          |
| C86    | 19A702061P29 | Ceramic: 22 pF +5%, 50 VDCW, temp coef 0 ±30 PPM. (Used in G1-G3 and G13-G15).               | C108          | 19A700219P22  | Ceramic: 6.8 pF +5%, 100 VDCW, temp coef 0 PPM. (Used in G1, G4, G5, G13, G16 and G17).         | L7 and L8                  | 19A700024P3   | Coil, RF: 150 nH ±10%. (Used in G1, G4, G5, G13, G16 and G17). | L40                             | 19A700024P13  | Coil, RF: 1.0 uH ±10%.                                |
| C86    | 19A702061P37 | Ceramic: 33 pF +5%, 50 VDCW, temp coef 0 ±30 PPM. (Used in G4, G5, G16 and G17).             | C109          | 19A116192P14  | Ceramic: 0.1 uF ±20%, 50 VDCW; sim to Erie USCC CW20C104-M2.                                    | L9                         | 19A700024P11  | Coil, RF: 680 nH ±10%. (Used in G1, G2, G13 and G14).          | L42                             | 19A703602G1   | Coil, RF. Includes 19B800827P24 tuning slug.          |
| C87    | 19A702061P41 | Ceramic: 39 pF +5%, 50 VDCW, temp coef 0 ±30 PPM. (Used in G1 and G13).                      | C110          | 19A702236P25  | Ceramic: 10 pF ±.5 pF, 50 VDCW, temp coef 0 ±30 PPM. (Used in G1, G2, G5, G13, G14 and G17).    | L9                         | 19A700024P10  | Coil, RF: 560 nH ±10%. (Used in G3 and G15).                   | L43                             | 19A700024P13  | Coil, RF: 1.0 uH ±10%.                                |
| C87    | 19A702061P37 | Ceramic: 33 pF +5%, 50 VDCW, temp coef 0 ±30 PPM. (Used in G2, G3, G14 and G15).             | C110          | 19A702236P30  | Ceramic: 15 pF +5%, 50 VDCW, temp coef 0 ±30 PPM. (Used in G4 and G16).                         | L9                         | 19A700024P12  | Coil, RF: 820 nH ±10%. (Used in G5 and G17).                   | L44                             | 19A702472P34  | Coil. (Used in G2, G3, G14 and G15).                  |
| C87    | 19A702061P47 | Ceramic: 51 pF +5%, 50 VDCW, temp coef 0 ±30 PPM. (Used in G4 and G16).                      |               |               |   | L10                        | 19A702472P24  | Coil.  | L44                             | 19A702472P7   | Coil. (Used in G1, G4, G5, G13, G16 and G17).         |
| C87    | 19A702061P43 | Ceramic: 43 pF +5%, 50 VDCW, temp coef 0 ±30 PPM. (Used in G5 and G17).                      |               |               |   | L11                        | 19A702472P26  | Coil. (Used in G1, G4, G5, G13, G16 and G17).                  | L45                             | 19A703161P1   | Coil. (Used in G3 and G15).                           |
| C88    | 19A702061P7  | Ceramic: 3.3 pF ±0.5 pF, 50 VDCW, temp coef 0 ±120 PPM.                                      |               |               |   | L11                        | 19A702472P25  | Coil. (Used in G2, G3, G14 and G15).                           | L46                             | 19A700024P13  | Coil, RF: 1.0 uH ±10%.                                |
|        |              |  |               |               |   |                            |               |  | L48 and L49                     | 19B801465P1   | Coil, RF.   |
|        |              |  |               |               |   |                            |               |  | L50                             | 19A700024P13  | Coil, RF: 1.0 uH ±10%.                                |
|        |              |  |               |               |   |                            |               |  | - - - - - TRANSISTORS - - - - - |               |   |
|        |              |  |               |               |   |                            |               |  | Q1                              | 19A702413P2   | Silicon, NPN; sim to Phillips BFR92.                  |
|        |              |  |               |               |   |                            |               |  | Q2                              | 19A703795P1   | N Type: field effect; sim to MMBF4418.                |
|        |              |  |               |               |   |                            |               |  | Q3                              | 19A700092P2   | Silicon, NPN.   |
|        |              |  |               |               |   |                            |               |  | Q4                              | 19A700236P4   | Silicon, NPN.   |
|        |              |  |               |               |   |                            |               |  | Q5                              | 19A700092P2   | Silicon, NPN.   |
|        |              |  |               |               |   |                            |               |  | Q6                              | 19A700076P2   | Silicon, NPN.   |
|        |              |  |               |               |   |                            |               |  | Q7 and Q8                       | 19A700026P1   | Silicon, PNP.   |
|        |              |  |               |               |   |                            |               |  | Q9                              | 19A702448P1   | Silicon, NPN; sim to 2N5945.                          |
|        |              |  |               |               |   |                            |               |  | Q10                             | 19A701940P3   | Silicon, NPN; sim to SRF-516.                         |

| SYMBOL      | GE PART NO.   | DESCRIPTION  | SYMBOL      | GE PART NO.   | DESCRIPTION  | SYMBOL      | GE PART NO.    | DESCRIPTION  |
|-------------|---------------|--|-------------|---------------|--|-------------|----------------|--|
| Q10         | 19A701940P4   | Silicon, NPN; sim to SRF-516.  | R38         | 19B801350P1   | Variable, 5 ohms to 10K ohms $\pm 20\%$ , 1/4 w.                                 | XY3         | 19A700042P3    | Contact, electrical: sim to AMP 2-332070-2.                              |
| Q11         | 19A701808P3   | Silicon, NPN; sim to MPS 6595.   | R41         | 19B800607P471 | Metal film: 470 ohms $\pm 5\%$ , 200 VDCW, 1/8 w.                                | XY4 and XY5 | 19A115834P1    | Contact, electrical: sim to AMP 2-330808-8.                              |
| Q12 and Q13 | 19A700236P4   | Silicon, NPN.  | R42         | 19B801251P471 | Composition: 470 ohms $\pm 5\%$ , 150 VDCW, 1/8 w.                               |             |                | ----- FILTERS -----  |
| Q14 and Q15 | 19A700092P2   | Silicon, NPN.  | R43         | 19B800607P681 | Metal film: 680 ohms $\pm 5\%$ , 200 VDCW, 1/8 w.                                | Z1          | 19A702522G11   | Crystal pair. (Includes Z2).   |
| Q16         | 19A700026P1   | Silicon, PNP.  | R44         | 19B800607P100 | Metal film: 10 ohms $\pm 5\%$ , 200 VDCW, 1/8 w.                                 | Z2          |                | (Part of Z1).  |
|             |               | ----- RESISTORS -----  | R45         | 19B800607P101 | Metal film: 100 ohms $\pm 5\%$ , 200 VDCW, 1/8 w.                                | Z3          | 19A702171P1    | Bandpass filter: 455 $\pm 1.5$ kHz; sim to Murata CFU455D2.              |
| R1          | 19B800607P122 | Metal film: 1.2K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.   | R47         | 19B800607P100 | Metal film: 10 ohms $\pm 5\%$ , 200 VDCW, 1/8 w.                                 |             |                | ----- MISCELLANEOUS -----  |
| R2          | 19A702585P99  | Composition: 33K ohms $\pm 5\%$ , 150 VDCW, 1/8 w.   | R48         | 19B800607P390 | Metal film: 39 ohms $\pm 5\%$ , 200 VDCW, 1/8 w.                                 |             | 19A702471P2    | Crystal pad. (Used in Z1 & Z2).  |
| R3          | 19B800607P123 | Metal film: 12K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.  | R51         | 19B800607P103 | Metal film: 10K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.                                |             | 19A134793P1805 | Screw, thread forming: No. 1-64 x 7/32. (Secures J1 mounting).           |
| R4          | 19B800607P332 | Metal film: 3.3K ohms $\pm 5\%$ , 200 VDCW, 1/8 w. (Used in G1, G2, G4, G13, G14 and G16). | R52         | 19B800607P220 | Metal film: 22 ohms $\pm 5\%$ , 200 VDCW, 1/8 w.                                 |             | 19A702945P1    | Shield.  |
| R4          | 19B800607P272 | Metal film: 2.7K ohms $\pm 5\%$ , 200 VDCW, 1/8 w. (Used in G3, G5, G15 and G17).          | R53         | 19B800607P562 | Metal film: 5.6K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.                               |             | 19D900639G2    | Battery Pack. 7.5 Volt.  |
| R5          | 19B800607P750 | Metal film: 75 ohms $\pm 5\%$ , 200 VDCW, 1/8 w.   | R54         | 19B800607P102 | Metal film: 1K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.                                 |             | 19D900639G3    | Battery Pack. 10 Volt.   |
| R6          | 19B800607P152 | Metal film: 1.5K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.   | R55         | 19B800607P103 | Metal film: 10K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.                                |             |                | ASSOCIATED PARTS   |
| R7          | 19B800607P750 | Metal film: 75 ohms $\pm 5\%$ , 200 VDCW, 1/8 w.   | R56         | 19B800607P470 | Metal film: 47 ohms $\pm 5\%$ , 200 VDCW, 1/8 w.                                 |             |                | ----- CRYSTALS -----   |
| R8 and R9   | 19B800607P152 | Metal film: 1.5K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.   | R57         | 19B800607P103 | Metal film: 10K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.                                |             |                | NOTE: when reordering specify GE part number and exact frequency needed. |
| R10         | 19B800607P220 | Metal film: 22 ohms $\pm 5\%$ , 200 VDCW, 1/8 w. (Used in G1-G3 and G13-G15).              | R58         | 19B800607P102 | Metal film: 1K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.                                 |             |                | $F_x = \frac{F_o - 21.4}{9}$   |
| R10         | 19B800607P181 | Metal film: 180 ohms $\pm 5\%$ , 200 VDCW, 1/8 w. (Used in G4, G5, G16 and G17).           | R59         | 19B800607P560 | Metal film: 56 ohms $\pm 5\%$ , 200 VDCW, 1/8 w.                                 | Y1 and Y2   | 19A702375G2    | Quartz.  |
| R11         | 19B800607P220 | Metal film: 22 ohms $\pm 5\%$ , 200 VDCW, 1/8 w. (Used in G1-G3 and G13-G15).              | R60         | 19B800607P102 | Metal film: 1K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.                                 |             |                | $F_x = \frac{F_o}{8}$  |
| R11         | 19B800607P181 | Metal film: 180 ohms $\pm 5\%$ , 200 VDCW, 1/8 w. (Used in G4, G5, G16 and G17).           | R61         | 19B800607P103 | Metal film: 10K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.                                | Y3          | 19A702284G3    | Quartz: 20945.000 kHz  |
| R12         | 19B800607P822 | Metal film: 8.2K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.   | R62         | 19B800607P222 | Metal film: 2.2K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.                               |             | 19A702284G4    | (Alternate IF Crystal) 21855.0 kHz.                                      |
| R13         | 19B800607P562 | Metal film: 5.6K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.   | R63         | 19B800607P331 | Metal film: 330 ohms $\pm 5\%$ , 200 VDCW, 1/8 w.                                | Y4 and Y5   | 19A702375G1    | Quartz.  |
| R14         | 19B800607P750 | Metal film: 75 ohms $\pm 5\%$ , 200 VDCW, 1/8 w.   | R64         | 19B800607P123 | Metal film: 12K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.                                |             |                | ----- MISCELLANEOUS -----  |
| R15         | 19B800607P561 | Metal film: 560 ohms $\pm 5\%$ , 200 VDCW, 1/8 w. (Used in G1-G3 and G13-G15).             | R65         | 19B800607P562 | Metal film: 5.6K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.                               |             | 19B800886P3    | Whip antenna. (403-470 MHz).   |
| R15         | 19B800607P391 | Metal film: 390 ohms $\pm 5\%$ , 200 VDCW, 1/8 w. (Used in G4, G5, G16 and G17).           | R66         | 19B800607P152 | Metal film: 1.5K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.                               |             | 19B800886P4    | Whip antenna. (470-494 MHz).   |
| R16         | 19B800607P104 | Metal film: 100K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.   | R67         | 19B800607P223 | Metal film: 22K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.                                |             | 19B800886P5    | Whip antenna. (489-512 MHz).   |
| R17         | 19B800607P123 | Metal film: 12K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.  | R68         | 19B800607P220 | Metal film: 22 ohms $\pm 5\%$ , 200 VDCW, 1/8 w.                                 |             |                |  |
| R18         | 19B800607P750 | Metal film: 75 ohms $\pm 5\%$ , 200 VDCW, 1/8 w.   | R69         | 19B800751P16  | Variable, solid carbon: 100K ohms $\pm 25\%$ , 0.05 w; sim to ALSP H0651A.       |             |                |  |
| R19         | 19B800607P101 | Metal film: 100 ohms $\pm 5\%$ , 200 VDCW, 1/8 w.  | R70         | 19B800607P220 | Metal film: 22 ohms $\pm 5\%$ , 200 VDCW, 1/8 w.                                 |             |                |  |
| R20         | 19B800607P102 | Metal film: 1K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.   | R71         | 19B800607P223 | Metal film: 22K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.                                |             |                |  |
| R21         | 19B800607P273 | Metal film: 27K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.  | R72         | 19B800607P152 | Metal film: 1.5K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.                               |             |                |  |
| R22         | 19B800607P103 | Metal film: 10K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.  | R73         | 19B800751P16  | Variable, solid carbon: 100K ohms $\pm 25\%$ , 0.05 w; sim to ALSP H0651A.       |             |                |  |
| R23         | 19B800607P822 | Metal film: 8.2K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.   | R74         | 19B801251P222 | Composition: 2.2K ohms $\pm 5\%$ , 150 VDCW, 1/8 w.                              |             |                |  |
| R24         | 19B800607P473 | Metal film: 47K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.  | R77         | 19B800607P223 | Metal film: 22K ohms $\pm 5\%$ , 200 VDCW, 1/8 w. (Used in G1-G3 and G13-G15).   |             |                |  |
| R25 and R26 | 19B800607P222 | Metal film: 2.2K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.   | R77         | 19B800607P183 | Metal film: 18K ohms $\pm 5\%$ , 200 VDCW, 1/8 w. (Used in G4, G5, G16 and G17). |             |                |  |
| R27         | 19B800607P473 | Metal film: 47K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.  | R78         | 19B800607P823 | Metal film: 82K ohms $\pm 5\%$ , 200 VDCW, 1/8 w. (Used in G4, G5, G16 and G17). |             |                |  |
| R28         | 19B800607P223 | Metal film: 22K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.  | R78         | 19B800607P683 | Metal film: 68K ohms $\pm 5\%$ , 200 VDCW, 1/8 w. (Used in G1-G3 and G13-G15).   |             |                |  |
| R29         | 19B800607P153 | Metal film: 15K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.  | R79         | 19B800607P473 | Metal film: 47K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.                                |             |                |  |
| R30         | 19B800607P563 | Metal film: 56K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.  | R80         | 19B800607P823 | Metal film: 82K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.                                |             |                |  |
| R31         | 19B800607P682 | Metal film: 6.8K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.   | R81         | 19B800607P123 | Metal film: 12K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.                                |             |                |  |
| R32         | 19B800762P1   | Variable, carbon film: 5K ohms $\pm 20\%$ , 150 VDCW, .1 w; sim to TOCOS RPR124.           |             |               | ----- SWITCHES -----   |             |                |  |
| R34         | 19B800607P563 | Metal film: 56K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.  | S1          |               | (Part of R38).   |             |                |  |
| R35         | 19B800607P823 | Metal film: 82K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.  | S2          | 19A702244P1   | Slide switch: DPDT, contact rating 1 mA @ 10 VDC; sim to Alps SSS02200.          |             |                |  |
| R36         | 19B800607P152 | Metal film: 1.5K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.   | U1          | 19A701780P1   | Linear: IF AMPLIFIER AND DETECTOR.   |             |                |  |
| R37         | 19B800607P821 | Metal film: 820 ohms $\pm 5\%$ , 200 VDCW, 1/8 w.  | U2          | 19D438002G1   | 5.4 Volt Voltage Regulator.  |             |                |  |
|             |               |  | XY1 and XY2 | 19A115834P1   | Contact, electrical: sim to AMP 2-330808-8.                                      |             |                |  |
|             |               |  |             |               | ----- SOCKETS -----  |             |                |  |

PARTS LIST

FRONT COVER  
19D900647G1 STANDARD  
19D900647G2 LICENSEE  
19D900647G4 CGE OPTION  
ISSUE 5

PARTS LIST

HARDWARE KIT  
19A702379G1 SINGLE/MULTI FREQ  
19A702379G2 UHF  
19A702379G3 HIGH BAND  
ISSUE 5

PARTS LIST

AUDIO BOARD  
19D901123G1 STANDARD  
19D901123G2 DTMF  
19D901123G7 STANDARD (GOLD CONTACTS)  
19D901123G8 DTMF (GOLD CONTACTS)  
ISSUE 1

| SYMBOL    | GE PART NO.  | DESCRIPTION  |
|-----------|--------------|--|
| B1        | 19A134460P1  | ----- SPEAKERS AND MIKES -----<br>Loudspeaker, permanent magnet: 2 inches, 8 ohms + or - 10%,imp 500 mW, 450 + or -100 Hz resonant freq; sim to Pioneer A50AP13-01P. |
|           | B2           | 19J706041P1<br>Microphone cartridge: 200-850 ohms output imp., 1.5 to 10 VDC; sim to Primo EM-60.  |
| C1 and C2 | 19A700232P64 | ----- CAPACITORS -----<br>Ceramic: 100 pF + or -10%, 100 VDCW, temp coef -5600 PPM.  |
|           | C3           | 19B800650P13<br>Tantalum: 1 uF -20+40%, 10 VDCW.   |
| P4        |              | ----- PLUGS -----<br>Connector. Includes:  |
|           | 19A702405P4  | Shell.   |
| W1        | 19A702405P28 | Contact, electrical.   |
|           | 19B800860G1  | Cable assembly. (Includes P4)  |
|           |              | ----- MISCELLANEOUS -----  |
|           | 19A702396P1  | Nameplate. (GENERAL ELECTRIC).   |
|           | 19C850975P1  | Insulator.   |
|           | 19A703346P1  | Pad.   |
|           | 19A149342P3  | Pad.   |

| SYMBOL | GE PART NO.   | DESCRIPTION   |
|--------|---------------|---|
|        | 19A702471P3   | Crystal pad. (Used with Y3).  |
|        | 19A702471P2   | Crystal pad. (Used with Y1, Y2, Y4, Y5).  |
|        | 19A702332P1   | Nut, slotted: M7 x .75. (Secures R32 & S1).                                       |
|        | 19B800849P1   | Washer, rectangular. (Located between ON-OFF switch and housing).                 |
|        | 19A702314P2   | Knurled nut. (Secures J11).   |
|        | 19A703007P212 | Machine screw, Torx drive: M2.5--.45 x 12. (Secures rear cover below nameplates). |
|        | 19A702362P208 | Machine screw, Torx drive: M2.5--.45 x 8. (Secures rear cover at top).            |
|        | 19B800859P1   | Knob, push on.  |
|        | 19A702364P104 | Machine screw, Torx®Drive: M2-0.4 x 4. (Secures option cover).                    |
|        | 19A700032P1   | Lockwasher, internal tooth: No. 2. (Secures option cover).                        |
|        | 19D900667P1   | Option Cover.   |
|        | N248P15B      | Hex nut.  |

| SYMBOL      | GE PART NO.   | DESCRIPTION   |
|-------------|---------------|---|
|             |               | NOTE: WHEN CHANGING BOARDS, CARE SHOULD BE TAKEN TO ASSURE BOARDS WITH GOLD CONTACTS ARE NOT INTERMIXED WITH BOARDS HAVING TIN CONTACTS. REPLACE ONLY WITH SAME GROUP NUMBER AS THE ORIGINAL. |
|             |               | ----- CAPACITORS -----  |
| C1          | 19A702052P120 | Ceramic: 0.033 uF ±5%, 50 VDCW.   |
| C2 and C3   | 19A702052P112 | Ceramic: 6800 pF ±5%, 50 VDCW.  |
| C4          | 19A702052P128 | Ceramic: 0.022 uF ±5%, 50 VDCW.   |
| C5          | 19A702052P12  | Ceramic: 6800 pF ±10%, 50 VDCW.   |
| C6          | 19A702844P1   | Tantalum: 22 uF ±20%, 6.3 VDCW.   |
| C7          | 19A702052P10  | Ceramic: 4700 pF ±10%, 50 VDCW.   |
| C8          | 19A702052P4   | Ceramic: 680 pF ±10%, 50 VDCW.  |
| C9          | 19A702052P26  | Ceramic: 0.1 uF ±10%, 50 VDCW.  |
| C10         | 19B800755P7   | Electrolytic: 100 uF ±20%, 10 VDCW.   |
| C11         | 19B800755P4   | Electrolytic: 10 uF ±20%, 16 VDCW.  |
| C12 and C13 | 19A702052P26  | Ceramic: 0.1 uF ±10%, 50 VDCW.  |
| C14         | 19A703324P1   | Electrolytic: 22 uF ±20%, 16 VDCW.  |
| C15         | 19A702052P107 | Ceramic: 2200 pF ±5%, 50 VDCW.  |
| C16         | 19A701534P4   | Tantalum: 1 uF ±20%, 35 VDCW.   |
| C17         | 19A702061P61  | Ceramic: 100 pF ±5%, 50 VDCW, temp coef 0 ±30 PPM.  |
| C18         | 19A702052P5   | Ceramic: 1000 pF ±10%, 50 VDCW.   |
| C19         | 19B800755P4   | Electrolytic: 10 uF ±20%, 16 VDCW.  |
| C20         | 19A702052P122 | Ceramic: 0.047 uF ±5%, 50 VDCW.   |
| C21         | 19A702052P110 | Ceramic: 4700 pF ±5%, 50 VDCW.  |
| C22 and C23 | 19A702052P122 | Ceramic: 0.047 uF ±5%, 50 VDCW.   |
| C24         | 19A702061P61  | Ceramic: 100 pF ±5%, 50 VDCW, temp coef 0 ±30 PPM. (G2 and G8 only).  |
| C25         | 19A702052P106 | Ceramic: 1600 pF ±5%, 50 VDCW.  |
| C26         | 19B800755P2   | Electrolytic: 2.2 uF ±20%, 50 VDCW.   |
| C27         | 19A702061P77  | Ceramic: 470 pF ±5%, 50 VDCW, temp coef 0 ±30 PPM.  |
| C28         | 19A702061P61  | Ceramic: 100 pF ±5%, 50 VDCW, temp coef 0 ±30 PPM.  |
| C30 and C31 | 19B800755P2   | Electrolytic: 2.2 uF ±20%, 50 VDCW.   |
| C32         | 19A702061P61  | Ceramic: 100 pF ±5%, 50 VDCW, temp coef 0 ±30 PPM.  |
| C33         | 19A702052P26  | Ceramic: 0.1 uF ±10%, 50 VDCW.  |
| C37         | 19A702061P61  | Ceramic: 100 pF ±5%, 50 VDCW, temp coef 0 ±30 PPM.  |
|             |               | ----- DIODES -----  |
| D1 and D2   | 19A700028P1   | Silicon, fast recovery: fwd current 75 mA, 75 PIV; sim to Type 1N4148.  |
|             |               | ----- PLUGS -----   |
| P2 and P3   | 19A700041P56  | Printed wire: 7 contacts rated @ 2.5 amps; sim to Molex 22-02-2075. (Groups 1 and 2 only).  |

| SYMBOL     | GE PART NO.   | DESCRIPTION   |
|------------|---------------|---|
| P2 and P3  | 19A704779P56  | Printed wire: 7 contacts rated @ 2.5 amps; Gold Plated Contacts. (Groups 7 and 8 only). |
|            |               | ----- TRANSISTORS -----   |
| Q1         | 19A134739P2   | Silicon, NPN.   |
| Q2         | 19A700026P1   | Silicon, PNP.   |
| Q3 thru Q7 | 19A700076P2   | Silicon, NPN.   |
| Q8         | 19A700059P2   | Silicon, PNP.   |
| Q9         | 19A700076P2   | Silicon, NPN.   |
| Q10        | 19A702760P1   | P type, field effect.   |
|            |               | ----- RESISTORS -----   |
| R1         | 19B800607P333 | Metal film: 33K ohms ±5%, 200 VDCW, 1/8 w.  |
| R2         | 19B800607P683 | Metal film: 68K ohms ±5%, 200 VDCW, 1/8 w.  |
| R3         | 19B800607P393 | Metal film: 39K ohms ±5%, 200 VDCW, 1/8 w.  |
| R4         | 19B800607P333 | Metal film: 33K ohms ±5%, 200 VDCW, 1/8 w.  |
| R5 and R6  | 19B800607P473 | Metal film: 47K ohms ±5%, 200 VDCW, 1/8 w.  |
| R7         | 19B800607P153 | Metal film: 15K ohms ±5%, 200 VDCW, 1/8 w.  |
| R8         | 19B800607P821 | Metal film: 820 ohms ±5%, 200 VDCW, 1/8 w.  |
| R9         | 19B800607P153 | Metal film: 15K ohms ±5%, 200 VDCW, 1/8 w.  |
| R10        | 19B800607P180 | Metal film: 18 ohms ±5%, 200 VDCW, 1/8 w.   |
| R11        | 19B800607P104 | Metal film: 100K ohms ±5%, 200 VDCW, 1/8 w.   |
| R13        | 19A702289P1   | Metal film: 1 ohms ±5%, 1/4 w; sim to Corning FL55.                                     |
| R14        | 19B800607P471 | Metal film: 470 ohms ±5%, 200 VDCW, 1/8 w.  |
| R15        | 19B800607P472 | Metal film: 4.7K ohms ±5%, 200 VDCW, 1/8 w.   |
| R16        | 19B800607P183 | Metal film: 18K ohms ±5%, 200 VDCW, 1/8 w.  |
| R17        | 19B800607P683 | Metal film: 68K ohms ±5%, 200 VDCW, 1/8 w.  |
| R18        | 19B800607P473 | Metal film: 47K ohms ±5%, 200 VDCW, 1/8 w.  |
| R19        | 19B800607P562 | Metal film: 5.6K ohms ±5%, 200 VDCW, 1/8 w.   |
| R20        | 19B800607P183 | Metal film: 18K ohms ±5%, 200 VDCW, 1/8 w.  |
| R21        | 19B800607P472 | Metal film: 4.7K ohms ±5%, 200 VDCW, 1/8 w.   |
| R22        | 19B800607P331 | Metal film: 330 ohms ±5%, 200 VDCW, 1/8 w.  |
| R23        | 19B800607P821 | Metal film: 820 ohms ±5%, 200 VDCW, 1/8 w.  |
| R24        | 19B800607P104 | Metal film: 100K ohms ±5%, 200 VDCW, 1/8 w.   |
| R25        | 19B800607P473 | Metal film: 47K ohms ±5%, 200 VDCW, 1/8 w.  |
| R26        | 19B800607P823 | Metal film: 82K ohms ±5%, 200 VDCW, 1/8 w.  |
| R27        | 19B800607P473 | Metal film: 47K ohms ±5%, 200 VDCW, 1/8 w. (G2 and G8 only).                            |
| R28        | 19B800607P224 | Metal film: 220K ohms ±5%, 200 VDCW, 1/8 w.   |
| R29        | 19B800607P823 | Metal film: 82K ohms ±5%, 200 VDCW, 1/8 w.  |
| R30        | 19B800607P274 | Metal film: 270K ohms ±5%, 200 VDCW, 1/8 w.   |
| R31        | 19B800607P103 | Metal film: 10K ohms ±5%, 200 VDCW, 1/8 w.  |
| R32        | 19B800607P223 | Metal film: 22K ohms ±5%, 200 VDCW, 1/8 w.  |
| R33        | 19B800607P183 | Metal film: 18K ohms ±5%, 200 VDCW, 1/8 w.  |
| R34        | 19B800607P333 | Metal film: 33K ohms ±5%, 200 VDCW, 1/8 w.  |
| R35        | 19B800607P103 | Metal film: 10K ohms ±5%, 200 VDCW, 1/8 w.  |
| R36        | 19B800607P223 | Metal film: 22K ohms ±5%, 200 VDCW, 1/8 w.  |
| R37        | 19B800607P183 | Metal film: 18K ohms ±5%, 200 VDCW, 1/8 w.  |
| R38        | 19A701828P1   | Thermistor: 3.3K ohms ±5%; sim to Phillips 2322-642-63332.                              |
| R39        | 19B800607P124 | Metal film: 120K ohms ±5%, 200 VDCW, 1/8 w.   |
| R40        | 19B800607P273 | Metal film: 27K ohms ±5%, 200 VDCW, 1/8 w.  |
| R41        | 19B800607P224 | Metal film: 220K ohms ±5%, 200 VDCW, 1/8 w.   |

\*COMPONENTS ADDED, DELETED OR CHANGED BY PRODUCTION CHANGES

\*COMPONENTS ADDED, DELETED OR CHANGED BY PRODUCTION CHANGES.

\*COMPONENTS ADDED, DELETED OR CHANGED BY PRODUCTION CHANGES.

| SYMBOL | GE PART NO.   | DESCRIPTION  |
|--------|---------------|--|
| R42    | 19B800607P223 | Metal film: 22K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.                                      |
| R43    | 19B800607P473 | Metal film: 47K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.                                      |
| R44    | 19B800607P102 | Metal film: 1K ohms $\pm 5\%$ , 200 VDCW, 1/8 w.                                       |
| R45    | 19B800607P471 | Metal film: 470 ohms $\pm 5\%$ , 200 VDCW, 1/8 w.                                      |
| U1     | 19A702410P1   | ----- INTEGRATED CIRCUITS -----<br>Linear: Audio Amplifier; sim to T8A-820M            |
|        | 19A701622P1   | ----- MISCELLANEOUS -----<br>Cotter pin. (Located between R15 & R19 - G2 and G8 only). |
|        | 19A149342P1   | Pad.   |
|        | 19A149342P2   | Pad.   |
|        | 19A705029P1   | Crystal boot.  |
|        | 19A705029P2   | Crystal boot.  |

PARTS LIST

SIDE PANEL  
19D900846G1 1 FREQ  
19D900846G3 2 FREQ  
ISSUE 3

| SYMBOL | GE PART NO. | DESCRIPTION   |
|--------|-------------|---|
| S1     | 19B800847P1 | ----- SWITCHES -----<br>Push switch: contacts rated 25 mA @ 9 VDC; sim to Bowmar KB3256-1D. |
|        | 19B800864G1 | ----- MISCELLANEOUS -----<br>Pushbutton.  |
|        | 19C850854P1 | Slide button.   |
|        | 19A702460P1 | Contact, electrical. (Quantity 2).  |
|        | 19A702471P6 | Crystal Pad.  |
|        | 19A703672P1 | Switch stop. (G1 only).   |

PARTS LIST

REAR COVER  
19D901087G1 HB HIGH POWER  
19D901087G2 UHF HIGH POWER  
19D901087G3 HB LOW POWER  
19D901087G4 UHF LOW POWER  
ISSUE 1

| SYMBOL    | GE PART NO.  | DESCRIPTION                                     |
|-----------|--------------|---|
| P1        | 19B800852P1  | ----- PLUGS -----<br>Connector. Includes:       |
|           | 19A701728P2  | Contact, electrical.                            |
|           | 19A701488P2  | Washer, non-metallic.                           |
|           | 19B216401P5  | Retaining ring.                                 |
| P2        | 19B216401P5  | Spring.   |
|           | 19B800851P1  | Insulator.                                      |
|           | 19B800852P1  | Connector. Includes:                            |
|           | 19A701728P2  | Contact, electrical.                            |
| P3 and P4 | 19A701488P2  | Washer, non-metallic;                           |
|           | 19B216401P5  | Retaining ring.                                 |
|           | 19B216401P5  | Spring.   |
|           | 19A702405P26 | Contact, electrical: rated @ 3 amps.            |
|           | 19C850865P1  | ----- MISCELLANEOUS -----<br>Option receptacle. |
|           | N327P9008E   | Rivet, tubular.                                 |
|           | 19A702471P6  | Foam pad.                                       |
|           | 19C850861P2  | Insulator, glass epoxy                          |

PARTS LIST

SIDE PANEL  
19D901089G1 1 FREQ  
19D901089G2 2 FREQ  
ISSUE 2

| SYMBOL    | GE PART NO. | DESCRIPTION   |
|-----------|-------------|---|
| J1 and J2 | 19A703304P1 | ----- JACKS -----<br>Telephone jack: rated 1/8 amp @ 125 VAC; sim to Switchcraft MDSL-280.  |
| S1        | 19B800847P1 | ----- SWITCHES -----<br>Push switch: contacts rated 25 mA @ 9 VDC; sim to Bowmar KB3256-1D. |
|           | 19A702461P1 | ----- MISCELLANEOUS -----<br>Screw, thread forming: No. 0-40 x 1/4. (Secures slide button). |
|           | 19B800864G1 | Pushbutton.   |
|           | 19C850854P1 | Slide button.   |
|           | 19A702460P1 | Contact, electrical. (Used with S1).  |
|           | 19B232415P1 | Bushing.  |
|           | 19A703672P1 | Switch stop.  |
|           | 19A702471P6 | Crystal pad.  |

PRODUCTION CHANGES

Changes in the equipment to improve performance or to simplify circuits are identified by a "Revision Letter," which is stamped after the model number of the unit. The revision stamped on the unit includes all previous revisions. Refer to the Parts List for descriptions of parts affected by these revisions.

REV. A - TRANSMITTER/RECEIVER BOARD 19D901656G1-5

To improve dependability of transmitter when voltage drops below 7.5 volts. Changed R48.

R48 was 19B800607P101 - Metal film: 100 ohms 5%, 1/8W.

REV. B - To facilitate manufacturing. Changed interconnect pins from solder mount to stake mount. This is a factory change to all system boards manufactured after 1/10/86.

REV. C - TRANSMITTER/RECEIVER BOARD 19D901656G1-4  
REV. A - TRANSMITTER/RECEIVER BOARD 19D901656G13-16

To prevent RF amplifier from oscillating while tuning C9 and C4. Changed R4. To facilitate manufacturing. Changed C86 and Q10.

R4 was: 19B800607P30 - Metal film: 3.3K ohms 5%, 1/8W.  
Q10 was: 19A701940P3 - Silicon, NPN.  
Q86 was: 19A702061P3 - Ceramic: 33 pF 5%, 50 VDCW.

FOR CANADIAN GE ONLY  
REV. E - AUDIO BOARD 19D901123G1,3

To prevent audio from squealing when transmitter is keyed and microphone is rubbed against operator's cheek. Added C201, C202, and C203 to High Band modification Kit (19A703829G1). Schematics have been revised to show location of components. See partial schematics and instructions for modification kit.

REV D TRANSMITTER/RECEIVER BOARD 19D901656G1-4  
REV C TRANSMITTER/RECEIVER BOARD 19D901656G5  
REV B TRANSMITTER/RECEIVER BOARD 19D901656G13-16  
REV A TRANSMITTER/RECEIVER BOARD 19D901656G17

To improve system operation, changed electrical contacts.

Part was 19A702752P2 Eletrical Contact.

REV E - TRANSMITTER/RECEIVER BOARD 19D901656G3  
REV C - TRANSMITTER/RECEIVER BOARD 19D901656G15

To improve power output of the UHF Transmitter Board, changed C65. To improve SINAD, changed C8.

C65 was: 19A702236P21 - Ceramic: 6.8 pF  $\pm$  .5 pF, 50 VDCW, temp coef 0  $\pm$  60 PPM.

C8 was: 19A702236P3 - Ceramic: .7 pF  $\pm$  .1 pF, 50 VDCW, temp coef 0  $\pm$  30 PPM.

\*COMPONENTS ADDED, DELETED OR CHANGED BY PRODUCTION CHANGES

\*COMPONENTS ADDED, DELETED OR CHANGED BY PRODUCTION CHANGES

\*COMPONENTS ADDED, DELETED OR CHANGED BY PRODUCTION CHANGES



## ***GE Mobile Communications***

---

**MPI® PERSONAL RADIO**  
CHANNEL GUARD  
DIGITAL CHANNEL GUARD  
CARRIER CONTROL TIMER

---

**Maintenance Manual**

## TABLE OF CONTENTS

|                                    |     |
|------------------------------------|-----|
| CHANNEL GUARD (CG)                 |     |
| Description .....                  | 1   |
| Circuit Analysis .....             | 1   |
| DIGITAL CHANNEL GUARD (DCG)        |     |
| Description .....                  | 2   |
| Circuit Analysis .....             | 2   |
| CARRIER CONTROL TIMER (CCT) .....  | 3   |
| OPTION BOARD                       |     |
| Outline Diagram .....              | 4   |
| Schematic Diagram .....            | 5   |
| PARTS LIST .....                   | 6   |
| INSTALLATION INSTRUCTIONS .....    | 7-9 |
| CG PROGRAMMING INSTRUCTIONS .....  | 10  |
| DCG PROGRAMMING INSTRUCTIONS ..... | 11  |

## CHANNEL GUARD (CG)

## DESCRIPTION

The MPI Channel Guard is a continuous-tone encoder and decoder for operation on tone frequencies in the 71.9 to 210.7 Hz range. Both the encoder and decoder operate on the same frequency. The option consists of a Channel Guard module and an option board. The option board provides the proper interface with the transmitter-receiver board.

The Channel Guard module contains a tone frequency synthesizer, encoder, decoder and Squelch Tail Eliminator circuitry (see Figure 1). The synthesizer is programmable to produce Channel Guard tones from 67 to 210.7 Hz in 0.25 Hz increments.

The synthesizer uses a crystal controlled 32,768 Hz reference to produce the desired clock inputs to the encoder and decoder circuits and produce digitally generated time delays for the STE circuitry.

The Channel Guard circuit is controlled by an CG-OFF switch on the control unit. Placing the switch in the OFF position disables the decoder circuits to permit monitoring all calls on the channel. Placing the switch in the CG position enables the Decoder.

## CIRCUIT ANALYSIS

## ENCODE

When the transmit circuit is keyed, the CPTT lead is pulled low and the

Channel Guard module responds by pulling the DPTT lead low, holding the transmit circuit in a keyed condition. The encoder circuit generates a sine wave encoder tone which passes through a low pass filter to remove any clock and tone harmonics. This output tone is connected by the CG output lead to the transmitter audio circuit.

When the radio is unkeyed, the CPTT lead goes high but the PTT delay circuit holds the transmit circuit in a keyed condition for an additional 160 milliseconds by holding the DPTT lead low during this time. During this 160 millisecond time, the encode circuit sends the tone with a 135° phase shift. This combination of 135° phase shift and 160 millisecond delay causes the CG decoder in other receivers to squelch the receiver audio prior to loss of RF signal. This reduces or eliminates the receiver noise burst.

## DECODE

In the decode mode, receiver audio from the quadrature detector is applied to the CG module where it passes through a 212 Hz low pass filter to remove voice information. This prevents voice falsing or clipping in the decoder circuit. The digital decoder compares the frequency of the incoming tone to a reference clock produced by the synthesizer. If the correct tone is detected, the module responds by releasing the RUS (Receiver UnSquelched) lead which is normally held in a low voltage condition when the correct tone is not detected.

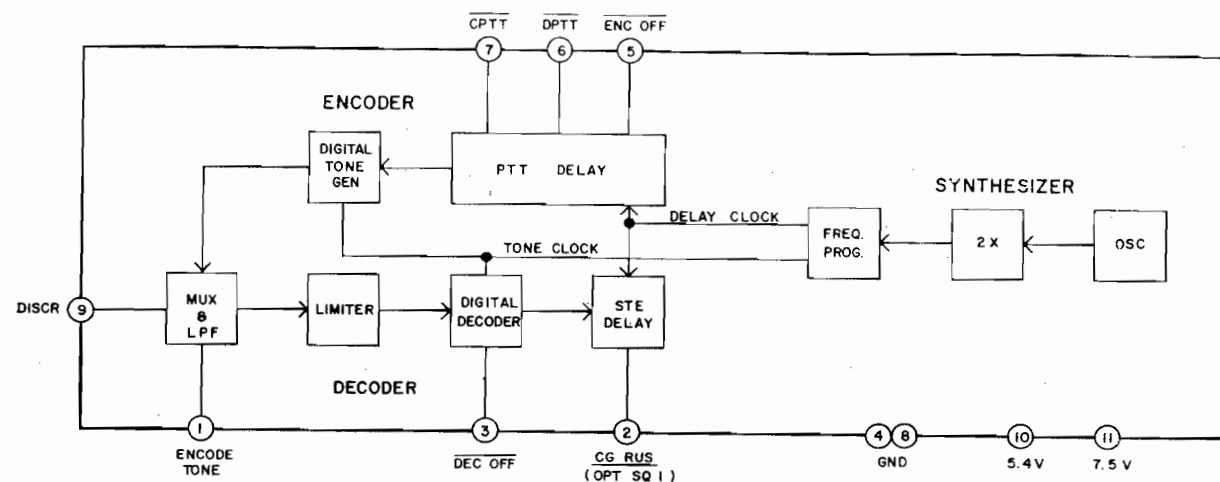


Figure 1 - Channel Guard Module

RC-3751

After decoding the tone, the decoder then looks for a phase shift to occur. If the phase shift occurs, the decoder responds by pulling CG RUS low for 200 milliseconds using the STE delay circuit. This forces the receive circuit to squelch for 200 ms during which time the received carrier should disappear.

### DIGITAL CHANNEL GUARD (DCG)

## DESCRIPTION

The DCG module contains three integrated circuits consisting of a system linear circuit, an encoder circuit and a decoder circuit (see Figure 2).

The system linear circuit contains the required analog circuits, including a crystal controlled slow clock oscillator circuit, a free running fast clock oscillator circuit, a limiter circuit, for received audio, active filter components and system interfacing.

### CIRCUIT ANALYSIS

**ENCODE**

The encoder circuit is programmed to produce a repetitive, twenty-three bit binary word. This binary word can be one

of 83 possible codes between 023 and 754 (see DCG Programming Procedure). The programming is accomplished by nine programming pins located on the top of the module.

When the transmit circuit is keyed, the CPTT lead is pulled low and the Digital Channel Guard module responds by pulling the DPTT lead low, holding the transmit circuit in a keyed condition. The encoder circuit generates a repetitive twenty-three code word, using the slow 32 kHz clock, which passes through a low pass filter (Digital Code Filter) to remove any high frequency components. The digital output is connected by the CG Encode lead to the transmit audio circuit.

When the radio is unkeyed, the CPTT lead goes high, but the PTT delay circuit holds the transmit circuit in a keyed condition for an additional 180 milliseconds by holding the DPTT lead low during this time. During this 180 milliseconds delay, the digital word generator generates a 135 Hz sine wave. This transmitted sine wave and the 180 millisecond delay causes the DCG decoder in other receivers to squelch the receiver circuit audio prior to loss of RF signal. This reduces or eliminates the receiver noise burst.

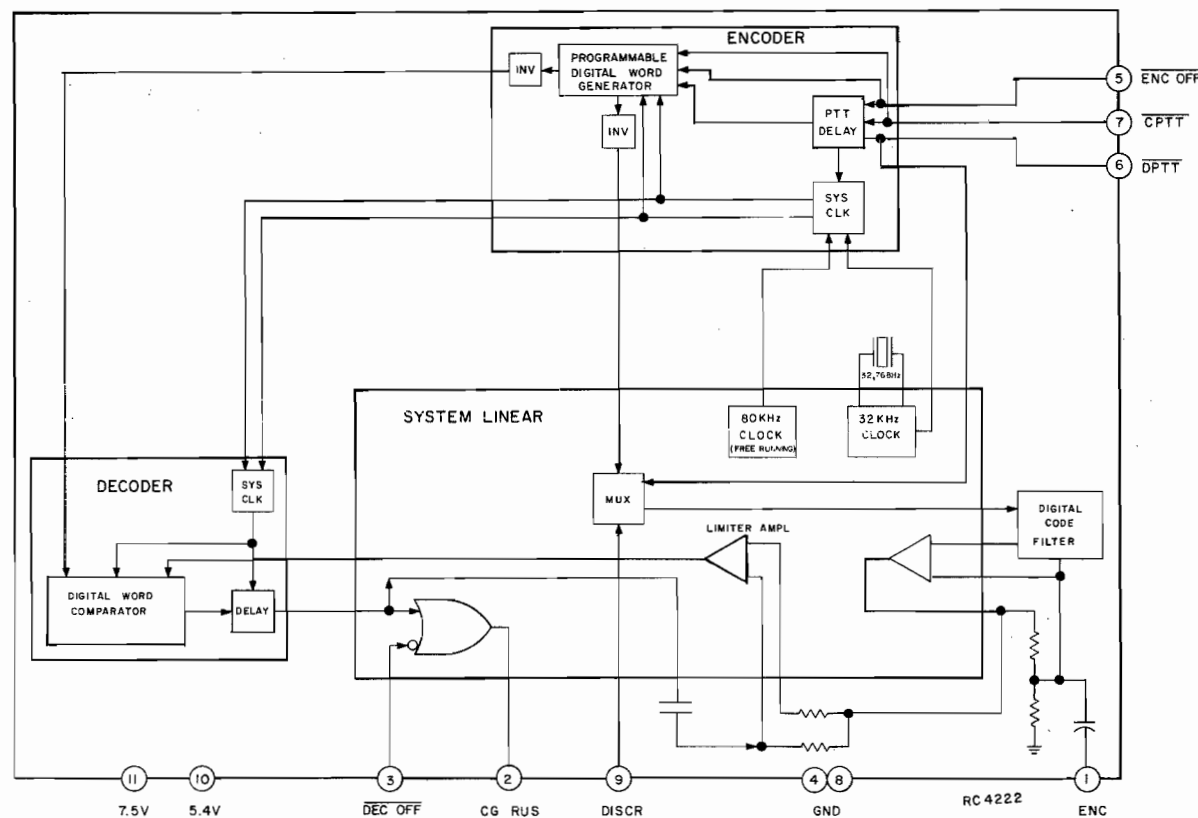


Figure 2 - Digital Channel Guard Module



## DECODE

In the decode mode, receiver audio from the quadrature detector lead is fed to the DCG module where it passes through a 212 Hz low pass filter to remove voice information. This prevents interference in detecting the correct code word in the decoder circuit. The decoder circuit compares the digital code word received by the receive circuit to the digital code word generated by the digital word generator. All possible combinations of the code word are checked to insure the correct code word is detected. Comparisons are made at the fast 80 kHz clock rate for a fast response time. The module responds by releasing the RUS lead normally held in a low voltage condition

when the correct code word is not detected. Releasing the RUS lead un-squelches the receive circuit.

## CARRIER CONTROL TIMER

## DESCRIPTION

MPI Carrier Control Timer automatically interrupts the transmission of a transmitter by deactivating the system PTT after a 70 second  $\pm 10$  seconds timing cycle. The timer also alerts the operator that the transmitter is off with a 950 Hertz alarm tone from the speaker as long as the push-to-talk switch is pressed. Transmission can be resumed by releasing the push-to-talk switch and re-keying the transmitter.




**GE Mobile Communications**

General Electric Company  
Lynchburg, Virginia 24502

Printed in U.S.A.



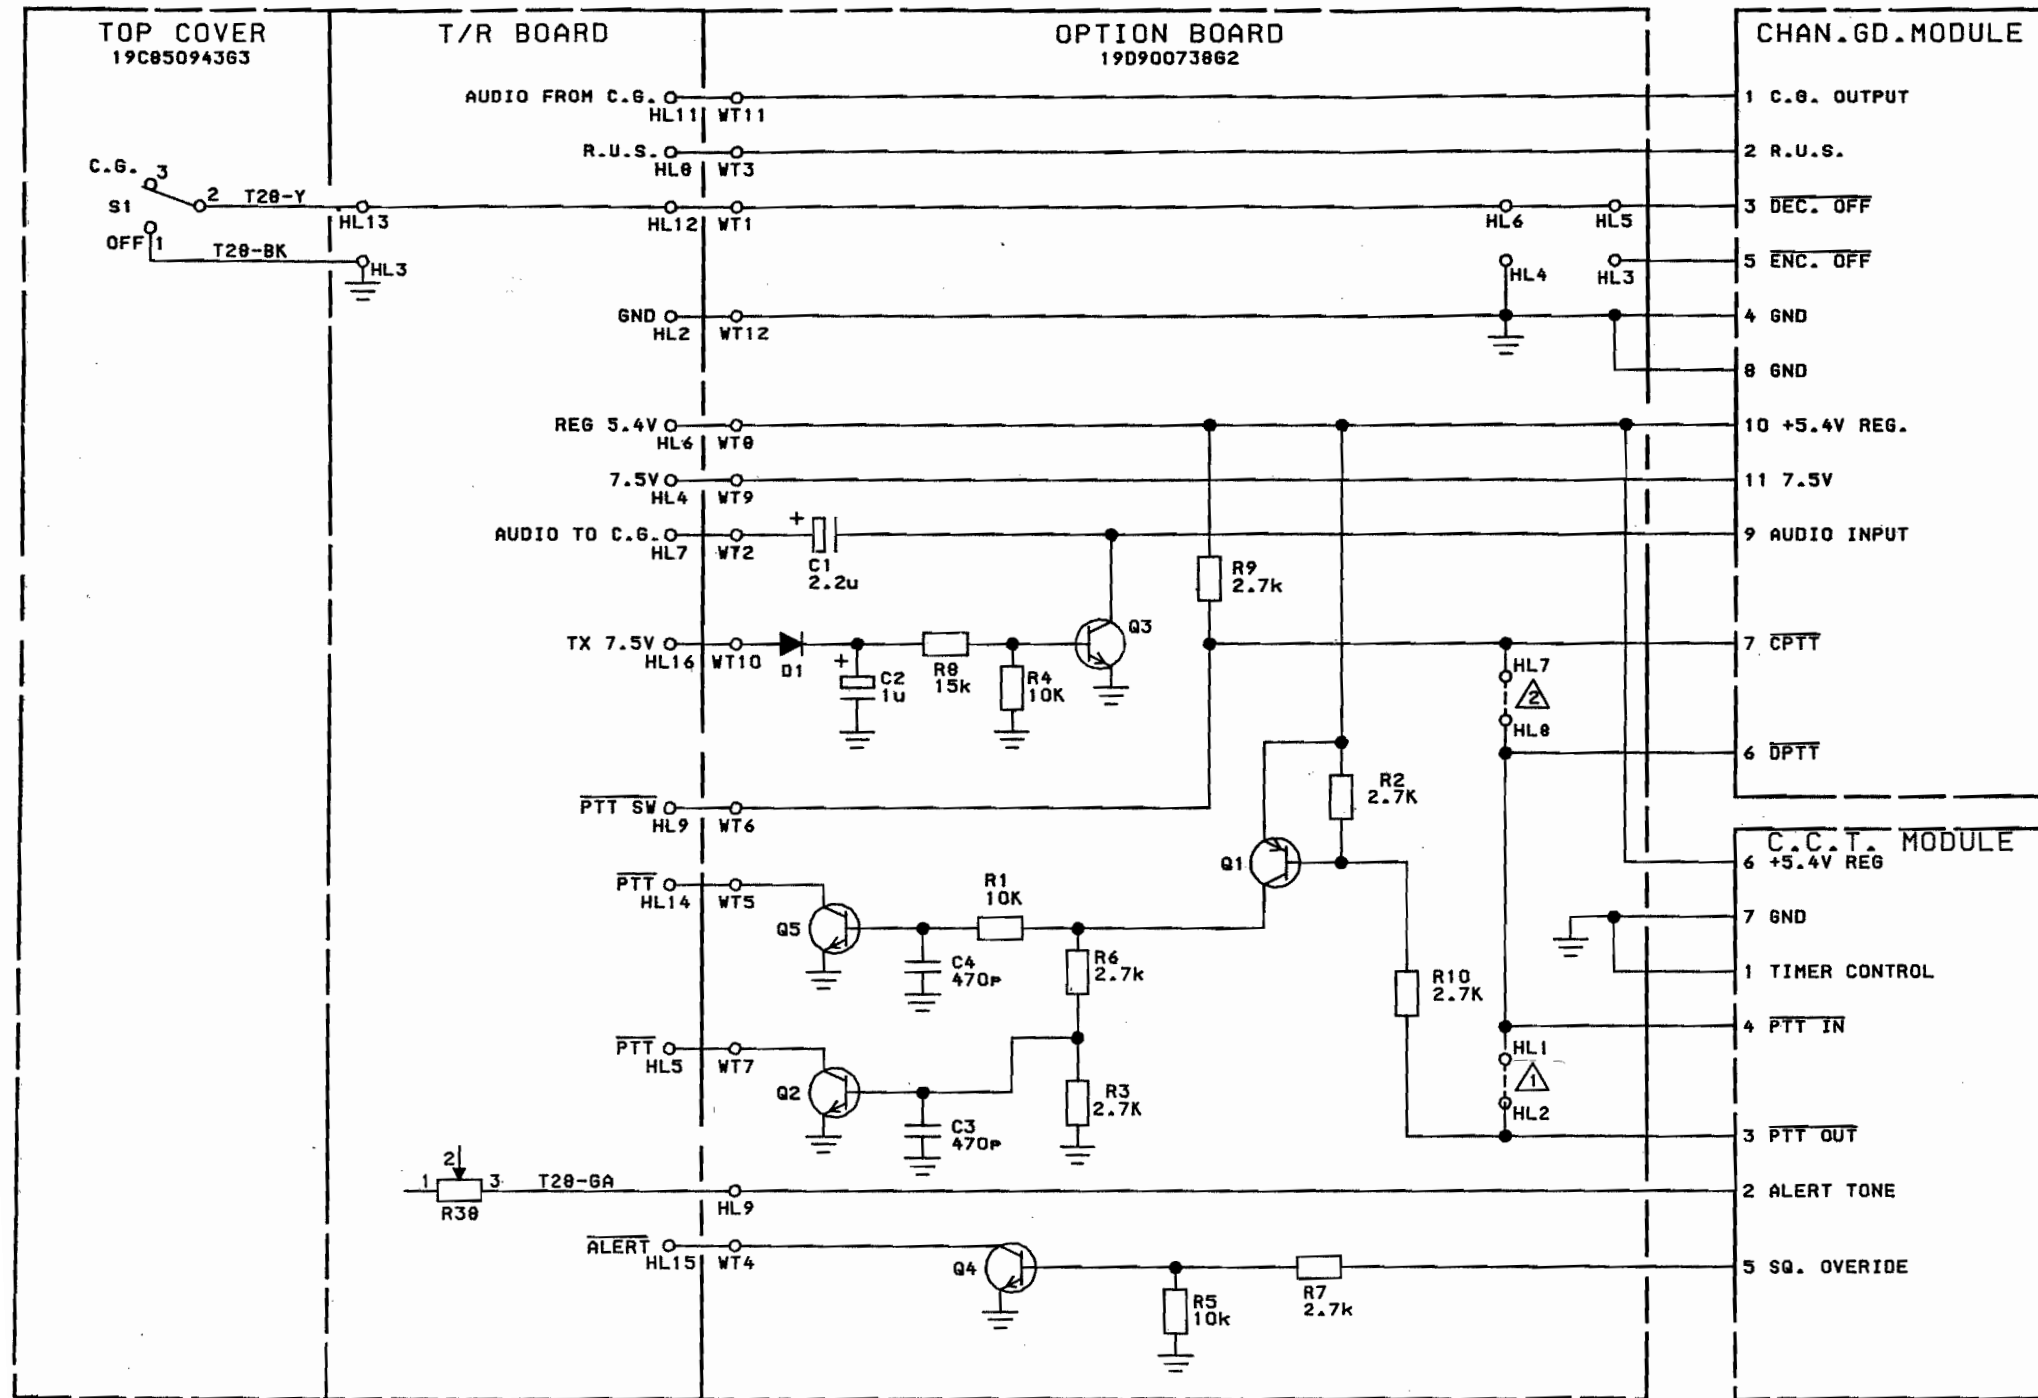

NOTES:

⚠ JUMPER FOR NON CCT UNITS.


⚡ JUMPER FOR CCT ONLY UNITS.

NOTE: NO JUMPERS ARE USED FOR COMBINATION CG AND CCT UNITS.

ALL RESISTORS ARE 1/8 WATT UNLESS OTHERWISE SPECIFIED.  
 RESISTOR VALUES IN  $\Omega$  UNLESS FOLLOWED BY MULTIPLIER k OR M.  
 CAPACITOR VALUES IN F UNLESS FOLLOWED BY MULTIPLIER  $\mu$ , n OR p.  
 INDUCTANCE VALUES IN H UNLESS FOLLOWED BY MULTIPLIER m OR  $\mu$ .

| MODEL NO.     | REV. LETTER |
|---------------|-------------|
| PL19D900738G2 |             |

(19D901356, Sh. 1, Rev. 5)

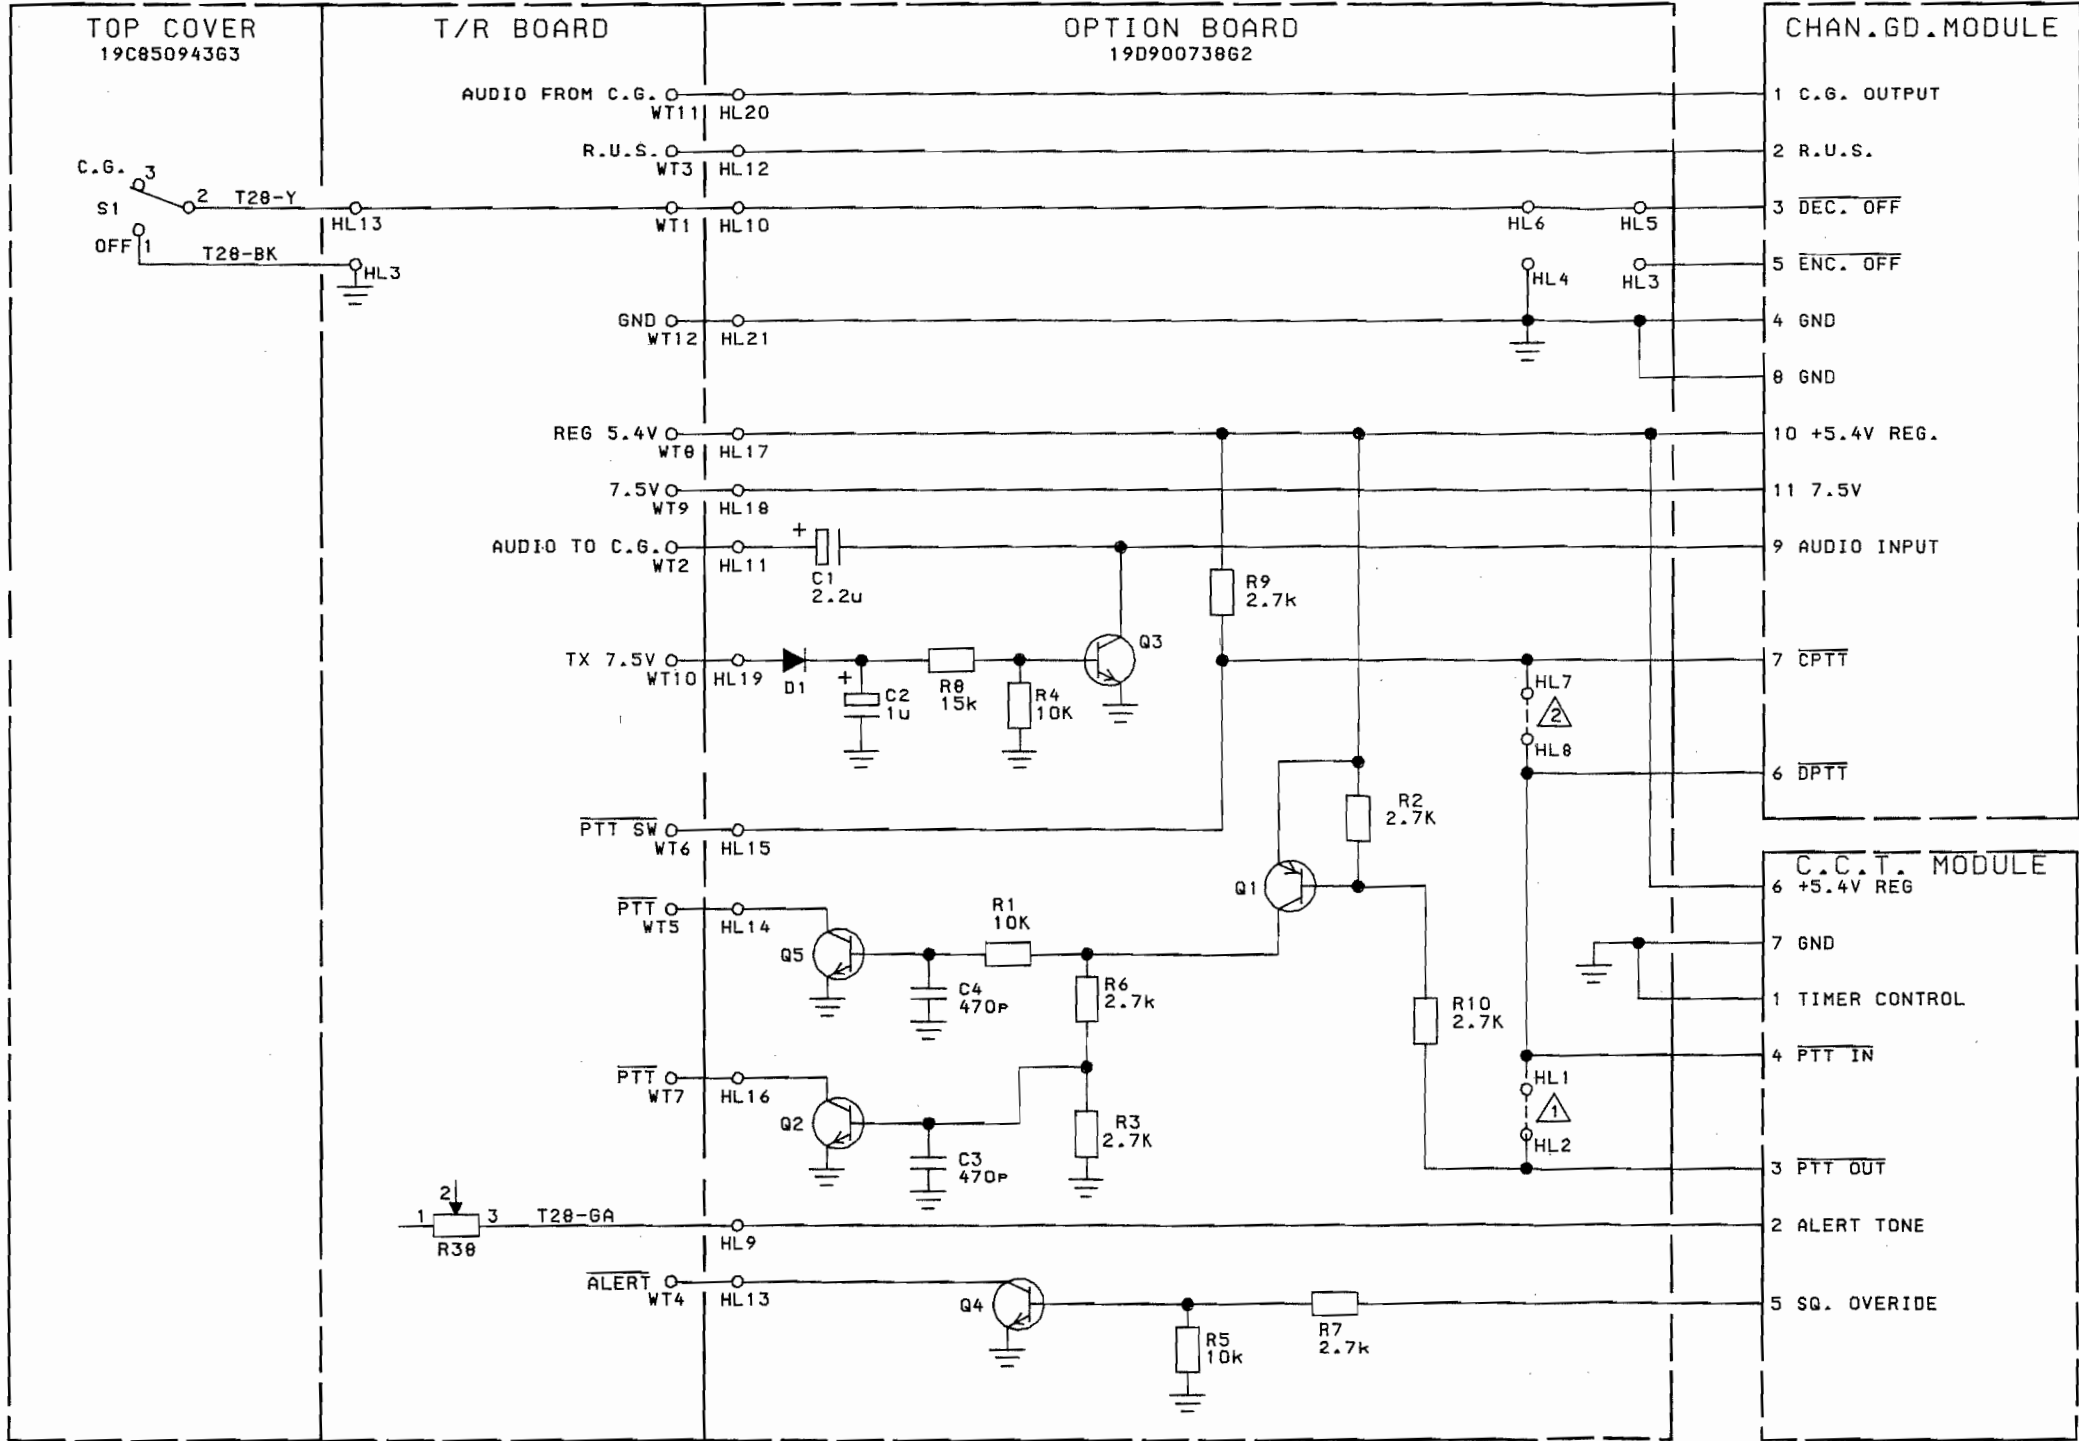

NOTES:  
① JUMPER FOR NON CCT UNITS.  
② JUMPER FOR CCT ONLY UNITS.  
NOTE: NO JUMPERS ARE USED FOR COMBINATION  
CG AND CCT UNITS.

ALL RESISTORS ARE 1/8 WATT UNLESS OTHERWISE SPECIFIED.  
RESISTOR VALUES IN  $\Omega$  UNLESS FOLLOWED BY MULTIPLIER k OR M.  
CAPACITOR VALUES IN F UNLESS FOLLOWED BY MULTIPLIER  $\mu$ , n OR p.  
INDUCTANCE VALUES IN H UNLESS FOLLOWED BY MULTIPLIER m OR  $\mu$ .

| MODEL NO.     | REV. LETTER |
|---------------|-------------|
| PL19D900738G3 |             |

SCHEMATIC DIAGRAM  
Channel Guard and  
Carrier Control Timer  
19D900738G3

(19D901356, Sh. 2, Rev. 1)

## PARTS LIST

MPI OPTION BOARD  
19D900738G1-G4  
ISSUE 6

| SYMBOL                  | GE PART NO.   | DESCRIPTION  |
|-------------------------|---------------|--|
| ----- CAPACITORS -----  |               |  |
| C1                      | 19B800650P14  | Tantalum: 2.2 uF +40-20%, 10 VDCW.                 |
| C1                      | 19A705205P3   | Tantalum: 2.2 uF + or -20%, 10 VDCW.               |
| C2                      | 19B800650P13  | Tantalum: 1 uF -20+40%, 10 VDCW.                   |
| C2                      | 19A705205P2   | Tantalum, EIA STD. Dry Solid: sim to Sprague 293D. |
| C3                      | 19A700121P7   | Ceramic: 470 pF + or -20%, 50 VDCW.                |
| C3                      | 19A702052P3   | Ceramic: 470 pF + or - 10%, 50 VDCW.               |
| C4                      | 19A700121P7   | Ceramic: 470 pF + or -20%, 50 VDCW.                |
| C4                      | 19A702052P3   | Ceramic: 470 pF + or - 10%, 50 VDCW.               |
| ----- DIODES -----      |               |  |
| D1                      | 19A702015P1   | Silicon; sim to IN458A.                            |
| D1                      | 19A700053P2   | Silicon, fast recovery (2 diodes in series).       |
| D2                      | 19A702015P1   | Silicon; sim to IN458A.                            |
| ----- TRANSISTORS ----- |               |  |
| Q1                      | 19A700059P1   | Silicon, PNP.                                      |
| Q1                      | 19A700059P2   | Silicon, PNP.                                      |
| Q2                      | 19A134739P1   | Silicon, NPN.                                      |
| Q2                      | 19A134739P2   | Silicon, NPN.                                      |
| Q3                      | 19A700076P1   | Silicon, NPN.                                      |
| Q3                      | 19A700076P2   | Silicon, NPN.                                      |
| Q4                      | 19A700076P1   | Silicon, NPN.                                      |
| Q4                      | 19A700076P2   | Silicon, NPN.                                      |
| Q5                      | 19A134739P1   | Silicon, NPN.                                      |
| Q5                      | 19A134739P2   | Silicon, NPN.                                      |
| ----- RESISTORS -----   |               |  |
| R1                      | 19A702585P87  | Composition: 10K ohms + or -5%, 150 VDCW, 1/8 w.   |
| R1                      | 19B800607P103 | Metal film: 10K ohms + or - 5%, 200 VDCW, 1/8 w.   |
| R2                      | 19A702585P87  | Composition: 10K ohms + or -5%, 150 VDCW, 1/8 w.   |
| R2                      | 19A702585P73  | Composition: 2.7K ohms + or -5%, 150 VDCW, 1/8 w.  |
| R2                      | 19B800607P272 | Metal film: 2.7K ohms + or - 5%, 200 VDCW, 1/8 w.  |
| R3                      | 19A702585P87  | Composition: 10K ohms + or -5%, 150 VDCW, 1/8 w.   |
| R3                      | 19A702585P73  | Composition: 2.7K ohms + or -5%, 150 VDCW, 1/8 w.  |
| R3                      | 19B800607P272 | Metal film: 2.7K ohms + or - 5%, 200 VDCW, 1/8 w.  |
| R4                      | 19A702585P87  | Composition: 10K ohms + or -5%, 150 VDCW, 1/8 w.   |
| R4                      | 19B800607P103 | Metal film: 10K ohms + or - 5%, 200 VDCW, 1/8 w.   |
| R5                      | 19A702585P87  | Composition: 10K ohms + or -5%, 150 VDCW, 1/8 w.   |
| R5                      | 19B800607P103 | Metal film: 10K ohms + or - 5%, 200 VDCW, 1/8 w.   |
| R6                      | 19A702585P73  | Composition: 2.7K ohms + or -5%, 150 VDCW, 1/8 w.  |
| R6                      | 19B800607P272 | Metal film: 2.7K ohms + or - 5%, 200 VDCW, 1/8 w.  |
| R7                      | 19A702585P73  | Composition: 2.7K ohms + or -5%, 150 VDCW, 1/8 w.  |
| R7                      | 19B800607P272 | Metal film: 2.7K ohms + or - 5%, 200 VDCW, 1/8 w.  |
| R8                      | 19A702585P91  | Composition: 15K ohms + or -5%, 150 VDCW, 1/8 w.   |

| SYMBOL                    | GE PART NO.   | DESCRIPTION                                       |
|---------------------------|---------------|---|
| R8                        | 19B800607P153 | Metal film: 15K ohms + or - 5%, 200 VDCW, 1/8 w.  |
| R9                        | 19A702585P73  | Composition: 2.7K ohms + or -5%, 150 VDCW, 1/8 w. |
| R9                        | 19B800607P272 | Metal film: 2.7K ohms + or - 5%, 200 VDCW, 1/8 w. |
| R10                       | 19A702585P73  | Composition: 2.7K ohms + or -5%, 150 VDCW, 1/8 w. |
| R10                       | 19B800607P272 | Metal film: 2.7K ohms + or - 5%, 200 VDCW, 1/8 w. |
| R11                       | 19B800607P1   | Metal Film: 0 ohms (50 Milli-ohms Max), 1/8 w.    |
| ----- WIRE TAPS -----     |               |   |
|                           | 19A702752P1   | Contact.  |
| ----- MISCELLANEOUS ----- |               |   |
|                           | 19A702471P6   | Foam pad. (Located on printed board 19D900739P1). |

## PARTS LIST

CARRIER CONTROLLED TIMER  
AND  
CHANNEL GUARD HARDWARE KIT  
19A702765G1 CARRIER CONTROLLED TIMER  
19A702765G2 CHANNEL GUARD ENCODER  
19A702765G3 CHANNEL GUARD ENCODER/DECODER  
19A702765G4 CHANNEL GUARD ENCODER/DECODER  
ISSUE 5

| SYMBOL                       | GE PART NO.   | DESCRIPTION  |
|------------------------------|---------------|--|
|                              | 19D900738G4   | MPI Option Board.  |
|                              | 19B219681P1   | Contact, electrical. (Located on terminals 0-9 to program CG freq. or DCG Code). |
|                              | 19D429521P1   | Cover. (Located over Channel Guard select pins).                                 |
|                              | 19C850943G3   | Top Cover.   |
|                              | 19D900667P1   | Option Cover.  |
|                              | 19A702364P104 | Machine screw, TORX Drive: M2-0.4 x 4.   |
|                              | 19A700032P1   | Lockwasher, internal tooth: No. 2.   |
|                              | 19A702471P6   | Xtal Pad.  |
| ----- ASSOCIATED PARTS ----- |               |  |
|                              | 19B800865G3   | Top Cover. Channel Guard.  |
|                              | 19D429618G5   | 1 Tone Channel Guard - Encode Module.  |
|                              | 19D429618G6   | 1 Tone Channel Guard - Encode/Decode Module.                                     |
|                              | 19C327619G1   | Carrier Controlled Timer   |
|                              | 19D432621G10  | 1 Code Digital Channel Guard (Negative Phase) Module.                            |

\*COMPONENTS ADDED, DELETED OR CHANGED BY PRODUCTION CHANGES.

## PRODUCTION CHANGES

Changes in the equipment to improve performance or to simplify circuits are identified by a "Revision Letter," which is stamped after the model number of the unit. The revision stamped on the unit includes all previous revisions. Refer to the Parts List for descriptions of parts affected by these revisions.


REV. A - Option Board 19D900738G2

Incorporated in initial shipment.

REV. B - Option Board 19D900738G2

To correct reverse squelch tail on radios with Carrier Control Timer. Added C4, Q5 and R10.

\*COMPONENTS ADDED, DELETED OR CHANGED BY PRODUCTION CHANGES.

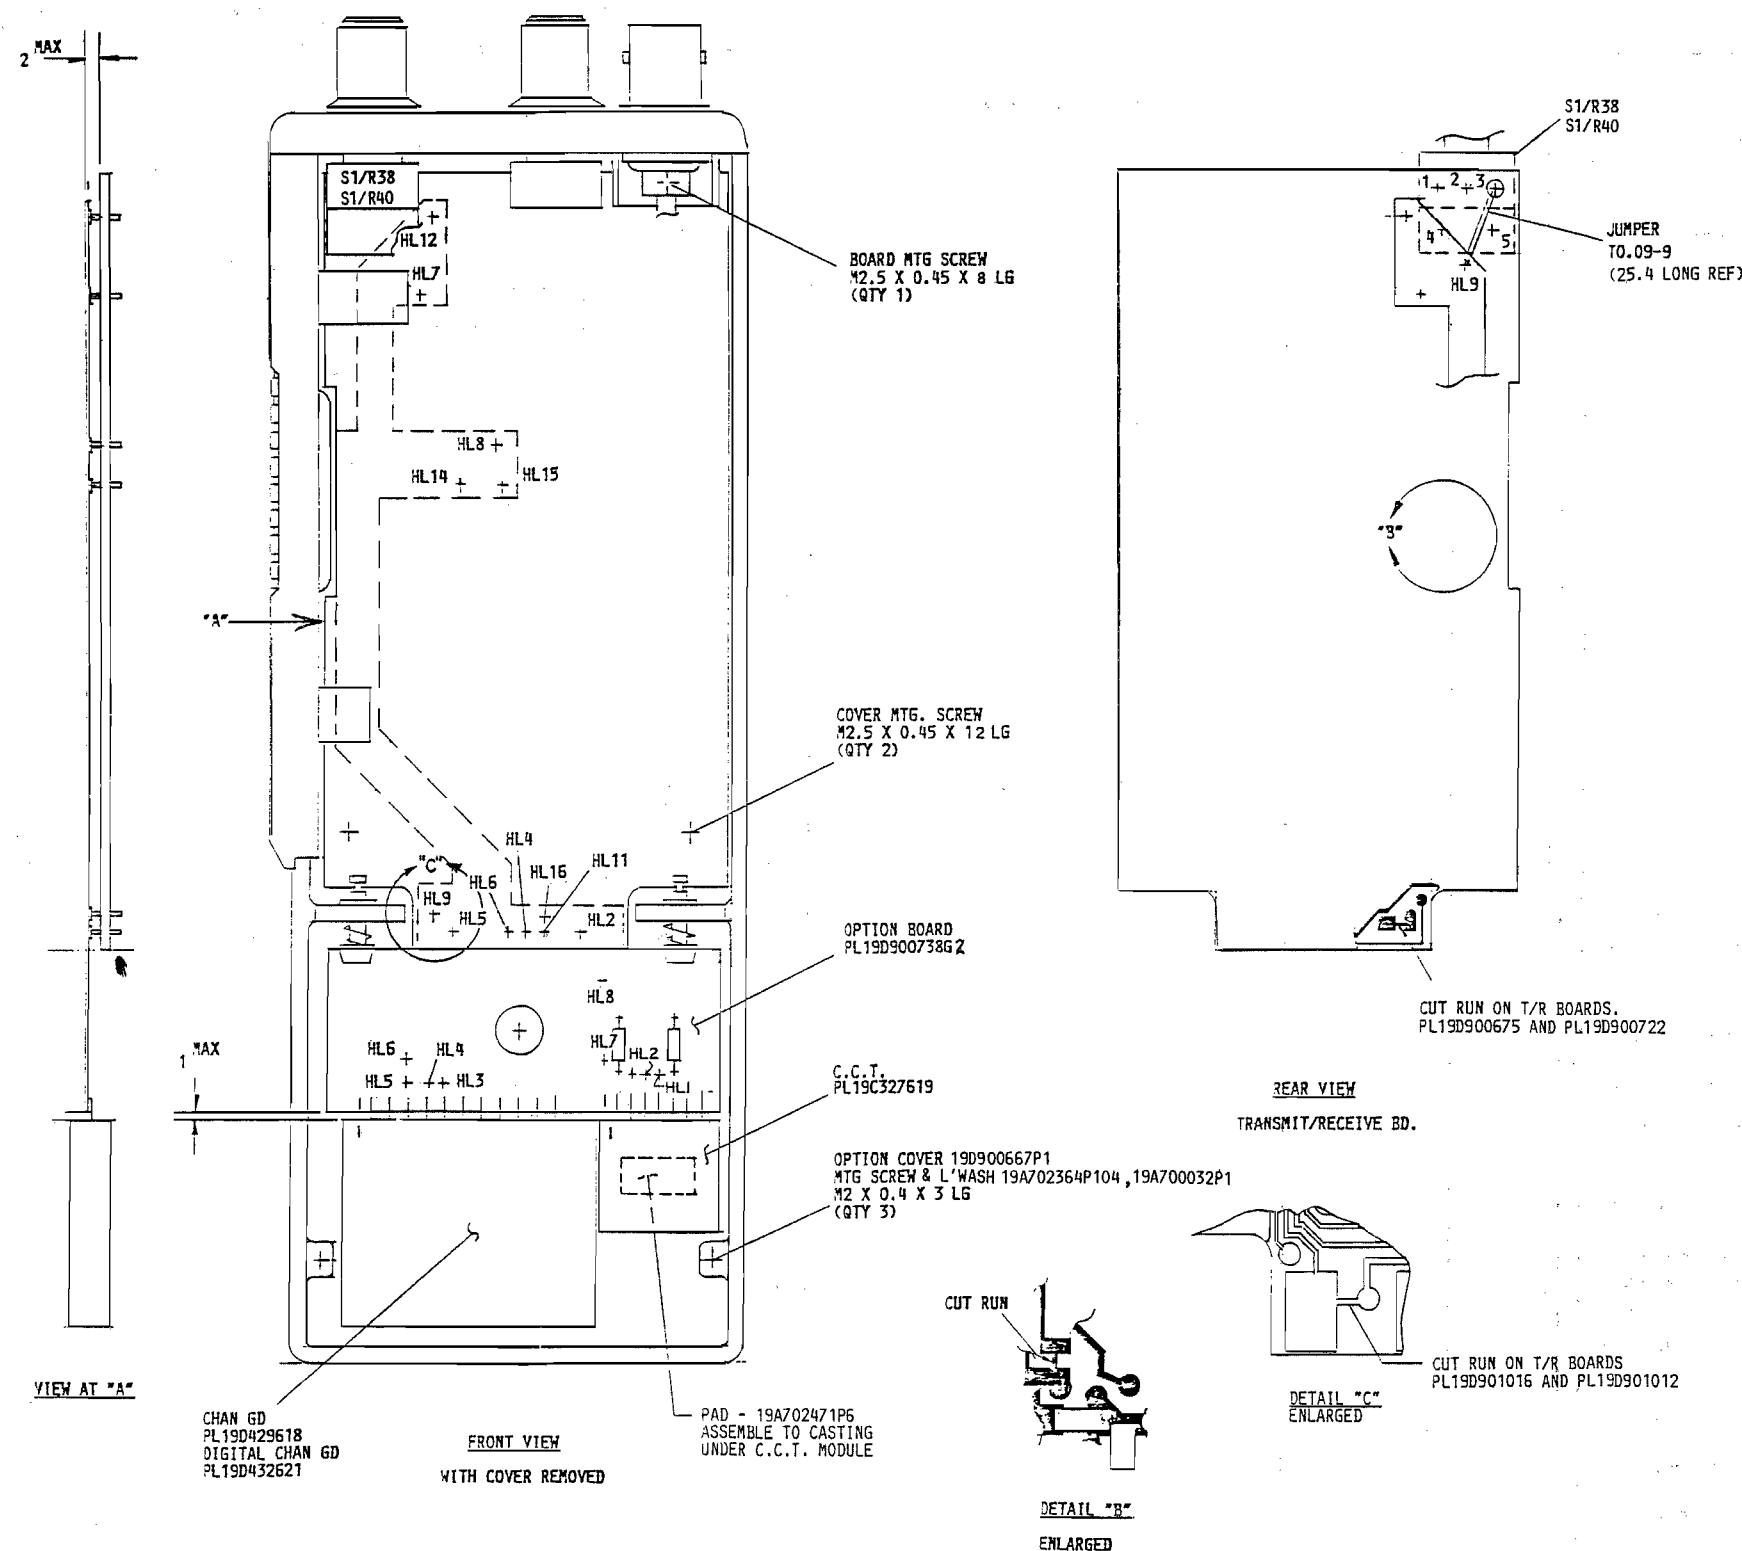

① THESE INSTRUCTIONS COVER THE INSTALLATION OF CHAN. GD. KIT PL19A702765G1 FOR APPLICATION OF CARRIER CONTROL TIMER TO MPI PERSONAL RADIO


- \* 1. REMOVE BATTERY PACK, FRONT COVER AND OPTION COVER. REMOVE SCREW FROM ANTENNA MOUNTING BRACKET AND REMOVE TOP COVER AND TRANSMIT/RECEIVE BOARD AS AN ASSEMBLY.
2. ON TRANSMIT/RECEIVE BOARD CUT RUNS AS SHOWN. (2 PLACES).
3. SOLDER C.C.T. MODULE TO OPTION BOARD AS SHOWN.
4. SOLDER JUMPER FROM HL9 ON OPTION BOARD TO S1/R38-3 OR S1/R40-3 ON SOLDER SIDE OF TRANSMIT/RECEIVE BOARD. ROUTE JUMPER BETWEEN OPTION BOARD AND T/R BOARD. REMOVE DM JUMPER FROM HL1 TO HL2 ON OPTION BOARD. ADD DM JUMPER FROM HL1 TO HL8 ON OPTION BOARD.
5. ALIGN PINS ON OPTION BOARD WITH CORRESPONDING HOLES ON TRANSMIT/RECEIVE BOARD. SEAT FULLY AND SOLDER. MAX ASSEMBLED HEIGHT TO BE 2 BELOW TRANSMIT/RECEIVE BOARD
- \* 6. REASSEMBLE TRANSMIT/RECEIVE BOARD, TOP COVER, REAR COVER, OPTION COVER, FRONT COVER, AND BATTERY PACK.

② THESE INSTRUCTIONS COVER THE INSTALLATION OF CHAN. GD. KIT PL19A702765G2 FOR APPLICATION OF CHANNEL GUARD/DIGITAL CHANNEL GUARD ENCODE ONLY TO MPI PERSONAL RADIO

- \* 1. REMOVE BATTERY PACK, FRONT COVER AND OPTION COVER. REMOVE SCREW FROM ANTENNA MOUNTING BRACKET AND REMOVE TOP COVER AND TRANSMIT/RECEIVE BOARD AS AN ASSEMBLY.
2. ON TRANSMIT/RECEIVE BOARD CUT RUNS AS SHOWN. (2 PLACES).
3. SOLDER DESIRED CHANNEL GUARD MODULE TO OPTION BOARD AS SHOWN. SEE SHEETS 4 OR 5 FOR CODING INSTRUCTIONS.
4. ON DIGITAL CHANNEL GUARD ONLY-SOLDER DA JUMPER FROM HL4 TO HL5 ON OPTION BOARD.
5. ALIGN PINS ON OPTION BOARD WITH CORRESPONDING HOLES ON TRANSMIT/RECEIVE BOARD. SEAT FULLY AND SOLDER. MAX ASSEMBLED HEIGHT TO BE 2 BELOW TRANSMIT/RECEIVE BOARD
- \* 6. REASSEMBLE TRANSMIT/RECEIVE BOARD, TOP COVER, REAR COVER, OPTION COVER, FRONT COVER, AND BATTERY PACK.

③ THESE INSTRUCTIONS COVER THE INSTALLATION OF CHAN. GD. KIT PL19A702765G2 FOR APPLICATION OF CHANNEL GUARD/DIGITAL CHANNEL GUARD ENCODE ONLY AND CARRIER CONTROL TIMER TO M.P.I. PERSONAL RADIO

- \* 1. REMOVE BATTERY PACK, FRONT COVER AND OPTION COVER. REMOVE SCREW FROM ANTENNA MOUNTING BRACKET AND REMOVE TOP COVER AND TRANSMIT/RECEIVE BOARD AS AN ASSEMBLY.
  2. ON TRANSMIT/RECEIVE BOARD CUT RUNS AS SHOWN. (2 PLACES).
  3. SOLDER DESIRED CHANNEL GUARD MODULE AND CARRIER CONTROL TIMER MODULE TO OPTION BOARD AS SHOWN. SEE SHEETS 4 OR 5 FOR CODING INSTRUCTIONS.
  4. SOLDER JUMPER FROM HL9 ON OPTION BOARD TO S1/R38-3 OR S1/R40-3 ON SOLDER SIDE OF TRANSMIT/RECEIVE BOARD. ROUTE JUMPER BETWEEN OPTION BOARD AND T/R BOARD. REMOVE DM JUMPER FROM HL1 TO HL2 ON OPTION BOARD. ON DIGITAL CHANNEL GUARD ONLY-SOLDER DA JUMPER FROM HL4 TO HL5 ON OPTION BOARD.
  5. ALIGN PINS ON OPTION BOARD WITH CORRESPONDING HOLES ON TRANSMIT/RECEIVE BOARD. SEAT FULLY AND SOLDER. MAX ASSEMBLED HEIGHT TO BE 2 BELOW TRANSMIT/RECEIVE BOARD
  - \* 6. REASSEMBLE TRANSMIT/RECEIVE BOARD, TOP COVER, REAR COVER, OPTION COVER, FRONT COVER, AND BATTERY PACK.
- \* APPLIES ONLY IF OPTION IS INSTALLED IN AN ASSEMBLED RADIO.

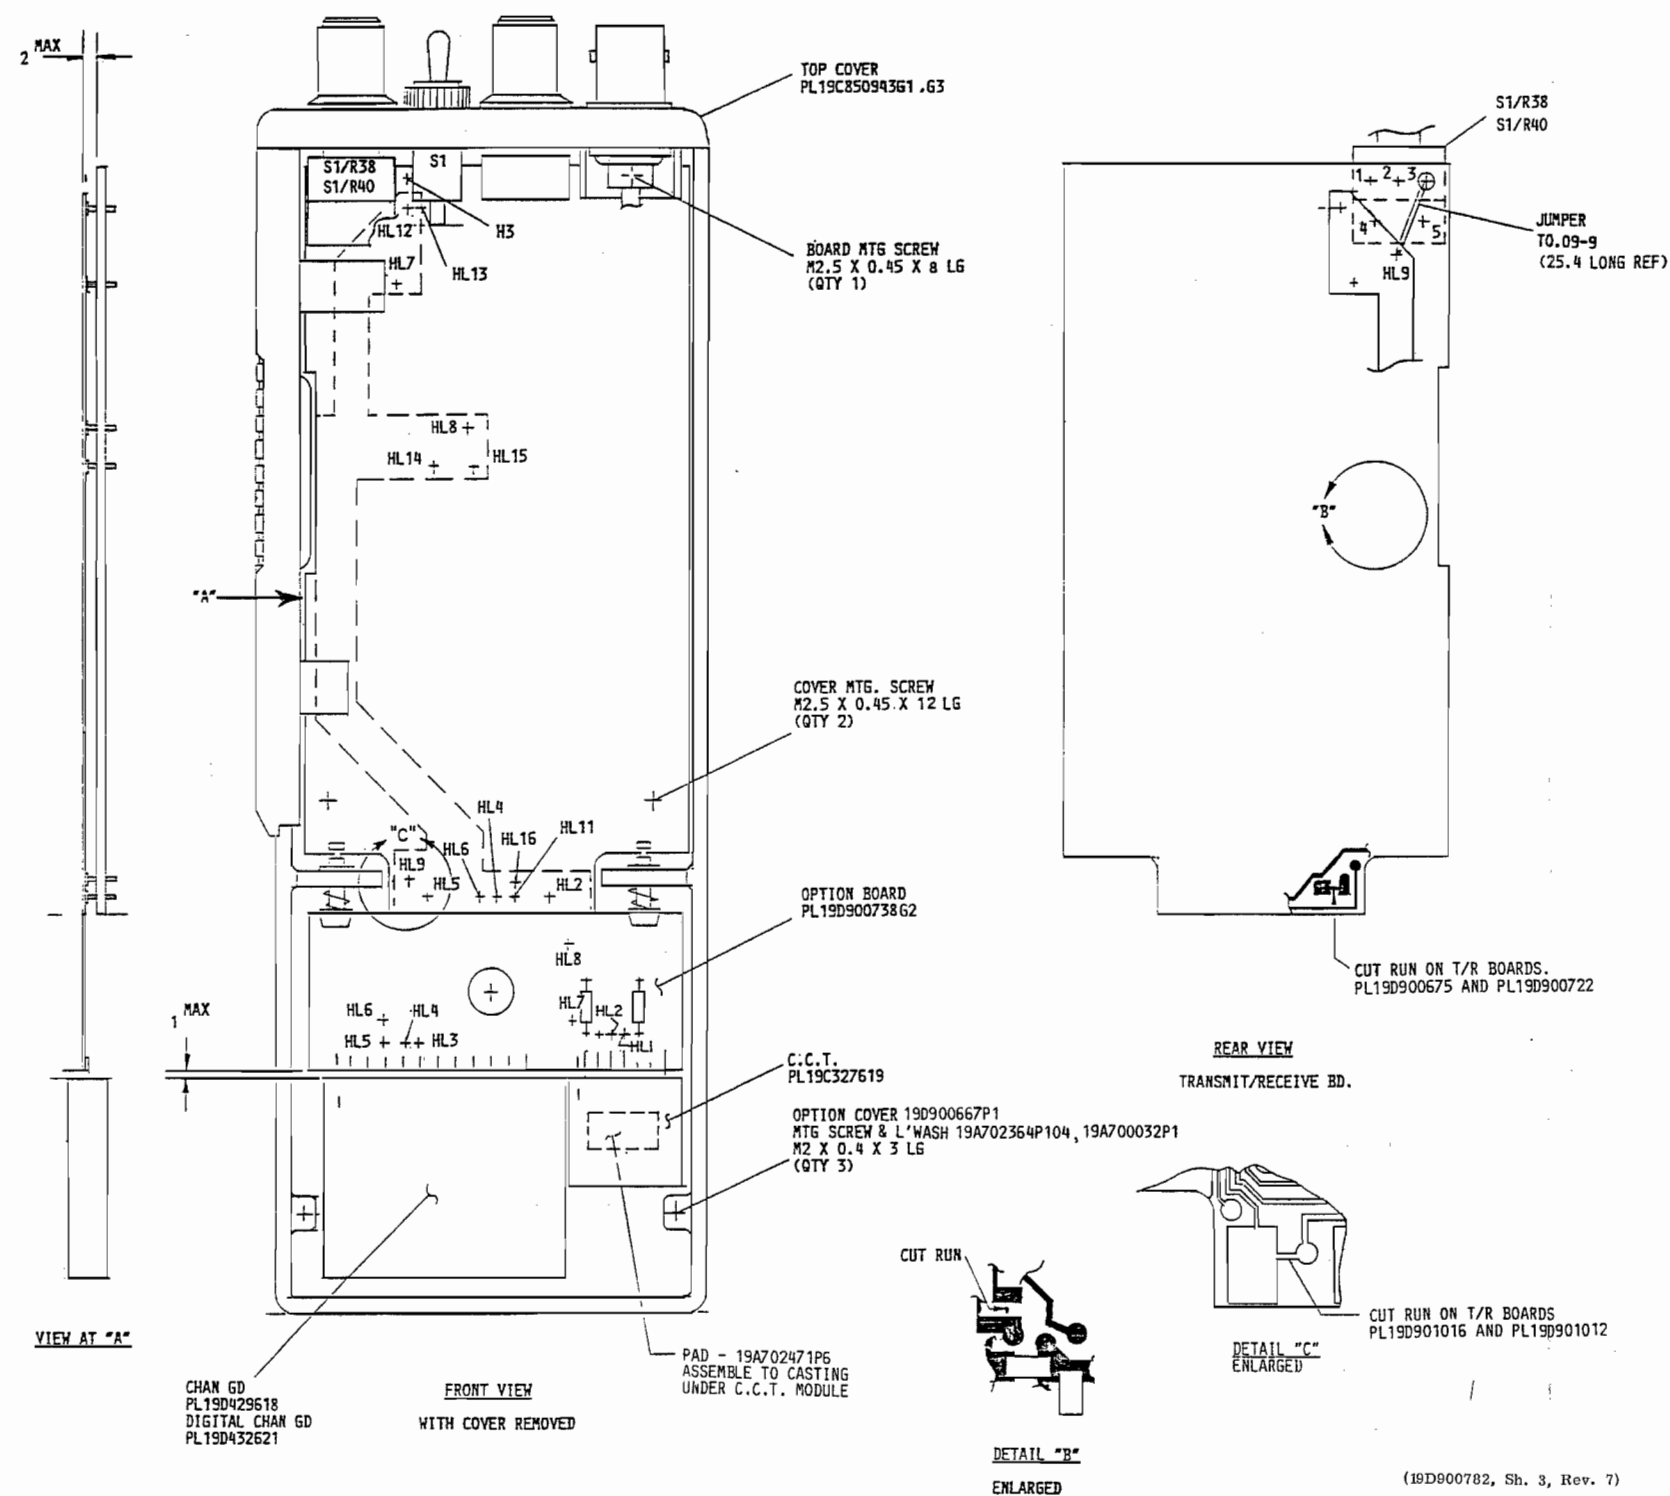

⑤ THESE INSTRUCTIONS COVER THE INSTALLATION OF CHAN. GD. KIT PL19A70276563 .64 FOR APPLICATION OF CHANNEL GUARD/DIGITAL CHANNEL GUARD ENCODE ONLY WITH OFF/ON SWITCH AND CARRIER CONTROL TIMER TO MPI PERSONAL RADIO

- \* 1. REMOVE BATTERY PACK, FRONT COVER AND OPTION COVER. REMOVE SCREW FROM ANTENNA MOUNTING BRACKET AND REMOVE TOP COVER AND TRANSMIT/RECEIVE BOARD AS AN ASSEMBLY.
- \* 2. REMOVE KNOBS & NUTS SECURING TOP COVER TO TRANSMIT/RECEIVE BOARD POTS. REMOVE EXISTING TOP COVER. BEFORE ASSEMBLING NEW TOP COVER PL19C850943G1 .63 MAKE THE FOLLOWING CONNECTIONS.

| FROM | TO   | WIRE |
|------|------|------|
| S1-1 | HL3  | BK   |
| S1-2 | HL13 | Y    |

- 3. ON TRANSMIT/RECEIVE BOARD CUT RUNS AS SHOWN, (2 PLACES).
- 4. SOLDER DESIRED CHANNEL GUARD MODULE AND CARRIER CONTROL TIMER MODULE TO OPTION BOARD AS SHOWN. SEE SHEETS 4 OR 5 FOR CODING INSTRUCTIONS.
- 5. ON OPTION BOARD CUT RUN BETWEEN HL5 & HL6 AS SHOWN.
- 6. MAKE THE FOLLOWING CONNECTIONS ON THE OPTION BOARD

| FROM | TO  | WIRE | REMARKS                    |
|------|-----|------|----------------------------|
| HL4  | HL5 | DA   | DIGITAL CHANNEL GUARD ONLY |
| HL3  | HL6 | DA   |                            |
| HL1  | HL2 | DM   | REMOVE                     |

- 7. SOLDER JUMPER FROM HL9 ON OPTION BOARD TO S1/R38-3 OR S1/R40-3 ON SOLDER SIDE OF TRANSMIT/RECEIVE BOARD. ROUTE JUMPER BETWEEN OPTION BOARD AND T/R BOARD.
- 8. ALIGN PINS ON OPTION BOARD WITH CORRESPONDING HOLES ON TRANSMIT/RECEIVE BOARD. SEAT FULLY AND SOLDER. MAX ASSEMBLED HEIGHT TO BE 2 BELOW TRANSMIT/RECEIVE BOARD.
- \* 9. REASSEMBLE TRANSMIT/RECEIVE BOARD, TOP COVER, REAR COVER, OPTION COVER, AND BATTERY PACK.

⑦ THESE INSTRUCTIONS COVER THE INSTALLATION OF CHAN. GD. KIT PL19A70276563 .64 FOR APPLICATION OF CHANNEL GUARD/DIGITAL CHANNEL GUARD ENCODE/DECODE WITH MONITOR SWITCH AND CARRIER CONTROL TIMER TO MPI PERSONAL RADIO


- \* 1. REMOVE BATTERY PACK, FRONT COVER AND OPTION COVER. REMOVE SCREW FROM ANTENNA MOUNTING BRACKET AND REMOVE TOP COVER AND TRANSMIT/RECEIVE BOARD AS AN ASSEMBLY.
- \* 2. REMOVE KNOBS & NUTS SECURING TOP COVER TO TRANSMIT/RECEIVE BOARD POTS. REMOVE EXISTING TOP COVER. BEFORE ASSEMBLING NEW TOP COVER PL19C850943G1 .63 MAKE THE FOLLOWING CONNECTIONS.

| FROM | TO   | WIRE |
|------|------|------|
| S1-1 | HL3  | BK   |
| S1-2 | HL13 | Y    |

- 3. ON TRANSMIT/RECEIVE BOARD CUT RUNS AS SHOWN, (2 PLACES).
- 4. SOLDER DESIRED CHANNEL GUARD MODULE AND CARRIER CONTROL TIMER MODULE TO OPTION BOARD AS SHOWN. SEE SHEETS 4 OR 5 FOR CODING INSTRUCTIONS.
- 5. SOLDER JUMPER FROM HL9 ON OPTION BOARD TO S1/R38-3 OR S1/R40-3 ON SOLDER SIDE OF TRANSMIT/RECEIVE BOARD. ROUTE JUMPER BETWEEN OPTION BOARD AND T/R BOARD. REMOVE DM JUMPER FROM HL1 TO HL2 ON OPTION BOARD.
- 6. ALIGN PINS ON OPTION BOARD WITH CORRESPONDING HOLES ON TRANSMIT/RECEIVE BOARD. SEAT FULLY AND SOLDER. MAX ASSEMBLED HEIGHT TO BE 2 BELOW TRANSMIT/RECEIVE BOARD.

- \* 7. REASSEMBLE TRANSMIT/RECEIVE BOARD, TOP COVER, REAR COVER, OPTION COVER, AND BATTERY PACK.

\* APPLIES ONLY IF OPTION IS INSTALLED IN AN ASSEMBLED RADIO

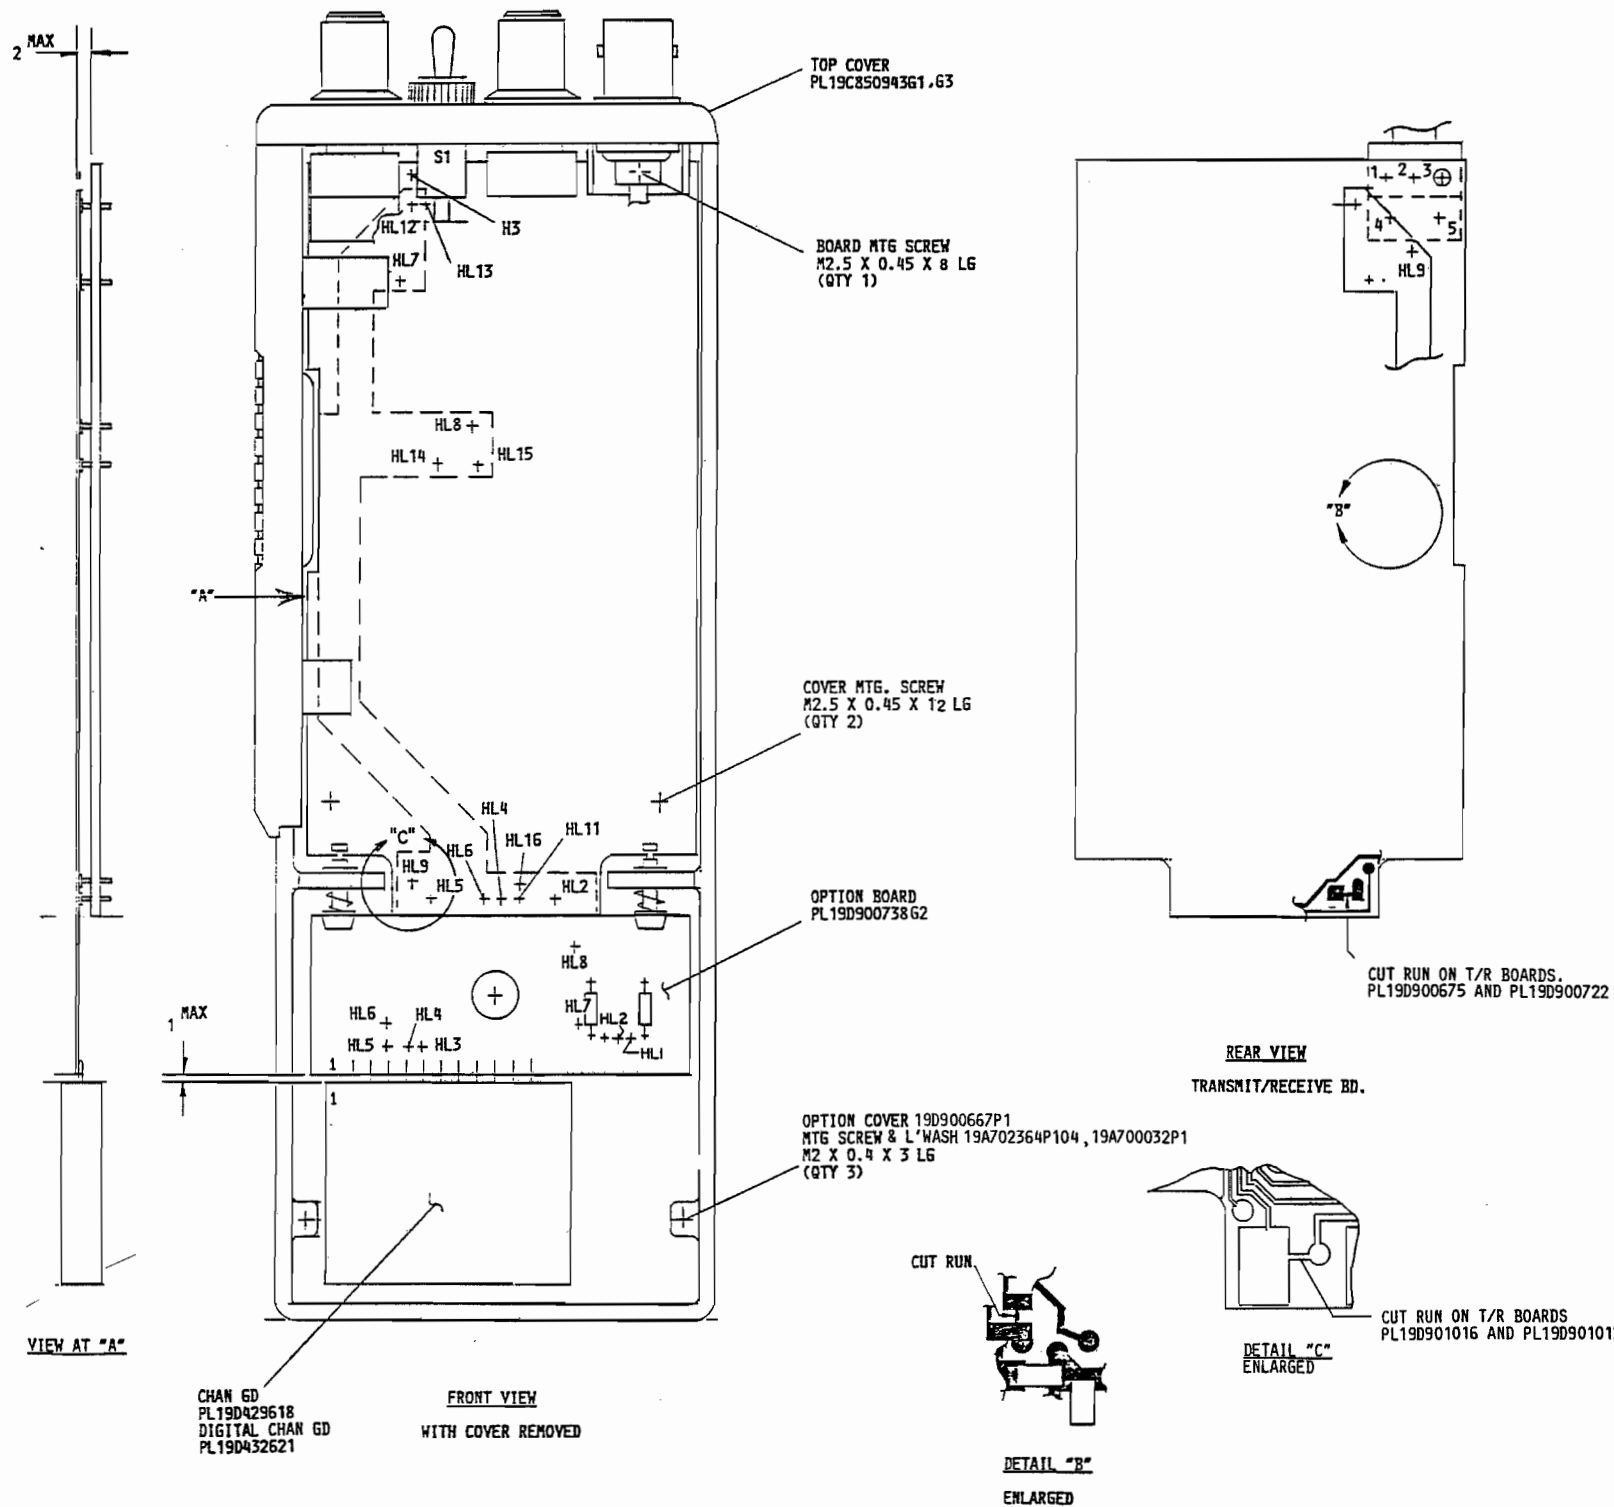

(19D900782, Sh. 2, Rev. 6)

④ THESE INSTRUCTIONS COVER THE INSTALLATION OF CHAN. GD. KIT PL19A70276563.64 FOR APPLICATION OF CHANNEL GUARD/DIGITAL CHANNEL GUARD ENCODE ONLY WITH OFF/ON SWITCH TO MPI PERSONAL RADIO

- \* 1. REMOVE BATTERY PACK, FRONT COVER AND OPTION COVER. REMOVE SCREW FROM ANTENNA MOUNTING BRACKET AND REMOVE TOP COVER AND TRANSMIT/RECEIVE BOARD AS AN ASSEMBLY.
- \* 2. REMOVE KNOBS & NUTS SECURING TOP COVER TO TRANSMIT/RECEIVE BOARD POTS, REMOVE EXISTING TOP COVER. BEFORE ASSEMBLING NEW TOP COVER PL19C85094361.63 MAKE THE FOLLOWING CONNECTIONS.

| FROM | TO   | WIRE |
|------|------|------|
| S1-1 | HL3  | BK   |
| S1-2 | HL13 | Y    |

- 3. ON TRANSMIT/RECEIVE BOARD CUT RUNS AS SHOWN. (2 PLACES)
- 4. SOLDER DESIRED CHANNEL GUARD MODULE TO OPTION BOARD AS SHOWN. SEE SHEETS 4 OR 5 FOR CODING INSTRUCTIONS.
- 5. ON OPTION BOARD CUT RUN BETWEEN HL5 & HL6 AS SHOWN.
- 6. MAKE THE FOLLOWING CONNECTIONS ON THE OPTION BOARD

| FROM | TO  | WIRE | REMARKS                    |
|------|-----|------|----------------------------|
| HL4  | HL5 | DA   | DIGITAL CHANNEL GUARD ONLY |
| HL3  | HL6 | DA   |                            |

- 7. ALIGN PINS ON OPTION BOARD WITH CORRESPONDING HOLES ON TRANSMIT/RECEIVE BOARD, SEAT FULLY AND SOLDER. MAX ASSEMBLED HEIGHT TO BE 2 BELOW TRANSMIT/RECEIVE BOARD.
- \* 8. REASSEMBLE TRANSMIT/RECEIVE BOARD, TOP COVER, REAR COVER, OPTION COVER, AND BATTERY PACK.

⑥ THESE INSTRUCTIONS COVER THE INSTALLATION OF CHAN. GD. KIT PL19A70276563.64 FOR APPLICATION OF CHANNEL GUARD/DIGITAL CHANNEL GUARD ENCODE/DECODE WITH MONITOR SWITCH TO MPI PERSONAL RADIO

- \* 1. REMOVE BATTERY PACK, FRONT COVER AND OPTION COVER. REMOVE SCREW FROM ANTENNA MOUNTING BRACKET AND REMOVE TOP COVER AND TRANSMIT/RECEIVE BOARD AS AN ASSEMBLY.
- \* 2. REMOVE KNOBS & NUTS SECURING TOP COVER TO TRANSMIT/RECEIVE BOARD POTS, REMOVE EXISTING TOP COVER. BEFORE ASSEMBLING NEW TOP COVER PL19C85094361.63 MAKE THE FOLLOWING CONNECTIONS.

| FROM | TO   | WIRE |
|------|------|------|
| S1-1 | HL3  | BK   |
| S1-2 | HL13 | Y    |

- 3. ON TRANSMIT/RECEIVE BOARD CUT RUNS AS SHOWN. (2 PLACES).
- 4. SOLDER DESIRED CHANNEL GUARD MODULE TO OPTION BOARD AS SHOWN. SEE SHEETS 4 OR 5 FOR CODING INSTRUCTIONS.
- 5. ALIGN PINS ON OPTION BOARD WITH CORRESPONDING HOLES ON TRANSMIT/RECEIVE BOARD. SEAT FULLY AND SOLDER. MAX ASSEMBLED HEIGHT TO BE 2 BELOW TRANSMIT/RECEIVE BOARD.
- \* 6. REASSEMBLE TRANSMIT/RECEIVE BOARD, TOP COVER, REAR COVER, OPTION COVER, AND BATTERY PACK.

\* APPLIES ONLY IF OPTION IS INSTALLED IN AN ASSEMBLED RADIO.

## INSTALLATION INSTRUCTIONS

Issue 2

9



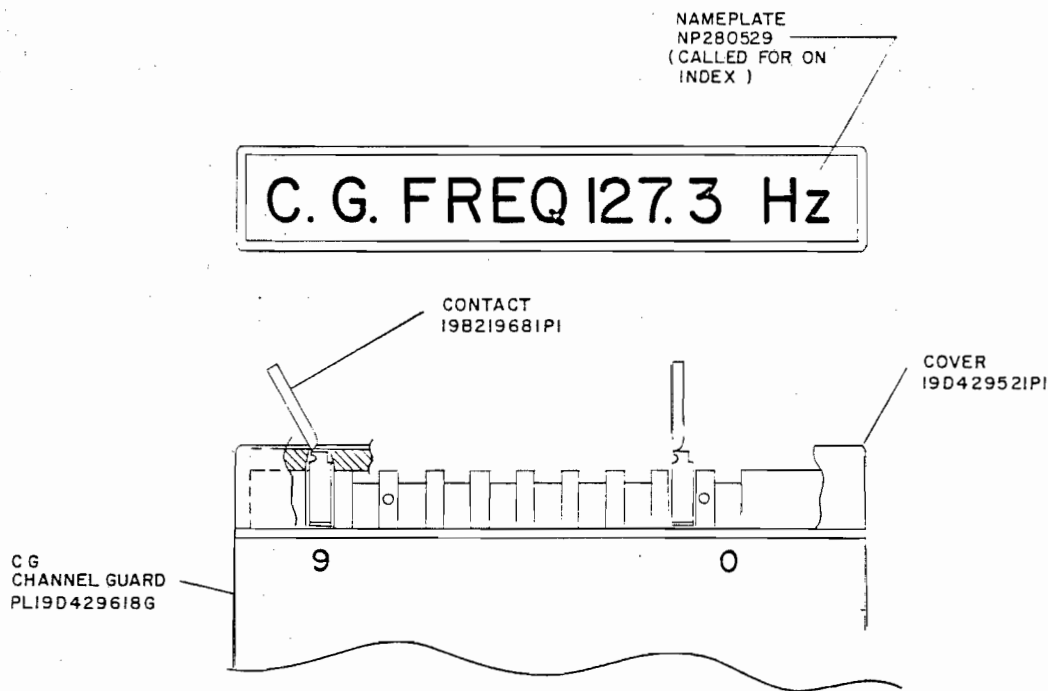


FIG. 1

THESE INSTRUCTIONS COVER THE FREQ CODING FOR C. G. MODULE 190429618 USING THE STANDARD C. G. FREQ.

1. INSTALL CONTACT PINS (198219681), PER FIG. 1, IN POSITIONS INDICATED BY "X" IN CHART 1, WHICH AGREES WITH DESIRED CG FREQ. (NOTE - EXAMPLE SHOWN FOR 127.3Hz).
2. ASSEMBLE SNAP ON COVER (190429521PI).
3. BREAK OFF CONTACT TABS ABOVE COVER BY BENDING TOWARD EITHER END OF MODULE. (DO NOT BEND TAB TOWARD SIDE OF MODULE).
4. STAMP APPROPRIATE CG FREQ ON LABEL (NP280529) AND ASSEMBLE IN RECESS ON TOP OF COVER. (EXAMPLE 127.3)

| C.G.<br>FREQ | FREQ CHART           |   |   |   |   |   |   |   |   |   |
|--------------|----------------------|---|---|---|---|---|---|---|---|---|
|              | CONTACT PIN POSITION |   |   |   |   |   |   |   |   |   |
|              | 9                    | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| 67           | X                    |   | X | X | X | X |   |   | X | X |
| 71.9         | X                    |   | X | X |   | X | X | X | X | X |
| 77           | X                    |   | X | X |   |   | X |   | X | X |
| 82.5         | X                    |   | X |   | X | X |   | X |   | X |
| 88.5         | X                    |   | X |   |   | X | X | X |   | X |
| 94.8         | X                    |   | X |   |   |   |   | X |   |   |
| 100          | X                    |   |   | X | X |   | X | X | X | X |
| 103.5        | X                    |   |   | X | X |   |   |   |   | X |
| 107.2        | X                    |   |   | X |   | X |   |   | X |   |
| 110.9        | X                    |   |   | X |   |   |   |   | X | X |
| 114.8        | X                    |   |   |   | X | X |   | X |   |   |
| 118.8        | X                    |   |   |   | X |   |   | X |   |   |
| 123          | X                    |   |   |   |   | X |   |   | X | X |
| 127.3        | X                    |   |   |   |   |   |   |   |   | X |
| 131.8        |                      | X | X | X | X | X |   |   |   |   |
| 136.5        |                      | X | X | X |   | X | X | X |   | X |
| 141.3        |                      | X | X | X |   |   | X |   | X |   |
| 146.2        |                      | X | X |   | X | X |   | X | X |   |
| 151.4        |                      | X | X |   | X |   |   |   |   | X |
| 156.7        |                      | X | X |   |   |   | X | X |   |   |
| 162.2        |                      | X |   | X | X | X |   | X | X |   |
| 167.9        |                      | X |   | X |   | X | X | X | X |   |
| 173.8        |                      | X |   | X |   |   |   | X |   |   |
| 179.9        |                      | X |   |   | X |   | X | X | X | X |
| 186.2        |                      | X |   |   |   | X |   | X | X |   |
| 192.8        |                      |   | X | X | X | X | X | X | X |   |
| 203.5        |                      |   | X | X |   | X |   |   |   | X |
| 210.7        |                      |   | X |   | X | X |   | X |   |   |

THESE INSTRUCTIONS COVER THE FREQ CODING FOR CG MODULE 190429618 USING THE NON STANDARD CG FREQ.

1. USE CHART 2 TO CALCULATE THE CG FREQ DESIRED.
2. FIND THE FREQ DESIRED BY ADDING UP THE FREQ IN CHART 2. ABOVE EACH FREQ IS A CONTACT PIN POSITION NUMBER, IF THIS POSITION IS OPEN (THAT IS A PIN IS NOT INSTALLED), THE CG WILL PRODUCE THAT FREQ. IF MORE THAN ONE IS LEFT OPEN, THE OUTPUT FREQ WILL BE THE SUM OF THE OPEN POSITIONS.  
EXAMPLE: CG FREQ 128Hz. THEREFORE CONTACT PIN POSITION #9 WILL BE OPEN AND CONTACT PINS WILL BE INSTALLED IN POSITION 0, 1, 2, 3, 4, 5, 6, 7 AND 8.  
EXAMPLE: CG FREQ 132.75Hz. THEREFORE CONTACT PIN POSITION #9 WHICH IS 128, #4 WHICH IS 4, #1 WHICH IS .5, AND #0 WHICH IS .25 WILL BE OPEN. ADD THE FREQ  $128 + 4 + .5 + .25 = 132.75$ . CONTACT PINS WILL BE INSTALLED IN POSITION #2, 3, 5, 6, 7 AND 8.
3. INSTALL CONTACT PINS, ASSEMBLE COVER AND STAMP LABEL PER INSTRUCTIONS FOR FREQ CODING THE STANDARD CG FREQ.

| CHART 2 |    |    |    |   |   |   |   |    |     | CONTACT PIN POSITION |
|---------|----|----|----|---|---|---|---|----|-----|----------------------|
| 9       | 8  | 7  | 6  | 5 | 4 | 3 | 2 | 1  | 0   |                      |
| 128     | 64 | 32 | 16 | 8 | 4 | 2 | 1 | .5 | .25 | FREQ IN Hz           |

| OCTAL CODES  |                 |              |                 |              |                 |
|--------------|-----------------|--------------|-----------------|--------------|-----------------|
| PRIMARY CODE | EQUIVALENT CODE | PRIMARY CODE | EQUIVALENT CODE | PRIMARY CODE | EQUIVALENT CODE |
| 023          | 340, 766        | 205          | 135, 610        | 464          | 237, 642, 772   |
| 025          |                 | 223          | 350, 475, 750   | 465          | 056, 656        |
| 026          | 566             | 226          | 104, 557        | 466          | 144, 666        |
| 031          | 374, 643        | 243          | 267, 342        | 503          | 157, 312        |
| 032          |                 | 244          | 176, 417        | 506          | 224, 313, 574   |
| 043          | 355             | 245          | 370, 554        | 516          | 067, 720        |
| 047          | 375, 707        | 251          | 236, 704, 742   | 532          | 161, 345        |
| 051          | 520, 771        | 261          | 227, 567        | 546          | 317, 614, 751   |
| 054          | 405, 675        | 263          | 213, 136        | 565          | 307, 362        |
| 065          | 301             | 265          | 171, 426        | 606          | 153, 630        |
| 071          | 603, 717, 746   | 271          | 427, 510, 762   | 612          | 254, 314, 706   |
| 072          | 470, 701        | 306          | 147, 303, 761   | 624          | 075, 501        |
| 073          | 640             | 311          | 330, 456, 561   | 627          | 037, 560        |
| 074          | 360, 721        | 315          | 321, 673        | 631          | 231, 504, 636   |
| 114          | 327, 615        | 331          | 372, 507        | 632          | 123, 657        |
| 115          | 534, 674        | 343          | 324, 570        | 654          | 163, 460, 607   |
| 116          | 060, 737        | 346          | 616, 635, 724   | 662          | 363, 436, 443   |
| 125          | 172             | 351          | 353, 435        |              | 444             |
| 131          | 572, 702        | 364          | 130, 641        | 664          | 344, 471, 715   |
| 132          | 605, 634, 714   | 365          | 107             | 703          | 150, 256        |
| 134          | 273             | 371          | 217, 453, 530   | 712          | 136, 502        |
| 143          | 333             | 411          | 117, 756        | 723          | 235, 611, 671   |
| 152          | 366, 415        | 412          | 127, 441, 711   | 731          | 447, 473, 474   |
| 155          | 233, 660        | 413          | 133, 620        | 732          | 164, 207        |
| 156          | 517, 741        | 423          | 234, 563, 621   | 734          | 066             |
| 162          | 416, 553        |              | 713             |              |                 |
| 165          | 354             | 431          | 262, 316, 730   | 743          | 312, 515, 663   |
| 172          | 057             | 432          | 276, 326        | 754          | 076, 203        |
| 174          | 142, 270        | 445          | 222, 457, 575   |              |                 |

Table 1 - Primary and Equivalent Octal Codes

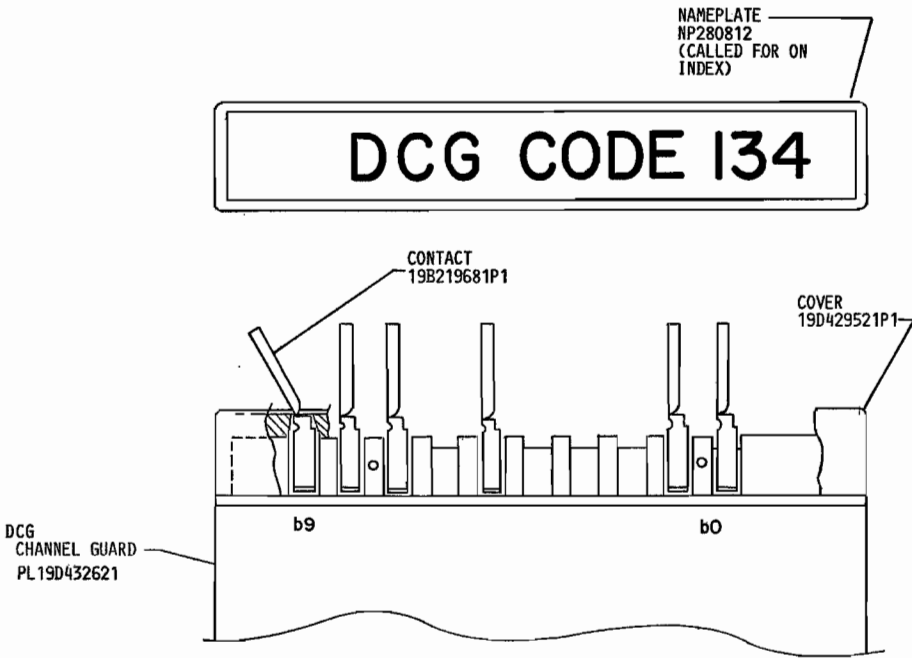


FIG. 2

| CODE CHART |                      |    |    |    |    |    |    |    |    |    |
|------------|----------------------|----|----|----|----|----|----|----|----|----|
| DCG CODE   | CONTACT PIN POSITION |    |    |    |    |    |    |    |    |    |
|            | *B9                  | B8 | B7 | B6 | B5 | B4 | B3 | B2 | B1 | B0 |
| 023        | X                    | X  | X  | X  | X  |    | X  | X  |    |    |
| 025        | X                    | X  | X  | X  | X  |    |    | X  |    |    |
| 026        | X                    | X  | X  | X  | X  |    | X  |    | X  |    |
| 031        | X                    | X  | X  | X  | X  |    |    | X  | X  |    |
| 032        | X                    | X  | X  | X  | X  |    |    |    |    | X  |
| 043        | X                    | X  | X  | X  | X  | X  | X  | X  |    |    |
| 047        | X                    | X  | X  | X  | X  | X  | X  | X  |    |    |
| 051        | X                    | X  | X  | X  | X  |    |    | X  | X  |    |
| 054        | X                    | X  | X  | X  | X  |    |    |    |    | X  |
| 065        | X                    | X  | X  | X  | X  |    | X  |    | X  |    |
| 067        | X                    | X  | X  | X  | X  |    | X  |    |    |    |
| 071        | X                    | X  | X  | X  | X  |    |    | X  | X  |    |
| 072        | X                    | X  | X  | X  | X  |    |    |    |    | X  |
| 073        | X                    | X  | X  | X  | X  |    |    | X  |    |    |
| 074        | X                    | X  | X  | X  | X  |    |    | X  | X  |    |
| 114        | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 115        | X                    | X  | X  | X  | X  |    |    | X  |    | X  |
| 116        | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 125        | X                    | X  | X  | X  | X  |    |    | X  | X  |    |
| 131        | X                    | X  | X  | X  | X  |    |    | X  | X  |    |
| 132        | X                    | X  | X  | X  | X  |    |    |    |    | X  |
| 134        | X                    | X  | X  | X  | X  |    |    | X  | X  |    |
| 143        | X                    | X  | X  | X  | X  | X  | X  | X  |    |    |
| 152        | X                    | X  | X  | X  | X  |    |    | X  | X  |    |
| 155        | X                    | X  | X  | X  | X  |    |    |    | X  |    |
| 156        | X                    | X  | X  | X  | X  |    | X  |    | X  |    |
| 162        | X                    | X  | X  | X  | X  |    | X  | X  |    | X  |
| 165        | X                    | X  | X  | X  | X  |    |    | X  | X  |    |
| 172        | X                    | X  | X  | X  | X  | X  | X  | X  |    |    |
| 174        | X                    | X  | X  | X  | X  | X  | X  | X  |    |    |
| 205        | X                    | X  | X  | X  | X  |    |    | X  |    |    |
| 223        | X                    | X  | X  | X  | X  | X  | X  | X  |    |    |
| 226        | X                    | X  | X  | X  | X  | X  | X  | X  |    |    |
| 243        | X                    | X  | X  | X  | X  | X  | X  | X  |    |    |
| 244        | X                    | X  | X  | X  | X  | X  | X  | X  |    |    |
| 245        | X                    | X  | X  | X  | X  | X  | X  | X  |    |    |
| 251        | X                    | X  | X  | X  | X  | X  | X  | X  |    |    |
| 254        | X                    | X  | X  | X  | X  | X  | X  | X  |    |    |
| 261        | X                    | X  | X  | X  | X  | X  | X  | X  |    |    |
| 263        | X                    | X  | X  | X  | X  | X  | X  | X  |    |    |
| 265        | X                    | X  | X  | X  | X  | X  | X  | X  |    |    |
| 271        | X                    | X  | X  | X  | X  | X  | X  | X  |    |    |
| 306        | X                    | X  | X  | X  | X  | X  | X  | X  |    |    |
| 311        | X                    | X  | X  | X  | X  | X  | X  | X  |    |    |
| 315        | X                    | X  | X  | X  | X  | X  | X  | X  |    |    |

\* B9 IS LEFT OPEN IN 800 MHZ RADIOS

| CODE CHART (CONT.) |                      |    |    |    |    |    |    |    |    |    |
|--------------------|----------------------|----|----|----|----|----|----|----|----|----|
| DCG CODE           | CONTACT PIN POSITION |    |    |    |    |    |    |    |    |    |
|                    | B9                   | B8 | B7 | B6 | B5 | B4 | B3 | B2 | B1 | B0 |
| 331                | X                    | X  | X  | X  | X  |    |    | X  | X  |    |
| 343                | X                    | X  | X  | X  | X  |    |    | X  | X  |    |
| 346                | X                    | X  | X  | X  | X  |    |    | X  | X  |    |
| 351                | X                    | X  | X  | X  | X  |    |    | X  | X  |    |
| 364                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 365                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 371                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 411                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 412                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 413                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 423                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 431                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 432                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 445                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 464                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 465                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 466                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 503                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 506                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 516                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 532                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 546                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 565                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 606                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 612                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 624                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 627                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 631                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 632                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 654                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 662                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 664                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 703                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 712                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 723                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 731                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 732                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 734                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 743                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |
| 754                | X                    | X  | X  | X  | X  | X  | X  | X  | X  |    |

THESE INSTRUCTIONS COVER THE FREQ CODING FOR DCG MODULE 19D432621 USING THE STANDARD DCG CODES.

1. INSTALL CONTACT PINS (19B219681), PER FIG. 2, IN POSITIONS INDICATED BY "X" IN CHART 1, WHICH AGREES WITH DESIRED DCG CODE. (NOTE - EXAMPLE SHOWN FOR 134).
2. ASSEMBLE SNAP ON COVER (19D429521P1).
3. BREAK OFF CONTACT TABS ABOVE COVER BY BENDING TOWARD EITHER END OF MODULE. (DO NOT BEND TAB TOWARD SIDE OF MODULE).
4. STAMP APPROPRIATE DCG CODE ON LABEL (NP280812), AND ASSEMBLE IN RECESS ON TOP OF COVER. (EXAMPLE 134).