



MAINTENANCE MANUAL

SYNTHESIZER BOARD B19/CCMG-168

TABLE OF CONTENTS

| Section/Paragraph | Page |
|--|------|
| DESCRIPTION | 1 |
| CIRCUIT ANALYSIS | 1 |
| REFERENCE OSCILLATOR | 1 |
| SYNTHESIZER | 1 |
| EQUALIZER | 4 |
| DC OFFSET AND HIGH-CURRENT BUFFERS | 4 |
| LOOP FILTER | 5 |
| RECEIVE VCO | 5 |
| TRANSMIT VCO | 5 |
| Frequency Segment Selector | 5 |
| VCO CHARACTERISTICS | 6 |
| FEEDBACK BUFFERS | 6 |
| DUAL-MODULUS PRESCALER | 6 |
| MODULATION LEVEL CONTROL | 6 |

DESCRIPTION

The frequency synthesizer generates the transmitter output frequency and the receiver first mixer injection frequency. The synthesizer board (CMG-168) mounts in the top section of the frame assembly as shown in Figure 1.

CIRCUIT ANALYSIS

The frequency synthesizer circuit (Figure 2 and schematic diagram) consists of reference oscillator XU201, synthesizer chip IC201, dual-modulus prescaler IC204, RX and TX Voltage Controlled Oscillators (VCOs) TR203 and TR209, a loop filter and associated circuitry.

REFERENCE OSCILLATOR

Reference oscillator XU201 operates at a frequency of 13.2 MHz and is temperature compensated to provide a frequency stability of ± 2.0 ppm. Voltage for the oscillator is supplied by 9-volt regulator IC209 and 4-volt Zener diode CD201. The oscillator output is applied to synthesizer chip IC201-2.


SYNTHESIZER

Synthesizer IC201 (Figure 3) consists of a Programmable R counter, phase detector, and programmable VCO dividers (N and A).

When the microcontroller desires to change transmit or receive frequencies, new frequency data is received on the CLOCK, DATA, and ENABLE lines. The synthesizer immediately begins generating the new frequency.

The serial data (DATA line) sets the internal VCO dividers which determines the VCO frequency. The reference oscillator frequency applied to the programmable reference oscillator divider (R counter) is divided down to a lower frequency determined by the input data. The lower frequency output is applied to the internal phase detector. The phase detector compares this signal with the output of the internal programmable VCO dividers. The output of the programmable VCO dividers is a function of the rf frequency which is divided down by the dual-modulus prescaler and the programmable VCO dividers.

When operating on the correct frequency, the inputs to the phase detector are identical and the output voltage of the phase detector is constant.

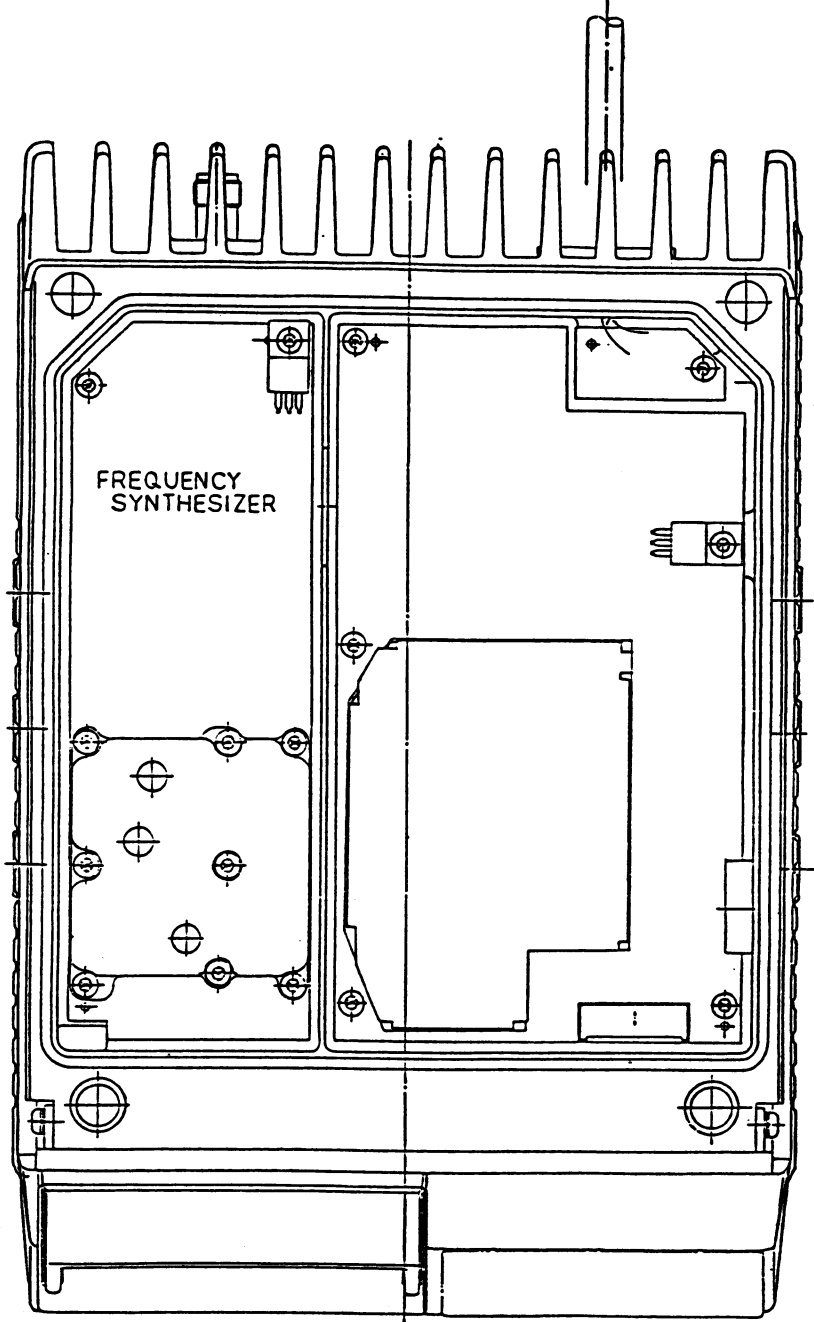

RC-7038

FIGURE 1 - SYNTHESIZER LOCATION (TOP VIEW)

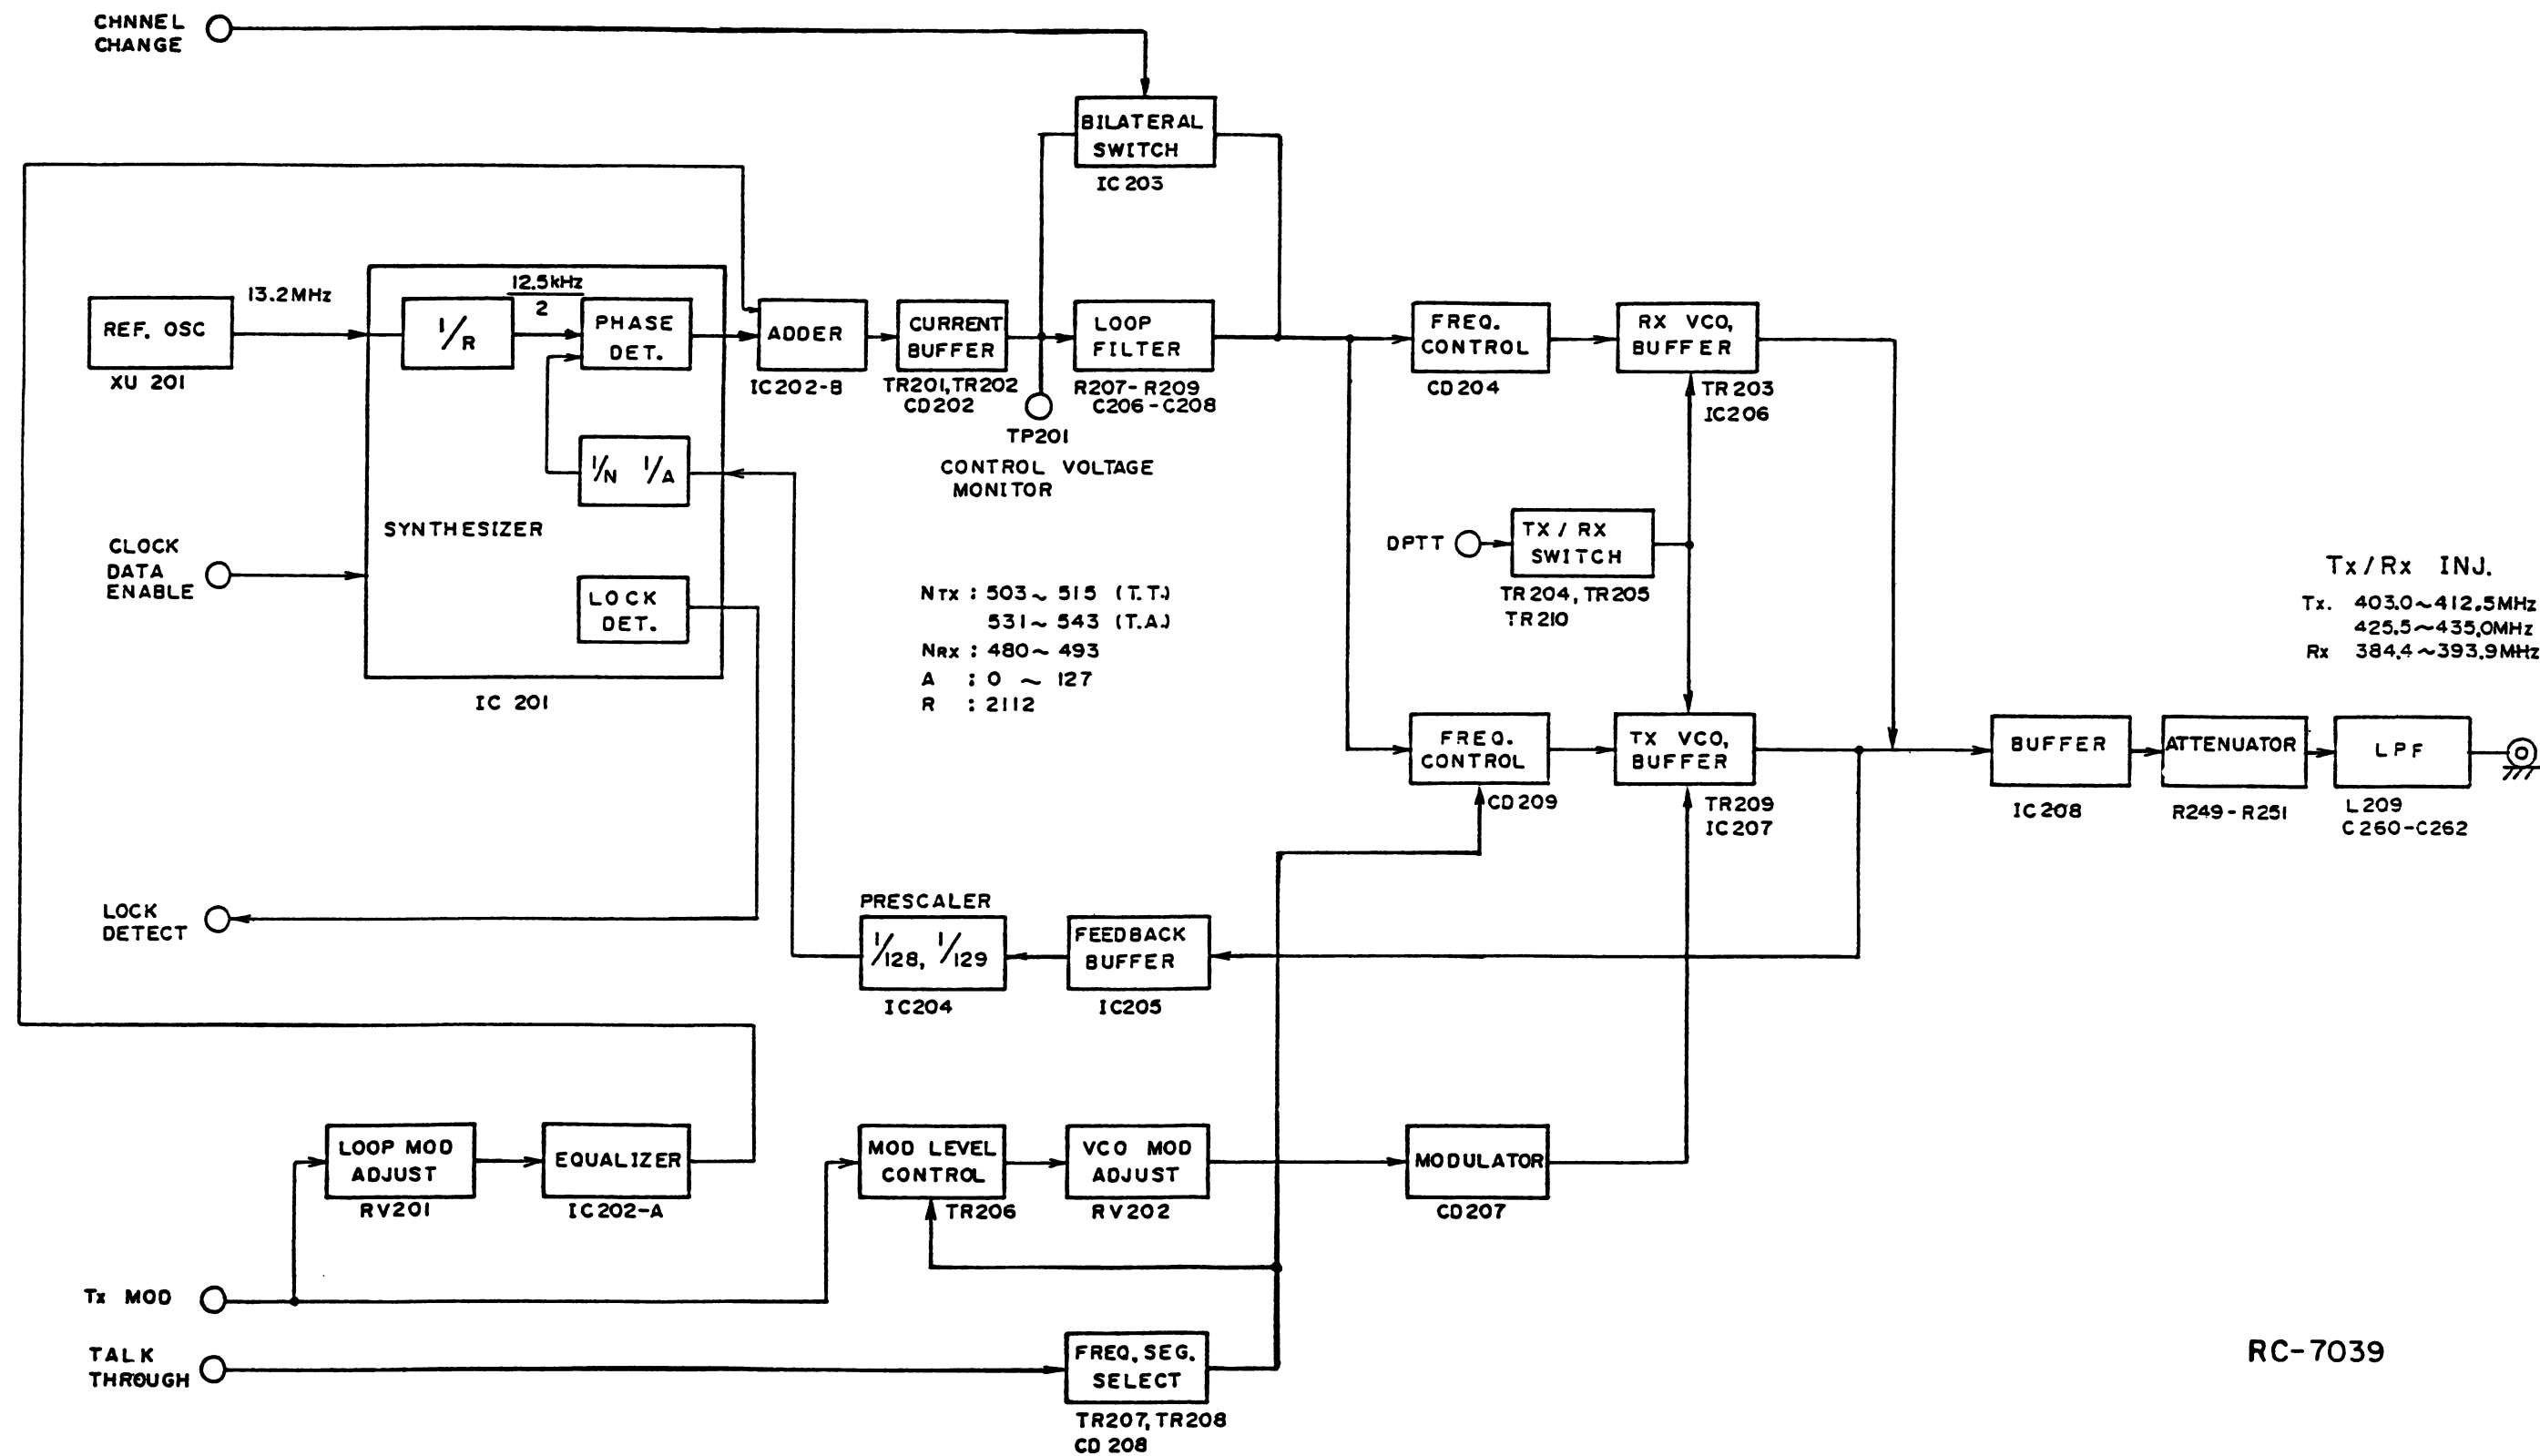


FIGURE 2 - SYNTHESIZER BLOCK DIAGRAM

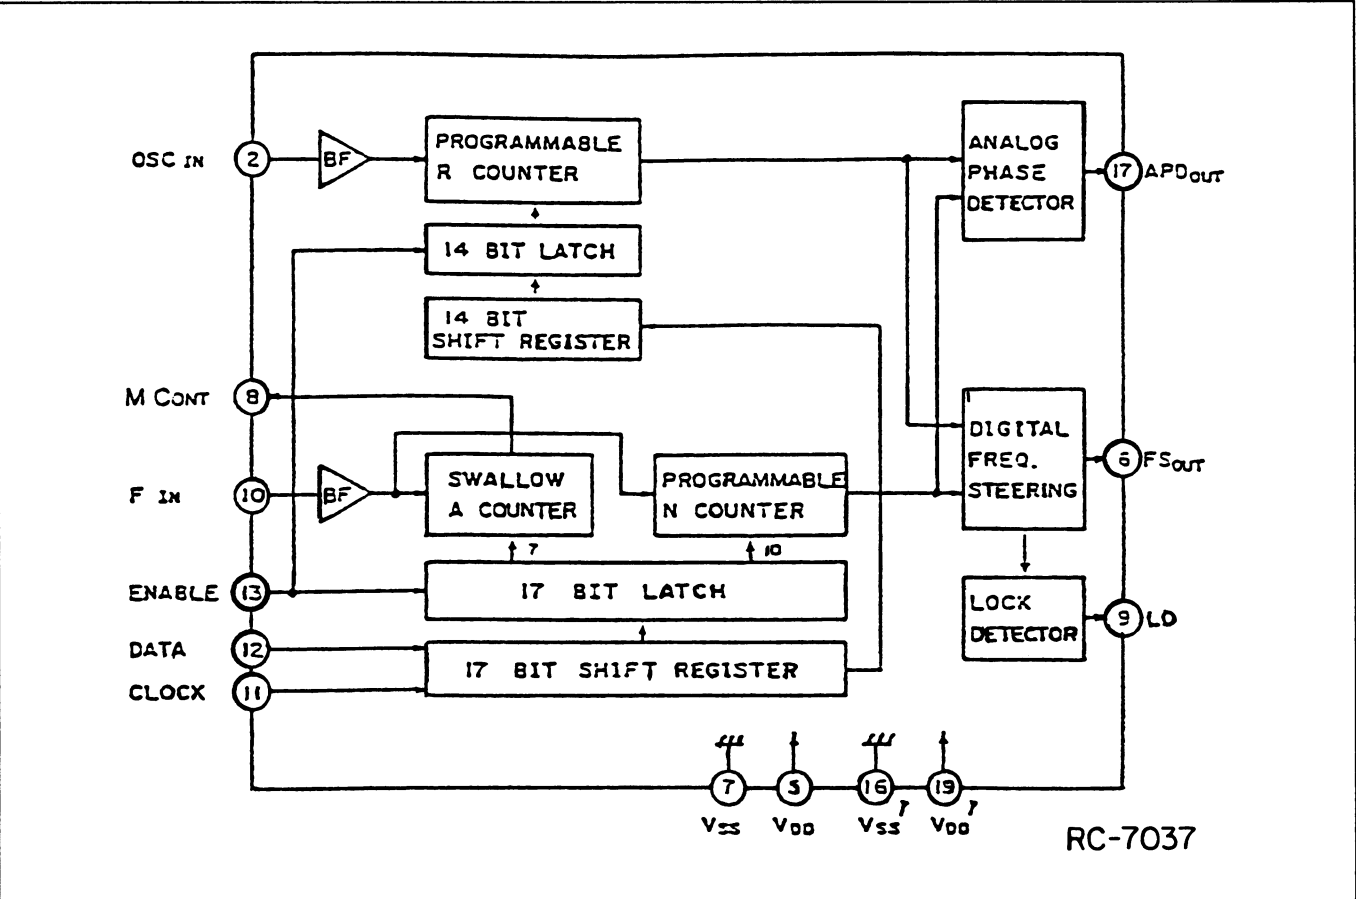


FIGURE 3 - SYNTHESIZER IC201

Under these conditions, the VCO is stabilized and locked on frequency. If the compared frequencies (phases) differ, an error voltage is generated and applied to the VCO through the frequency-acquisition circuit, causing the Phase-Lock Loop (PLL) to acquire the new frequency.

The LOCK DETECT (LD) line provides the PLL status information to the microcontroller. When the PLL is out of lock, the LOCK DETECT line is low. When locked on frequency, the line is high.

EQUALIZER

The equalizer (see schematic diagram) consisting of IC202-A, R218, R219, and C220, receives transmit audio from LOOP MOD adjust RV201 and provides the required audio level. The output of the equalizer (LOOP MOD) is summed with the output signal from the phase detector (BIAS) by adder IC202-B

DC OFFSET AND HIGH-CURRENT BUFFERS

Dc offset buffers TR201, TR202, and CD202 (see schematic diagram) receive the error voltage from the equalizer and increase this level by 1.8 Vdc to extend the operating range of the high-current buffers. When the PLL is off frequency due to a channel change or frequency drift, the error voltage from the synthesizer (APD OUT) rises or falls turning TR201 on or off. Transistor TR201 controls the dc offset buffer (TR202 and CD202). Resistors R206, R208, and R209 provide a high-current, rapid-charge path between the +9 volt supply and C206 and C208. Transistor TR202 and CD202 provide a rapid discharge path for the capacitors.

As the error voltage decreases, transistors TR201 and TR202 turn on completing a discharge path for C206 thru C208 through bilateral switches IC203. When the error voltage goes positive TR201, TR202, and CD202 are turned off, allowing C206 thru C208 to charge through R206. IC203 is turned on for 15 milliseconds when a channel is changed.

LOOP FILTER

The loop filter (see schematic diagram) consists of R207 thru R209 and C206 thru C208. This filter controls the bandwidth and stability of the synthesizer loop.

Bilateral switch IC203 is controlled by the 4-millisecond, 9-volt channel change (CH. CHANGE) pulse. When the channel change pulse is present, the bilateral switch shorts out the low-pass filter, increasing the loop bandwidth to achieve the 4-millisecond channel acquisition time required for dual-priority scan.

The low-pass filter removes noise and other extraneous signals internal to the synthesizer chip. The output of the filter is applied to the varicaps in the transmit and receive VCOs to adjust or correct the VCO frequency.

RECEIVE VCO

The receiver VCO (see schematic diagram) consists of a low-noise JFET oscillator (TR203) followed by high-gain buffer IC206. This buffer prevents external loading and improves power gain.

The VCO is a Colpitts oscillator with varactor C225 and L203 forming the tank circuit. Variable capacitor CV201 allows manual adjustment of the VCO across the frequency split. The VCO operates over a frequency range of 384.4 to 393.9 MHz.

The VCO switches on and off under control of the DPTT line. When the DPTT line is low, the receiver VCO is turned on (TR204 is off and TR206 is on). Buffer IC206 provides a typical output of +5 dBm.

TRANSMIT VCO

The transmit VCO (TR209) is basically the same as the receiver VCO. The wide band VCO allows frequency separation of 45 MHz as determined by the band-split of the radio (806-825 MHz or 851-870 MHz). The varactor in conjunction with the frequency segment selector circuitry (TR207, TR208, and PIN diode CD208) provides a voltage controlled adjustment range that extends across the entire frequency split.

The VCO operates over frequency ranges of 403-412.5 MHz and 425.5-435.0 MHz. Buffer IC207 provides a typical output of +5 dBm. Trans-

mit audio is applied to modulation adjustment control RV202 (VCO MOD ADJ). Deviation is set for 3.75 kHz.

The TX VCO control switch TR210 turns the Transmit VCO on when DPTT is high (TR210 is on). The use of two VCOs allows rapid independent selection of transmit and receive frequencies across the frequency split.

Frequency Segment Selector

The frequency segment selector switches capacitance in and out of the Tx VCO tank circuit to select the frequency segment containing the channel. The frequency segment selector consists of TR207, TR208, and CD208 and operates under control of the microcontroller through transistor TR706. Capacitor C243 is selected or deselected for operation in a given segment. Table 1 identifies the circuit conditions and capacitor used for selection of each segment.

TABLE 1
FREQUENCY SEGMENT SELECTION

| SEGMENT | FREQUENCY SPLIT (MHZ) | TRANSISTOR TR207 TR208 | PIN DIODE CD208 | GROUNDING CAPACITOR | GROUNDING RESISTOR |
|---------|----------------------------|------------------------|-----------------|---------------------|--------------------|
| 1 | TX: 806-825 RX: 851-870 | ON OFF | ON | C243 | NONE |
| 2 | TX: 851-870 RX: 851-870 | OFF ON | OFF | NONE | R232 |

Reverse bias to turn PIN diode CD208 off is provided by the +8 volt filtered supply through resistor R240. Forward bias for the diode and power for the switching transistors is provided by the +8 volt source through resistor R241.

When segment "1" is selected, transistor TR207 is turned on and transistor TR208 is turned off. PIN diode CD208 is forward biased causing it to turn on. This effectively places a short across capacitor C244 and ac grounds C243 in the Tx VCO.

When segment "2" is selected, transistor TR208 is turned on and TR207 is turned off. Diode CD208 is reverse biased causing it to turn off. L206 presents a high impedance to rf frequencies and the anode of CD208 is near dc ground and not at ac ground.

VCO CHARACTERISTICS

The synthesizer has two VCOs, the frequency of which is directly related to a control voltage generated by the synthesizer circuitry and must remain within specified limits for the synthesizer to function properly. The RX VCO typically will increase in frequency about 9.5 MHz when the control voltage moves from its lower limit to its upper limit. The TX VCO moves about 9.5 MHz on each split respectively for the same situation.

FEEDBACK BUFFERS

The RX injection and TX injection voltage output from the RX VCO and TX VCO are supplied to the buffer and to the feedback buffer. Buffer IC208 provides typical output of +2 dBm to TX/RX INJECTION P201. Feedback buffer is provided by IC204 and the output applied to dual-modulus prescaler IC202.

DUAL-MODULUS PRESCALER

The dual-modulus prescaler (IC204) completes the PLL feedback path from the synthesizer to loop filter, to the VCOs and feedback buffer, and then back to the synthesizer through the prescaler. The prescaler divides the VCO frequency by 128 or 129 under control of N counter in the synthesizer IC.

The output of the prescaler is applied to the synthesizer where it is divided down to 6.25 kHz by an internal N and A counter and compared in frequency and phase with the divided frequency from the reference oscillator. The result of this comparison is the error voltage used to maintain frequency lock. The divide by N and A counters are controlled by data received from the microcontroller. Depending on the operating frequency, the dc voltage at TP201 should be within the range of 3.5 and 7.5 Vdc when the PLL is locked.

MODULATION LEVEL CONTROL

The modulation level control circuit automatically sets the Tx Audio level applied to the transmit VCO modulator CD207, depending on the setting of VCO MOD ADJ control RV202. The modulation level control circuit consists of R231, R232, and TR206.



Modulation level is controlled by turning transistor switch TR206 on or off (under control of IC706), which adds (or removes) attenuator R232 to the circuit. Resistors R231 and R232 form an adjustable voltage divider used to change the modulation level as required.




GE Mobile Communications

General Electric Company
Lynchburg, Virginia 24502

Printed in U.S.A.

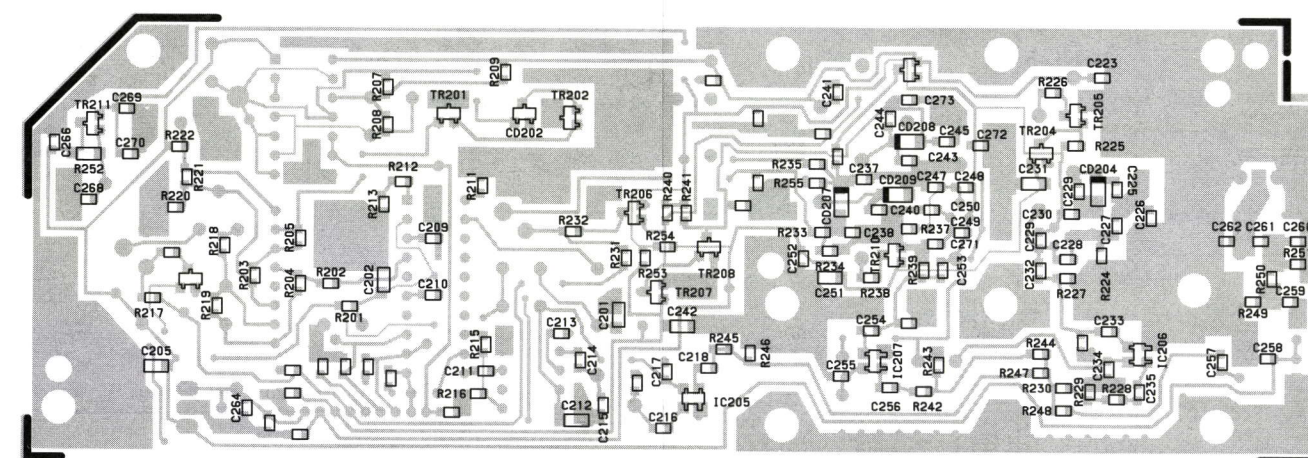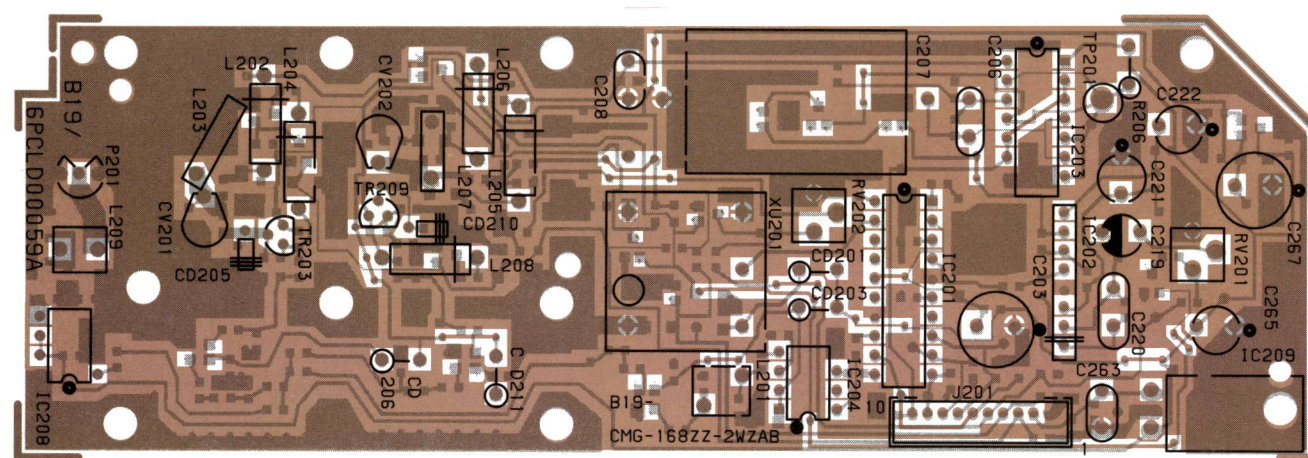


(6PCLD00059A)

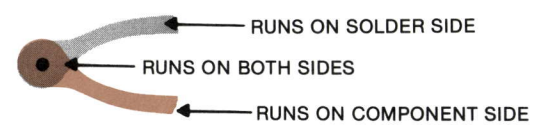

OUTLINE DIAGRAM

SYNTHESIZER BOARD

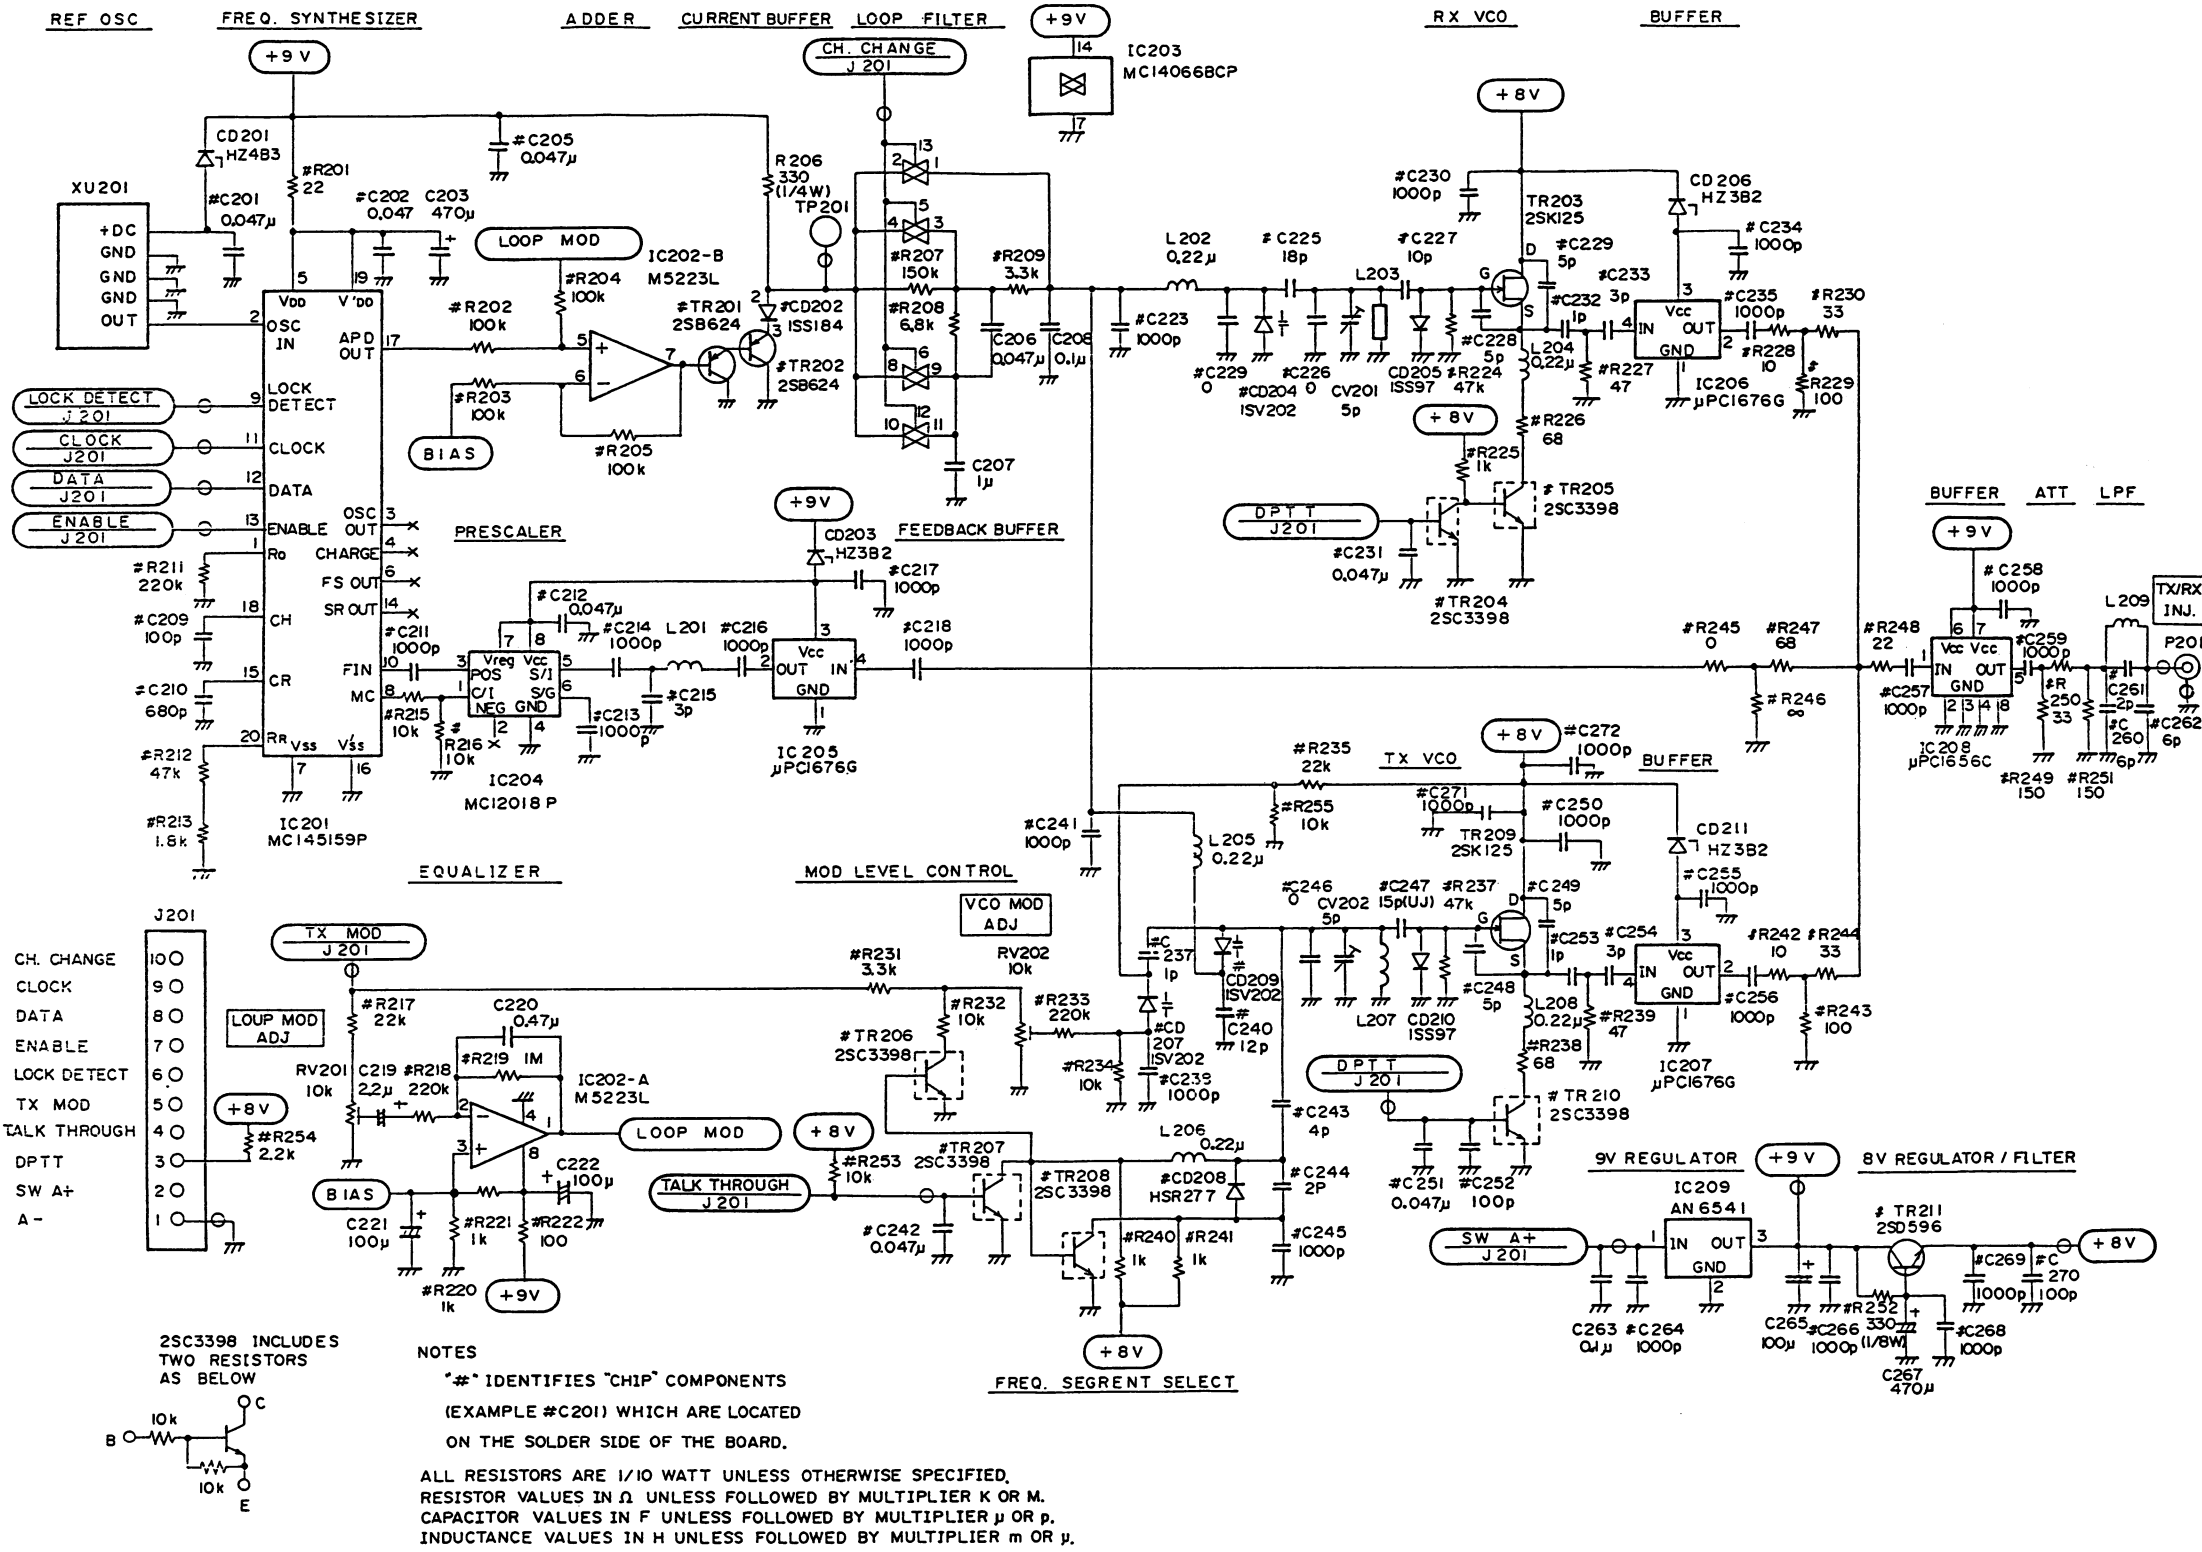

SCHEMATIC DIAGRAM

SYNTHESIZER

PARTS LIST

SYNTHESIZER BOARD
B19/CMG-168
ISSUE 1

| SYMBOL | GE PART NO. | DESCRIPTION |
|----------------|----------------|---|
| | | - - - - - CAPACITORS - - - - - |
| C201 and C202 | B19/5CAAD01131 | Ceramic: 0.047 uF ±10%, 25 VDCW. |
| C203 | B19/5CEAA01829 | Electrolytic: 470 uF ±20%, 16 VDCW. |
| C205 | B19/5CAAD01131 | Ceramic: 0.047 uF ±10%, 25 VDCW. |
| C206 | B19/5CRAA00628 | Metallized plastic: 0.047 uF ±5%, 50 VDCW. |
| C207 | B19/5CRAH00066 | Metallized plastic: 1 uF ±10%, 200 VDCW. |
| C208 | B19/5CRAA00617 | Metallized plastic: 0.1 uF ±5%, 50 VDCW. |
| C209 | B19/5CAAD00839 | Ceramic: 100 pF ±5%, 50 VDCW, temp coef 0 ±30 PPM. |
| C210 | B19/5CAAD01063 | Ceramic: 680 pF ±5%, 50 VDCW, temp coef +350 -1000 PPM. |
| C211 | B19/5CAAD01154 | Ceramic: 1000 pF ±10, 50 VDCW, temp coef +350 -1000 PPM. |
| C212 | B19/5CAAD01131 | Ceramic: 0.047 uF ±10%, 25 VDCW. |
| C213 and C214 | B19/5CAAD01154 | Ceramic: 1000 pF ±10%, 50 VDCW, temp coef +350 -1000 PPM. |
| C215 | B19/5CAAD00853 | Ceramic: 3 pF ±0.25 pF, 50 VDCW, temp coef 0 ±30 PPM. |
| C216 thru C218 | B19/5CAAD01154 | Ceramic: 1000 pF ±10%, 50 VDCW, temp coef +350 -1000 PPM. |
| C219 | B19/5CSAC01129 | Tantalum: 2.2 uF ±10%, 25 VDCW. |
| C220 | B19/5CRAA00838 | Metallized plastic: 0.47 uF ±5%, 50 VDCW. |
| C221 and C222 | B19/5CEAA01827 | Electrolytic: 100 uF ±20%, 16 VDCW. |
| C223 | B19/5CAAD01154 | Ceramic: 1000 pF ±10%, 50 VDCW, temp coef +350 -1000 PPM. |
| C225 | B19/5CAAD00963 | Ceramic: 18 pF ±5%, 50 VDCW, temp coef 0 ±30 PPM. |
| C227 | B19/5CAAD00953 | Ceramic: 10 pF ±0.5 pF, 50 VDCW, temp coef 0 ±30 PPM. |
| C228 and C229 | B19/5CAAD00956 | Ceramic: 5 pF ±0.25 pF, 50 VDCW, temp coef 0 ±30 PPM. |
| C230 | B19/5CAAD01154 | Ceramic: 1000 pF ±10%, 50 VDCW, temp coef +350 -1000 PPM. |
| C231 | B19/5CAAD01131 | Ceramic: 0.047 uF ±10%, 25 VDCW. |
| C232 | B19/5CAAD00852 | Ceramic: 1 pF ±0.25 pF, 50 VDCW, temp coef 0 ±30 PPM. |
| C233 | B19/5CAAD00853 | Ceramic: 3 pF ±0.25 pF, 50 VDCW, temp coef 0 ±30 PPM. |
| C234 and C235 | B19/5CAAD01154 | Ceramic: 1000 pF ±10%, 50 VDCW, temp coef +350 -1000 PPM. |
| C237 | B19/5CAAD00852 | Ceramic: 1 pF ±0.25 pF, 50 VDCW, temp coef 0 ±30 PPM. |
| C238 | B19/5CAAD01154 | Ceramic: 1000 pF ±10%, 50 VDCW, temp coef +350 -1000 PPM. |
| C240 | B19/5CAAD00968 | Ceramic: 12 pF ±5%, 50 VDCW, temp coef 0 ±30 PPM. |
| C241 | B19/5CAAD01154 | Ceramic: 1000 pF ±10%, 50 VDCW, temp coef +350 -1000 PPM. |
| C242 | B19/5CAAD01131 | Ceramic: 0.047 uF ±10%, 25 VDCW. |
| C243 | B19/5CAAD00961 | Ceramic: 4 pF ±0.25 pF, 50 VDCW, temp coef 0 ±30 PPM. |
| C244 | B19/5CAAD00949 | Ceramic: 2 pF ±0.25 pF, 50 VDCW, temp coef 0 ±30 PPM. |
| C245 | B19/5CAAD01154 | Ceramic: 1000 pF ±10%, 50 VDCW, temp coef +350 -1000 PPM. |



| SYMBOL | GE PART NO. | DESCRIPTION |
|------------------|----------------|---|
| C247 | B19/5CAAD01423 | Ceramic: 15 pF ±5%, 50 VDCW, temp coef -750 ±120 PPM. |
| C248 and C249 | B19/5CAAD00956 | Ceramic: 5 pF ±0.25 pF, 50 VDCW, temp coef 0 ±30 PPM. |
| C250 | B19/5CAAD01154 | Ceramic: 1000 pF ±10%, 50 VDCW, temp coef +350 -1000 PPM. |
| C251 | B19/5CAAD01131 | Ceramic: 0.047 uF ±10%, 25 VDCW. |
| C252 | B19/5CAAD00839 | Ceramic: 100 pF ±5%, 50 VDCW, temp coef 0 ±30 PPM. |
| C253 | B19/5CAAD00852 | Ceramic: 1 pF ±0.25 pF, 50 VDCW, temp coef 0 ±30 PPM. |
| C254 | B19/5CAAD00853 | Ceramic: 3 pF ±0.25 pF, 50 VDCW, temp coef 0 ±30 PPM. |
| C255 thru C259 | B19/5CAAD01154 | Ceramic: 1000 pF ±10%, 50 VDCW, temp coef +350 -1000 PPM. |
| C260 | B19/5CAAD00962 | Ceramic: 6 pF ±0.5 pF, 50 VDCW, temp coef 0 ±30 PPM. |
| C261 | B19/5CAAD00949 | Ceramic: 2 pF ±0.25 pF, 50 VDCW, temp coef 0 ±30 PPM. |
| C262 | B19/5CAAD00962 | Ceramic: 6 pF ±0.5 pF, 50 VDCW, temp coef 0 ±30 PPM. |
| C263 | B19/5CRAA00617 | Metallized plastic: 0.1 uF ±5%, 50 VDCW. |
| C264 | B19/5CAAD01154 | Ceramic: 1000 pF ±10%, 50 VDCW, temp coef +350 -1000 PPM. |
| C265 | B19/5CEAA01827 | Electrolytic: 100 uF ±20, 16 VDCW. |
| C266 | B19/5CAAD01154 | Ceramic: 1000 pF ±10%, 50 VDCW, temp coef +350 -1000 PPM. |
| C267 | B19/5CEAA01829 | Electrolytic: 470 uF ±20%, 16 VDCW. |
| C268 and C269 | B19/5CAAD01154 | Ceramic: 1000 pF ±10%, 50 VDCW, temp coef +350 -1000 PPM. |
| C270 | B19/5CAAD00839 | Ceramic: 100 pF ±5%, 50 VDCW, temp coef 0 ±30 PPM. |
| C271 and C272 | B19/5CAAD01154 | Ceramic: 1000 pF ±10%, 50 VDCW, temp coef +350 -1000 PPM. |
| | | - - - - - DIODES - - - - - |
| CD201 | B19/5TXAE00587 | Zener: 4V, sim to HITACHI HZ4B3. |
| CD202 | B19/5TXAD00290 | Silicon, fast recovery (2 diodes in Cathode common), sim to TOSHIBA 1S5184. |
| CD203 | B19/5TXAE00566 | Zener: 3V, sim to HITACHI HZ3B2. |
| CD204 | B19/5TXAE00690 | Silicon, Variable Capacitance Diode; sim to HITACHI ISV202. |
| CD205 | B19/5TXAA00326 | Silicon, Schottky Barrier; sim to NEC ISS97. |
| CD206 | B19/5TXAE00566 | Zener: 3V, sim to HITACHI HZ3B2. |
| CD207 | B19/5TXAE00690 | Silicon, Variable Capacitance Diode; sim to HITACHI ISV202. |
| CD208 | B19/5TXAE00686 | Silicon, Epitaxial planar; sim to HITACHI HSR277. |
| CD209 | B19/5TXAE00690 | Silicon, Variable Capacitance Diode; sim to HITACHI ISV202. |
| CD210 | B19/5TXAA00326 | Silicon, Schottky Barrier; sim to NEC ISS97. |
| CD211 | B19/5TXAE00566 | Zener: 3V, sim to HITACHI HZ3B2. |
| CV201 | B19/5CVBB00003 | Variable: 5P max. |
| CV202 | B19/5CVAB00093 | Variable: 5P max. |
| | | - - - - - INTEGRATED CIRCUITS - - - - - |
| IC201 | B19/5DAAJ00328 | Synthesizer, cmos serial input; sim to MOTOROLA MC145159P. |
| IC202 | B19/5DDAB00164 | Linear Dual OP Amp; sim to MITSUBISHI M5223L. |
| IC203 | B19/5DAAJ00359 | Digital Bilateral Switch; sim to MOTOROLA MC14066BCP. |
| IC204 | B19/5DAAJ00574 | Prescaler, sim to MOTOROLA MC12018P. |
| IC205 thru IC207 | B19/5DAAA00284 | RF Wide band amplifier; sim to NEC uPC1676G. |
| IC208 | B19/5DAAA00183 | RF Wide band amplifier; sim to uPC1656C. |

| SYMBOL | GE PART NO. | DESCRIPTION |
|----------------|----------------|---|
| IC209 | B19/5DAAR00021 | Linear, Positive voltage regulator; sim to MATSUSHITA AN6541. |
| | | - - - - - CONNECTORS - - - - - |
| J201 | B19/5JWAV00121 | Connector: 10 pins. |
| | | - - - - - COILS - - - - - |
| L201 | B19/6LAPD01241 | Coil, RF. |
| L202 | B19/5LCAC00882 | Coil, RF: 0.22 uH. |
| L203 | B19/5LZNN00001 | Coil, Dielectric resonator. |
| L204 thru L206 | B19/5LCAC00882 | Coil, RF: 0.22 uH. |
| L207 | B19/6LALD00080 | Coil, RF. |
| L208 | B19/5LCAC00882 | Coil, RF: 0.22 uH. |
| L209 | B19/6LALD00038 | Coil, RF. |
| | | - - - - - PLUGS - - - - - |
| P201 | B19/6JJLD00020 | Connector, RF. |
| | | - - - - - RESISTORS - - - - - |
| R201 | B19/5RDAC02465 | Metal film: 22 ohms ±5%, 100 VDCW, 1/10W. |
| R202 thru R205 | B19/5RDAC02449 | Metal film: 100K ohms ±5%, 100 VDCW, 1/10W. |
| R206 | B19/5RDAA01480 | Carbon film: 330 ohms ±5%, 300 VDCW, 1/4W. |
| R207 | B19/5RDAC02455 | Metal film: 150K ohms ±5%, 100 VDCW, 1/10W. |
| R208 | B19/5RDAC02458 | Metal film: 6.8K ohms ±5%, 100 VDCW, 1/10W. |
| R209 | B19/5RDAC02462 | Metal film: 3.3K ohms ±5%, 100 VDCW, 1/10W. |
| R211 | B19/5RDAC02453 | Metal film: 220K ohms ±5%, 100 VDCW, 1/10W. |
| R212 | B19/5RDAC02439 | Metal film: 47K ohms ±5%, 100 VDCW, 1/10W. |
| R213 | B19/5RDAC02475 | Metal film: 1.8K ohms ±5%, 100 VDCW, 1/10W. |
| R215 and R216 | B19/5RDAC02445 | Metal film: 10K ohms ±5%, 100 VDCW, 1/10W. |
| R217 | B19/5RDAC02454 | Metal film: 22K ohms ±5%, 100 VDCW, 1/10W. |
| R218 | B19/5RDAC02453 | Metal film: 220K ohms ±5%, 100 VDCW, 1/10W. |
| R219 | B19/5RDAC02461 | Metal film: 1M ohms ±5%, 100 VDCW, 1/10W. |
| R220 and R221 | B19/5RDAC02446 | Metal film: 1K ohms ±5%, 100 VDCW, 1/10W. |
| R222 | B19/5RDAC02447 | Metal film: 100 ohms ±5%, 100 VDCW, 1/10W. |
| R224 | B19/5RDAC02439 | Metal film: 47K ohms ±5%, 100 VDCW, 1/10W. |
| R225 | B19/5RDAC02446 | Metal film: 1K ohms ±5%, 100 VDCW, 1/10W. |
| R226 | B19/5RDAC02467 | Metal film: 68 ohms ±5%, 100 VDCW, 1/10W. |
| R227 | B19/5RDAC02460 | Metal film: 47 ohms ±5%, 100 VDCW, 1/10W. |
| R228 | B19/5RDAC02450 | Metal film: 10 ohms ±5%, 100 VDCW, 1/10W. |
| R229 | B19/5RDAC02447 | Metal film: 100 ohms ±5%, 100 VDCW, 1/10W. |
| R230 | B19/5RDAC02466 | Metal film: 33 ohms ±5%, 100 VDCW, 1/10W. |
| R231 | B19/5RDAC02462 | Metal film: 3.3K ohms ±5%, 100 VDCW, 1/10W. |
| R232 | B19/5RDAC02445 | Metal film: 10K ohms ±5%, 100 VDCW, 1/10W. |
| R233 | B19/5RDAC02453 | Metal film: 220K ohms ±5%, 100 VDCW, 1/10W. |
| R234 | B19/5RDAC02445 | Metal film: 10K ohms ±5%, 100 VDCW, 1/10W. |
| R235 | B19/5RDAC02454 | Metal film: 22K ohms ±5%, 100 VDCW, 1/10W. |
| R237 | B19/5RDAC02439 | Metal film: 47K ohms ±5%, 100 VDCW, 1/10W. |
| R238 | B19/5RDAC02467 | Metal film: 68 ohms ±5%, 100 VDCW, 1/10W. |
| R239 | B19/5RDAC02460 | Metal film: 47 ohms ±5%, 100 VDCW, 1/10W. |
| R240 and R241 | B19/5RDAC02446 | Metal film: 1K ohms ±5%, 100 VDCW, 1/10W. |
| R242 | B19/5RDAC02450 | Metal film: 10 ohms ±5%, 100 VDCW, 1/10W. |
| R243 | B19/5RDAC02447 | Metal film: 100 ohms ±5%, 100 VDCW, 1/10W. |

| SYMBOL | GE PART NO. | DESCRIPTION |
|------------------|----------------|--|
| R244 | B19/5RDAC02466 | Metal film: 33 ohms ±5%, 100 VDCW, 1/10W. |
| R247 | B19/5RDAC02467 | Metal film: 68 ohms ±5%, 100 VDCW, 1/10W. |
| R248 | B19/5RDAC02465 | Metal film: 22 ohms ±5%, 100 VDCW, 1/10W. |
| R249 | B19/5RDAC02468 | Metal film: 150 ohms ±5%, 100 VDCW, 1/10W. |
| R250 | B19/5RDAC02466 | Metal film: 33 ohms ±5%, 100 VDCW, 1/10W. |
| R251 | B19/5RDAC02468 | Metal film: 150 ohms ±5%, 100 VDCW, 1/10W. |
| R252 | B19/5RDAC02140 | Metal film: 330 ohms ±5%, 100 VDCW, 1/8W. |
| R253 | B19/5RDAA02445 | Metal film: 10K ohms ±5%, 100 VDCW, 1/10W. |
| R254 | B19/5RDAA02451 | Metal film: 2.2K ohms ±5%, 100 VDCW, 1/10W. |
| R255 | B19/5RDAA02445 | Metal film: 10K ohms ±5%, 100 VDCW, 1/10W. |
| RV201 and RV202 | B19/5RVAB00399 | Variable: 10K ohms, 0.1W. |
| | | - - - - - TRANSISTORS - - - - - |
| TR201 and TR202 | B19/5TBAB00055 | Silicon, PNP: sim to NEC2SB624 (BV3). |
| TR203 | B19/5TKAH00006 | N-channel field effect (Junction Single Gate); sim to SONY 2SK125. |
| TR204 thru TR208 | B19/5TCAZ00011 | Silicon, NPN: sim to SANYO 2SC3398 |
| TR209 | B19/5TKAH00006 | N-channel field effect (Junction Single Gate); sim to SONY 2SK125. |
| TR210 | B19/5TCAZ00011 | Silicon, NPN: sim to SANYO 2SC3398. |
| TR211 | B19/5TDAB00054 | Silicon, NPN: sim to NEC 2SD596 (DV3). |
| | | - - - - - OSCILLATOR - - - - - |
| XU201 | B19/5XHAA00990 | Reference Oscillator Unit. |

*COMPONENTS ADDED, DELETED OR CHANGED BY PRODUCTION CHANGES

MC145159P

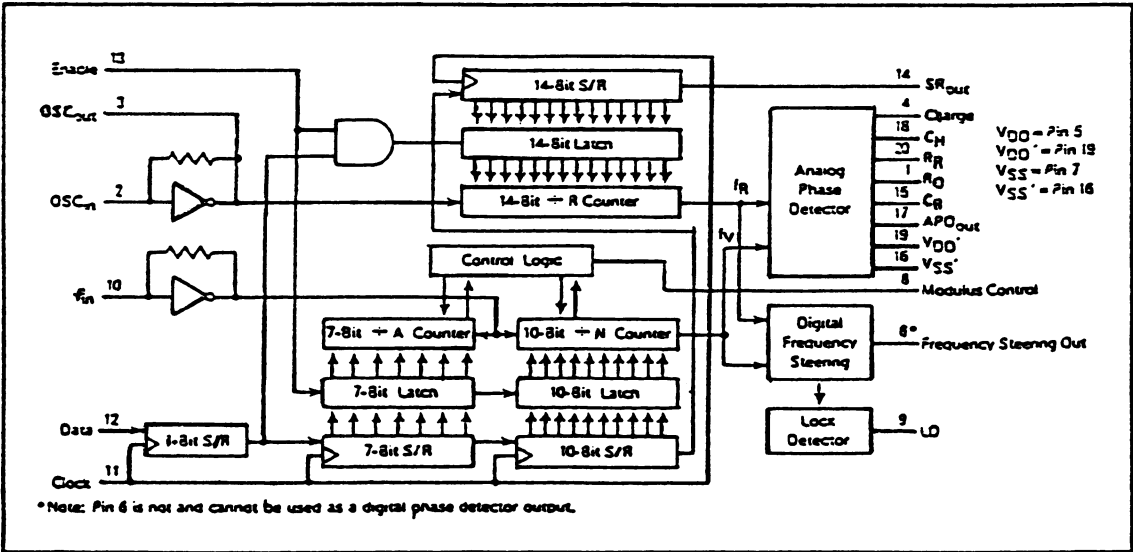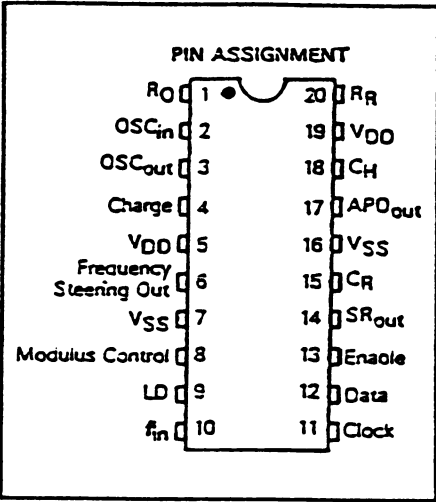


RC-7040

IC DATA

PHASE LOCK LOOP (PLL)
(IC201)

MC12018

PIN ASSIGNMENT

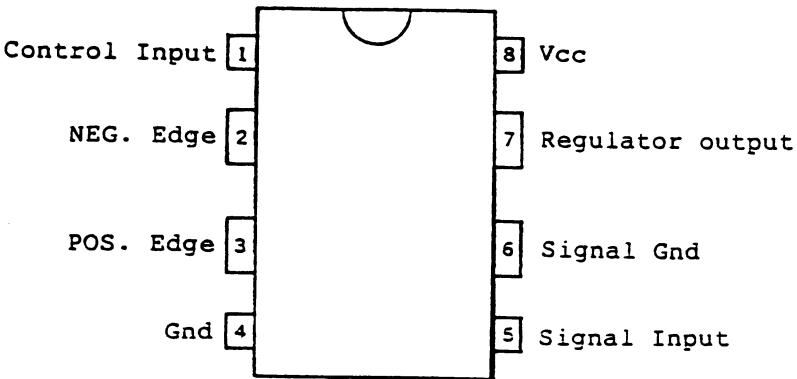


RC-7042

WIDE BAND AMPLIFIER

(IC205 THROUGH IC207)

NEC uPC1676G



- 1. GND
- 2. OUTPUT
- 3. VCC
- 4. INPUT


RC-7041

DUAL-MODULUS PRESCALER

(IC204)

NEC uPC1656C

PIN ASSIGNMENT

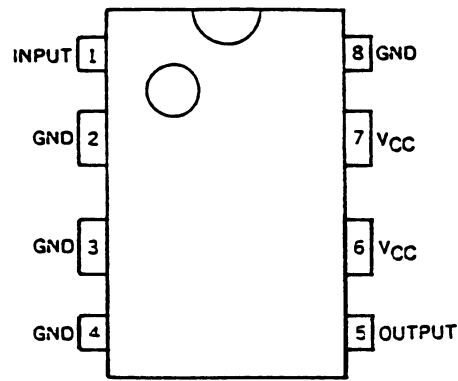


RC-7043

DUAL OPERATIONAL AMPLIFIER
(IC202)

MITSUBISHI M5223L

PIN ASSIGNMENT



RC-7044

WIDE-BAND AMPLIFIER

(IC208)