

MAINTENANCE MANUAL406-512 MHz RF ASSEMBLIES 19D417075G9-G38, 19B233690G1-G20
AND IF FILTER BOARDS 19C320523G2-G3, 19C331148G1-G2**TABLE OF CONTENTS**

	<u>Page</u>
DESCRIPTION	1
CIRCUIT ANALYSIS	1
MODIFICATIONS	2
OUTLINE DIAGRAMS	3 & 6
SCHEMATIC DIAGRAMS	
RF Assembly	4, 7 & 9
IF Filter Board	5, 8 & 10
PARTS LIST AND PRODUCTION CHANGES	11 - 14

DESCRIPTION

The RF Assembly uses five tuned helical resonators to provide front end RF selectivity with no gain. A UHS pre-amplifier assembly is available that can be used with the receiver to improve sensitivity.

Mixer board A303 uses the RF signal from the RF Assembly and the mixer injection frequency from the oscillator multiplier board to generate the IF frequency.

connects to J502 on the IF-Filter Board for regulated +10 Volt supply voltage.

ANTENNA INPUT A301A/A301B/A301C

An RF signal from the antenna or UHS pre-amplifier is applied to A301 which provides an AC ground between vehicle ground and receiver A-. Resistor R1 prevents a static charge from building up on the vehicle antenna. The output of A301 is coupled through five high Q helical resonators that provide the front end RF selectivity. The helicals are tuned to the incoming frequency by C301 through C305.

CIRCUIT ANALYSIS**MIXER A304****RF ASSEMBLY**

The mixer uses a FET (Q1) as the active device. The FET mixer provides a high input impedance, high power gain and an output relatively free of harmonics (low in intermodulation products).

PRE-AMPLIFIER

The pre-amplifier is present only in UHS receivers, and uses a bi-polar transistor to provide approximately 10 dB gain.

RF from the antenna is link-coupled through helical resonator L2301 to the base of Class A pre-amplifier Q2301. L2301 matches the 50 ohm input to the base of Q2301. The amplified output is coupled through L2302, and connected through W2301 to J1 on Antenna Input Board A301. P2301

In the mixer stage, RF from the helical resonators is coupled through L1 and C2 which matches the RF output to the gate of mixer Q501. Injection voltage from the multiplier-selectivity stages is applied to the source of the mixer. The 11.2 MHz mixer IF output signal is coupled from the drain of Q1 through Cable W1 to J501 on the IF Filter board.

IF-FILTER

MODIFICATIONS

CRYSTAL FILTER

The output of A303-Q1 is coupled through a tuned circuit (L507 & C515) which matches the output to the input of the four-pole monolithic crystal filter. The highly-selective crystal filter (FL501 & FL502) provides the first portion of the receiver IF selectivity. The output of the filter is coupled through impedance-matching network L503 and C511 to the IF amplifier.

Service Note: Variable capacitor C504 does not require adjustment when performing normal alignment. If the four-pole monolithic crystal filter is replaced, then adjustment of C504 is necessary for optimum IF response.

IF AMPLIFIER

IF Amplifier Q501 is a dual-gate FET. The filter output is applied to Gate 1 of the amplifier, and the output is taken from the drain. The biasing on Gate 2 and the drain load determines the gain of the stage. The amplifier provides approximately 20 dB of IF gain. The output of Q501 is coupled through a network (L504 & C509) that matches the amplifier output to the crystal filter on the IFAS board. The output of the IF-Filter board is applied to the IFAS board through feed-through capacitor C325.

Supply voltage for the RF amplifier and IF-Filter board is supplied from the IFAS board through feed-through capacitor C326.

Some of the RF amplifier assemblies are not compatible with some of the IF-Filter boards without a modification to the RF assembly mixer board. Refer to the compatibility chart shown below.

RF ASSEMBLY	COMPATIBLE WITH IF-FILTER BOARD
19D417075G9-G18	19C320523G2
19B233690G1-G10	19C331148G1


The following modifications are provided to permit field replacement using incompatible boards or assemblies. Refer to the applicable Outline Diagram for component location and printed wiring board layout.

- To modify RF assemblies 19D417075G9-G18 for operation with IF-Filter board 19C331148G1: add frequency select network Z1 from the drain of mixer FET Q1 to ground. Refer to the Parts List in this manual for the correct part number.
- To modify RF assemblies 19B233690G1-G10 for operation with IF-Filter board 19C320523G2: clip out and remove frequency select network Z1 on the mixer board.


GENERAL ELECTRIC COMPANY • MOBILE COMMUNICATIONS DIVISION
WORLD HEADQUARTERS • LYNCHBURG, VIRGINIA 24502 U.S.A.

GENERAL  ELECTRIC
U.S.A.

RF ASSEMBLY
BOTTOM VIEW

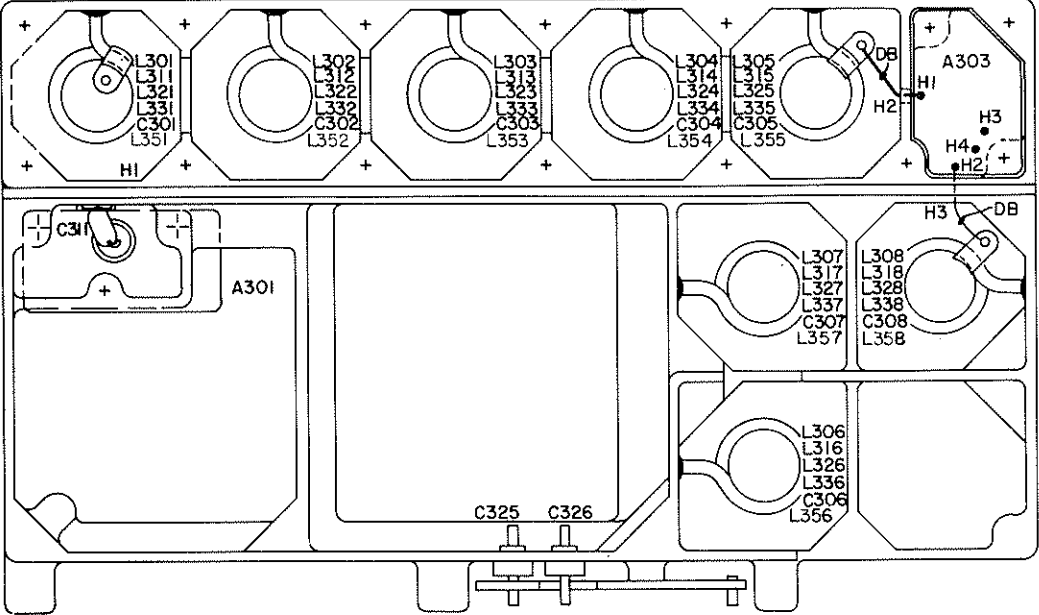


MIXER
A304

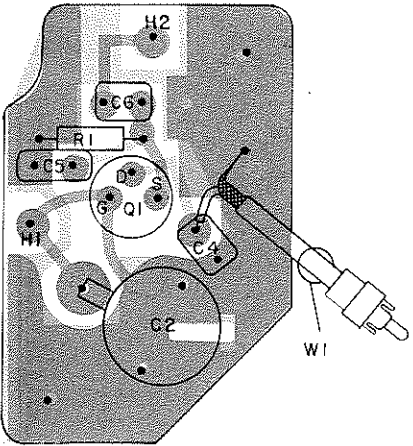

(19D429194, Sh. 2, Rev. 1)
(19D429194, Sh. 3, Rev. 1)


IF-FILTER BOARD
COMPONENT SIDE

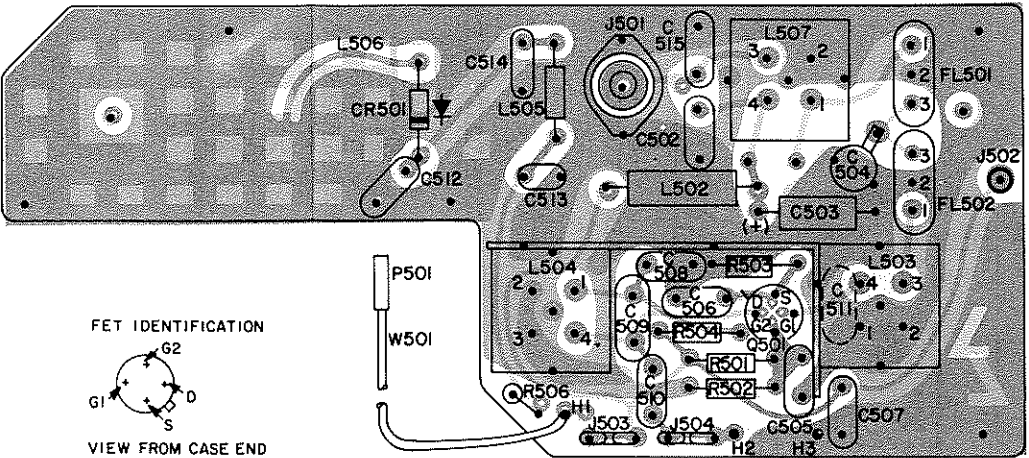


FET IDENTIFICATION
VIEW FROM CASE END

(19C320522, Sh. 2, Rev. 7)
(19C320522, Sh. 3, Rev. 7)


UHS PRE-AMPLIFIER

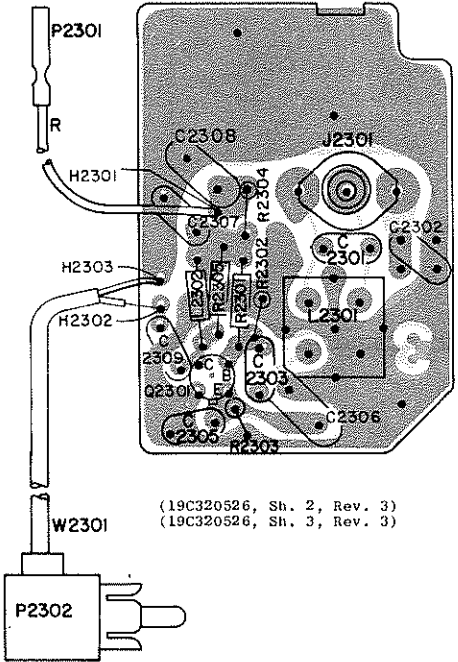

(19C320526, Sh. 2, Rev. 3)
(19C320526, Sh. 3, Rev. 3)




NOTE: LEAD ARRANGEMENT, AND NOT CASE SHAPE, IS DETERMINING FACTOR FOR LEAD IDENTIFICATION. TAB INDICATES EMITTER LEAD.




NOTE: LEAD ARRANGEMENT, AND NOT CASE SHAPE, IS DETERMINING FACTOR FOR LEAD IDENTIFICATION. TAB INDICATES EMITTER LEAD.


SOLDER SIDE

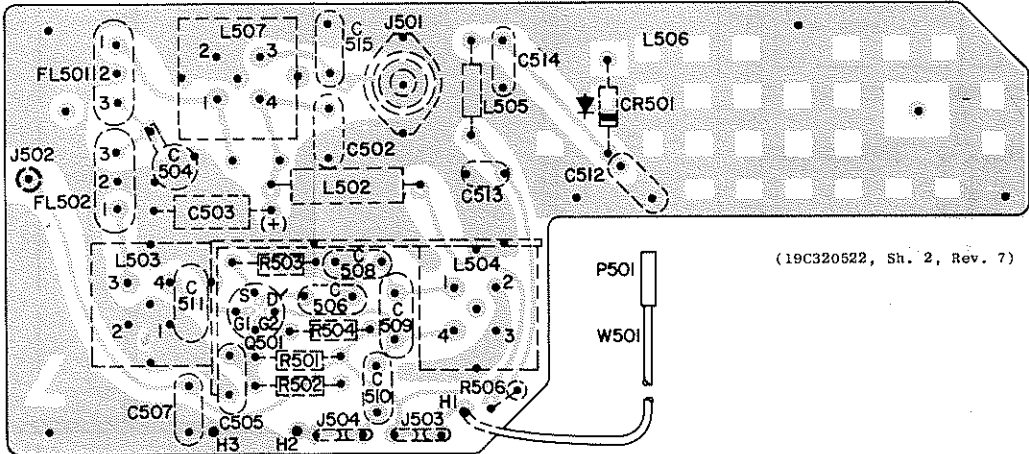

(19C320522, Sh. 2, Rev. 7)




A301A
ANT INPUT
(FLOATING GROUND)




(19B219941, Sh. 2, Rev. 0)
(19B219941, Sh. 3, Rev. 0)

A301B
ANT INPUT
(NON- FLOATING GROUND)




(19D423794, Rev. 7)

A301C
ANT INPUT
(FLOATING GROUND)



OUTLINE DIAGRAM

406—512 MHz, RF ASSEMBLY BOARD
19D417075G9-G18, IF FILTER BOARD
19C320523G2 AND MIXER 19B227059G2

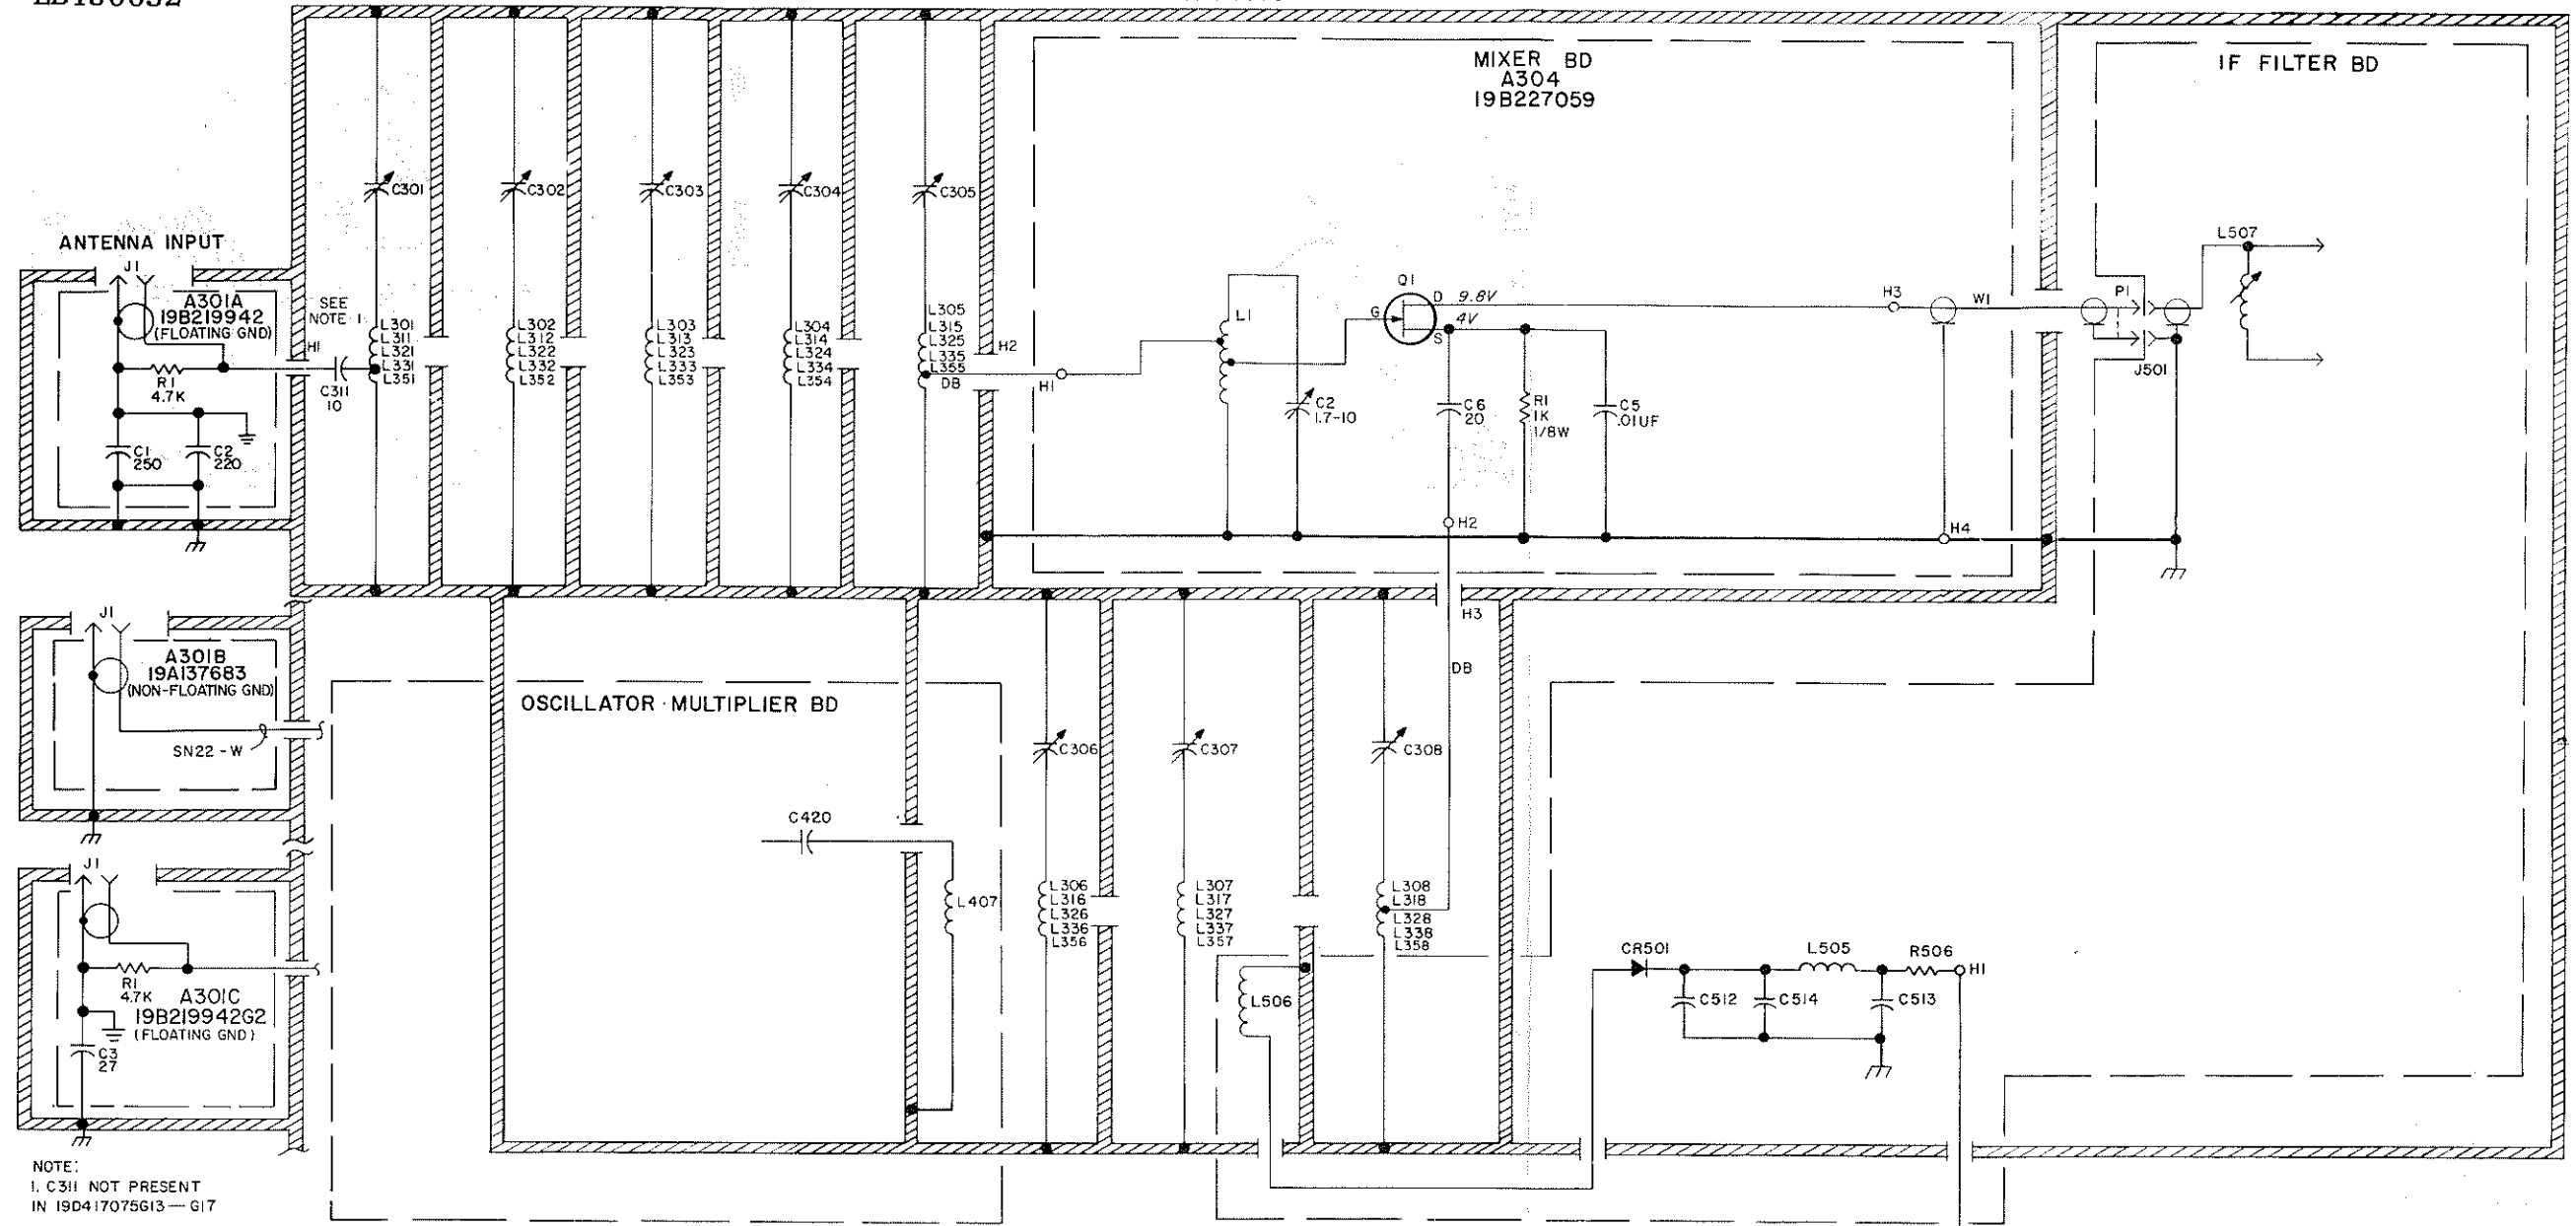

VOLTAGE READINGS

VOLTAGE READINGS ARE TYPICAL READINGS
MEASURED TO SYSTEM NEGATIVE (P903-10) WITH
TEST SET MODEL 4EX3A11 OR A 20,000 OHM-
PER-VOLT METER.

⚡ INDICATES A-
⚡ INDICATES VEHICLE GROUND

SCHEMATIC DIAGRAM


406—512 MHz, RF ASSEMBLY
19D417075G9-G18 AND UHS
PRE-AMPLIFIER 19C320527G1-G5


IN ORDER TO RETAIN RATED EQUIPMENT
PERFORMANCE, REPLACEMENT OF ANY
SERVICE PART SHOULD BE MADE ONLY WITH
A COMPONENT HAVING THE SPECIFICATIONS
SHOWN ON THE PARTS LIST FOR THAT PART

ALL RESISTORS ARE 1/4 WATT UNLESS
OTHERWISE SPECIFIED AND RESISTOR
VALUES IN OHMS UNLESS FOLLOWED BY
K=1000 OHMS OR MEG=1,000,000 OHMS.
CAPACITOR VALUES IN PICOFARADS (EQUAL
TO MICROMICROFARADS) UNLESS FOLLOWED
BY UF= MICROFARADS. INDUCTANCE VALUES
IN MICROHENRYS UNLESS FOLLOWED BY
MH= MILLIHENRYS OR H=HENRYS

COMPONENT VALUE TABLE					
COMP DESIG	LL	LM	LL	M	H
RF FREQ (MHZ)	406-420		450-470	470-494	494-512
L301-L308	X				
L311-L318			X		
L321-L328				X	
L331-L338					X
L351-L358		X			


UHS PRE-AMPLIFIER

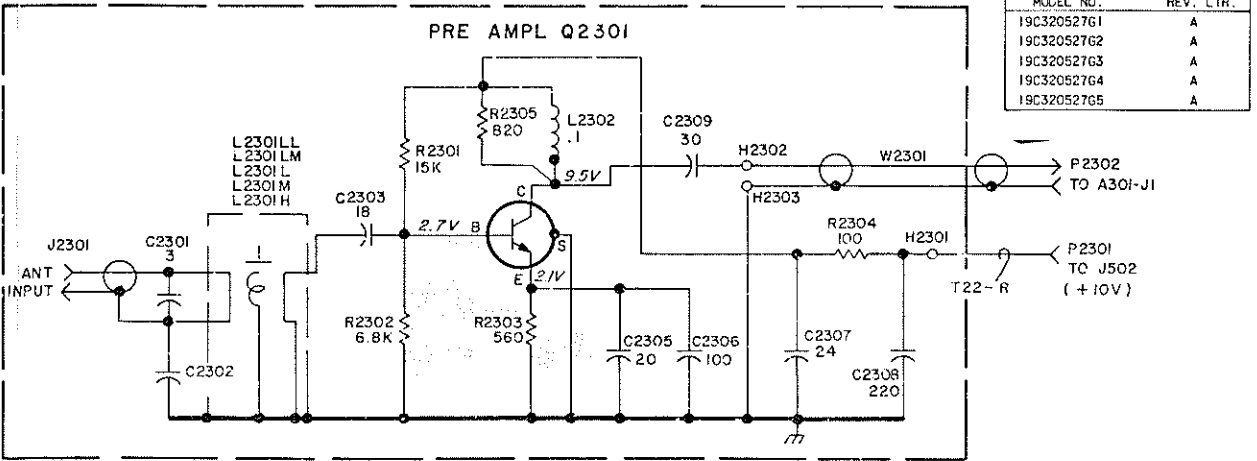

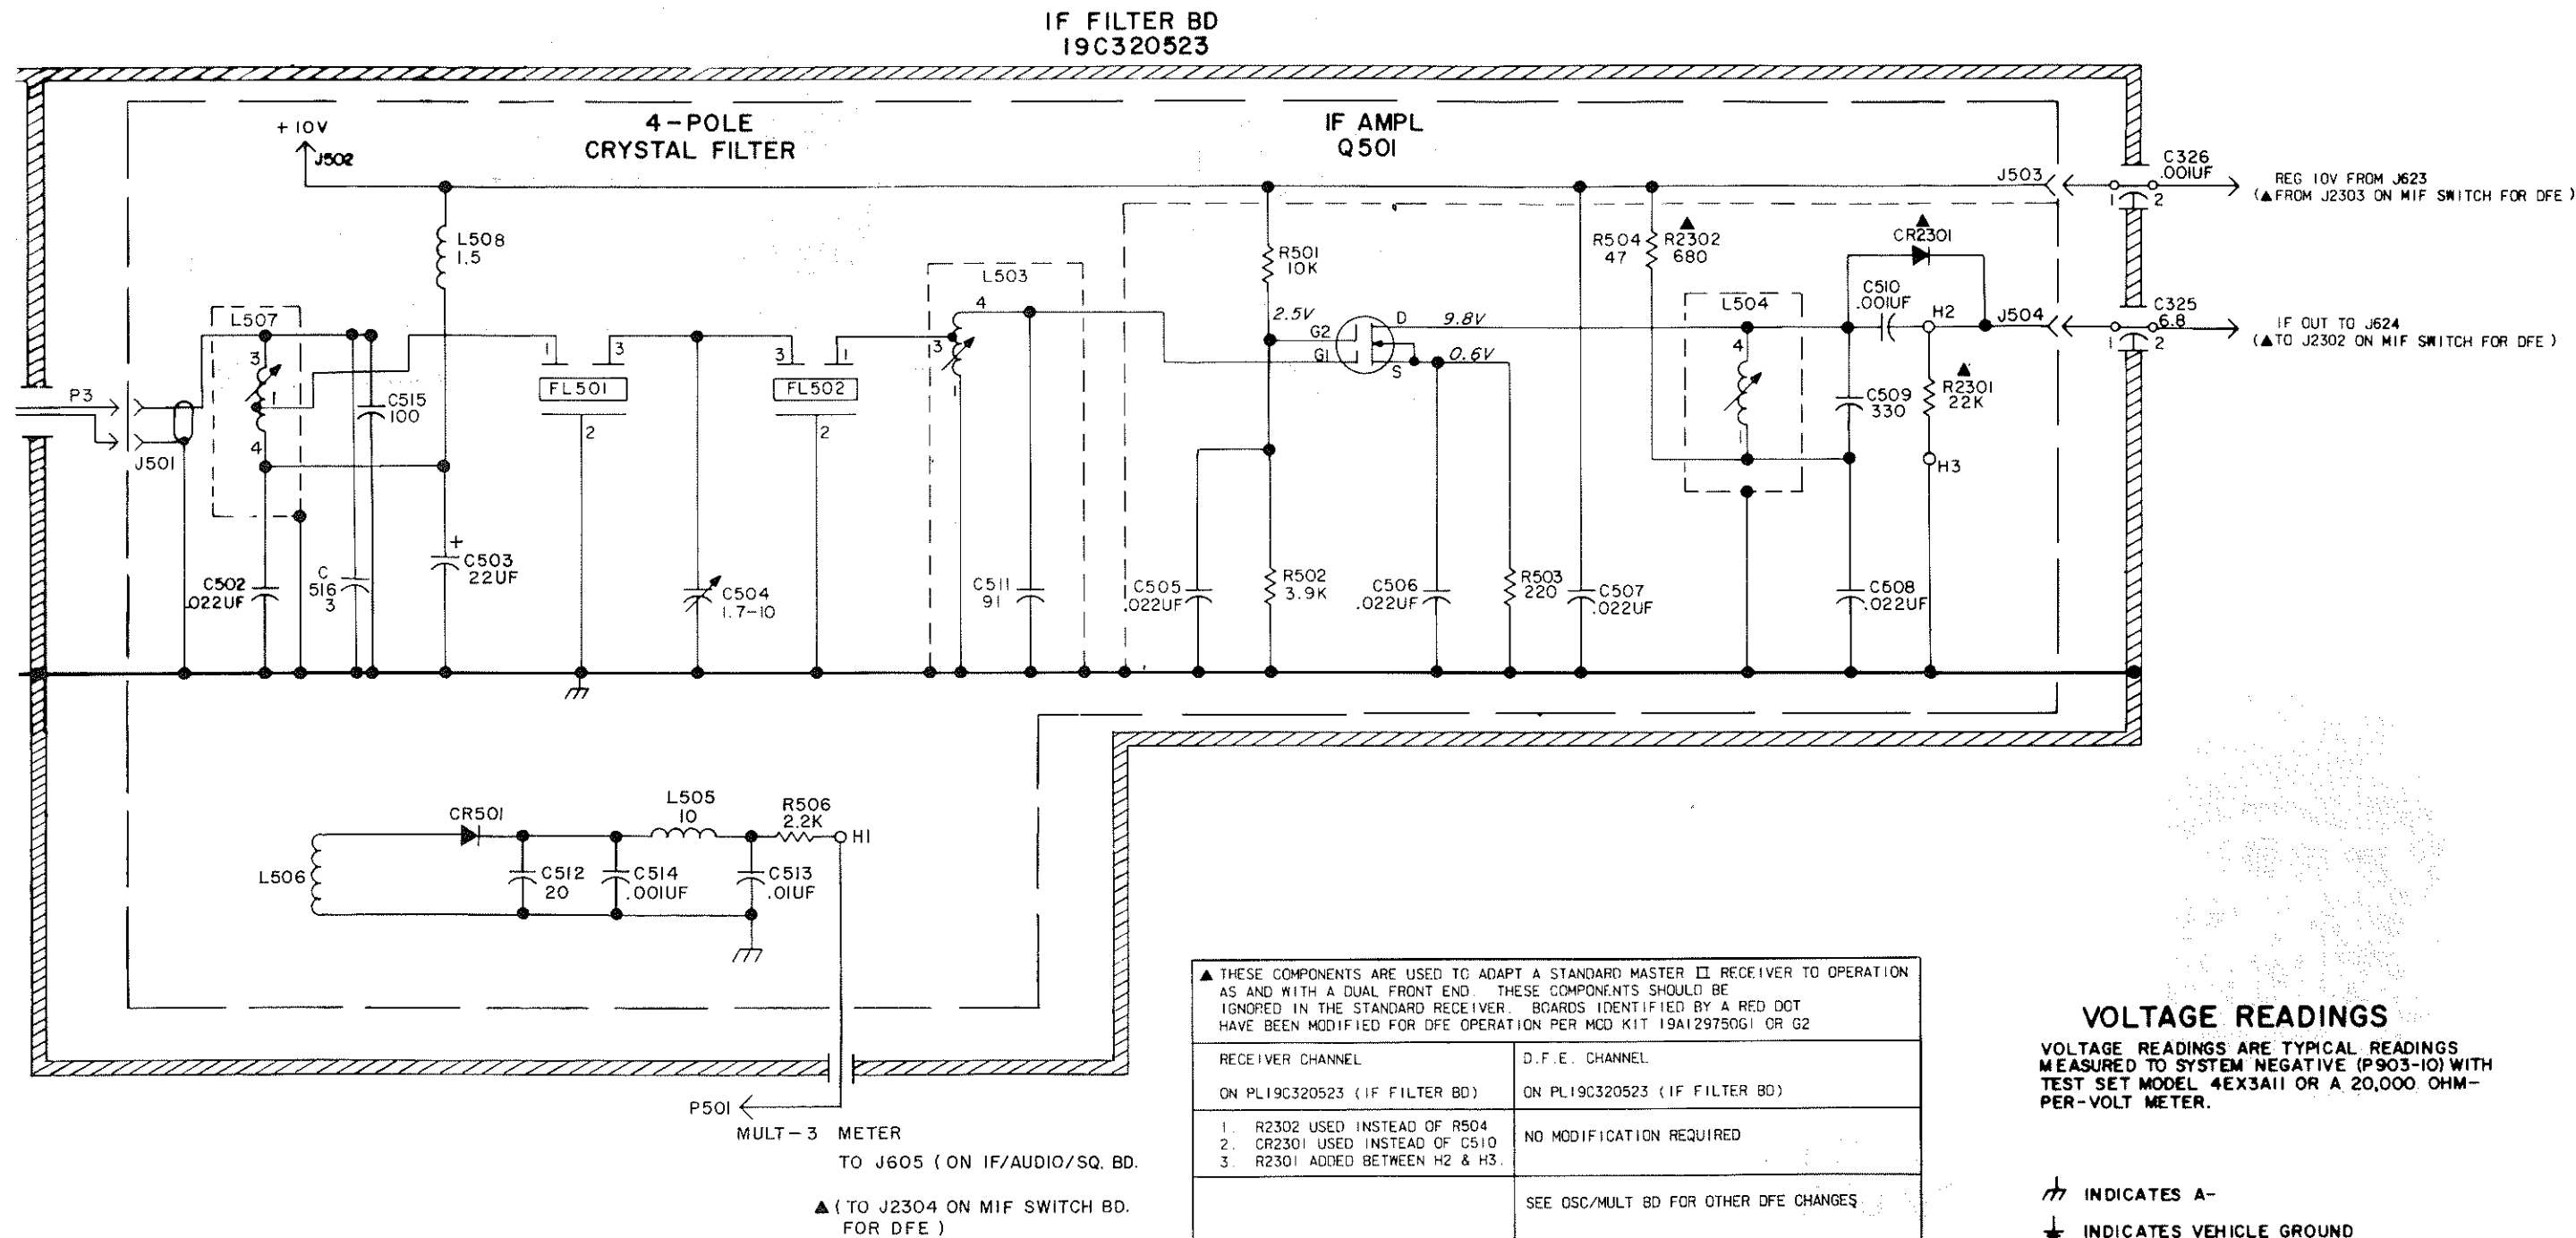

SCHMATIC DIAGRAM

IF FILTER BOARD 19C320523G2

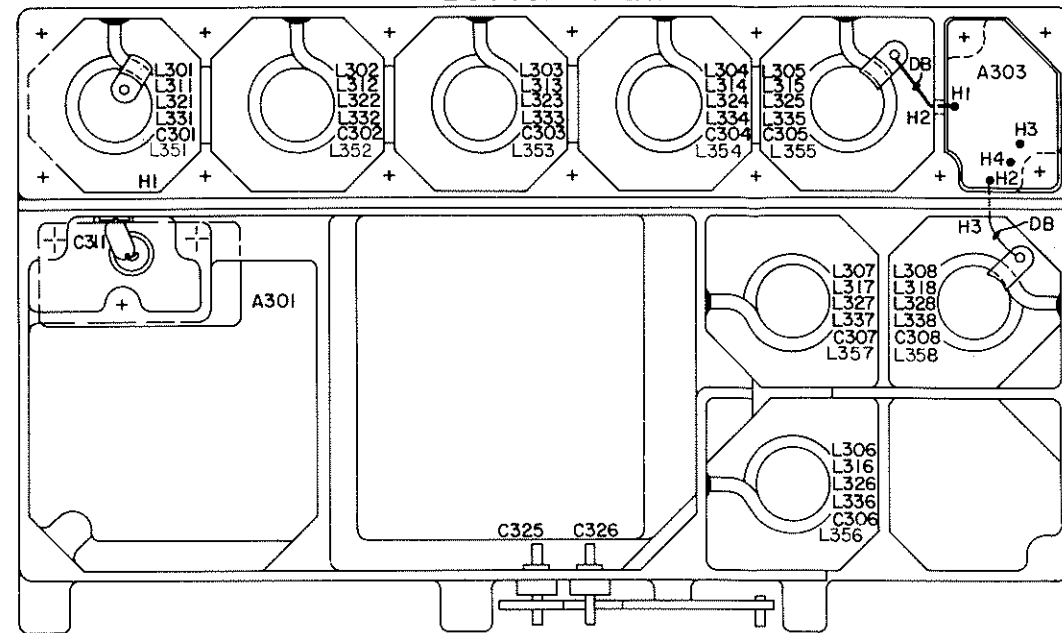

(19C331201, Rev. 0)
(19A143759, Sh. 1, Rev. 0)
(19A143759, Sh. 2, Rev. 1)

A schematic diagram of the front panel of the 1000 Series Synthesizer. It shows a circular control knob labeled 'J1' and a rectangular component labeled 'C2' with two pins. A label 'C1' points to a component on the right side of the panel. A label 'R1' points to a component near the bottom left of the knob.

A diagram showing a circular structure with two concentric circles. The inner circle is labeled 'R1' and the outer circle is labeled 'J1'. There are three dots: one at the top, one at the bottom left, and one at the bottom right.

A diagram of a cell. It features a large, oval nucleus on the left containing a smaller, circular nucleolus. The nucleus is labeled 'C3'. To the right of the nucleus is a large, circular cytoplasmic organelle, possibly a mitochondrion, with a double membrane and internal folds. It is labeled 'J1'. Several small, circular vesicles or granules are scattered in the cytoplasm. The entire cell is enclosed in a rectangular border.

Diagram illustrating three types of solder joints:

- RUNS ON SOLDER SIDE**: The solder is applied to the solder side of the PCB.
- RUNS ON BOTH SIDES**: The solder is applied to both the solder side and the component side of the PCB.
- RUNS ON COMPONENT SIDE**: The solder is applied to the component side of the PCB.



Issue 2

VOLTAGE READINGS

VOLTAGE READINGS ARE TYPICAL READINGS MEASURED TO SYSTEM NEGATIVE (P903-10) WITH TEST SET MODEL 4EX3A11 OR A 20,000 OHM-PER-VOLT METER.

⌚ INDICATES A-
⊥ INDICATES VEHICLE GROUND

R F ASSEMBLY
19D417075

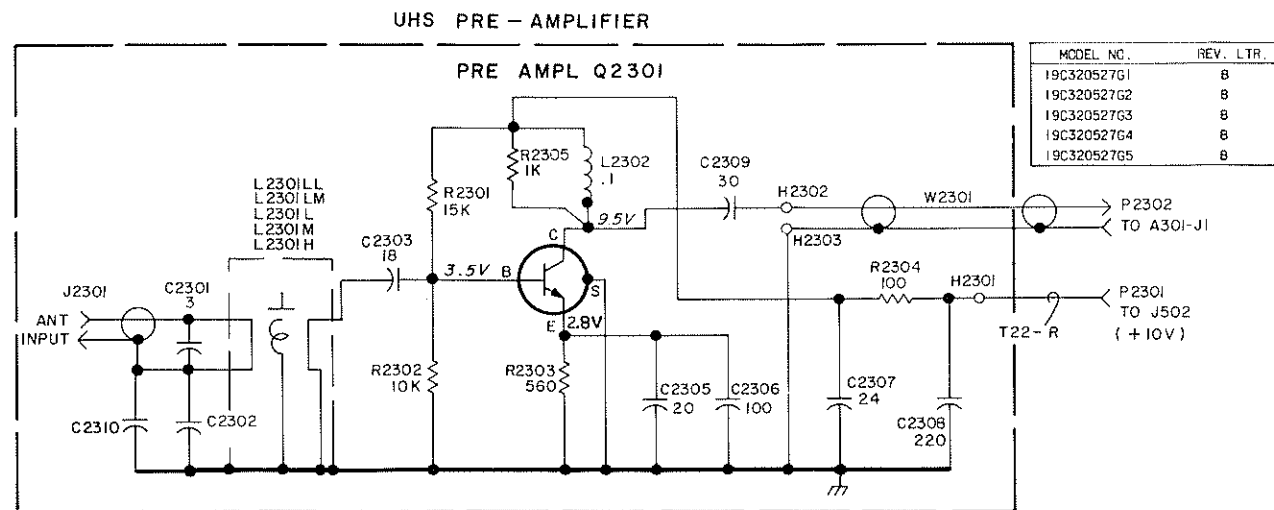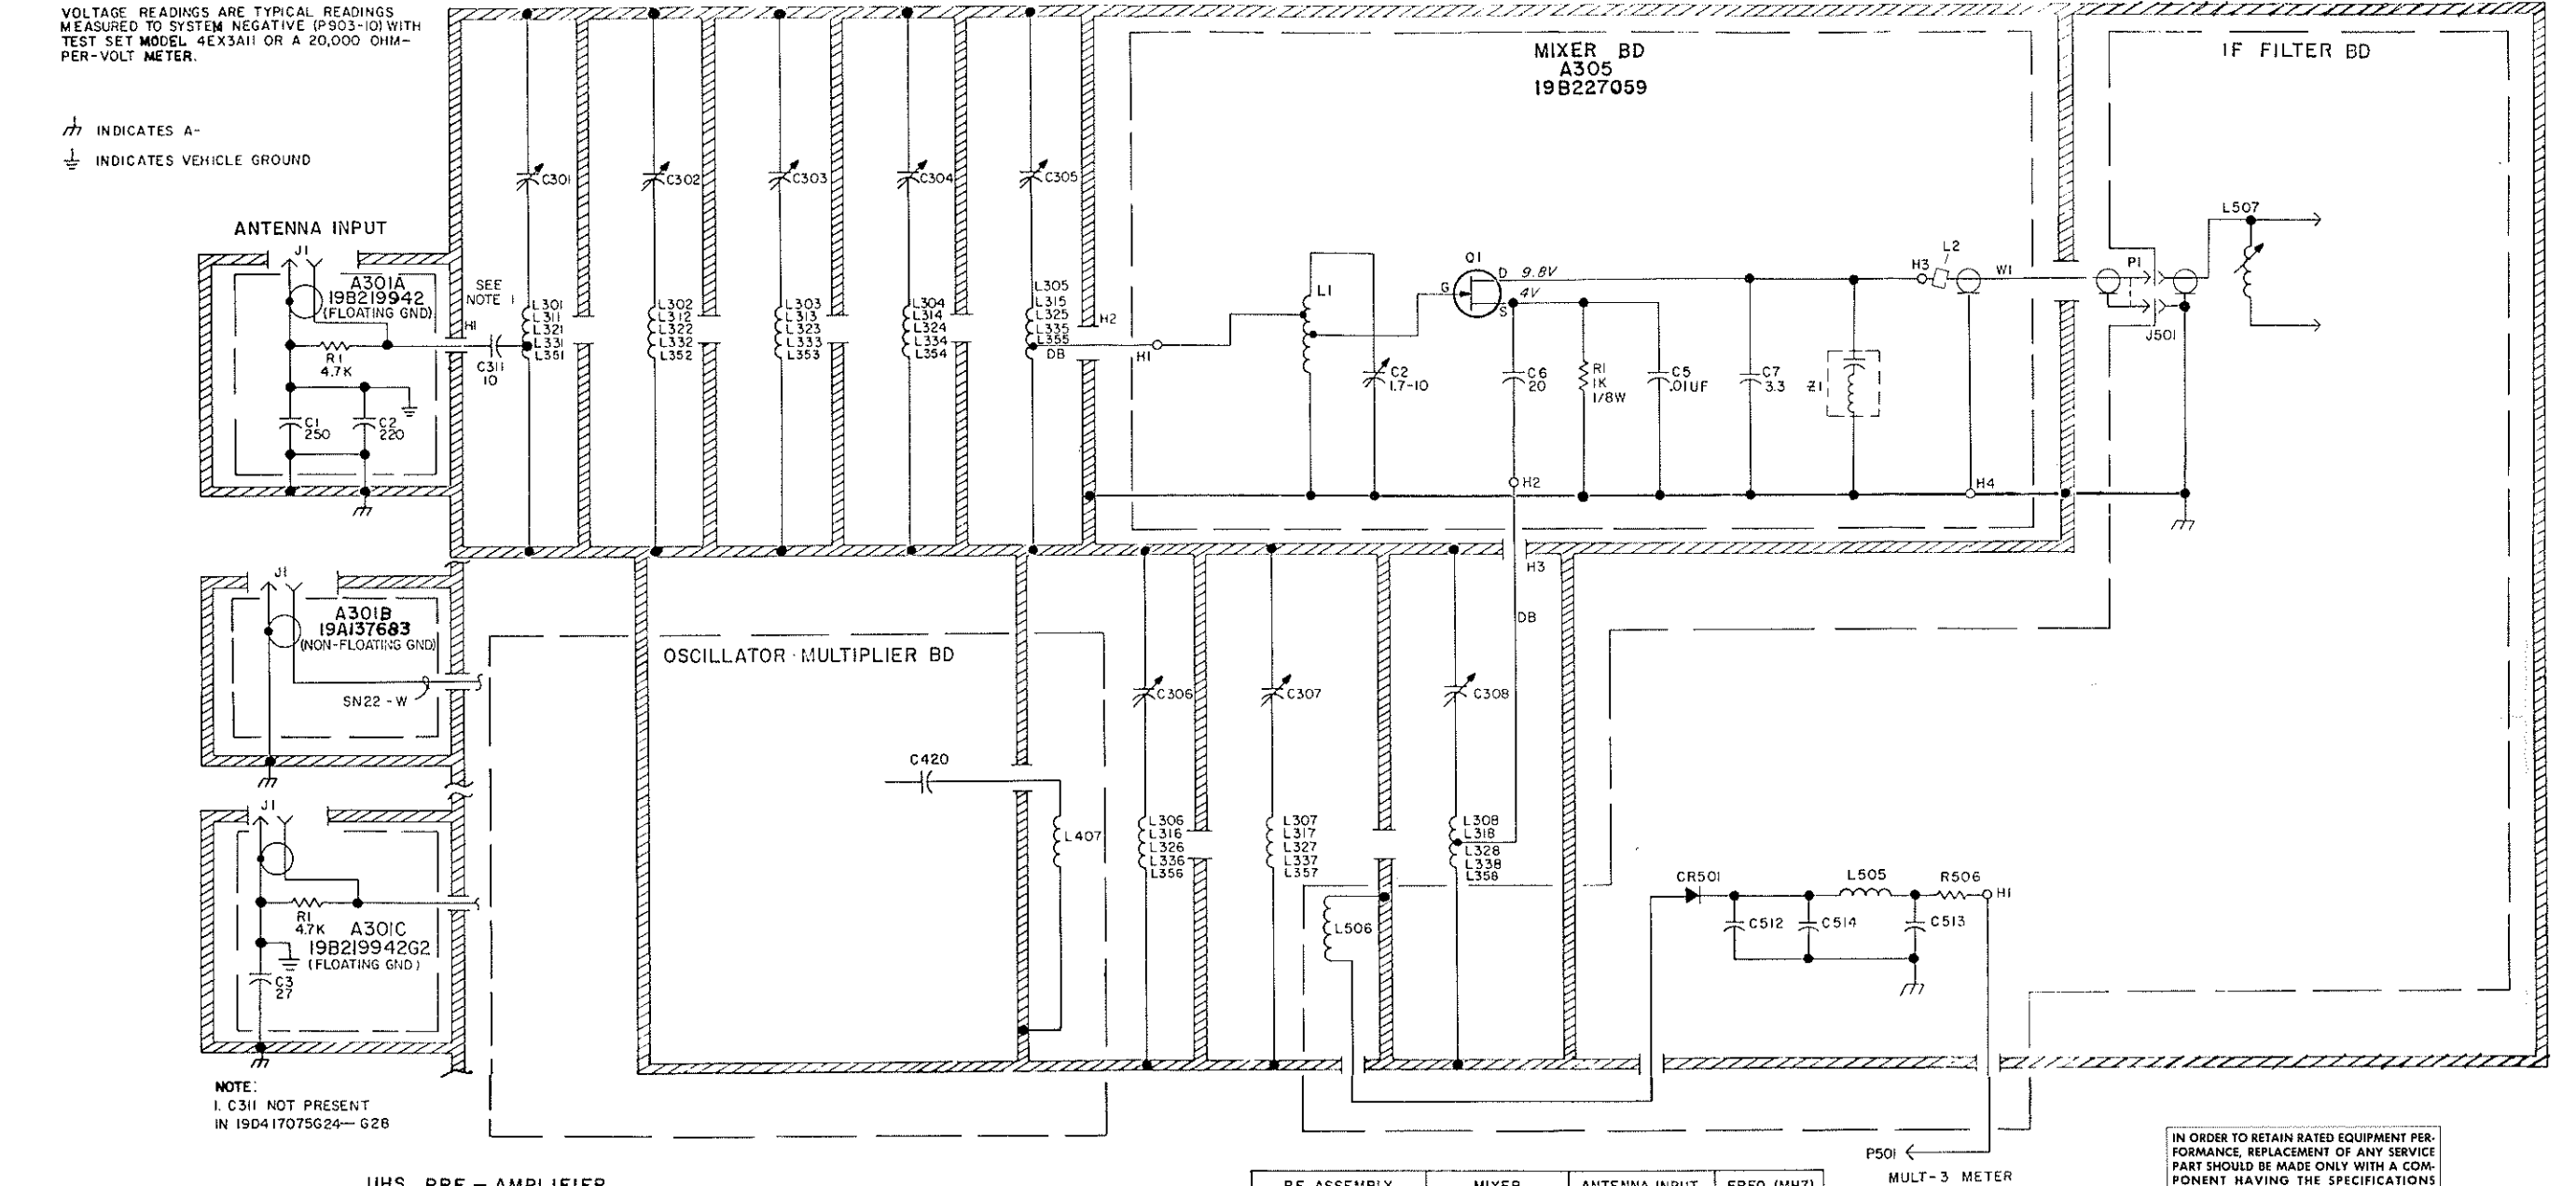

RF ASSEMBLY		MIXER		ANTENNA INPUT		FREQ (MHZ)
REV	LTR	REV	LTR	REV	LTR	
19D417075G19	A	19B227059G3	-	19B219942G2	-	406-420(LL)
19D417075G20	A	19B227059G3	-	19B219942G1	-	420-450(LM)
19D417075G21	A	19B227059G3	-	19B219942G1	-	450-470(L)
19D417075G22	A	19B227059G3	-	19B219942G1	-	470-494(M)
19D417075G23	A	19B227059G3	-	19B219942G1	-	494-512(H)
19D417075G24	A	19B227059G3	-	19A137683G2	-	406-420(LL)
19D417075G25	A	19B227059G3	-	19A137683G2	-	420-450(LM)
19D417075G26	A	19B227059G3	-	19A137683G2	-	450-470(L)
19D417075G27	A	19B227059G3	-	19A137683G2	-	470-494(M)
19D417075G28	A	19B227059G3	-	19A137683G2	-	494-512(H)


COMPONENT VALUE TABLE				
COMP DESIG	LL	LM	LL	H
RF FREQ (MHZ)	406-420		450-470	470-494
L301-L308	X			
L311-L318			X	
L321-L328				X
L331-L338				X
L351-L358		X		

IN ORDER TO RETAIN RATED EQUIPMENT PERFORMANCE, REPLACEMENT OF ANY SERVICE PART SHOULD BE MADE ONLY WITH A COMPONENT HAVING THE SPECIFICATIONS SHOWN ON THE PARTS LIST FOR THAT PART.

ALL RESISTORS ARE 1/4 WATT UNLESS OTHERWISE SPECIFIED AND RESISTOR VALUES IN OHMS UNLESS FOLLOWED BY K=1000 OHMS OR MEG=1,000,000 OHMS. CAPACITOR VALUES IN PICOFARADS (EQUIV. TO MICROMICROFARADS) UNLESS FOLLOWED BY UF= MICROFARADS. INDUCTANCE VALUES IN MILLIHENRYS UNLESS FOLLOWED BY MH= MILLIHENRYS OR H= HENRYS

SCHEMATIC DIAGRAM

406-512 MHz, RF ASSEMBLY
19D417075G19-G28
WITH MIXER BOARD 19B227059G3 AND
UHS PRE-AMPLIFIER 19C320527G1-G5

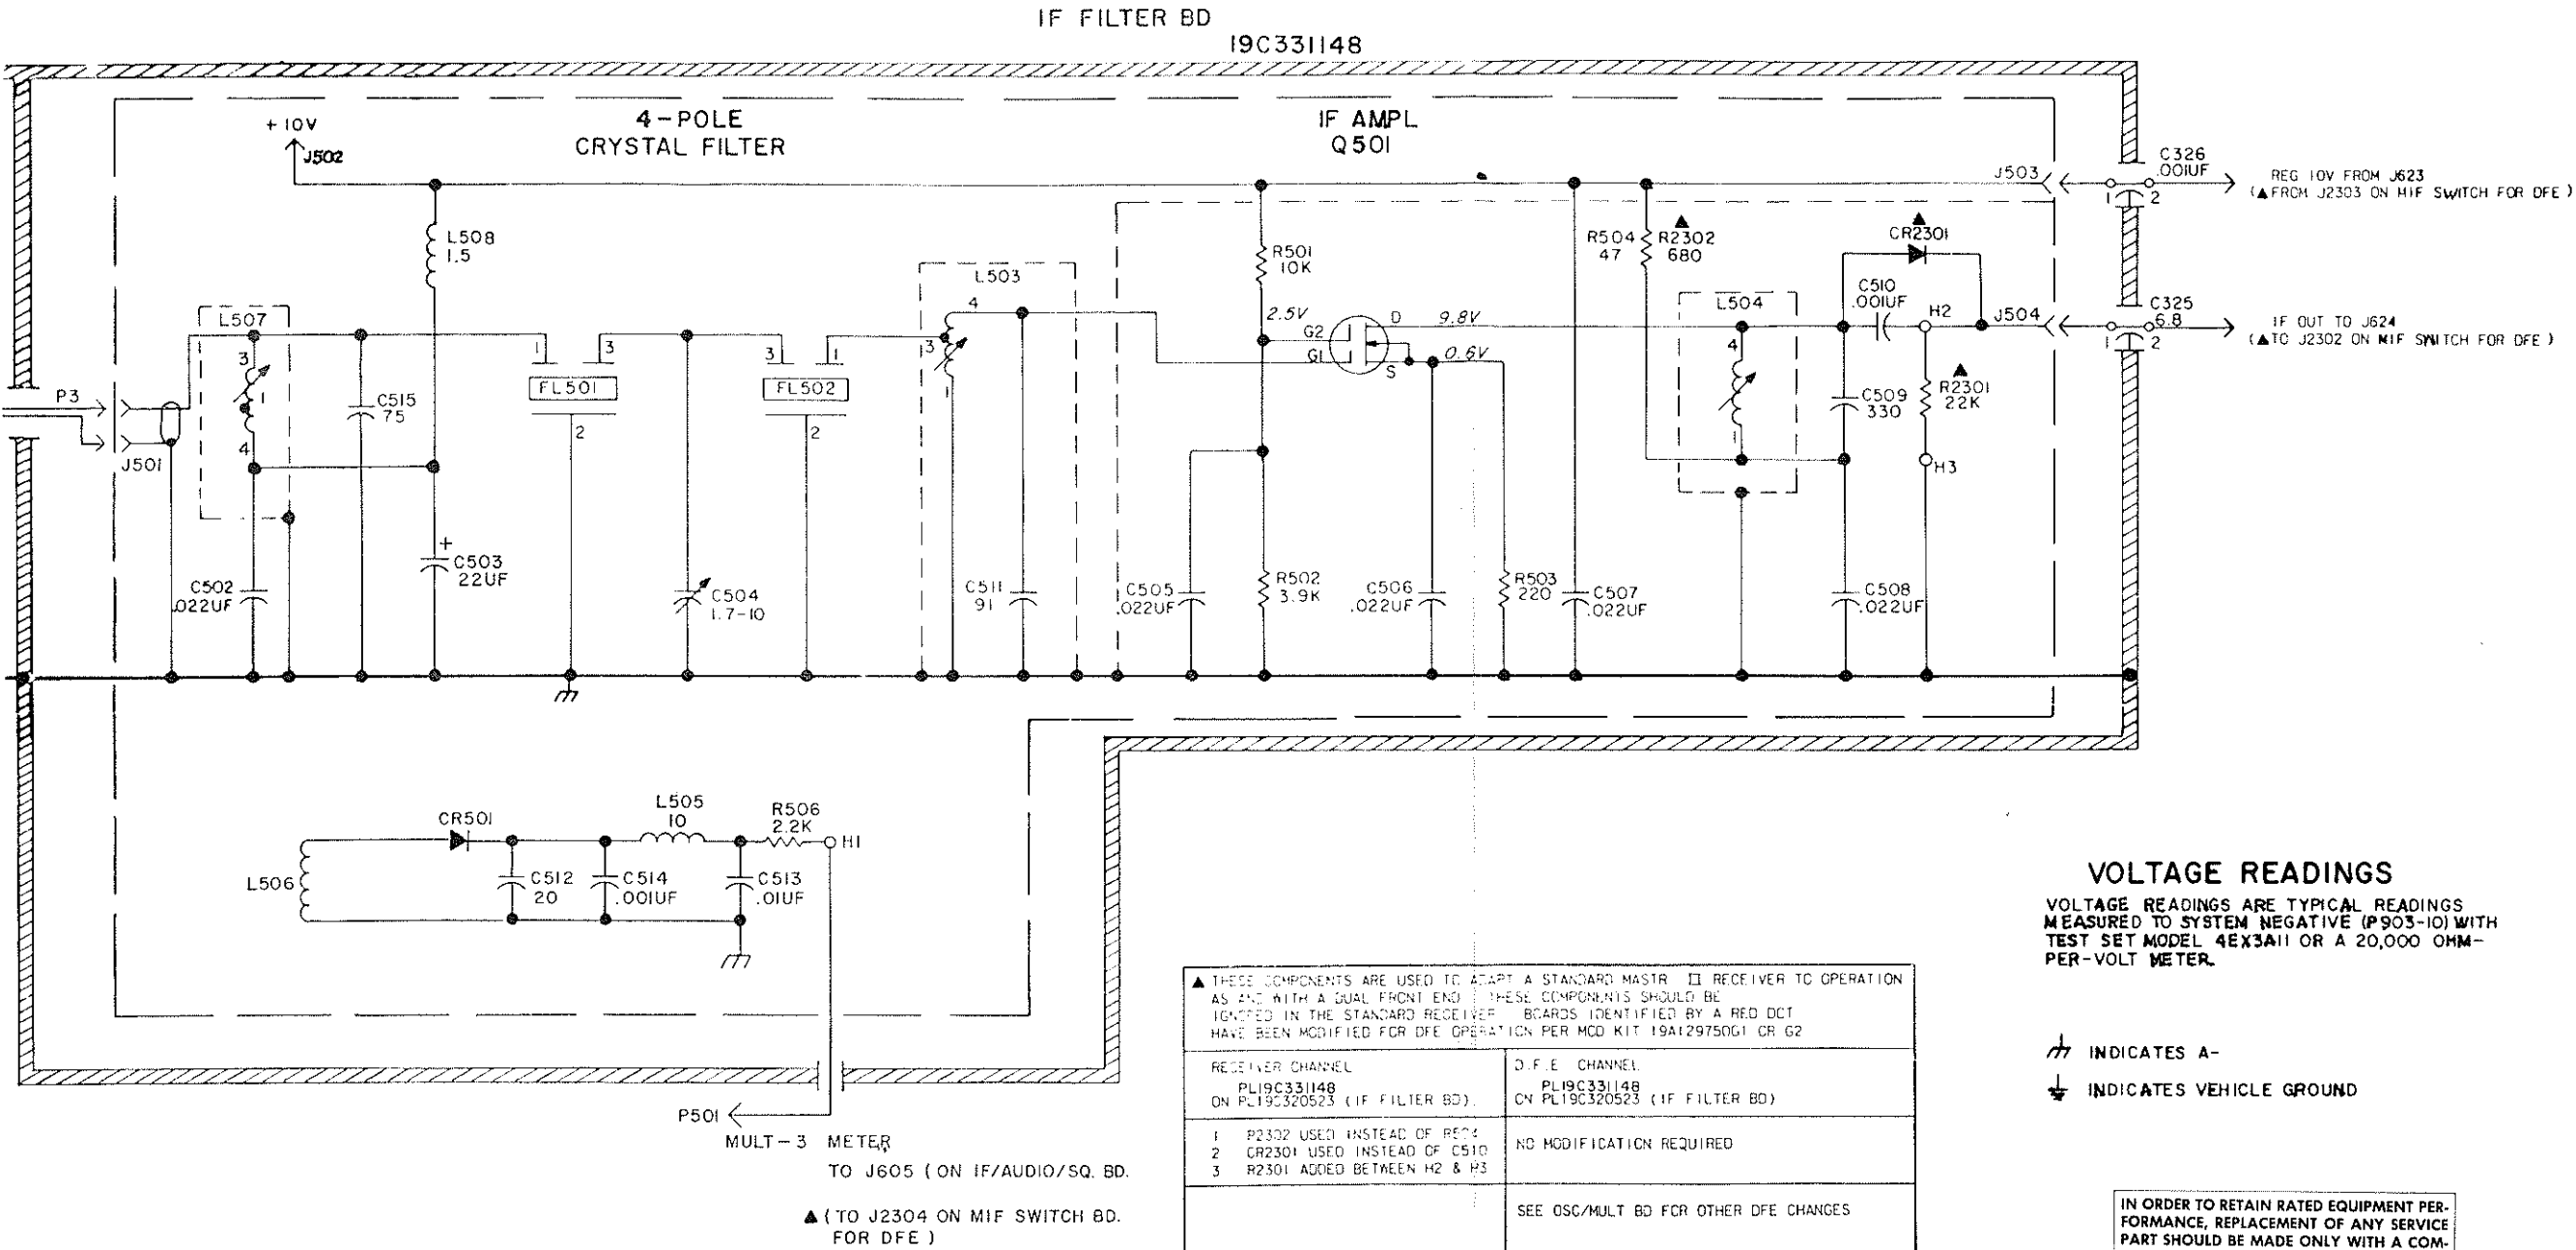

VOLTAGE READINGS

VOLTAGE READINGS ARE TYPICAL READINGS MEASURED TO SYSTEM NEGATIVE (P903-10) WITH TEST SET MODEL 4EX3A11 OR A 20,000 OHM- PER-VOLT METER.

- INDICATES A-
- INDICATES VEHICLE GROUND

IN ORDER TO RETAIN RATED EQUIPMENT PERFORMANCE, REPLACEMENT OF ANY SERVICE PART SHOULD BE MADE ONLY WITH A COMPONENT HAVING THE SPECIFICATIONS SHOWN ON THE PARTS LIST FOR THAT PART.

▲ THESE COMPONENTS ARE USED TO ADAPT A STANDARD MASTER II RECEIVER TO OPERATION AS A DUAL FRONT END. THESE COMPONENTS SHOULD BE IGNORED IN THE STANDARD RECEIVER. BOARDS IDENTIFIED BY A RED DCT HAVE BEEN MODIFIED FOR DFE OPERATION PER MOD KIT 19A129750G1 OR G2.	
RECEIVER CHANNEL PL19C331148 ON PL19C320523 (IF FILTER BD).	D.F.E. CHANNEL PL19C331148 ON PL19C320523 (IF FILTER BD)
1 R2302 USED INSTEAD OF R204 2 CR2301 USED INSTEAD OF C510 3 R2301 ADDED BETWEEN H2 & H3	NO MODIFICATION REQUIRED
	SEE OSC/MULT BD FOR OTHER DFE CHANGES
THESE ITEMS ARE SUPPLIED IN MOD. KIT PL19A129750G1	THESE ITEMS ARE SUPPLIED IN MOD. KIT PL19A129750G2

	REV LETTER
IF FILTER BD	
19C331148G1	A

ALL RESISTORS ARE 1/4 WATT UNLESS OTHERWISE SPECIFIED AND RESISTOR VALUES IN OHMS UNLESS FOLLOWED BY K=1000 OHMS OR MEG=1,000,000 OHMS. CAPACITOR VALUES IN PICO FARADS (EQUAL TO MICROFARADS) UNLESS FOLLOWED BY UF= MICROFARADS. INDUCTANCE VALUES IN MICROHENRYS UNLESS FOLLOWED BY MH= MILLIHENRYS OR H=HENRYS.

SCHEMATIC DIAGRAM

IF-FILTER BOARD 19C331148G1


(19D432484, Rev. 2)

R F ASSEMBLY
19D417075

VOLTAGE READINGS

VOLTAGE READINGS ARE TYPICAL READINGS.
MEASURED TO SYSTEM NEGATIVE (P903-10) WITH
TEST SET MODEL 4EX3A11 OR A 20,000 OHM-
PER-VOLT METER.


⏏ INDICATES A-
⏏ INDICATES VEHICLE GROUND

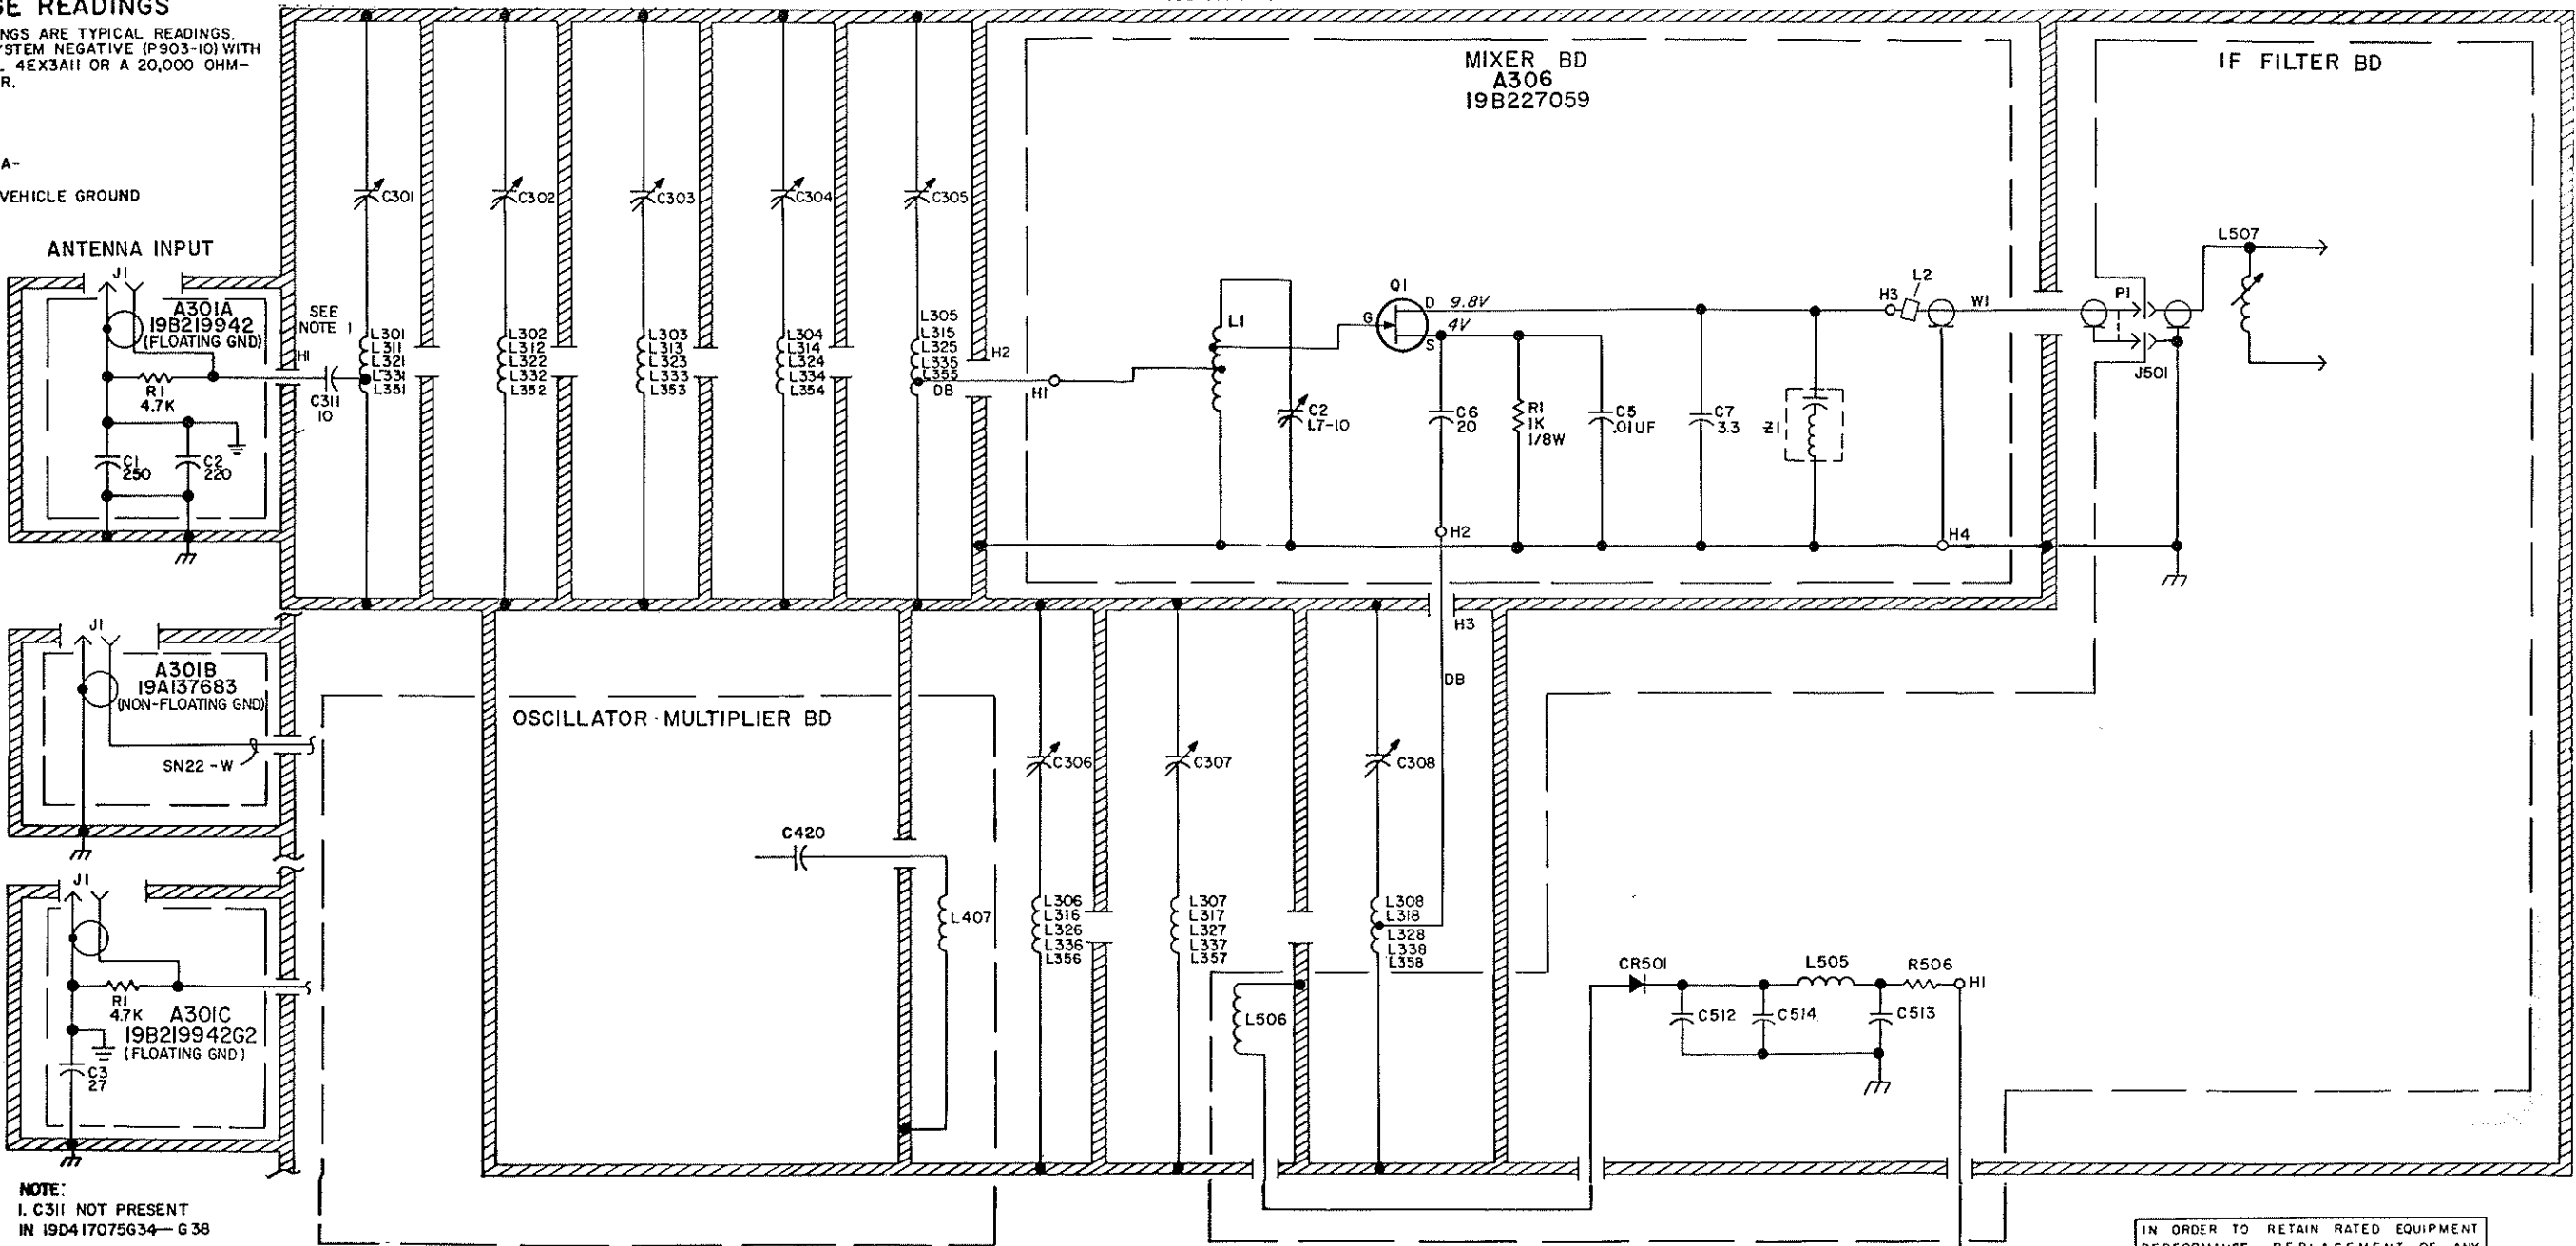

NOTE:
1. C311 NOT PRESENT
IN 19D417075G34-G38

IN ORDER TO RETAIN RATED EQUIPMENT
PERFORMANCE, REPLACEMENT OF ANY
SERVICE PART SHOULD BE MADE ONLY WITH
A COMPONENT HAVING THE SPECIFICATIONS
SHOWN ON THE PARTS LIST FOR THAT PART.

UHS PRE-AMPLIFIER

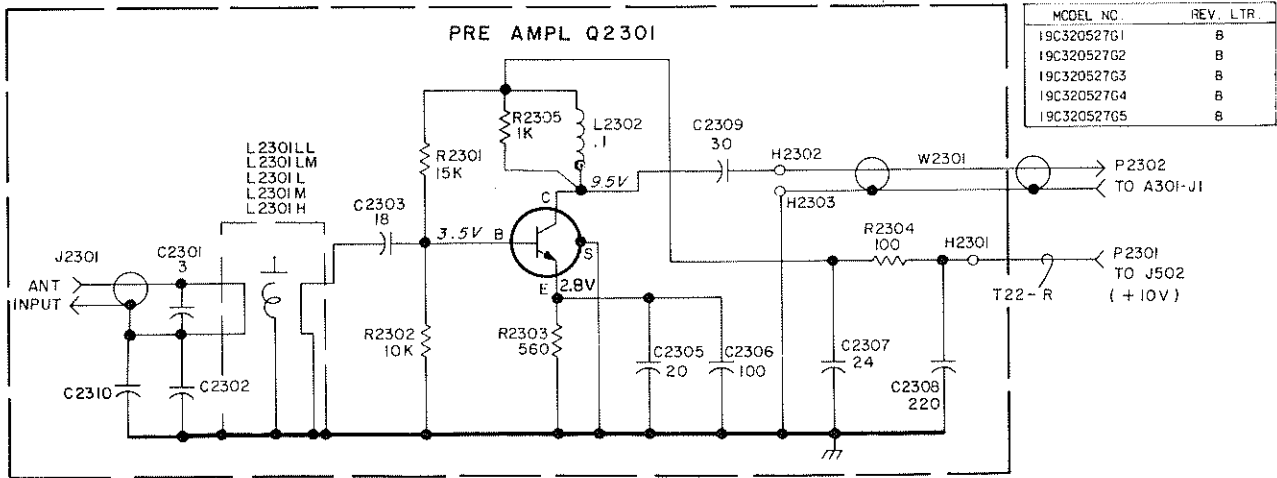

(19B226008, Rev. 8)


RF ASSEMBLY		MIXER		ANTENNA INPUT		FREQ (MHZ)
	REV LTR		REV LTR		REV LTR	
19D417075G29		19B227059G4	-	19B219942G2	-	406-420 (LL)
19D417075G30		19B227059G4	-	19B219942G1	-	420-450 (LM)
19D417075G31		19B227059G4	-	19B219942G1	-	450-470 (L)
19D417075G32		19B227059G4	-	19B219942G1	-	470-494 (M)
19D417075G33		19B227059G4	-	19B219942G1	-	494-512 (H)
19D417075G34		19B227059G4	-	19A137683G2	-	406-420 (LL)
19D417075G35		19B227059G4	-	19A137683G2	-	420-450 (LM)
19D417075G36		19B227059G4	-	19A137683G2	-	450-470 (L)
19D417075G37		19B227059G4	-	19A137683G2	-	470-495 (M)
19D417075G38		19B227059G4	-	19A137683G2	-	494-512 (H)

COMPONENT VALUE TABLE				
COMP DESIG	LL	LM	M	H
RF FREQ (MHZ)	406-420	450-470	470-494	494-512
L301-L308	X			
L311-L318		X		
L321-L328			X	
L331-L338				X
L351-L358	X			

(19D433368, Rev. 0)

SCHEMATIC DIAGRAMS

406-512 MHz, RF ASSEMBLY
19D417075G29-G38
WITH MIXER BOARD 19B227059G4 AND
UHS PRE-AMPLIFIER 19C320527G1-G5

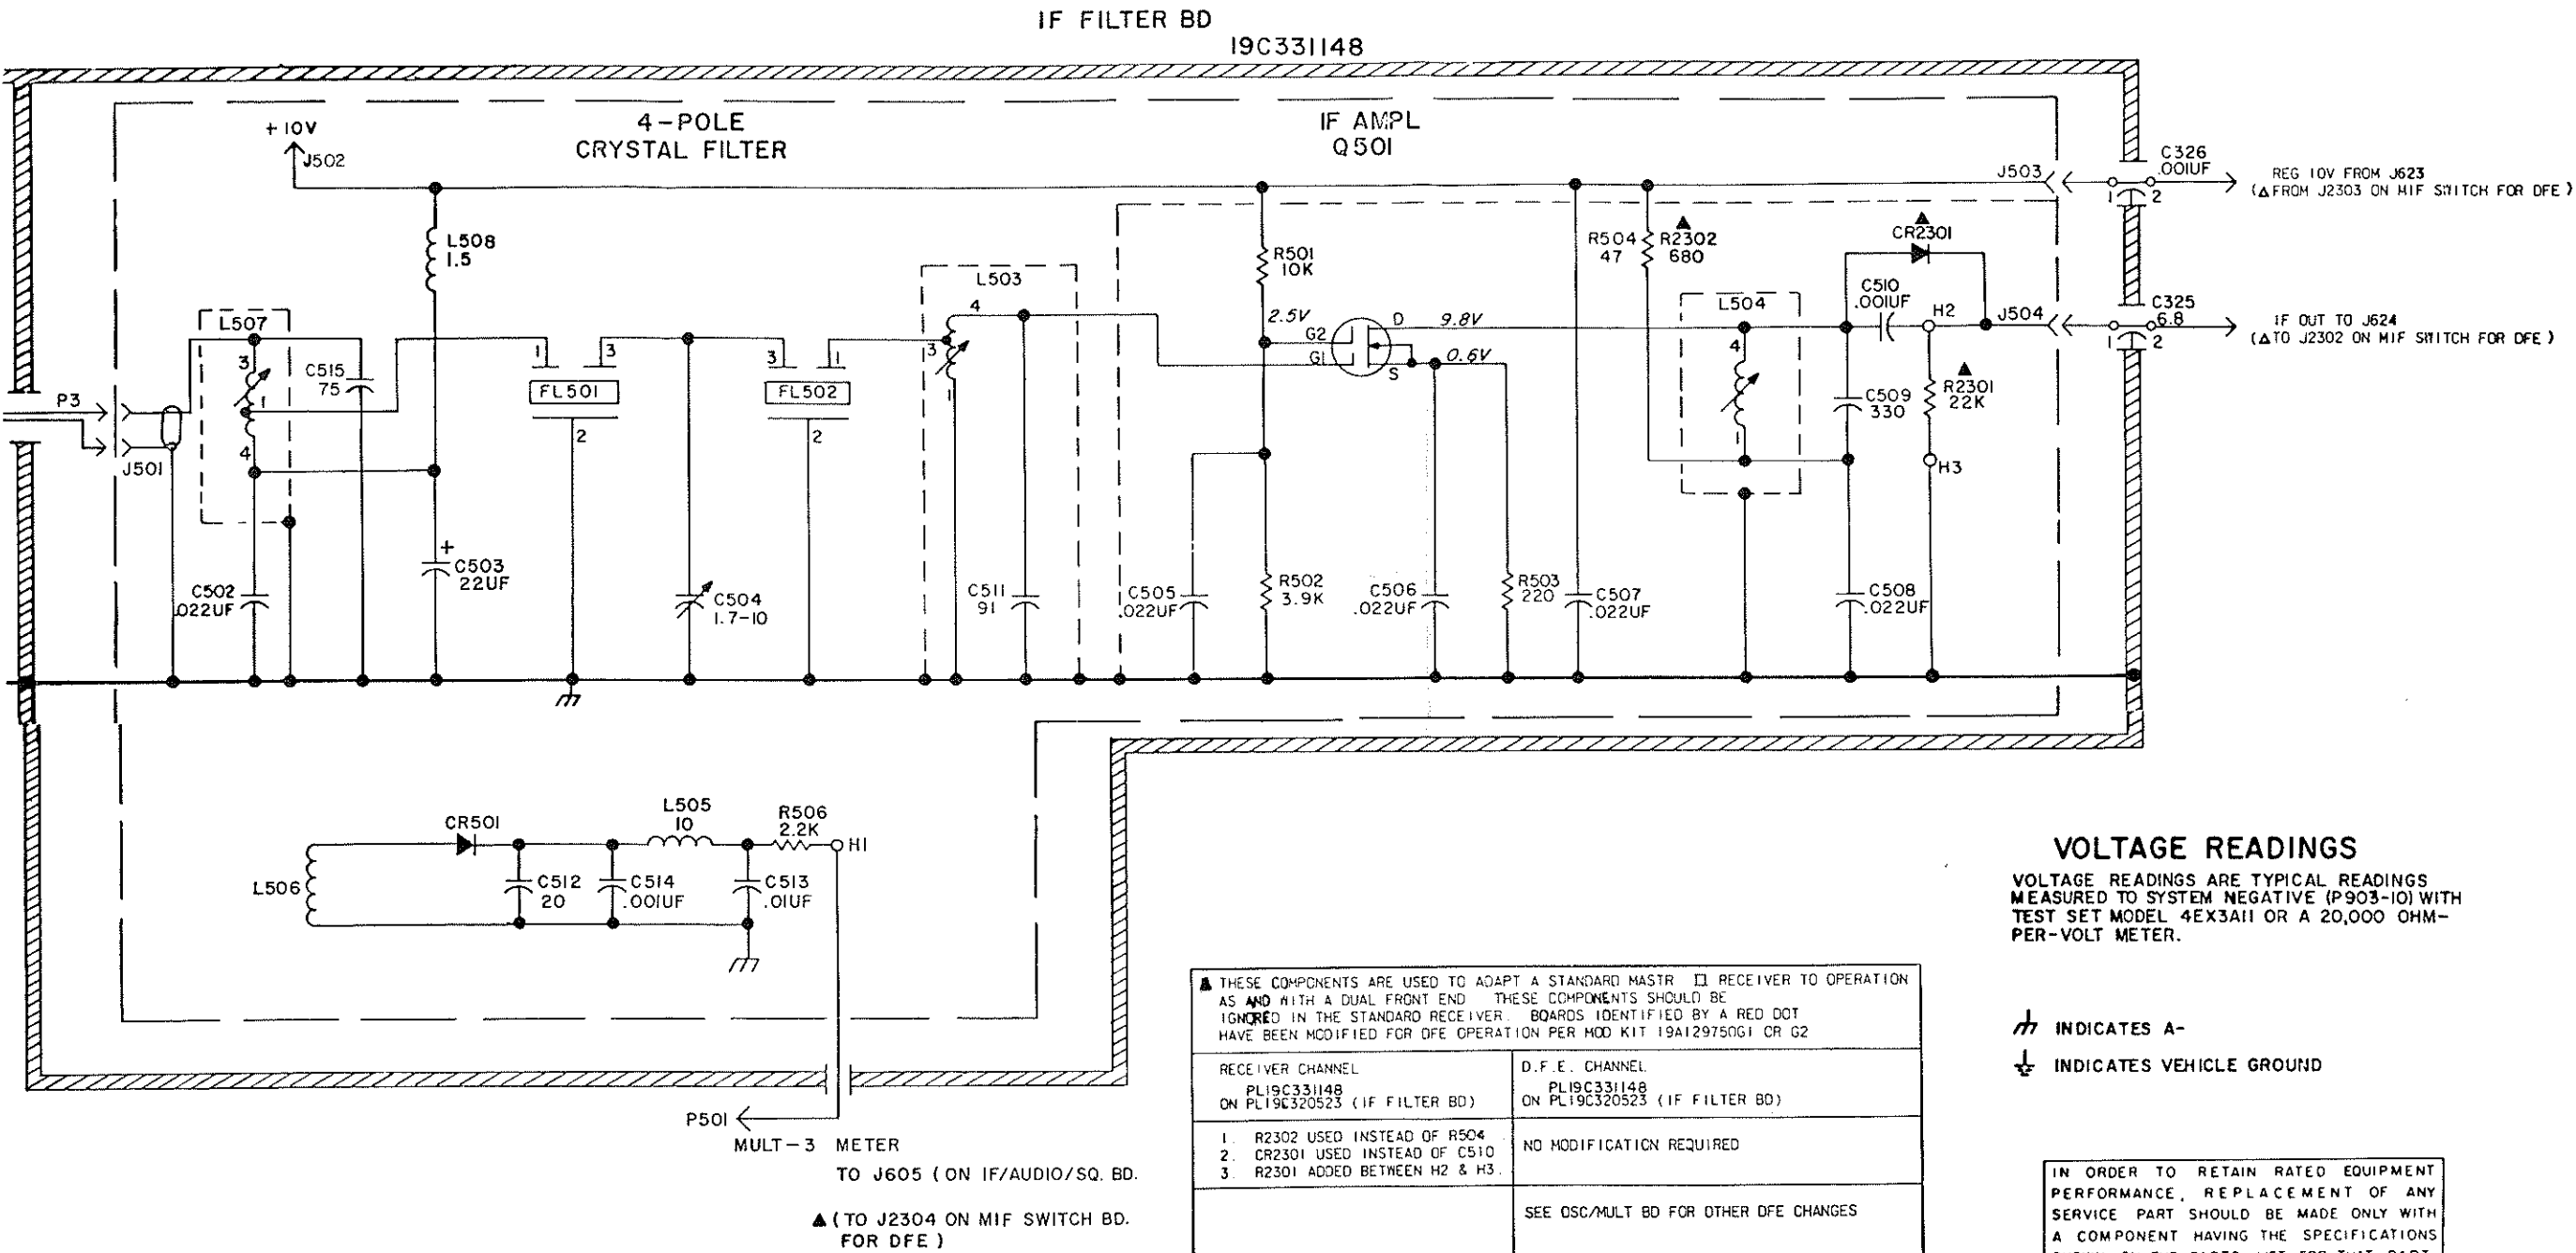

▲ THESE COMPONENTS ARE USED TO ADAPT A STANDARD MASTR □ RECEIVER TO OPERATION AS AND WITH A DUAL FRONT END. THESE COMPONENTS SHOULD BE IGNORED IN THE STANDARD RECEIVER. BOARDS IDENTIFIED BY A RED DOT HAVE BEEN MODIFIED FOR DFE OPERATION PER MOD KIT 19A129750G1 OR G2	
RECEIVER CHANNEL PL19C331148 ON PL19C320523 (IF FILTER BD)	D.F.E. CHANNEL PL19C331148 ON PL19C320523 (IF FILTER BD)
1. R2302 USED INSTEAD OF R504 2. CR2301 USED INSTEAD OF C510 3. R2301 ADDED BETWEEN H2 & H3.	NO MODIFICATION REQUIRED
	SEE OSC/MULT BD FOR OTHER DFE CHANGES
THESE ITEMS ARE SUPPLIED IN MOD. KIT PL19A129750G1.	THESE ITEMS ARE SUPPLIED IN MOD. KIT PL19A129750G2.

	REV LETTER
IF FILTER BD	
19C331148G2	

SCHEMATIC DIAGRAM

IF-FILTER BOARD 19C331148G2

PARTS LIST

LB130033H

406-512 MHz RECEIVER RF ASSEMBLY
IF-FILTER BOARD ASSEMBLY
AND UHS PRE-AMPLIFIER

SYMBOL	GE PART NO.	DESCRIPTION
		RF ASSEMBLY
		19D417075G9 406-420 MHz FLOATING GRD
		19D417075G10 450-470 MHz FLOATING GRD
		19D417075G11 470-494 MHz FLOATING GRD
		19D417075G12 494-512 MHz FLOATING GRD
		19D417075G13 406-420 MHz NON FLOATING GRD
		19D417075G14 450-470 MHz NON FLOATING GRD
		19D417075G15 470-494 MHz NON FLOATING GRD
		19D417075G16 494-512 MHz NON FLOATING GRD
		19D417075G17 420-450 MHz NON FLOATING GRD
		19D417075G18 420-456 MHz FLOATING GRD
		19D417075G19 406-420 MHz FLOATING GRD - REV A
		19D417075G20 450-470 MHz FLOATING GRD - REV A
		19D417075G21 470-494 MHz FLOATING GRD - REV A
A301A* and A301C*		ANTENNA INPUT BOARD
		A301A 19B219942G1 450-512 MHz (Deleted in G9 by REV D).
		A301C 19B219942G2 406-420 MHz (Added to G9 by REV D).
		----- CAPACITORS -----
C1	7484398P3	Silver mica: 250 pf $\pm 10\%$, 500 VDCW; sim to Underwood Type J1HF.
C2	19A116679P220K	Mica: 220 pf $\pm 10\%$, 250 VDCW.
C3	19A116656P27J0	Ceramic disc: 27 pf $\pm 5\%$, 500 VDCW, temp coef 0 PPM.
		----- JACKS AND RECEPTACLES -----
J1	7104941P16	Connector, phono: jack; sim to National Tel. Barrel Ceramic.
		----- RESISTORS -----
R1	19A700106P79	Composition: 4.7K ohms $\pm 5\%$, 1/4 w.
A301B*		ANTENNA INPUT PLATE
		19A137683G2
		(Added to G13-G16 by REV A)
		----- JACKS AND RECEPTACLES -----
J1	7104941P20	Connector, jack: sim to National Tel.
A301B*		ANTENNA INPUT PLATE
		19A137683G1
		(Deleted in G13-G16 by REV A)
		----- JACKS AND RECEPTACLES -----
J1	7104941P20	Connector, jack: sim to National Tel.
		----- RESISTORS -----
R1	19A700106P79	Composition: 4.7K ohms $\pm 5\%$, 1/4 w.
A303*		MIXER BOARD
		19B227059G1
		(Deleted by REV B)
		----- CAPACITORS -----
C1	19A116080P103	Polyester: 0.022 μ f $\pm 10\%$, 50 VDCW.
C2	19A700012P1	Variable, ceramic: 2-10 pf, 200 VDCW, temp coef -350+500 PPM/ $^{\circ}$ C; sim to Panasonic ECV-LZW10X32.
C3	19A116656P20K0	Ceramic disc: 20 pf $\pm 10\%$, 500 VDCW, temp coef 0 PPM.
C4*	19A700219P14	Ceramic: 3.3 pf $\pm 5\%$, 100 VDCW; temp coef 0 PPM.
		Earlier than REV A:
	19A116656P3K0	Ceramic disc: 3 pf ± 1 pf, 500 VDCW, temp coef 0 PPM.

SYMBOL	GE PART NO.	DESCRIPTION
L1		----- INDUCTORS ----- (Part of printed wiring board 19D423518P1).
P1		----- PLUGS ----- (Part of W1).
Q1	19A134093P1	----- TRANSISTORS ----- N Type, field effect: sim to Type 2N4391.
R1	3R151P102K	----- RESISTORS ----- Composition: 1K ohms $\pm 10\%$, 1/8 w.
W1	5491689P114	----- CABLES ----- RF: approx 5-1/8 inches long.
A304*		MIXER BOARD 19B227059G2 (Added by REV B)
C2	19A700012P1	----- CAPACITORS ----- Variable, ceramic: 2-10 pf, 200 VDCW, temp coef -350 +500 Parts/W ^o C; sim to Panasonic ECV-1Z*10X32.
C4*	19A700219P14	Ceramic: 3.3 pf $\pm 5\%$, 100 VDCW; temp coef 0 PPM. Deleted in G9-G12 by REV C, in G13-G18 by REV A.
C5	19A116192P1	Ceramic: 0.01 μ f $\pm 20\%$, 50 VDCW; sim to Erie 8121 SPECIAL.
C6	19A700219P39	Ceramic: 20 pf $\pm 5\%$, 100 VDCW; temp coef 0 PPM.
L1		----- INDUCTORS ----- (Part of printed board 19D429194P1).
P1		----- PLUGS ----- (Part of W1).
Q1	19A134093P1	----- TRANSISTORS ----- N Type, field effect; sim to Type 2N4391.
R1	3R151P102J	----- RESISTORS ----- Composition: 1K ohms $\pm 5\%$, 1/8 w.
W1	5491689P114	----- CABLES ----- Cable, RF: approx 5-1/2 inches long. (Includes P1).
A305		MIXER BOARD 19B227059G3
C2	19A700012P1	----- CAPACITORS ----- Variable, ceramic: 2-10 pf, 200 VDCW, temp coef -350 +500 Parts/W ^o C; sim to Panasonic ECV-1Z*10X32.
C5	19A116192P1	Ceramic: 0.01 μ f $\pm 20\%$, 50 VDCW; sim to Erie 8121 SPECIAL.
C6	19A700219P39	Ceramic: 20 pf $\pm 5\%$, 100 VDCW; temp coef 0 PPM.
C7	19A700219P14	Ceramic: 3.3 pf $\pm 5\%$, 100 VDCW; temp coef 0 PPM.
L1		----- INDUCTORS ----- (Part of printed board 19D429194P1).
L2	19A700122P1	Core: toroidal.
P1		----- PLUGS ----- (Part of W1).
Q1	19A134093P1	----- TRANSISTORS ----- N Type, field effect; sim to Type 2N4391.

SYMBOL	GE PART NO.	DESCRIPTION
		- - - - - RESISTORS - - - - -
R1	3R151P102J	Composition: 1K ohms $\pm 5\%$, 1/8 w.
		- - - - - CABLES - - - - -
w1	5491689P114	Cable, RF: approx 5-1/2 inches long. (Includes P1).
		- - - - - NETWORKS - - - - -
Z1	19A134666P1	Frequency Selective: 470-630 MHz, 500 VDCW.
		- - - - - CAPACITORS - - - - -
C301 thru C305		Includes:
	19C328755P3	Screw.
	19A143476G2	Nut: thd size No. 6-32.
C306 thru C308		Includes:
	19C328755P2	Screw.
	19A143476G2	Nut: thd size No. 6-32.
C311*	5496218P241	Ceramic disc: 10 pf ± 0.25 pf, 500 VDCW, temp coef -80 PPM. Deleted in G13-G16 by REV A.
C325	19B209488P1	Ceramic, feed-thru: 6.8 pf $\pm 20\%$, 500 VDCW; sim to Allen-Bradley Style FA5D.
C326	19B209488P2	Ceramic, feed-thru: 1000 pf $\pm 100\%$ -10%, 500 VDCW; sim to Allen-Bradley Style FA5D.
		- - - - - INDUCTORS - - - - -
L301	19B204938G37	Coil.
L302 thru L304	19B219944P1	Coil.
L305	19B204938G33	Coil.
L306 and L307	19B219944P5	Coil.
L308	19B204938G41	Coil.
L311	19B204938G38	Coil.
L312 thru L314	19B219944P2	Coil.
L315	19B204938G34	Coil.
L316 and L317	19B219944P6	Coil.
L318	19B204938G42	Coil.
L321	19B204938G39	Coil.
L322 thru L324	19B219944P3	Coil.
L325	19B204938G35	Coil.
L326 and L327	19B219944P7	Coil.
L328	19B204938G43	Coil.
L331	19B204938G40	Coil.
L332 thru L334	19B219944P4	Coil.
L335	19B204938G36	Coil.
L336 and L337	19B219944P8	Coil.
L338	19B204938G44	Coil.
L351	19B204938G47	Coil.
L352 thru L354	19B219944P9	Coil.
L355	19B204938P48	Coil.

(Cont'd on Page 12)

(Cont'd on Page 12)

SYMBOL	GE PART NO.	DESCRIPTION
L356 and L357	19B219944P10	Coil.
L358	19B204938P49	Coil.
		IF FILTER BOARD 19C320523G2, G3
		----- CAPACITORS -----
C502	19A116080P103	Polyester: 0.022 μ f $\pm$ 10%, 50 VDCw.
C503	5496267P10	Tantalum: 22 μ f $\pm$ 20%, 15 VDCw; sim to Sprague Type 150D.
C504	19A700012P1	Variable, ceramic: 2 to 10 pf, 200 VDCw, temp $\pm$ 500% $\sim$ 350 Parts/M/ $^{\circ}$ C; sim to Panasonic ECV-1ZW10X32.
C505 thru C508	19A116080P3	Polyester: 0.022 μ f $\pm$ 20%, 50 VDCw.
C509	5490008P139	Silver mica: 330 pf $\pm$ 10%, 500 VDCw; sim to Electro Motive Type DM-15.
C510	19A116655P19	Ceramic disc: 1000 pf $\pm$ 20%, 1000 VDCw; sim to RMC Type JF Discap.
C511		(Part of L503).
C512	19A116656P20K0	Ceramic disc: 20 pf $\pm$ 10%, 500 VDCw, temp coef 0 PPM.
C513	19A116080P101	Polyester: 0.01 μ f $\pm$ 10%, 50 VDCw.
C514	19A116655P20	Ceramic disc: 1000 pf $\pm$ 10%, 1000 VDCw; sim to RMC Type JF Discap.
C515A	5490008P27	Silver mica: 100 pf $\pm$ 5%, 500 VDCw; sim to Electro Motive Type DM-15.
C515B	5490008P24	Silver mica: 75 pf $\pm$ 5%, 500 VDCw; sim to Electro Motive Type DM-15.
C516*	19A116656P3K0	Ceramic disc: 3 pf $\pm$ 1 pf, 500 VDCw, temp coef 0 PPM. Added by REV A.
		----- DIODES AND RECTIFIERS -----
CR501	19A116052P1	Silicon, hot carrier: Fwd. drop .350 volts max.
		----- FILTERS -----
FL501	19B219573G7	Crystal, freq: Resonator A: 11,200000 KHz, Resonator B: 11,196024 KHz.
FL502		(Part of FL501).
		----- JACKS AND RECEPTACLES -----
J501	19A130924G1	Receptacle, coaxial: sim to Cinch 14H11613.
J502	4033513P1	Contact, electrical: sim to Bead Chain L93-4.
J503 and J504	19A116975P1	Receptacle, wire spring.
		----- INDUCTORS -----
L502*	7488079P48	Choke, RF: 27.0 μ h $\pm$ 10%, 1.40 ohms DC res max; sim to Jeffers 4422-9K. Deleted by REV A.
L503	19C320141G4	Coil. Includes:
	5493185P9	Tuning slug.
L504	19C320141G29	Coil. Includes:
	5493185P9	Tuning slug.
L505	19A700024P25	Coil, RF: 10.0 μ h $\pm$ 10%, 3.70 ohms DC res max.
L506		(Part of printed board 19C320522P1).
L507	19C321810G1	Coil.
L508*	19A700000P114	Choke, RF: 1.5 μ h $\pm$ 10%, 0.28 ohms DC res max.
		----- PLUGS -----
P501		(Part of W501).

SYMBOL	GE PART NO.	DESCRIPTION
		----- TRANSISTORS -----
Q501	19A116818P1	N Channel, field effect; sim to Type 3N187.
		----- RESISTORS -----
R501	19A700106P87	Composition: 10K ohms $\pm$ 5%, 1/4 w.
R502	19A700106P77	Composition: 3.9K ohms $\pm$ 5%, 1/4 w.
R503	19A700107P47	Composition: 220 ohms $\pm$ 5%, 1/4 w.
R504	19A700106P31	Composition: 47 ohms $\pm$ 5%, 1/4 w.
R506	19A700106P71	Composition: 2.2K ohms $\pm$ 5%, 1/4 w.
		----- CABLES -----
W501	19A129947G7	Cable: orange, No. 22 stranded, approx 7-1/2 inches, includes (P501).
		UHS RF PRE-AMPLIFIER 19C320527G1 406-420 MHz (LL) 19C320527G2 450-470 MHz (L) 19C320527G3 470-494 MHz (M) 19C320527G4 494-512 MHz (H) 19C320527G5 420-450 MHz (LM)
		----- CAPACITORS -----
C2301	19A116656P3J8	Ceramic disc: 3 pf $\pm$ 0.1 pf, 500 VDCw, temp coef -80 PPM.
C2302*	19A116679P220K	Mica: 220 pf $\pm$ 10%, 250 VDCw. Deleted by REV A.
C2302A*	19A134666P2	Silver mica: 22 pf $\pm$ 5%, 500 VDCw; sim to Electro Motive Type DM154CR. Added to G1 & G5 by REV A.
C2302B*	19A134666P1	Silver mica: 18 pf $\pm$ 5%, 500 VDCw; sim to Electro Motive Type DM154CR. Added to G2-G4 by REV A.
C2303	19A116656P18J8	Ceramic disc: 18 pf $\pm$ 5%, 500 VDCw, temp coef -80 PPM.
		----- DIODES AND RECTIFIERS -----
C2305	19A116656P20K0	Ceramic disc: 20 pf $\pm$ 10%, 500 VDCw, temp coef 0 PPM.
C2306*	5490008P127	Silver mica: 100 pf $\pm$ 10%, 500 VDCw; sim to Electro Motive Type DM-15.
		Earlier than REV A:
	19A116679P100K	Mica: 100 pf $\pm$ 10%, 250 VDCw.
C2307*	19A116656P24J0	Ceramic disc: 24 pf $\pm$ 5%, 500 VDCw; temp coef 0 PPM.
		Earlier than REV A:
	19A116679P220K	Mica: 220 pf $\pm$ 10%, 250 VDCw.
C2308	5490008P135	Silver mica: 220 pf $\pm$ 10%, 500 VDCw; sim to Electro Motive Type DM-15.
		Earlier than REV A:
	19A116679P100K	Mica: 100 pf $\pm$ 10%, 250 VDCw.
C2309	19A116656P30J8	Ceramic disc: 30 pf $\pm$ 5%, 500 VDCw, temp coef -80 PPM.
C2310*	19A116656P20K0	Ceramic disc: 20 pf $\pm$ 10%, 500 VDCw, temp coef 0 PPM. Deleted by REV A.
C2310A*	19A134666P2	Ceramic: 27 pf $\pm$ 5%, 500 VDCw. Added by REV B.
C2310B*	19A134666P1	Ceramic: 24 pf $\pm$ 5%, 500 VDCw. Added by REV B.
		----- JACKS AND RECEPTACLES -----
J2301	19A130924G1	Receptacle, coaxial: sim to Cinch 14H11613.
		----- INDUCTORS -----
L2301LL	19D413078G3	Helical resonator.
L2301L	19D413078G5	Helical resonator.
L2301M	19D413078G6	Helical resonator.
L2301H	19D413078G7	Helical resonator.
L2301LM	19D413078G9	Helical resonator.

SYMBOL	GE PART NO.	DESCRIPTION
L2302*	19B209420P101	Coil, RF: 0.10 μ h $\pm$ 10%, 0.08 ohms DC res max; sim to Jeffers 4416-1K.
		Earlier than REV A:
	19A129716G4	Coil.
		----- PLUGS -----
P2301	4029840P2	Contact, electrical: sim to Amp 42827-2.
P2302		(Part of W2301).
		----- TRANSISTORS -----
Q2301	19A116859P2	Silicon, NPN.
		----- RESISTORS -----
R2301	19A700106P91	Composition: 15K ohms $\pm$ 5%, 1/4 w.
R2302*	19A700106P87	Composition: 10K ohms $\pm$ 5%, 1/4 w.
		In REV A & earlier:
	19A700106P83	Composition: 6.8K ohms $\pm$ 5%, 1/4 w.
R2303	19A700106P57	Composition: 560 ohms $\pm$ 5%, 1/4 w.
R2304	19A700106P39	Composition: 100 ohms $\pm$ 5%, 1/4 w.
R2305*	19A700106P63	Composition: 1K ohms $\pm$ 5%, 1/4 w.
		In REV A:
	19A700106P61	Composition: 820 ohms $\pm$ 5%, 1/4 w. Added by REV A.
		----- CABLES -----
W2301	5491689P94	RF: approx 3 inches long. Includes P2302.
		----- MISCELLANEOUS -----
	19E501121G1	Casting, RF Circuit.
	19B227101G1	Cover, RF Circuit.
		----- DIODES AND RECTIFIERS -----
	19B209209P306	Tap screw, Phillips Pozidriv [®] : No. 6-32 x 3/8. (Secures RF Circuit Cover).
	19C328755P3	Screw. (Part of C301-C305).
	19C328755P2	Screw. (Part of C306-C308).
	19A143476G2	Nut: thd size No. 6-32. (Part of C301-C308).
	4031594P1	Insulator. (Used with C504 on IF Filter Board).
	19B219470P2	Shield. (Used with IF Filter Board).
	19A129424G1	Can. (Used with LA01-LA03, L501, L503, L504).
	19A127060P2	Can. (Used with L2301).
	4035306P59	Washer, fiber. (Used with FL501, FL502).
	4035306P23	Washer, fiber. (Used with J501, J2301).
	19A701332P1	Insulator. (Used with Q2301).
	4035306P11	Washer, fiber. (Used with Q501).

PARTS LIST		
RF ASSEMBLY 19B233690G1-G10 ISSUE 1		
SYMBOL	GE PART NO.	DESCRIPTION
A301A and A301C		STANDARD 19B233690G1, 11 406-420 MHz 19B233690G2, 12 420-450 MHz 19B233690G3, 13 450-470 MHz 19B233690G4, 14 470-494 MHz 19B233690G5, 15 494-512 MHz NON FLOATING GROUND ONLY 19B233690G6, 16 406-420 MHz 19B233690G7, 17 420-450 MHz 19B233690G8, 18 450-470 MHz 19B233690G9, 19 470-494 MHz 19B233690G10, 20 494-512 MHz RF CIRCUIT 19D417075G19, 29 406-420 MHz FLOATING GRD 19D417075G20, 30 420-450 MHz FLOATING GRD 19D417075G21, 31 450-470 MHz FLOATING GRD 19D417075G22, 32 470-494 MHz FLOATING GRD 19D417075G23, 33 494-512 MHz FLOATING GRD 19D417075G24, 34 406-420 MHz NON FLOATING GRD 19D417075G25, 35 420-450 MHz NON FLOATING GRD 19D417075G26, 36 450-470 MHz NON FLOATING GRD 19D417075G27, 37 470-494 MHz NON FLOATING GRD 19D417075G28, 38 494-512 MHz NON FLOATING GRD COMPONENT BOARD A301A 19B219942G1 A301C 19B219942G2
		----- CAPACITORS -----
	C1	7484398P3 Silver mica: 250 pf ±10%, 500 VDCW; sim to Underwood Type J1HF.
	C2	19A116679P220K Mica: 220 pf ±10%, 250 VDCW.
	C3	19A116656P27J0 Ceramic disc: 27 pf ±5%, 500 VDCW, temp coef 0 PPM.
	J1	7104941P16 ----- JACKS AND RECEPTACLES ----- Connector, phono: jack; sim to National Tel. Barrel Ceramic.
	R1	19A700106P79 ----- RESISTORS ----- Composition: 4.7K ohms ±5%, 1/4 w.
	A301B	ANTENNA INPUT PLATE 19A137683G2
	J1	7104941P20 ----- JACKS AND RECEPTACLES ----- Connector, jack: sim to National Tel.
	A305	MIXER BOARD 19B227059G3
		----- CAPACITORS -----
	C2	19A700012P1 Variable, ceramic: 2-10 pf, 200 VDCW, temp coef -350+500 Parts/M/*C; sim to Panasonic ECV-12w10X32.
	C5	19A116192P1 Ceramic: 0.01 pf ±20%, 50 VDCW; sim to Erie 8121 SPECIAL.
	C6	19A700219P39 Ceramic: 20 pf ±5%, 100 VDCW; temp coef 0 PPM.
	C7	19A700219P14 Ceramic: 3.3 pf ±5%, 100 VDCW; temp coef 0 PPM.

SYMBOL	GE PART NO.	DESCRIPTION
L1		----- INDUCTORS ----- (Part of printed board 19D429194P1).
L2	19A7000122P1	Core, toroidal.
P1		----- PLUGS ----- (Part of w1).
Q1	19A134093P1	----- TRANSISTORS ----- N Type, field effect; sim to Type 2N4391.
R1	3R151P102J	----- RESISTORS ----- Composition: 1K ohms ±5%, 1/8 w.
W1	5491689P114	----- CABLES ----- Cable, RF: approx 5-1/2 inches long. (includes P1).
I Z19	19A134666P1	----- NETWORKS ----- Frequency Selective: 470-630 MHz, 500 VDCW.
C301 thru C305	19C328755P3	----- CAPACITORS ----- Includes: Screw.
C306 thru C308	19A143476G2	Nut: thd size No. 6-32.
C311	5493218P241	Includes: Screw. Nut: thd size No. 6-32.
C325	19B209488P1	Ceramic disc: 10 pf ±0.25 pf, 500 VDCW, temp coef -80 PPM.
C326	19B209488P2	Ceramic, feed-thru: 6.8 pf ±20%, 500 VDCW; sim to Allen-Bradley Style FA5D.
L301	19B204938G37	Ceramic, feed-thru: 1000 pf +100%-10%, 500 VDCW; sim to Allen-Bradley Style FA5D.
L302 thru L304	19B219944P1	----- INDUCTORS ----- Coil.
L305	19B204938G33	Coil.
L306 and L307	19B219944P5	Coil.
L308	19B204938G41	Coil.
L311	19B204938G38	Coil.
L312 thru L314	19B219944P2	Coil.
L315	19B204938G34	Coil.
L316 and L317	19B219944P6	Coil.
L318	19B204938G42	Coil.
L321	19B204938G39	Coil.
L322 thru L324	19B219944P3	Coil.
L325	19B204938G35	Coil.
L326 and L327	19B219944P7	Coil.
L328	19B204938G43	Coil.

SYMBOL	GE PART NO.	DESCRIPTION
L331	19B204938G40	Coil.
L332 thru L334	19B219944P4	Coil.
L335	19B204938G36	Coil.
L336 and L337	19B219944P8	Coil.
L338	19B204938G44	Coil.
L351	19B204938G47	Coil.
L352 thru L354	19B219944P9	Coil.
L355	19B204938P48	Coil.
L356 and L357	19B219944P10	Coil.
L358	19B204938P49	Coil.
		1F FILTER BOARD 19C331148G1 19C331148G2
		----- CAPACITORS -----
C502	19A700234P9	Polyester: 0.022 pf ±10%, 50 VDCW.
C503	19A701534P8	Tantalum: 22 pf ±20%, 15 VDCW; sim to Sprague Type 150D.
C504	19A700012P1	Variable, ceramic: 2 to 10 pf, 200 VDCW, temp coef +500% -350 Parts/M/*C; sim to Panasonic ECV-12w10X32.
C505 thru C508	19A143477P17	Polyester: 0.022 pf ±20%, 50 VDCW.
C509	5490008P139	Silver mica: 330 pf ±10%, 500 VDCW; sim to Electro Motive Type DM-15.
C510	19A700233P7	Ceramic disc: 1000 pf ±20%, 1000 VDCW; sim to RMC Type JF Discap.
C511		(Part of L503).
C512	19A116656P20K0	Ceramic disc: 20 pf ±10%, 500 VDCW, temp coef 0 PPM.
C513	19A700234P7	Polyester: 0.01 pf ±10%, 50 VDCW.
C514	19A700233P7	Ceramic disc: 1000 pf ±10%, 1000 VDCW; sim to RMC Type JF Discap.
C515	5490008P24	Silver mica: 75 pf ±5%, 500 VDCW; sim to Electro Motive Type DM-15.
CR501	19A700047P1	----- DIODES AND RECTIFIERS ----- Silicon, hot carrier: Fwd. drop .350 volts max.
FL501	19B219573G7	----- FILTERS ----- Crystal, freq: Resonator A: 11,200000 KHz, Resonator B: 11,196024 KHz.
FL502		(Part of FL501).
J501	19A130924G1	----- JACKS AND RECEPTACLES ----- Receptacle, coaxial: sim to Cinch 14H11613.
J502	4033513P1	Contact, electrical: sim to Bead Chain L83-4.
J503 and J504	19A116975P1	Receptacle, wire spring.
		----- INDUCTORS -----
L503	19C320141G4	Coil. Includes: Tuning slug.
L504	19C320141G29	Coil. Includes: Tuning slug.

(Cont'd on Page 14)

*COMPONENTS ADDED, DELETED OR CHANGED BY PRODUCTION CHANGES

SYMBOL	GE PART NO.	DESCRIPTION
L505	19A700024P25	Coil, RF: 10.0 μ h $\pm$ 10%, 3.70 ohms DC res. max.
L506		(Part of printed board 19C331147P1).
L507	19C321810G1	Coil.
L508	19A700000P114	Choke, RF: 1.5 μ h $\pm$ 10%, 0.28 ohms DC res. max.
		----- PLUGS -----
P501		(Part of #501).
		----- TRANSISTORS -----
Q501	19A116818P1	N Channel, field effect; sim to Type 3N187.
		----- RESISTORS -----
R501	19A700106P87	Composition: 10K ohms $\pm$ 5%, 1/4 w.
R502	19A700106P77	Composition: 3.9K ohms $\pm$ 5%, 1/4 w.
R503	19A700107P47	Composition: 220 ohms $\pm$ 5%, 1/4 w.
R504	19A700106P31	Composition: 47 ohms $\pm$ 5%, 1/4 w.
R505	19A700106P71	Composition: 2.2K ohms $\pm$ 5%, 1/4 w.
		----- CABLES -----
#501	19A129947G7	Cable: orange, No. 22 stranded, approx 7-1/2 inches. (includes P501).
		----- MISCELLANEOUS -----
	19E501121G1	Casting, RF Circuit.
	19B227101G1	Cover, RF Circuit.
	19B209209P306	Tap screw, Phillips Pozidriv®: No. 6-32 x 3/8. (Secures RF Circuit Cover).
	19C328755P3	Screw. (Part of C301-C305).
	19C328755P2	Screw. (Part of C306-C308).
	19A143476G2	Nut: thd size No. 6-32. (Part of C301-C308).
	4031594P1	Insulator. (Used with C504 on IF Filter Board).
	19B219470P2	Shield. (Used with IF Filter Board).
	19A129424G1	Can. (Used with L503, L504, L507).
	4035306P59	Washer, fiber. (Used with FL501, FL502).
	4035306P23	Washer, fiber. (Used with J501).
	4035306P11	Washer, fiber. (Used with Q501).
	19A129715G1	Adapter Board.

PRODUCTION CHANGES

Changes in the equipment to improve performance or to simplify circuits are identified by a "Revision Letter", which is stamped after all the model number of the unit. The revision stamped on the unit includes all previous revisions. Refer to the Parts List for descriptions of parts affected by those revisions.

REV. A - RF Assembly 19D417075G9-12


To improve receiver sensitivity. Changed C4.

REV. B - RF Assembly 19D417075G9-12


To incorporate new mixer board. Replaced A303 (19B227059G1) with A304 (19B227059G2).

Schematic Diagram Was:

R F ASSEMBLY
19D417075

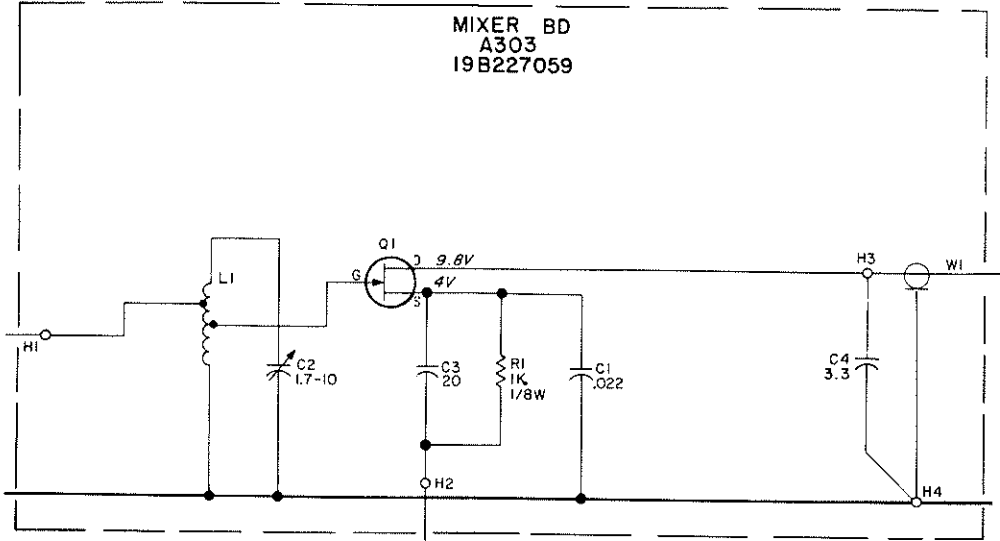

Outline Diagram Was:

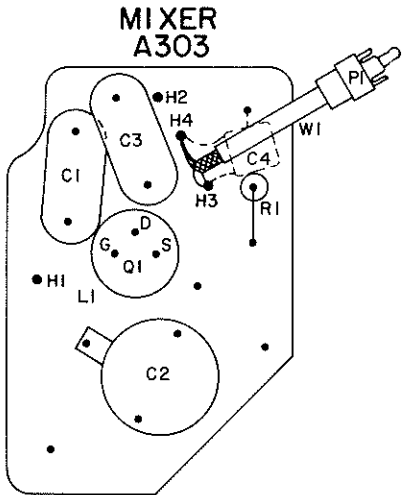

REV. A - RF Assembly 19D417075G19-G28

IF Filter Board 19C331148G1

To improve operation of UHF mixer circuit. Added C7 and L2.

REV. B - UHS Pre-Amplifier

To improve receiver sensitivity. Changed R2302 and R2305. Added C2310.

REV. A - IF-Filter Board 19C320523G2

To improve operation. Replaced L502 with L508, added C516.

REV. A - RF Assembly 19D417075G13-G16

REV. C - RF Assembly 19D417075G9-G12

To improve sensitivity. Deleted A304-C4.

REV. D - RF Assembly 19D417075G9

To improve receiver sensitivity in 406 to 420 MHz range. Added A301C.

REV. A - UHS Pre-Amplifier

To incorporate new coil (L2302). Changed L2302, C2302, C2306, C2307 and C2308. Deleted C2310 and added R2305.

REV. B - UHS Pre-Amplifier

To improve receiver sensitivity. Changed R2302 and R2305. Added C2310.