

MASTR® II MAINTENANCE MANUAL

406 - 512 MHz, 100-WATT TRANSMITTER-MOBILE AND STATION

(DF3158, THIS SHEET ONLY)

Maintenance Manual LBI30198D

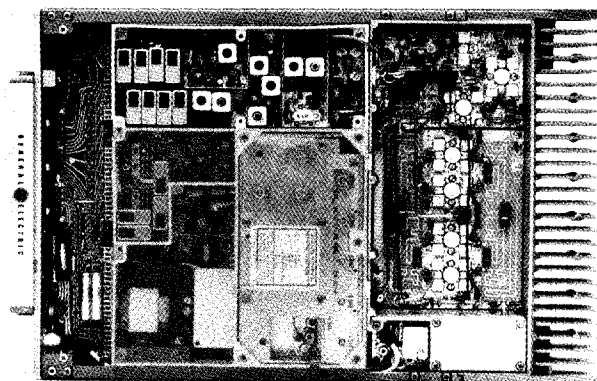


TABLE OF CONTENTS

SPECIFICATIONS	ii
DESCRIPTION AND MAINTENANCE	LBI 30199 (DF3158)
EXCITER	LBI 30200 (DF3165)
POWER AMPLIFIER	LBI 30201 (DF3174)

**406-512 MHz EXCITER 19D423865G2,4
100-WATT PA ASSEMBLY 19D42488G14-17, G31-34, G37 & G38
19D424895G14-17, G31-34, G38 & G39**

SPECIFICATIONS*

Power Output

406-420 MHz, 450-470 MHz	100 Watts (Adjustable from 30 to 100 Watts)
420-440 MHz, 470-512 MHz	90 Watts (Adjustable from 30 to 90 Watts)
440-450 MHz	80 Watts (Adjustable from 30 to 90 Watts)

Crystal Multiplication Factor

36

Frequency Stability

5C-ICOM with EC-ICOM	±0.0005% (-40°C to +70°C)
5C-ICOM or EC-ICOM	±0.0002% (0°C to +55°C)
2C-ICOMS	±0.0002% (-40°C to +70°C)

Spurious and Harmonic Emission

At least 85 dB below full rated power output.

Modulation

Adjustable from 0 to ±5 kHz swing with instantaneous modulation limiting.

Modulation Sensitivity

75 to 120 Millivolts (Mobile)
10 to 120 Millivolts (Station)

Audio Frequency Characteristics

Within +1 dB to -3 dB of a 6 dB/octave pre-emphasis from 300 to 3000 Hz per EIA standards. Post limiter filter per FCC and EIA.

Distortion

Less than 2% @ 1000 Hz
Less than 5% @ 300 Hz
Less than 3% @ 3000 Hz

Deviation Symmetry

0.6 kHz maximum

Maximum Frequency Spread

	Full Specifications	1 dB Degradation
406-470 MHz	5.50 MHz	9.00 MHz
470-494 MHz	5.80 MHz	9.50 MHz
494-512 MHz	6.00 MHz	9.75 MHz

Duty Cycle

EIA 20% Intermittent (Mobile and Station)
Continuous (Stations)

RF Output Impedance

50 Ohms

* These specifications are intended primarily for the use of the Serviceman. Refer to the appropriate Specification Sheet for the complete specifications.

WARNING

Although the highest DC voltage supplied to the MASTR II transmitter is +12 Volts DC, high current may be drawn under short circuit conditions. These currents can possibly heat metal objects such as tools, rings, watchbands, etc., enough to cause burns. Be careful when working near energized circuits!

High-level RF energy in the transmitter Power Amplifier assembly can cause RF burns. KEEP AWAY FROM THESE CIRCUITS WHEN THE TRANSMITTER IS ENERGIZED!

GENERAL ELECTRIC COMPANY • MOBILE COMMUNICATIONS DIVISION
WORLD HEADQUARTERS • LYNCHBURG, VIRGINIA 24502 U.S.A.

GENERAL  ELECTRIC*

U.S.A.