


**GE** MOBILE RADIO

# MASTR<sup>®</sup> Executive II MAINTENANCE MANUAL

SYSTEM BOARD, MULTI-FREQUENCY BOARDS &  
CRYSTAL MODULES FOR RADIO COMMON CARRIER MOBILES

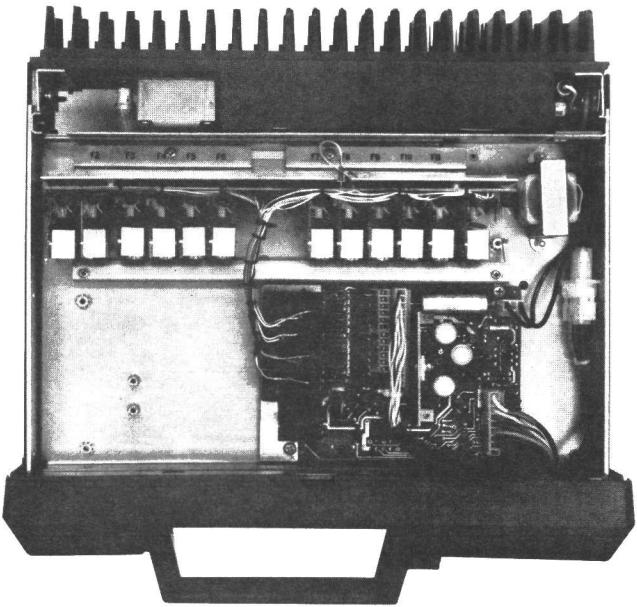

## SPECIFICATIONS \*

INPUT VOLTAGE	13.8 Volts DC (Negative Ground Only)
OUTPUT VOLTAGE	Regulated 10 Volts DC at 0.1 to 0.5 Amperes
MAXIMUM CURRENT DRAIN	0.4 Amperes
AUDIO OUTPUT	1.6 Volts RMS into 600 ohms (300 Hz with 6 dB/octave rolloff)

\*These specifications are intended primarily for the use of the serviceman. Refer to the appropriate Specification Sheet for the complete specifications.

**SYSTEM BOARD 19C327080G1**

**Maintenance Manual LBI 30358 B**  
DATAFILE FOLDER DF4101

GENERAL **GE** ELECTRIC

## TABLE OF CONTENTS

	Page
DESCRIPTION .....	1
CIRCUIT ANALYSIS .....	1
10 Volt Regulator .....	1
Transmitter Keying .....	1
Audio Amplifier .....	1
Crystal Module .....	1
Transmitter Multi-Frequency Oscillator Board .....	2
Receiver Multi-Frequency Oscillator Board .....	2
SYSTEM INTERCONNECTION DIAGRAM .....	3/4
<b>OUTLINE DIAGRAMS</b>	
System Board .....	5
Transmitter Multi-Frequency Oscillator Board .....	6
Receiver Multi-Frequency Oscillator Board .....	7
<b>SCHEMATIC DIAGRAMS (Includes Parts Lists and Production Changes)</b>	
System Board .....	9/10
Crystal Module .....	10
Transmitter Multi-Frequency Oscillator Board .....	11/12
Receiver Multi-Frequency Oscillator Board .....	13/14

## WARNING

Although the highest DC voltage in MASTR Executive II Mobile Equipment is supplied by the vehicle battery, high currents may be drawn under short circuit conditions. These currents can possibly heat metal objects such as tools, rings, watchbands, etc., enough to cause burns. Be careful when working near energized circuits! High-level RF energy in the transmitter Power Amplifier Assembly can cause RF burns upon contact. Keep away from these circuits when the transmitter is energized!

## DESCRIPTION

The System Board for MASTR Executive II Common Carrier Mobiles provides interconnection between the control cable from the control unit and the transmitter and receiver RF boards which plug into it.

Mounted on the underside of the radio chassis, the System Board is accessible by removing the radio chassis from the mounting frame. Molex pins on the board protrude through slots on the radio chassis to make connections with the exciter, IF-Detector (IF-DET) and transmitter multi-frequency board. The receiver multi-frequency board connects to the System Board via a harness and connector.

The control head end of the control cable terminates in a 38-pin connector. The radio end of the control cable connects to the front connector J1. An internal harness routes from the front connector to the System Board where it plugs onto Molex pins.

Centralized metering jack J910 is accessible from the top of the radio and is provided for use with General Electric Test Set 4EX3A11 or Test Kit 4EX8K12. The red metering plug provides continuous access to the regulated 10 Volts, A+, transmitter and receiver audio and PTT.

## CIRCUIT ANALYSIS

### +10 VOLT REGULATOR

The +10 Volt Regulator provides a closely-controlled supply voltage for the transmitter exiter, the receiver and the multi-frequency boards. The 13.8 VDC is applied to the choke input filter composed of L1901 and C906. The output of the filter is applied to the regulator circuit which consists of Q901, Q902, Q903, and zener diode VR901.

When the output of the regulator starts to increase, Q903 conducts harder and Q902 conducts less, causing Q901 to conduct less. This increases the voltage drop across Q901, keeping the output constant. Potentiometer R906 is used to set the base voltage of Q903 for the desired 10-Volt output.

Diodes CR905 and CR906 provide reverse battery polarity protection, and will cause the in-line fuse to blow if the polarity reverses.

### TRANSMITTER KEYING

Operating the PTT switch on the handset forward biases diodes CR903 and CR904, connecting the emitter of Q904 to A-. Conduction of Q904 turns on transmitter oscillator control switch Q905. Operation of

Q905 applies voltage to the transmitter oscillator and applies an RF signal to the transmitter.

### AUDIO AMPLIFIER

The audio signal from the receiver is fed through the de-emphasis network (C915, C918, R919, R921) to audio amplifiers Q906 and Q907. The output of emitter-follower Q906 is coupled to the base of Q907 through C919. The amplified audio signal is fed to the earpiece of the handset.

The 15 mA required for operating the carbon microphone in the handset is supplied through R911 and R912 from the 10 Volt regulator output to the MIC HI lead. C911 provides the necessary filtering.

### CRYSTAL MODULE

Crystal modules determine the operating frequency of the transmitter and receiver. The plug-in module contains a crystal, a trimmer capacitor, and varicap for temperature compensation.

The quartz crystals used in the crystal module exhibit the traditional "S" curve characteristics of output frequency versus operating temperature.

In the mid-temperature range (-10°C to +50°C), the raw crystal characteristic is maintained. The compensation voltage which drives the crystal module varicap is approximately constant over this temperature range. Consequently, the crystal almost solely determines the temperature characteristic. The crystals whose temperature characteristic lie toward the high limit of +4 PPM shown in Figure 1 are rotated slightly. All others have little or no rotation.

The cold end temperature characteristic is "lifted" by a temperature-dependent increasing voltage. The compensator which drives the crystal module varicap produces a voltage which increases linearly from -10°C to -30°C. This voltage decreases the varicap capacity, which in turn increases the module tuned circuit frequency to compensate for the decreasing frequency characteristic of the crystal.

The hot end crystal temperature characteristic in Figure 1 is shown to be increasing with temperature. The hot end (above 50°C) crystal characteristic is compensated for by a decreasing voltage from the compensator. This results in added capacity from the varicap. In turn, a decreasing module frequency results to counteract the increasing frequency response of the crystal.

Compensation voltage is applied to pin 4 of the crystal module to maintain frequency stability within ±5 PPM over a temperature range of -30°C to +60°C.

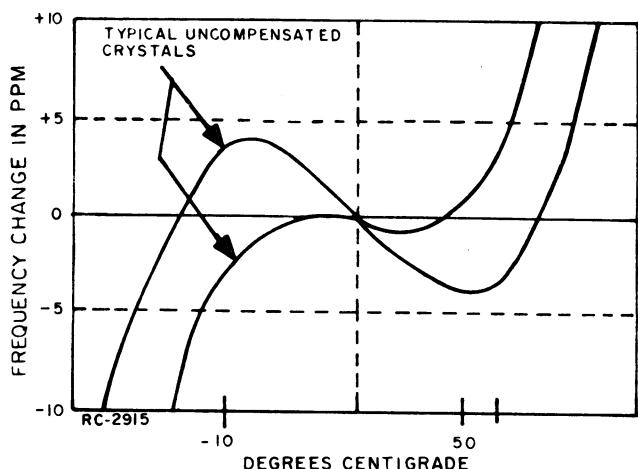


Figure 1 - Typical Crystal Characteristics

**Service Note:** Proper crystal module operation is dependent on the closely-controlled input voltages from the 10-Volt regulator. Should all of the crystal modules shift off frequency, check the 10-Volt regulator.

The compensation voltage varies non-linearly with temperature to complement the temperature/frequency characteristics of the crystal. Listed below are typical minimum and maximum voltage readings to be expected at pin 4 of the crystal modules, as measured with a high impedance meter.

TEMPERATURE RANGE	OUTPUT VOLTAGE	
	MINIMUM	MAXIMUM
-30°C	4.9 Volts	6.0 Volts
-10°C to +50°C	3.7 Volts	4.3 Volts
-75°C	3.3 Volts	3.8 Volts

Trimmer capacitor C3 is used to adjust the radio for the exact operating frequency. Refer to the applicable Alignment Procedure for details.

Operating voltage for the crystal module is supplied through the forward biased pin diode on the multi-frequency board to pin 1 of the selected crystal module.

#### TRANSMITTER MULTI-FREQUENCY OSCILLATOR BOARD

The Transmitter Multi-Frequency Oscillator Board contains the necessary circuitry for providing up to twelve transmit frequencies. The oscillator board plugs into J907 and J912 on the System Board and

utilizes crystal modules to determine the exact operating frequencies.

The transmit oscillator circuits are identical, each using a single transistor in conjunction with the selected crystal module to comprise the oscillator circuit. Crystal modules are selected for operation by the frequency select lead from the control unit. PIN diodes are used to switch the output of the selected crystal module to the base of the appropriate transistor (Q2101 or Q2102). Since the oscillator circuits are identical, only the F1 transmit circuit is described here.

When F1 is selected at the control unit, A- is applied to the junction of Q2101 and CR2101. PIN diode CR2101 is now forward biased applying the output of crystal module Y2101 (pin 1) to the base of common oscillator transistor Q2101. The selected crystal module and the transistor circuit comprise a Colpitts oscillator.

Pressing the PTT switch applies the +10 Volt oscillator control voltage to the emitter/base circuit of Q2101, causing it to oscillate at the assigned F1 crystal frequency.


A short plug-in coaxial cable (W2601) connects the output of the oscillator board to J102 on the exciter board. When the PTT switch is released, the transmitter oscillator control voltage is removed from Q2101 and the anode of PIN diode CR2101. Q2101 stops oscillating and no longer provides an input to the exciter.

#### RECEIVER MULTI-FREQUENCY OSCILLATOR BOARD

The Receiver Multi-Frequency Oscillator Board contains the necessary circuitry for providing up to 13 receive frequencies. Interconnection to the System Board are made through P908 and J908. The module contains two Colpitts oscillators and 13 crystal module sockets. The frequency selection and oscillator circuits operate in the same manner as described for the transmitter oscillator. The output signal is fed to the receiver oscillator/multiplier through J2301 and a wire connected to the underside of the OSC/MULT board.

The receiver oscillator board has its own compensation circuit composed of Q2303, VR2301, RT2301, and RT2302. Zener diode VR2301 provides a constant +8.5 Volts reference voltage for compensator Q2303.


R/CONTROL CABLE  
9C327299G1

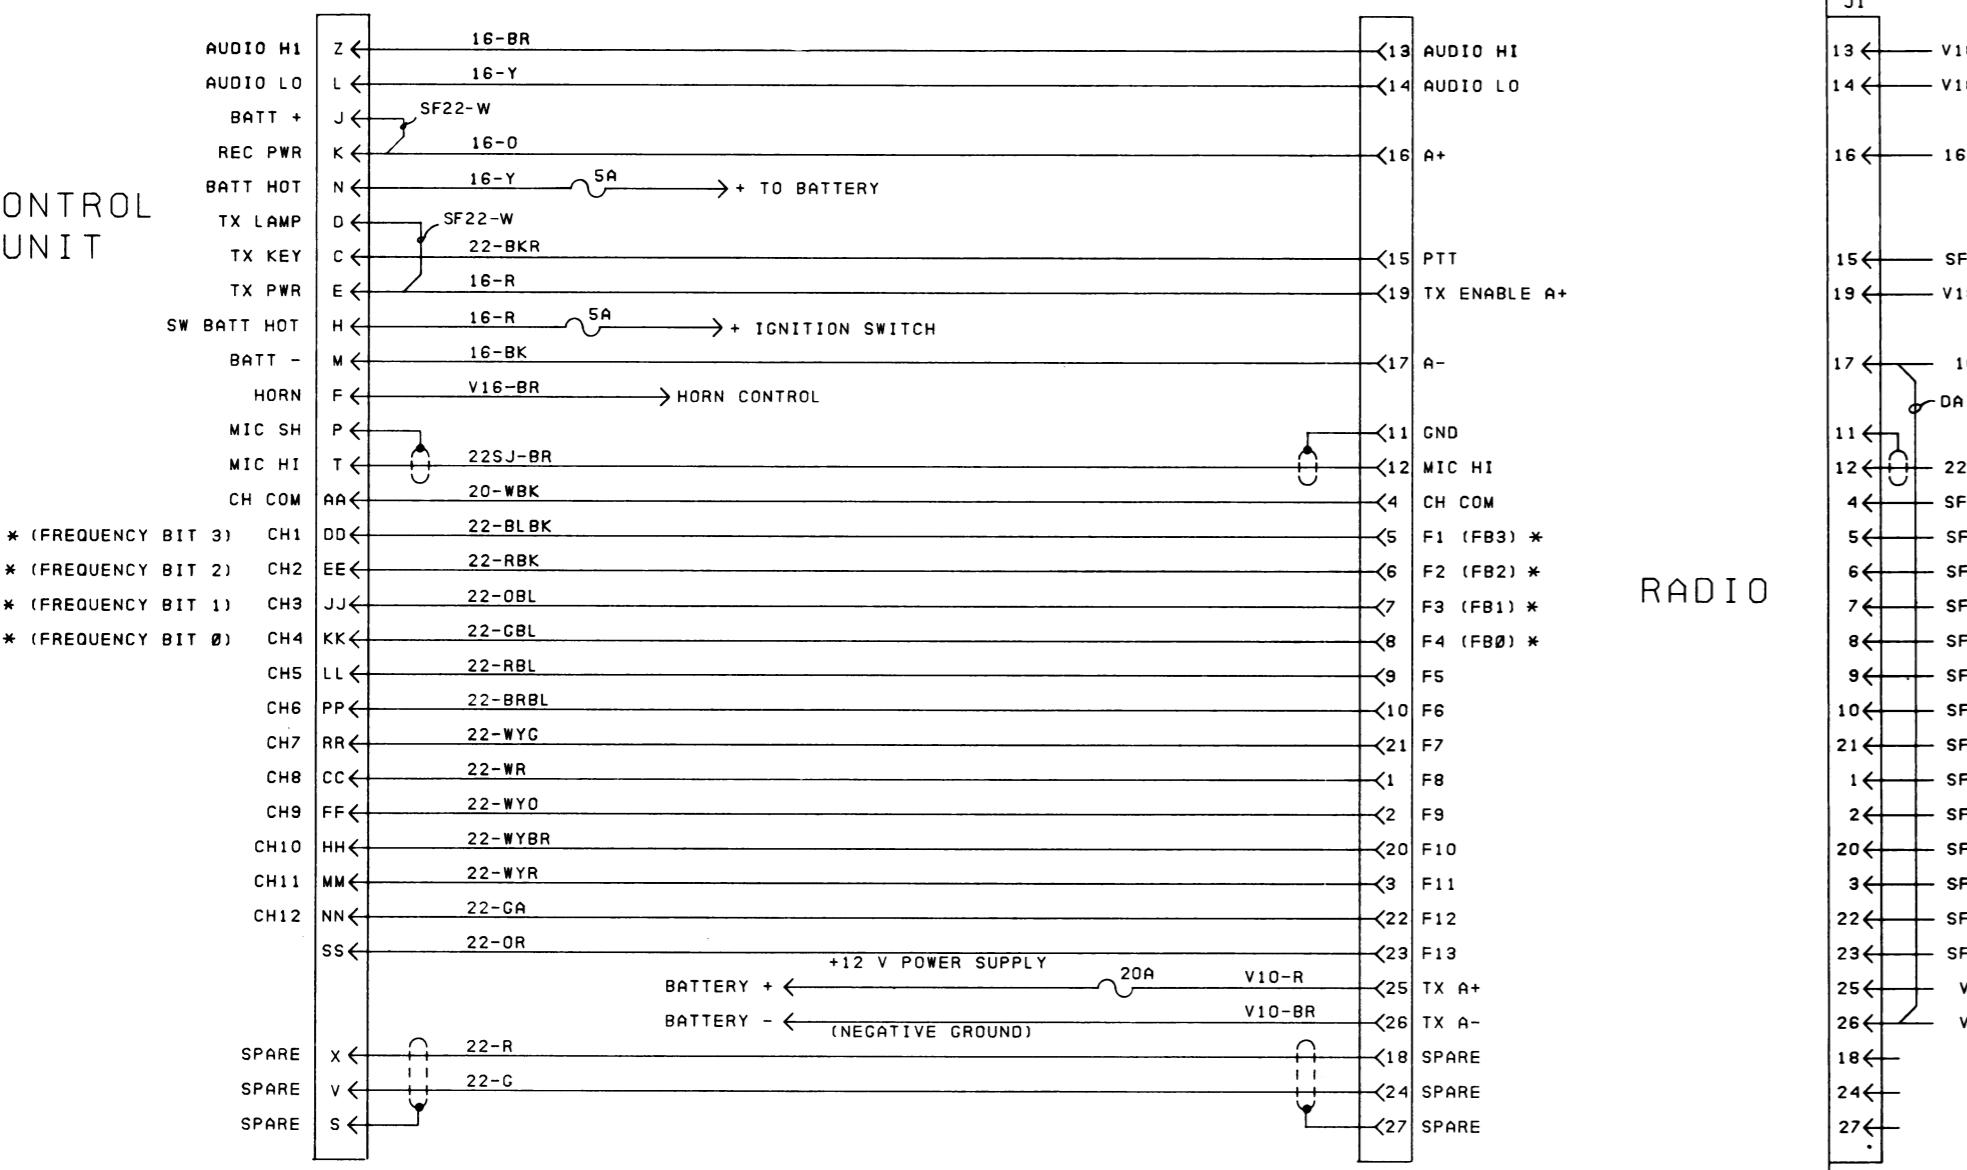

DO NOT RETAIN RATED EQUIPMENT  
PART. REPLACEMENT OF ANY  
PART SHOULD BE MADE ONLY WITH  
PART HAVING THE SPECIFICATIONS  
IN THE PARTS LIST FOR THAT PART.

## PRIMARY FREQUENCY SELECTION FUNCTIONS.

1

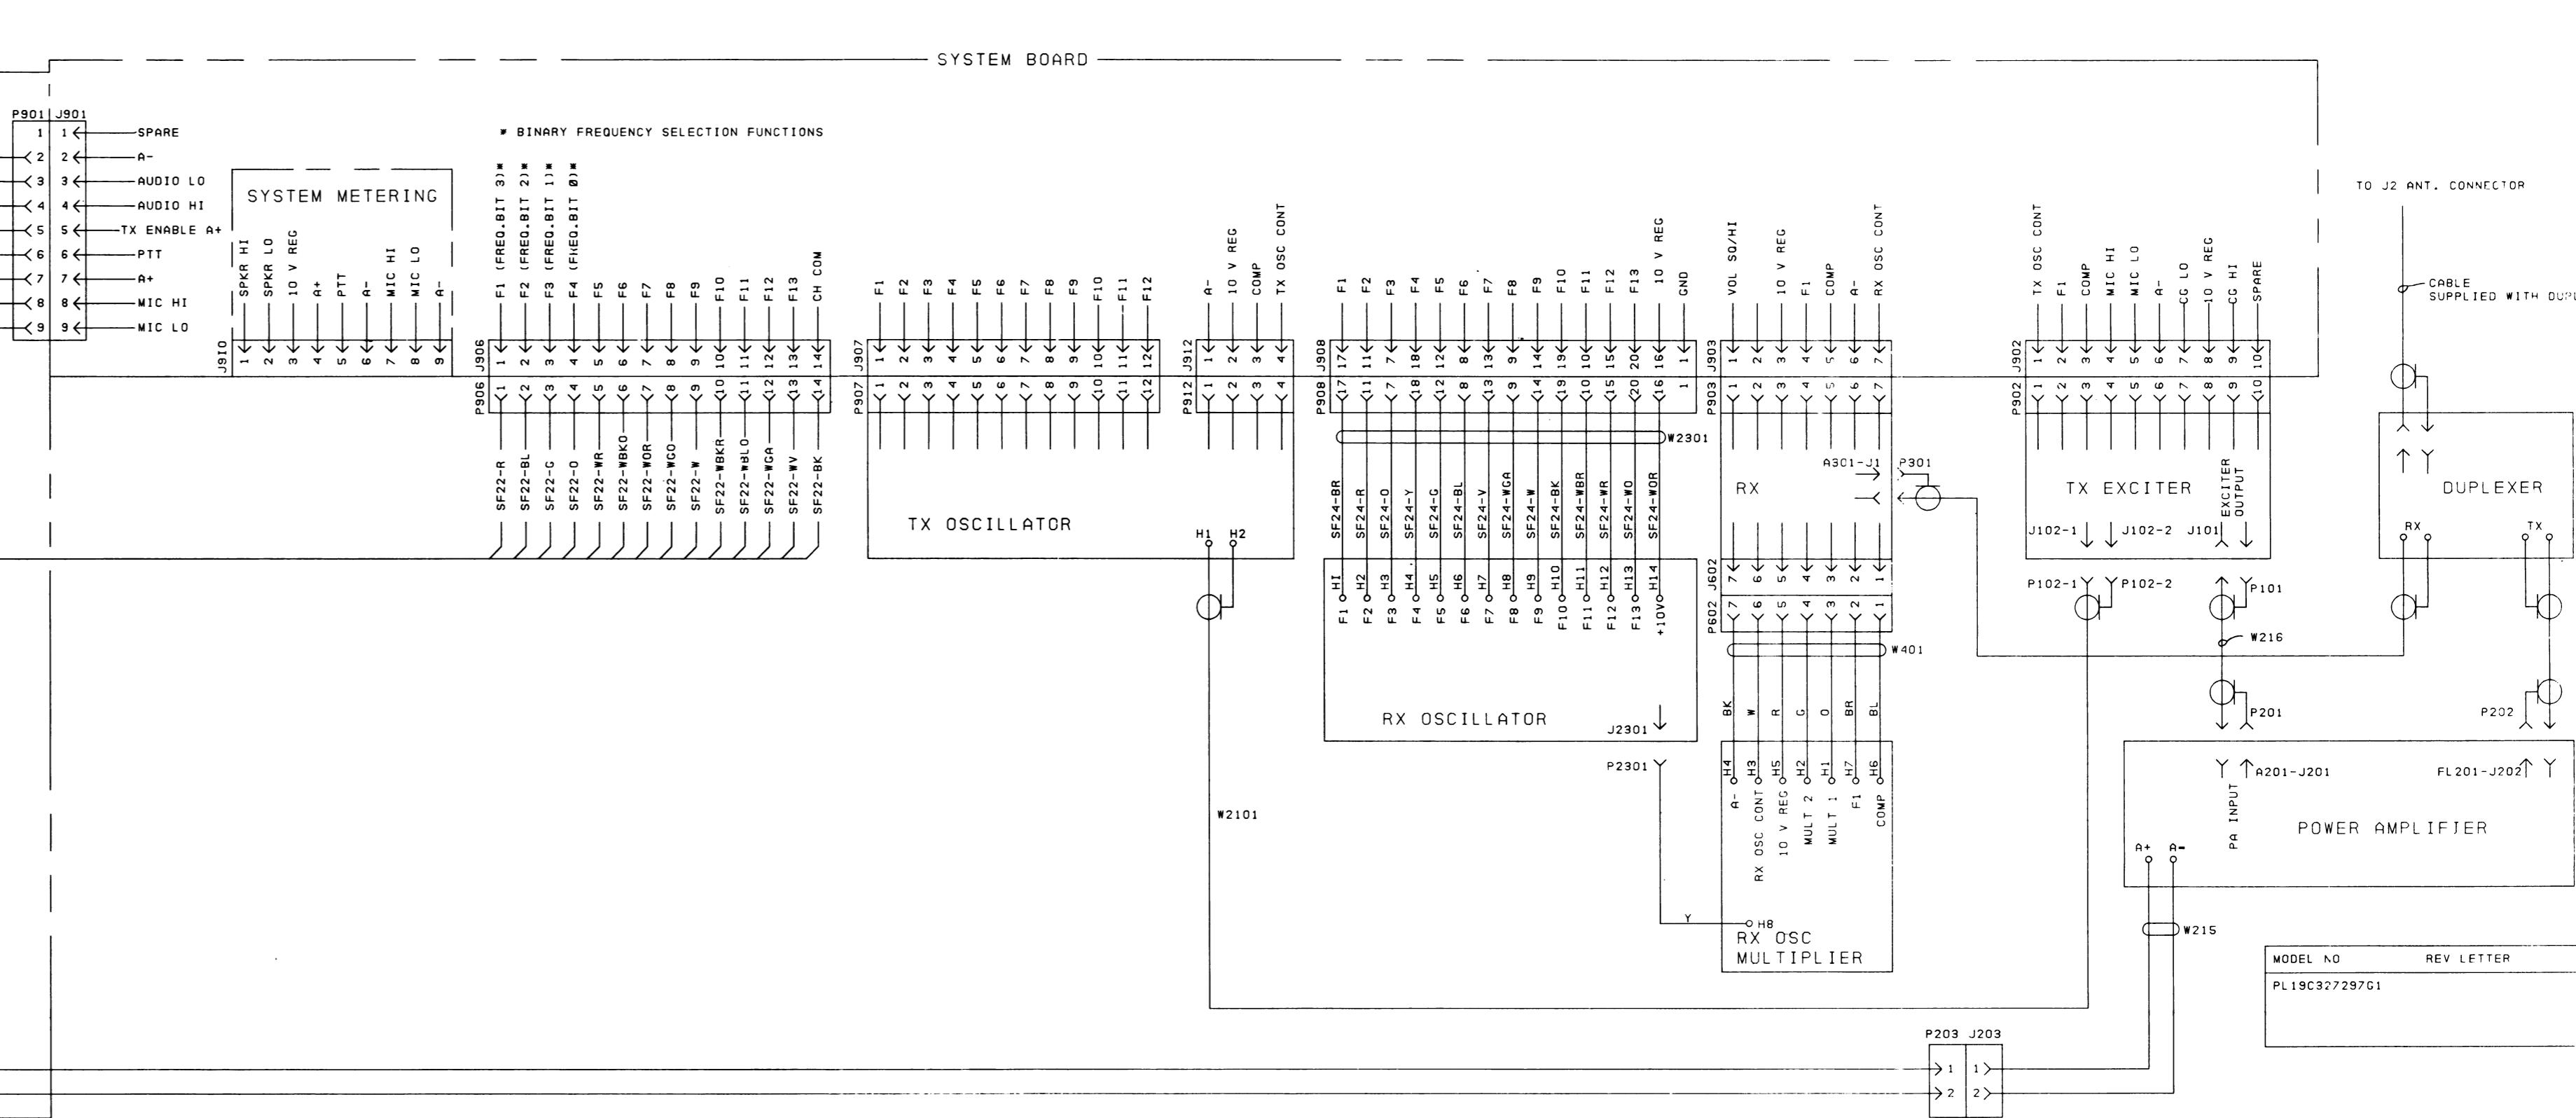

. 2)

## SYSTEM INTERCONNECTION DIAGRAM

## PARTS LIST

LBI-30364

CABLE ASSEMBLY  
19C327297G1

SYMBOL	GE PART NO.	DESCRIPTION
J1	19C303775P1	- - - - - JACKS AND RECEPTACLES - - - - - Connector, plug: 28 terminals.
P203	19A134281P1 19A134282P2	- - - - - PLUGS - - - - - Connector. Includes: Shell. Contact, electrical: wire size No. 10-14 AWG; sim to AMP 350200-2.
P901	19A136644G1 19A116781P5 19A116781P6	Connector. Includes: Shell. Contact, electrical: wire range No. 16-20 AWG; sim to Molex 08-50-0106. (P901-2, P901-3, P901- 4, P901-5, P901-7, P901-9).
P906	19A130712G1 19A116781P6	Connector. Includes: Shell. Contact, electrical: wire range No. 22-26 AWG; sim to Molex 08-50-0108.
	19B201074P606	- - - - - MISCELLANEOUS - - - - - Tap screw, Phillips POZIDRIV®: No. 4-40 x 3/8. (Secures J1 to connector support).
	19B226892P1 19A115185P5	Support. (J1). Retaining strap: sim to Panduit Corp. SST-1. (Secures wires from J1 to P203, P901, P906).

\*COMPONENTS ADDED, DELETED OR CHANGED BY PRODUCTION CHANGES


## PARTS LIST

LBI-30361

CABLE ASSEMBLY  
19C327299G1


SYMBOL	GE PART NO.	DESCRIPTION
	19C311409P1	Connector, audio, 28 contacts: Contacts 1-24, 4.5 amps, Contacts 25-28, 25 amps.
	19C311411G1	Thumbscrew. (Used with 28 pin connector).
	19B226473G1	Cover, connector. (Used with 28 pin connector).
	N36P9020C13	Machine screw: No. 4-40 x 1-1/4. (Secures 28 pin connector together).
	N210P9C13	Hexnut: No. 4-40. (Secures 28 pin connector together).
	19A129232G1	Connector, Audio, 38 contacts.
	19B209227P5	Contact. (Used with 38 pin connector- Quantity 30).
	N44P9006C6	Machine screw: No. 4-40 x 3/8. (Secures 38 pin connector together).
	7139880P11	Cable, 23 conductor: approx 20 feet long.
	19A122111G1	Fused lead, red. (Includes 2 19A115776P3 con- tacts, 1 4029482P2 contact, 1 7491823P8 terminal 1 7491823P7 terminal).
	19A122111G2	Fused lead, yellow. (Includes 2 19A115776P3 con- tacts, 1 4029482P2 contact, 1 7491823P8 terminal, 1 7491823P7 terminal).
	1R16P8	Fuse, cartridge, quick blowing: 5 amps at 250 v: sim to Littlefuse 31200 or Bussmann MTH-5. (Used with fused lead assemblies- Battery and ignition switch).
	19B209260P27	Terminal, solderless: wire range No. 12-10: sim to AMP 31829-1008 PC. (Terminates 12 volt power supply wire - V10-B wire).
	19B209260P18	Terminal, solderless: wire range No. 12-10: sim to AMP 41125. (Terminates negative ground wire- V10-B wire).
	19C301208P6	Insulated sleeving, electrical. (Used with red 12 volt power supply wire and brown negative ground wire).
	4029484P2	Contact, electrical: sim to AMP 41274. (Term- inates V16-BH wire out of 38 pin connector).
	4033347G1	Splice conductor. (Used with 4029484P2 contact).
	FUSE ASSEMBLY 19B216021G4 (Fuses must be ordered separately)	
	1R11P5	Fuse, quick blowing: 20 amps, 250 v: sim to Bussman NON20.

\*COMPONENTS ADDED, DELETED OR CHANGED BY PRODUCTION CHANGES

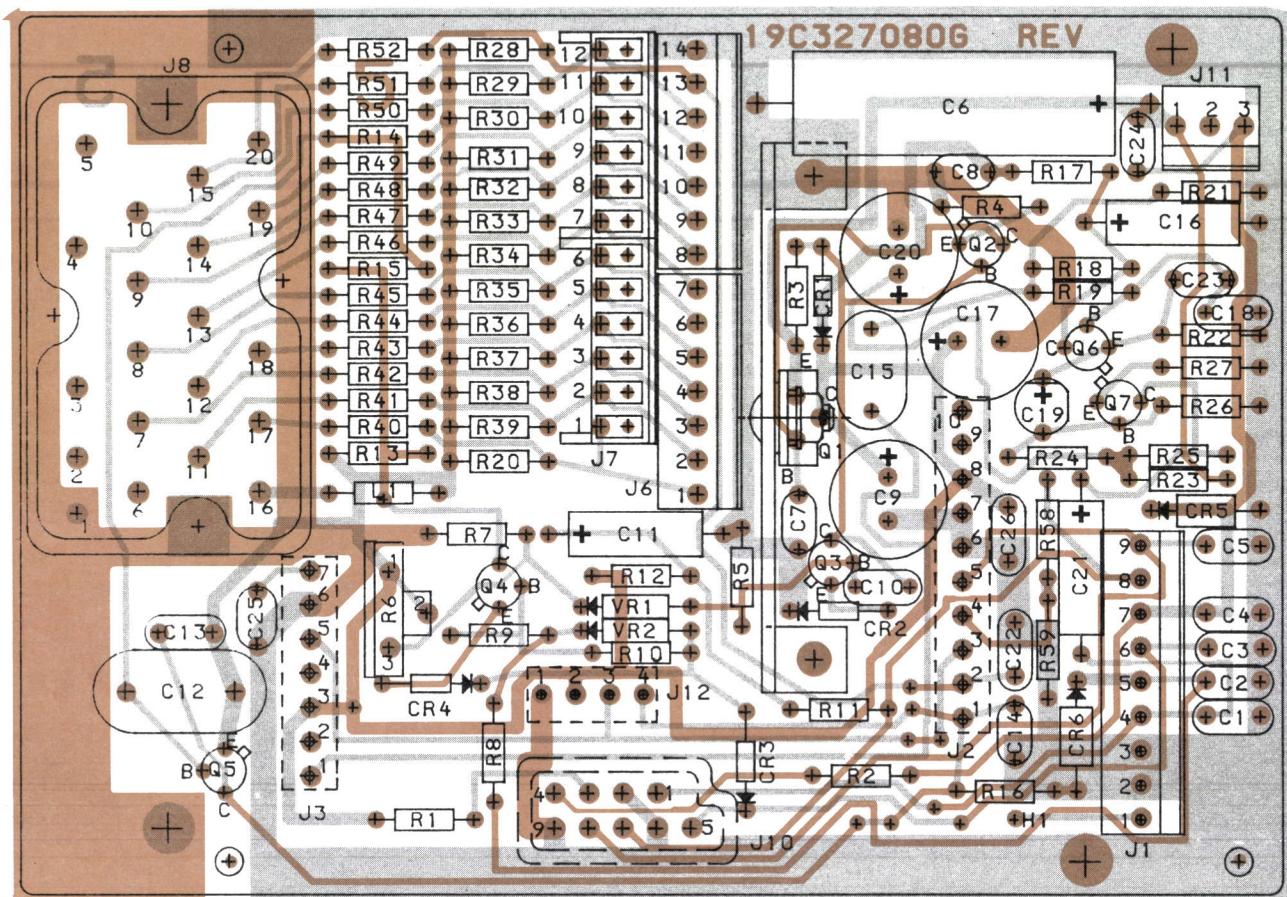


(19C327256, Rev. 4)  
(19B227326, Sh. 1, Rev. 5)  
(19B227326, Sh. 2, Rev. 5)

#### LEAD IDENTIFICATION FOR Q2-Q7

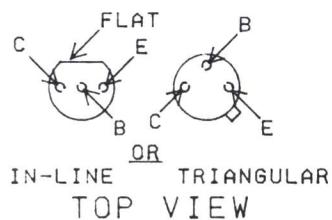

NOTE: LEAD ARRANGEMENT, AND NOT  
CASE SHAPE, IS DETERMINING  
FACTOR FOR LEAD IDENTIFICATION.

NOTE:  
PARTIAL REFERENCE DESIGNATIONS ARE  
SHOWN. FOR COMPLETE DESIGNATION, PREFIX  
WITH 900 SERIES.  
EXAMPLE: C1-C901, R1-R901....ETC.

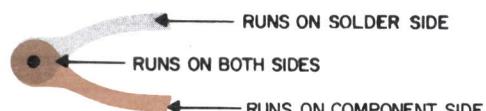


## OUTLINE DIAGRAM

RCC SYSTEM BOARD  
19C327080G1


P102-1

W2101  
(CENTER CONDUCTOR TO H1)  
(SHIELD TO H2)

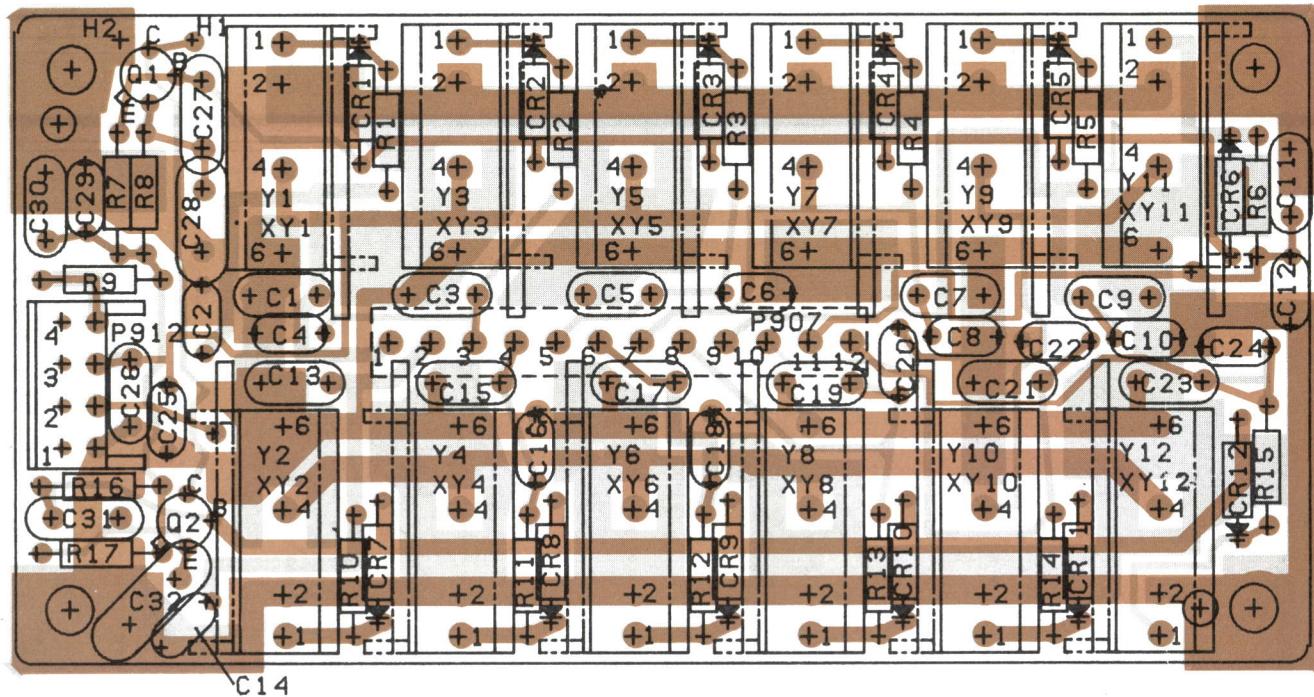

(19C327076, Rev. 1)  
(19B227319, Sh. 1, Rev. 1)  
(19B227319, Sh. 2, Rev. 1)


LEAD IDENTIFICATION  
FOR Q1 AND Q2

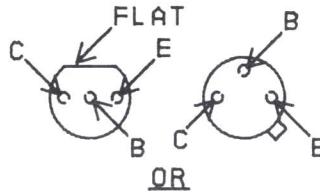

IN-LINE — TRIANGULAR  
TOP VIEW



PARTIAL REFERENCE DESIGNATIONS ARE SHOWN.  
FOR COMPLETE DESIGNATIONS PREFIX WITH  
2100 SERIES. EXAMPLE: C1 = C2101 RI = R2101  
ETC.

NOTE: LEAD ARRANGEMENT, AND NOT  
CASE SHAPE, IS DETERMINING  
FACTOR FOR LEAD IDENTIFICATION.

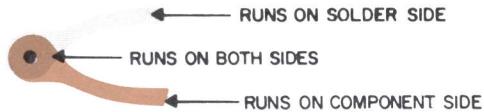

## OUTLINE DIAGRAM



# TRANSMITTER MULTI-FREQUENCY OSCILLATOR BOARD 19C327060G1

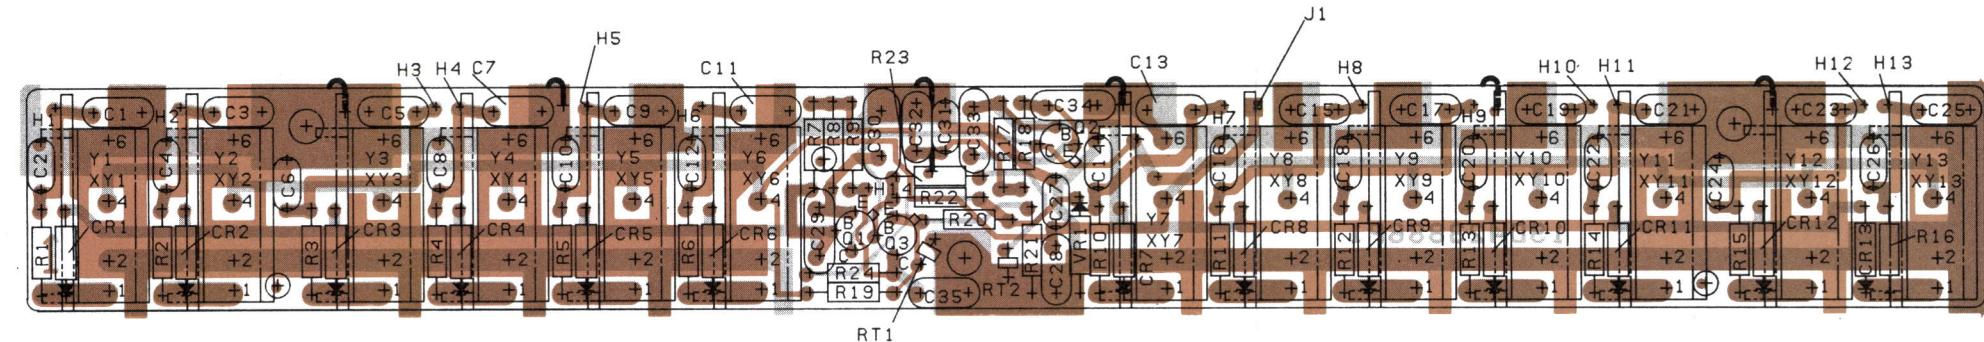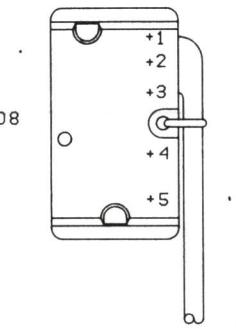

(19D423887, Rev. 2)  
(19C327094, Sh. 1, Rev. 1)  
(19C327094, Sh. 2, Rev. 1)

PARTIAL REFERENCE DESIGNATIONS ARE SHOWN,  
FOR COMPLETE DESIGNATION, PREFIX WITH 2300 SERIES.  
EXAMPLE C1-C2301, R1-R2301, ETC.


FROM	TO	WIRE
P908-17	H1	T28-BR
P908-11	H2	T28-R
P908-7	H3	T28-O
P908-18	H4	T28-Y
P908-12	H5	T28-G
P908-8	H6	T28-BL
P908-13	H7	T28-V
P908-9	H8	T28-WGA
P908-14	H9	T28-W
P908-19	H10	T28-BK
P908-10	H11	T28-WBR
P908-15	H12	T28-WR
P908-20	H13	T28-WO
P908-16	H14	T28-WY

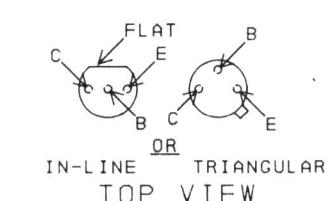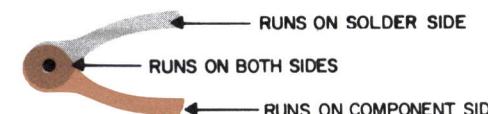

NOTE: LEAD ARRANGEMENT, AND NOT  
CASE SHAPE, IS DETERMINING  
FACTOR FOR LEAD IDENTIFICATION.


## OUTLINE DIAGRAM

RECEIVER MULTI-FREQUENCY  
OSCILLATOR BOARD 19D423885G1

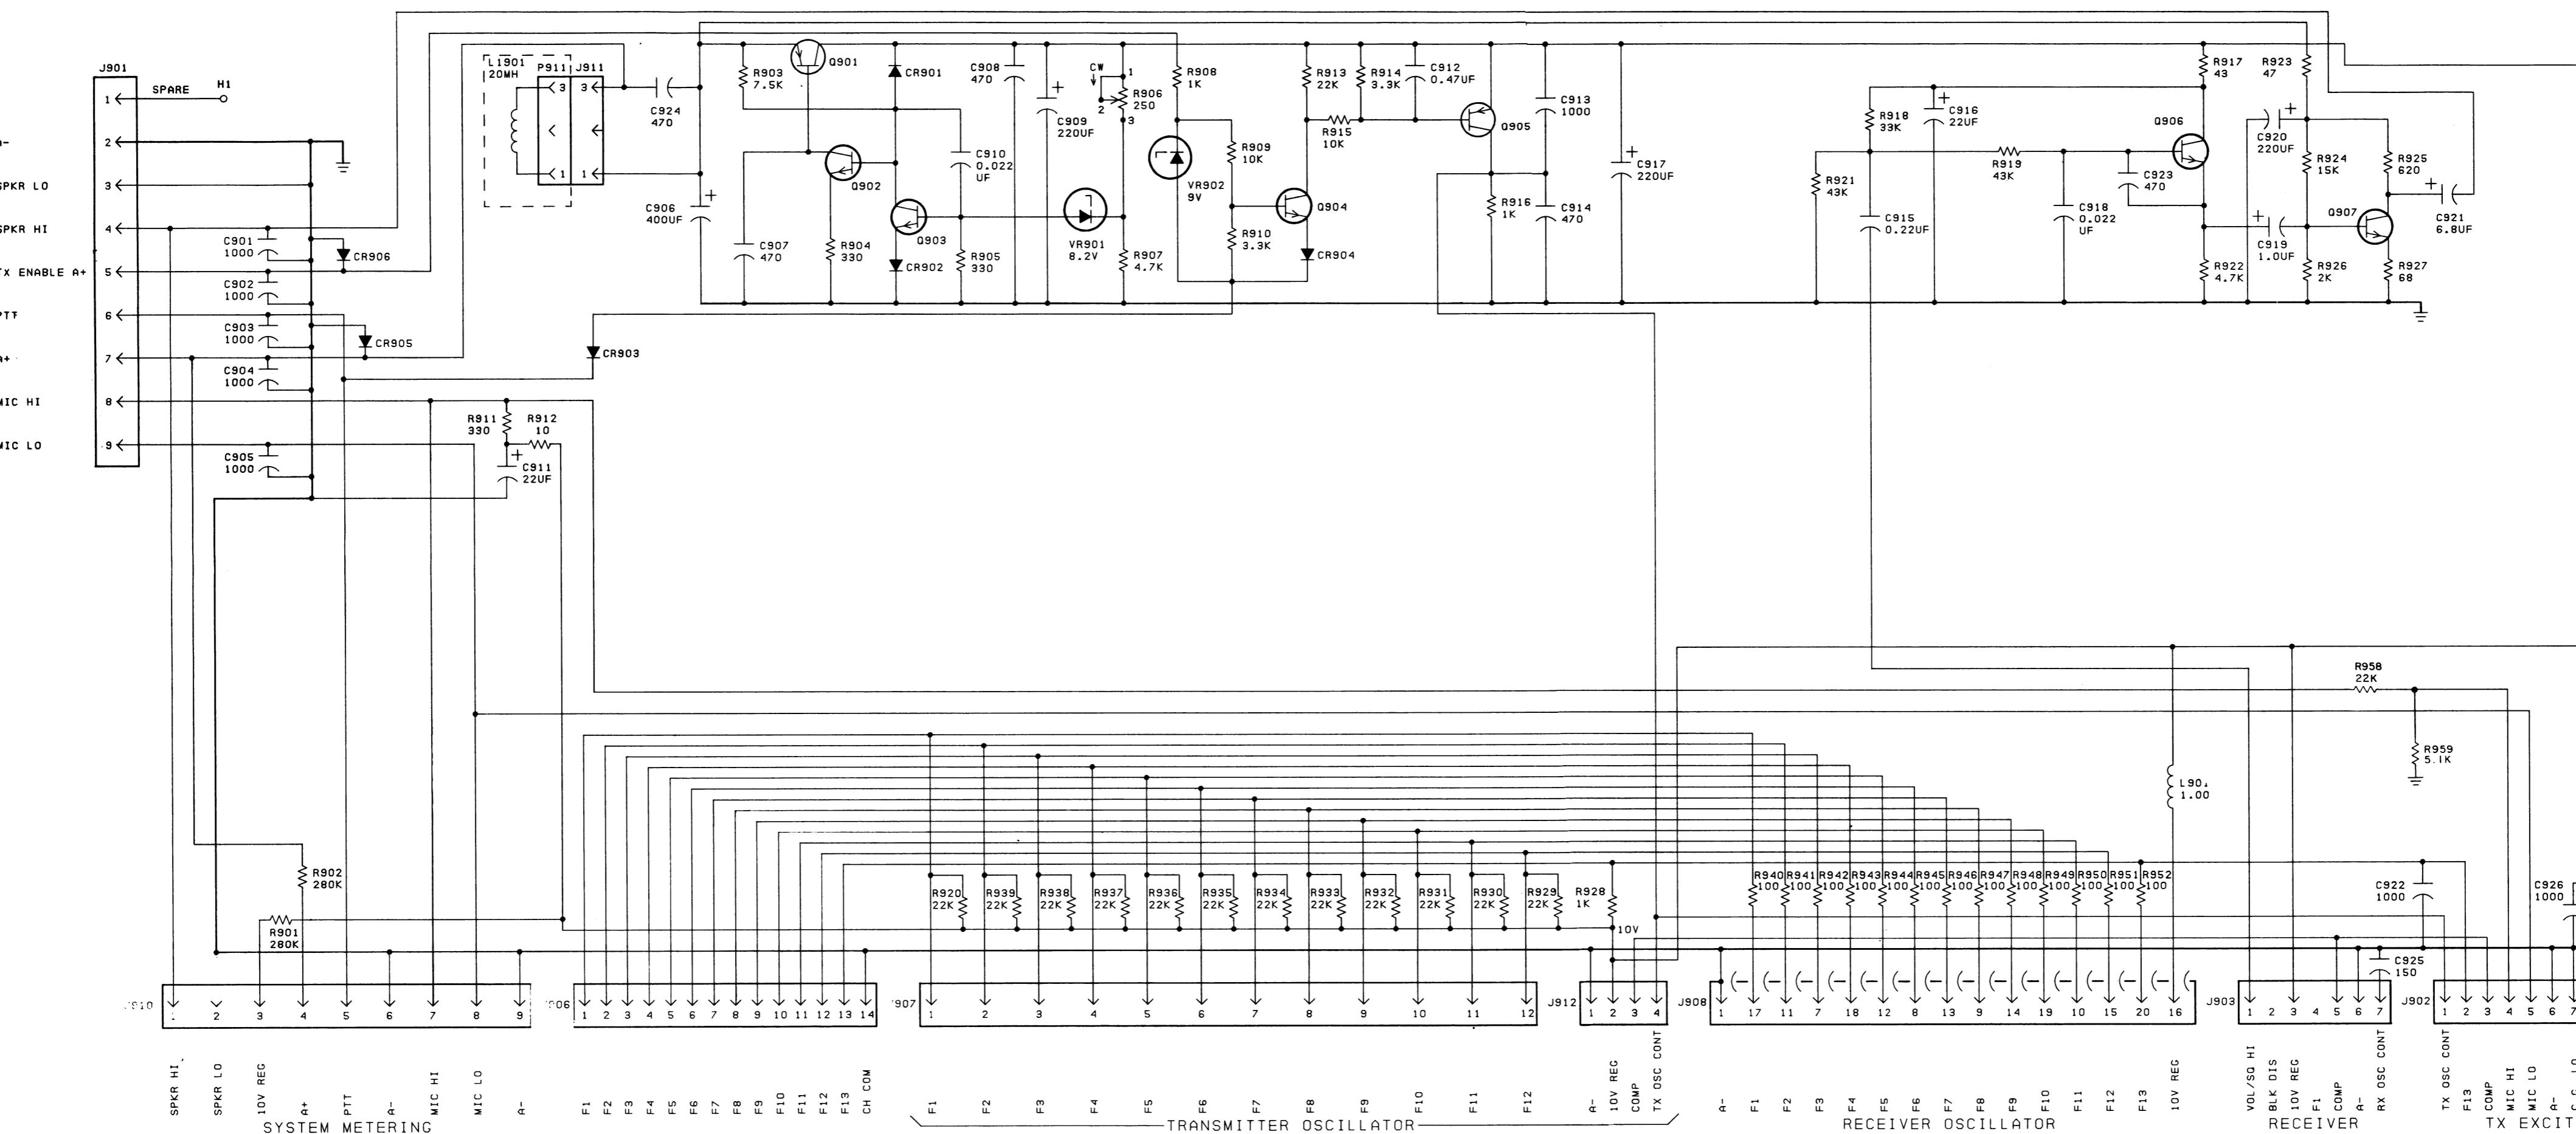

**SCHEMATIC DIAGRAM**  
RCC SYSTEM BOARD  
19C327080G1

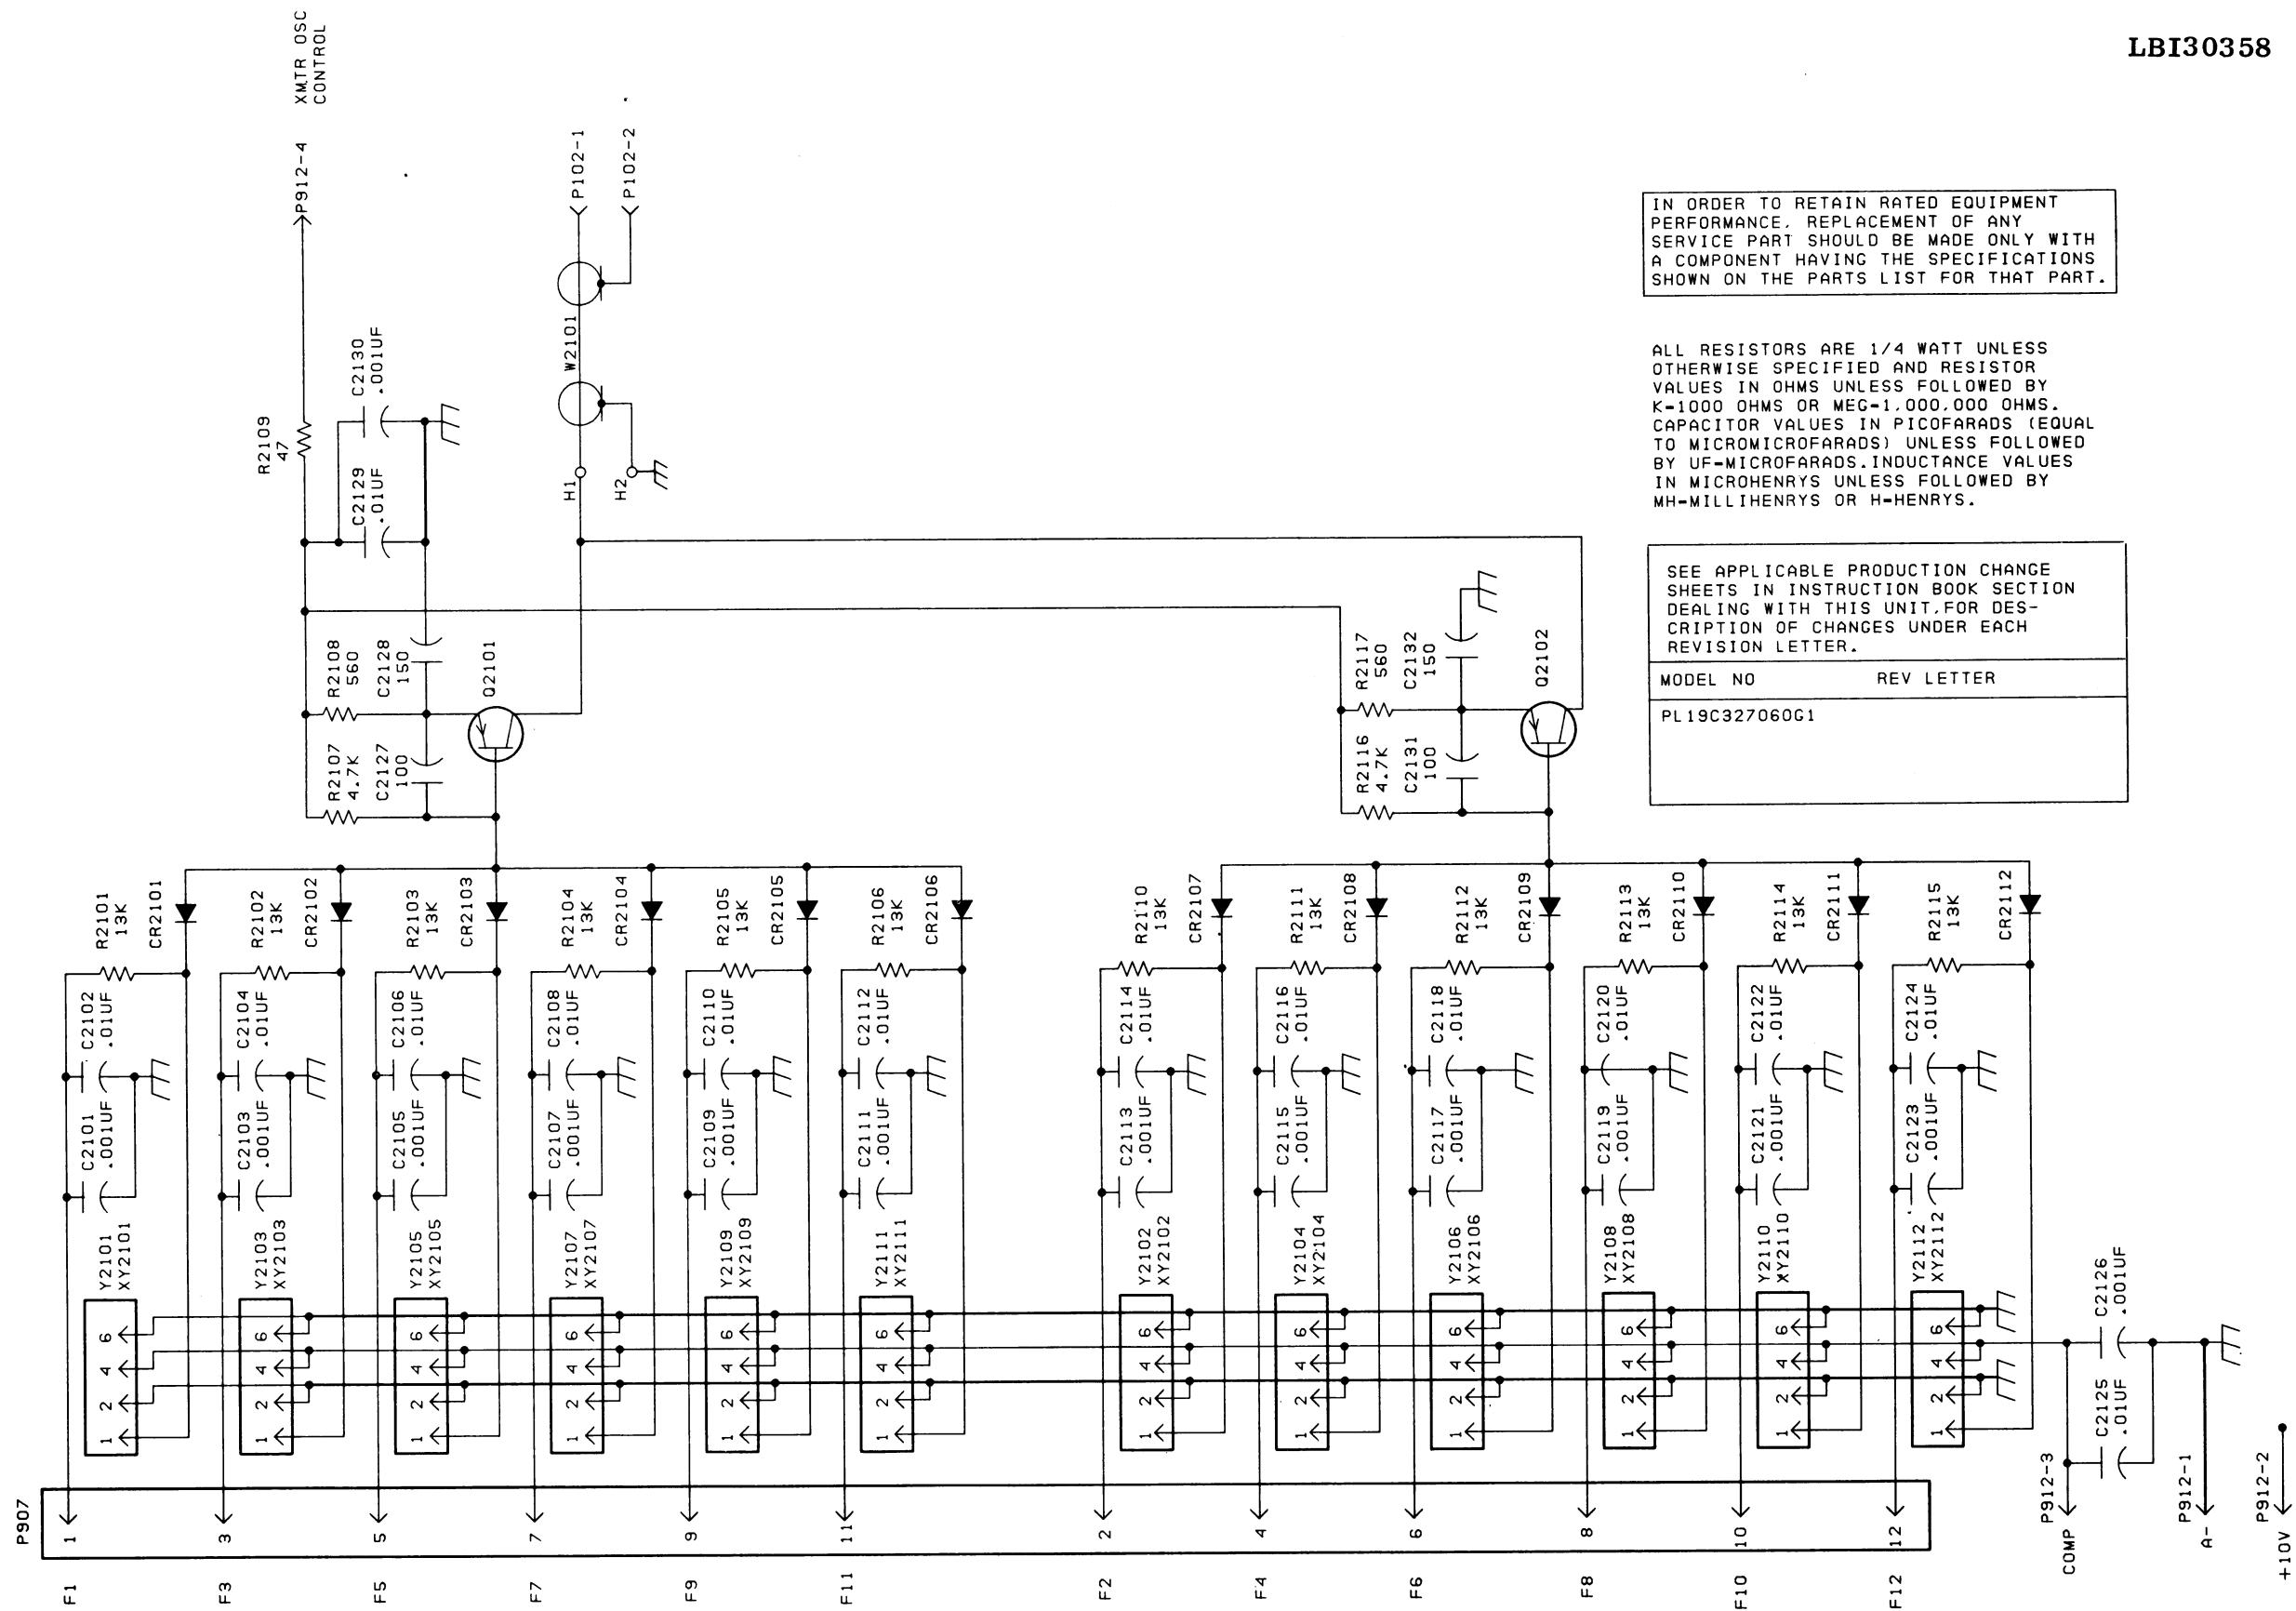

**SCHEMATIC DIAGRAM**

(19D423864, Rev. 1)


**TRANSMITTER MULTI-FREQUENCY OSCILLATOR BOARD 19C327060G1**

## PARTS LIST

LBI30362A

TRANSMITTER MULTI-FREQUENCY BOARD  
19C327060G1

SYMBOL	GE PART NO.	DESCRIPTION
<b>PARTS LIST</b>		
C2101	5494481P12	- - - - - CAPACITORS - - - - - Ceramic disc: 1000 pf $\pm 10\%$ , 1000 VDCW; sim to RMC Type JF Discap.
C2102	19A116080P101	Polyester: 0.01 $\mu$ f $\pm 10\%$ , 50 VDCW.
C2103	5494481P12	Ceramic disc: 1000 pf $\pm 10\%$ , 1000 VDCW; sim to RMC Type JF Discap.
C2104	19A116080P101	Polyester: 0.01 $\mu$ f $\pm 10\%$ , 50 VDCW.
C2105	5494481P12	Ceramic disc: 1000 pf $\pm 10\%$ , 1000 VDCW; sim to RMC Type JF Discap.
C2106	19A116080P101	Polyester: 0.01 $\mu$ f $\pm 10\%$ , 50 VDCW.
C2107	5494481P12	Ceramic disc: 1000 pf $\pm 10\%$ , 1000 VDCW; sim to RMC Type JF Discap.
C2108	19A116080P101	Polyester: 0.01 $\mu$ f $\pm 10\%$ , 50 VDCW.
C2109	5494481P12	Ceramic disc: 1000 pf $\pm 10\%$ , 1000 VDCW; sim to RMC Type JF Discap.
C2110	19A116080P101	Polyester: 0.01 $\mu$ f $\pm 10\%$ , 50 VDCW.
C2111	5494481P12	Ceramic disc: 1000 pf $\pm 10\%$ , 1000 VDCW; sim to RMC Type JF Discap.
C2112	19A116080P101	Polyester: 0.01 $\mu$ f $\pm 10\%$ , 50 VDCW.
C2113	5494481P12	Ceramic disc: 1000 pf $\pm 10\%$ , 1000 VDCW; sim to RMC Type JF Discap.
C2114	19A116080P101	Polyester: 0.01 $\mu$ f $\pm 10\%$ , 50 VDCW.
C2115	5494481P12	Ceramic disc: 1000 pf $\pm 10\%$ , 1000 VDCW; sim to RMC Type JF Discap.
C2116	19A116080P101	Polyester: 0.01 $\mu$ f $\pm 10\%$ , 50 VDCW.
C2117	5494481P12	Ceramic disc: 1000 pf $\pm 10\%$ , 1000 VDCW; sim to RMC Type JF Discap.
C2118	19A116080P101	Polyester: 0.01 $\mu$ f $\pm 10\%$ , 50 VDCW.
C2119	5494481P12	Ceramic disc: 1000 pf $\pm 10\%$ , 1000 VDCW; sim to RMC Type JF Discap.
C2120	19A116080P101	Polyester: 0.01 $\mu$ f $\pm 10\%$ , 50 VDCW.
C2121	5494481P12	Ceramic disc: 1000 pf $\pm 10\%$ , 1000 VDCW; sim to RMC Type JF Discap.
C2122	19A116080P101	Polyester: 0.01 $\mu$ f $\pm 10\%$ , 50 VDCW.
C2123	5494481P12	Ceramic disc: 1000 pf $\pm 10\%$ , 1000 VDCW; sim to RMC Type JF Discap.
C2124 and C2125	19A116080P101	Polyester: 0.01 $\mu$ f $\pm 10\%$ , 50 VDCW.
C2126	5494481P12	Ceramic disc: 1000 pf $\pm 10\%$ , 1000 VDCW; sim to RMC Type JF Discap.
C2127	5496218P763	Ceramic disc: 100 pf $\pm 5\%$ , 500 VDCW, temp coef -750 PPM.
C2128	7489162P31	Silver mica: 150 pf $\pm 5\%$ , 500 VDCW; sim to Electro Motive Type DM-15.
C2129	19A116080P101	Polyester: 0.01 $\mu$ f $\pm 10\%$ , 50 VDCW.
C2130	5494481P12	Ceramic disc: 1000 pf $\pm 10\%$ , 1000 VDCW; sim to RMC Type JF Discap.
C2131	5496218P763	Ceramic disc: 100 pf $\pm 5\%$ , 500 VDCW, temp coef -750 PPM.
C2132	7489162P31	Silver mica: 150 pf $\pm 5\%$ , 500 VDCW; sim to Electro Motive Type DM-15.
- - - - - DIODES AND RECTIFIERS - - - - -		
CR2101 thru CR2112	19A116925P4	Silicon.
- - - - - SOCKETS - - - - -		
XY2101 thru XY2112	19A130958G1	Connector, printed wiring: 6 contacts; sim to Molex 09-65-1061.

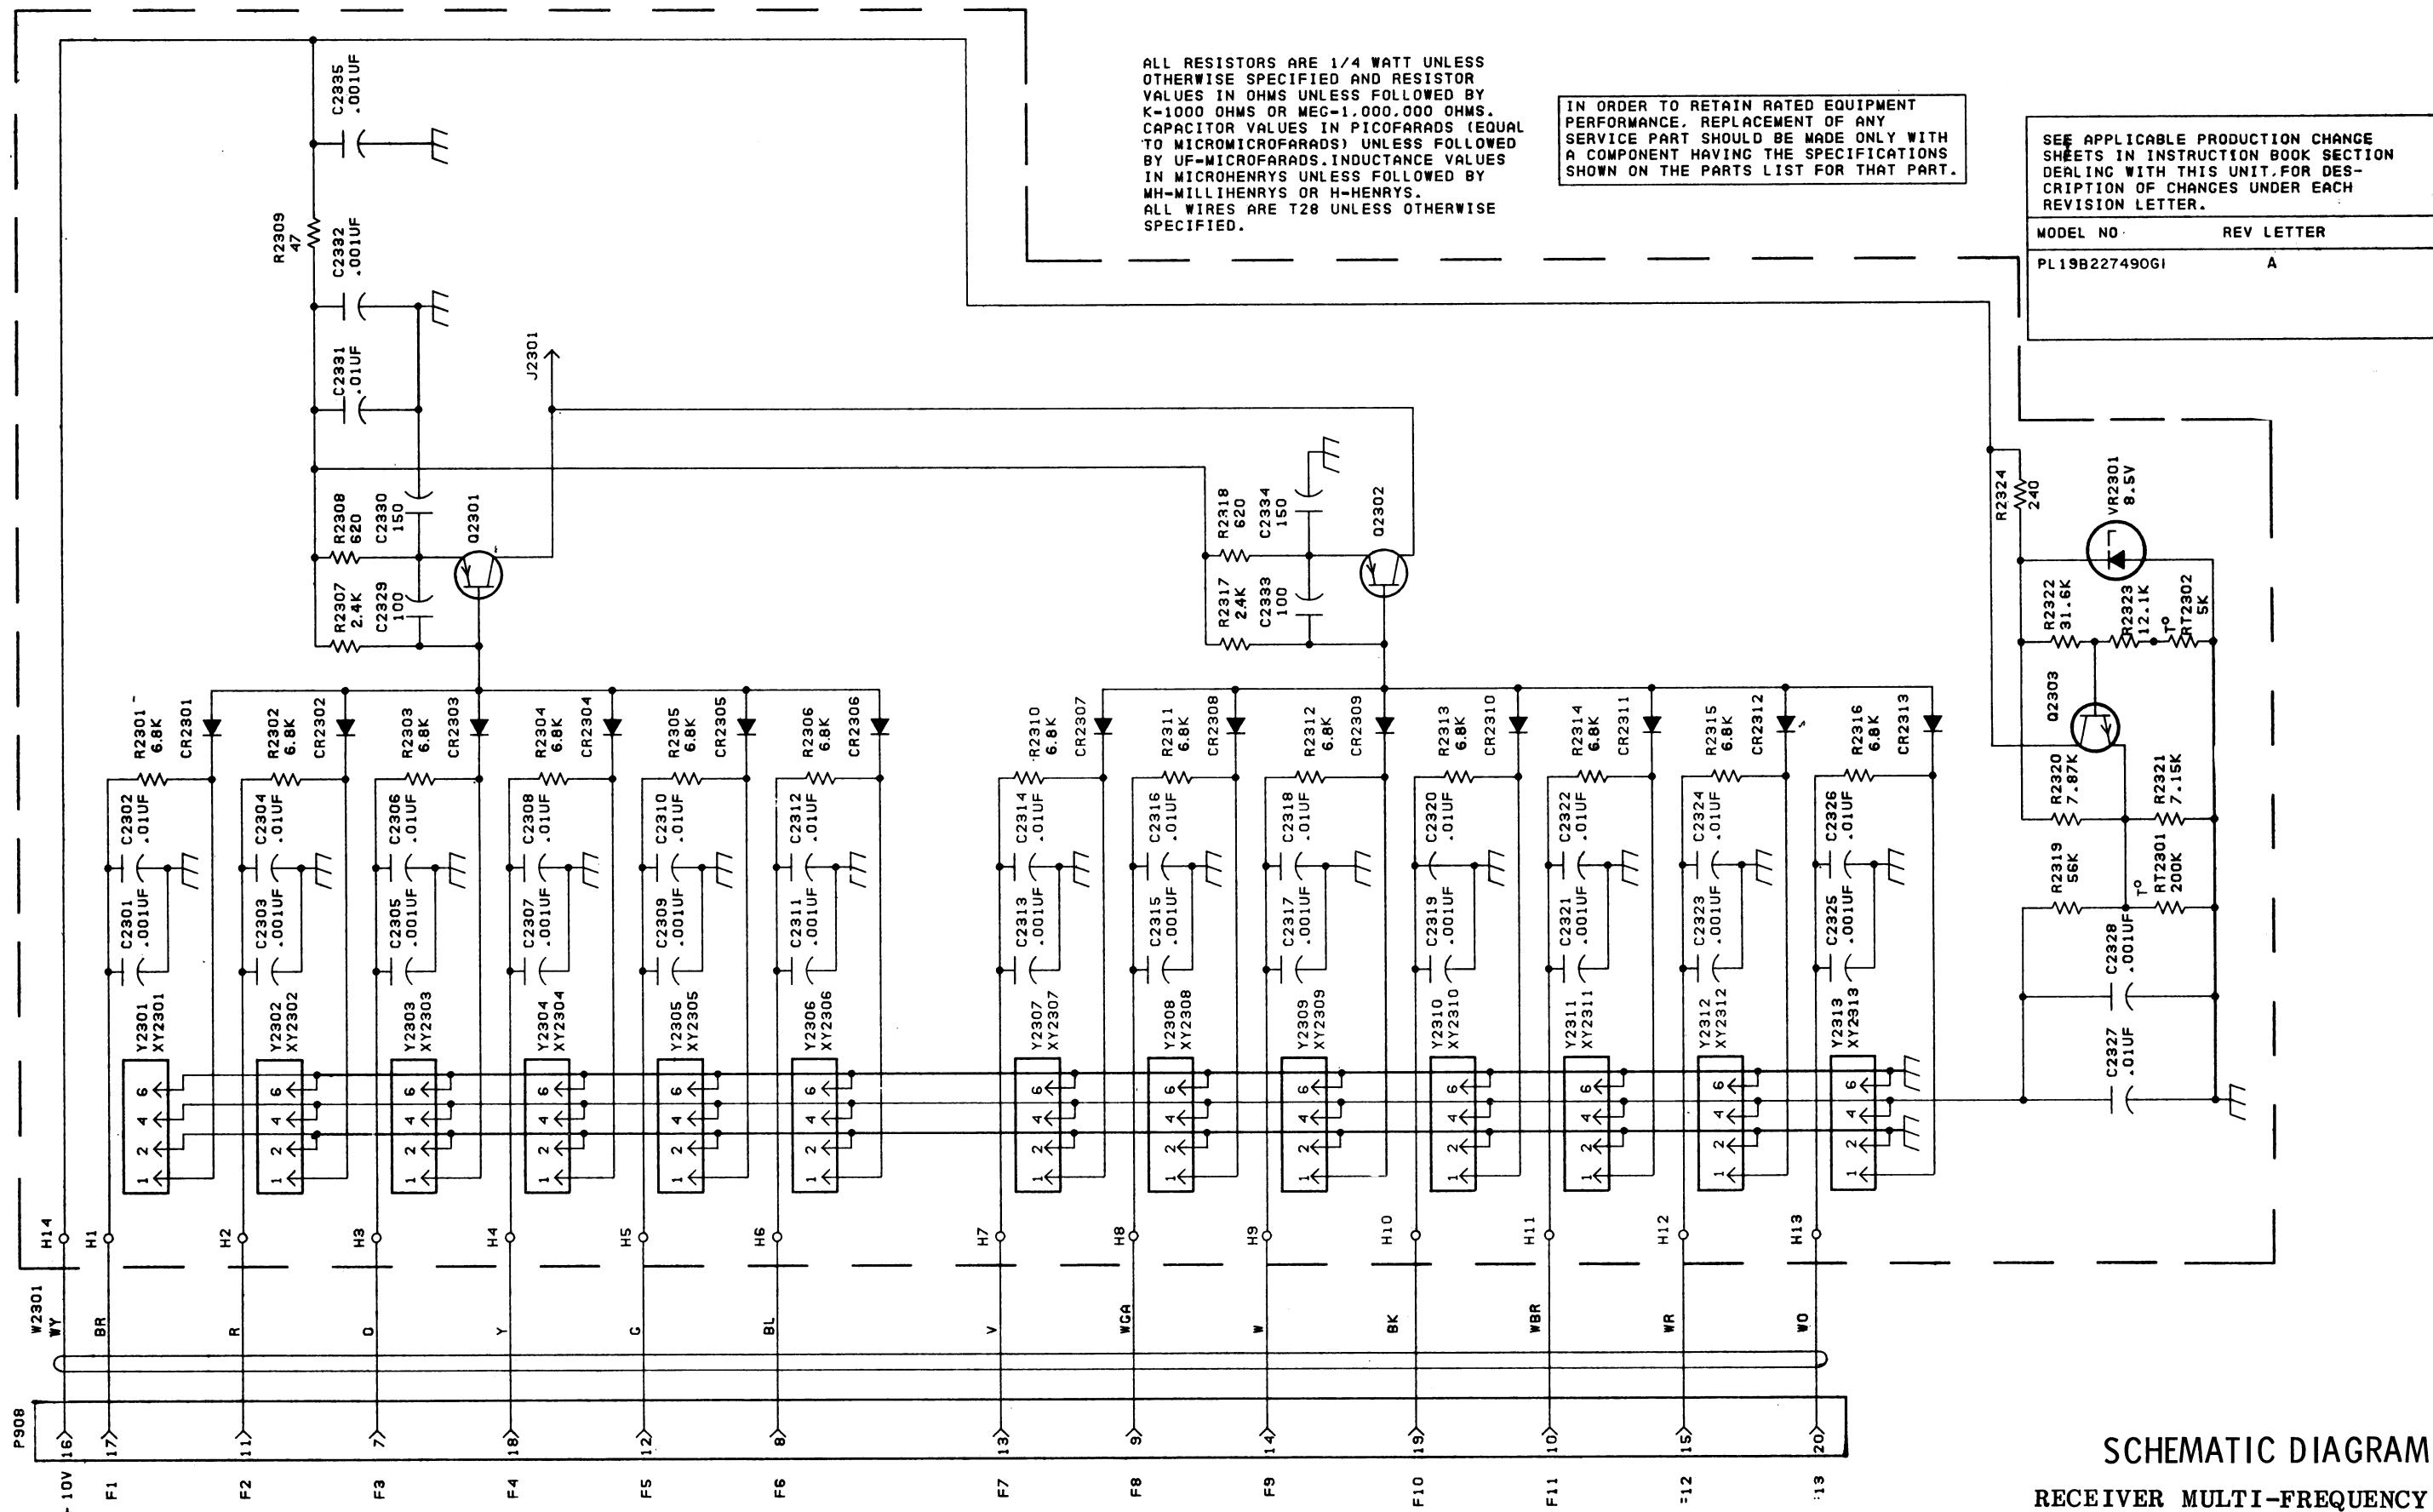

## PARTS LIST

## LBI30363A

RECEIVER MULTI-FREQUENCY BOARD  
19B22749G1  
(19D423885G1)

SYMBOL	GE PART NO.	DESCRIPTION
C2301	5494481P12	- - - - - CAPACITORS - - - - - Ceramic disc: 1000 pf ±10%, 1000 VDCW; sim to RMC Type JF Discap.
C2302	19A116080P101	Polyester: 0.01 µf ±10%, 50 VDCW.
C2303	5494481P12	Ceramic disc: 1000 pf ±10%, 1000 VDCW; sim to RMC Type JF Discap.
C2304	19A116080P101	Polyester: 0.01 µf ±10%, 50 VDCW.
C2305	5494481P12	Ceramic disc: 1000 pf ±10%, 1000 VDCW; sim to RMC Type JF Discap.
C2306	19A116080P101	Polyester: 0.01 µf ±10%, 50 VDCW.
C2307	5494481P12	Ceramic disc: 1000 pf ±10%, 1000 VDCW; sim to RMC Type JF Discap.
C2308	19A116080P101	Polyester: 0.01 µf ±10%, 50 VDCW.
C2309	5494481P12	Ceramic disc: 1000 pf ±10%, 1000 VDCW; sim to RMC Type JF Discap.
C2310	19A116080P101	Polyester: 0.01 µf ±10%, 50 VDCW.
C2311	5494481P12	Ceramic disc: 1000 pf ±10%, 1000 VDCW; sim to RMC Type JF Discap.
C2312	19A116080P101	Polyester: 0.01 µf ±10%, 50 VDCW.
C2313	5494481P12	Ceramic disc: 1000 pf ±10%, 1000 VDCW; sim to RMC Type JF Discap.
C2314	19A116080P101	Polyester: 0.01 µf ±10%, 50 VDCW.
C2315	5494481P12	Ceramic disc: 1000 pf ±10%, 1000 VDCW; sim to RMC Type JF Discap.
C2316	19A116080P101	Polyester: 0.01 µf ±10%, 50 VDCW.
C2317	5494481P12	Ceramic disc: 1000 pf ±10%, 1000 VDCW; sim to RMC Type JF Discap.
C2318	19A116080P101	Polyester: 0.01 µf ±10%, 50 VDCW.
C2319	5494481P12	Ceramic disc: 1000 pf ±10%, 1000 VDCW; sim to RMC Type JF Discap.
C2320	19A116080P101	Polyester: 0.01 µf ±10%, 50 VDCW.
C2321	5494481P12	Ceramic disc: 1000 pf ±10%, 1000 VDCW; sim to RMC Type JF Discap.
C2322	19A116080P101	Polyester: 0.01 µf ±10%, 50 VDCW.
C2323	5494481P12	Ceramic disc: 1000 pf ±10%, 1000 VDCW; sim to RMC Type JF Discap.
C2324	19A116080P101	Polyester: 0.01 µf ±10%, 50 VDCW.
C2325	5494481P12	Ceramic disc: 1000 pf ±10%, 1000 VDCW; sim to RMC Type JF Discap.
C2326 and C2327	19A116080P101	Polyester: 0.01 µf ±10%, 50 VDCW.
C2328	5494481P12	Ceramic disc: 1000 pf ±10%, 1000 VDCW; sim to RMC Type JF Discap.
C2329	5496218P763	Ceramic disc: 100 pf ±5%, 500 VDCW, temp coef -750 PPM.
C2330	7489162P31	Silver mica: 150 pf ±5%, 500 VDCW; sim to Electro Motive Type DM-15.
C2331	19A116080P101	Polyester: 0.01 µf ±10%, 50 VDCW.
C2332	5494481P12	Ceramic disc: 1000 pf ±10%, 1000 VDCW; sim to RMC Type JF Discap.
C2333	5496218P763	Ceramic disc: 100 pf ±5%, 500 VDCW, temp coef -750 PPM.
C2334	7489162P31	Silver mica: 150 pf ±5%, 500 VDCW; sim to Electro Motive Type DM-15.
C2335	5494481P12	Ceramic disc: 1000 pf ±10%, 1000 VDCW; sim to RMC Type JF Discap.

SYMBOL	GE PART NO.	DESCRIPTION
CR2301 thru CR2313	19A116925P4	- - - - - DIODES AND RECTIFIERS - - - - - Silicon.
J2301	19A116779P1	- - - - - JACKS AND RECEPTACLES - - - - - Contact, electrical: sim to Molex 08-50-0404.
P908	19C303506P1	- - - - - PLUGS - - - - - Connector, phen: 20 contacts.
Q2301 and Q2302	19A115852P1	- - - - - TRANSISTORS - - - - - Silicon, PNP; sim to Type 2N3906.
Q2303	19A115910P1	Silicon, NPN; sim to Type 2N3904.
R2301* thru R2306*	3R152P682J	- - - - - RESISTORS - - - - - Composition: 6.8K ohms ±5%, 1/4 w. Earlier than REV A:
	3R152P133J	Composition: 13K ohms ±5%, 1/4 w.
R2307*	3R152P242J	Composition: 2.4K ohms ±5%, 1/4 w. Earlier than REV A:
	3R152P472J	Composition: 4700 ohms ±5%, 1/4 w.
R2308*	3R152P621J	Composition: 620 ohms ±5%, 1/4 w. Earlier than REV A:
	3R152P681J	Composition: 680 ohms ±5%, 1/4 w.
R2309	3R152P470J	Composition: 47 ohms ±5%, 1/4 w.
R2310* thru R2316*	3R152P682J	Composition: 6.8K ohms ±5%, 1/4 w. Earlier than REV A:
	3R152P133J	Composition: 13K ohms ±5%, 1/4 w.
R2317*	3R152P242J	Composition: 2.4K ohms ±5%, 1/4 w. Earlier than REV A:
	3R152P472J	Composition: 4.7K ohms ±5%, 1/4 w.
R2318*	3R152P621J	Composition: 620 ohms ±5%, 1/4 w. Earlier than REV A:
	3R152P681J	Composition: 680 ohms ±5%, 1/4 w.
R2319	3R152P563J	Composition: 56K ohms ±5%, 1/4 w.
R2320	19C314256P27871	Metal film: 7.87K ohms ±1%, 1/4 w.
R2321	19C314256P27151	Metal film: 7.15K ohms ±1%, 1/4 w.
R2322	19C314256P23162	Metal film: 31.60K ohms ±1%, 1/4 w.
R2323	19C314256P21212	Metal film: 12.10K ohms ±1%, 1/4 w.
R2324	3R152P241J	Composition: 240 ohms ±5%, 1/4 w. - - - - - THERMISTORS - - - - -
RT2301	19C300048P15	Disc: 200K ohms ±10%; sim to GE 4D0514.
RT2302	19C300048P7	Disc: 5K ohms ±10%; sim to GE 1D 103.
VR2301	4036887P9	- - - - - VOLTAGE REGULATORS - - - - - Silicon, Zener.
W2301	19D423885G2	- - - - - CABLES - - - - - Cable. Includes P908.
		- - - - - CRYSTAL MODULES - - - - - NOTE: When reordering, give GE Part Number and specify exact frequency needed.
		150.8-174 MHz Fx = $F_0 + 11.2$ 9
		450-512 MHz Fx = $F_0 + 11.2$ 27

## PRODUCTION CHANGES

Changes in the equipment to improve performance or to simplify circuits are identified by a "Revision Letter", which is stamped after the model number of the unit. The revision stamped on the unit includes all previous revisions. Refer to the Parts List for description of parts affected by these revisions.

REV. A - To compensate for variations in diode characteristics.  
Changed R3201-R2306, R2307, R2308, R2310-R2316, R2317, and R2318.