

CUSTOM **MVP** MAINTENANCE MANUAL

SYSTEM-AUDIO-SQUELCH BOARD,
CONTROL PANEL, MULTI-FREQ. KIT

MAINTENANCE MANUAL LB131128D
*
*
*
*
*
*

SPECIFICATIONS *

INPUT VOLTAGE

13.0 Volts DC $\pm 20\%$ (RX)
13.2 Volts DC $\pm 20\%$ (TX)

OUTPUT VOLTAGE

Regulated 10 Volts DC ± 0.1 VDC
at 0.1 to 0.5 Amperes

MAXIMUM CURRENT DRAIN (at 13.8 VDC)

0.25 Amperes (Squelched)
0.70 Amperes (Unsquelched)

AUDIO OUTPUT

3.0 Watts at less than 5%
Distortion

SYSTEM-AUDIO-SQUELCH
CONTROL & MULTI-FREQ.

TABLE OF CONTENTS

SPECIFICATIONS	Cover
DESCRIPTION	1
CIRCUIT ANALYSIS	1
OUTLINE DIAGRAMS	
System-Audio Squelch Board 19C331617G1	5
Control Panel 19D423840G1	5
Multi-Frequency Kit 19C321954G1 & G2	5
2 PPM Oscillator Board 19C327107G1	5
SCHEMATIC DIAGRAMS (Includes Parts List and Production Changes)	
2 PPM Oscillator Board 19C327107G1	6
System-Audio-Squelch Board 19C321920G1	7 - 8
Crystal Module	9 - 10
Multi-Frequency Kit 19C321954G1 & G2	9 - 10
INTERCONNECTION DIAGRAM (Includes Control Panel and Associated Assemblies)	11 - 12
SERVICE SHEETS	
Transistorized Dynamic Microphone 19C320270G1	13
Transistorized Dynamic Handset 19C320478G1, G3	13
INSTALLATION INSTRUCTION	
Multi-Frequency Kit and Channel Guard	14 & 15

WARNING

Although the highest DC voltage in Custom MVP radio is +12 VDC, high currents may be drawn under short circuit conditions. These currents can possible heat metal objects such as tools, rings, watchbands, etc., enough to cause burns. Be careful when working near energized circuits!

High-level RF energy in the transmitter Power Amplifier assembly can cause RF burns upon contact. Keep away from these live circuits when the transmitter is energized!

DESCRIPTION

The System-Audio-Squelch Board for the custom MVP radio mounts on the front of the system frame behind the front control panel assembly. Molex connectors are provided on the board to provide interconnection with other modules and options. The microphone jack connects into the system harness between the System-Audio-Squelch (SAS) Board and the system connector (J1) at the rear of the radio. The Carrier Control Timer (option 1907) connects directly to the SAS board. The Channel Guard board or Carrier Defeat Timer (Option 1908) connects to the SAS board by means of a harness.

The SAS board contains a hybrid 10 Volt Regulator IC, a hybrid Squelch Module IC and a monolithic 3 Watt audio amplifier circuit. An active filter de-emphasis network is also provided in the audio circuit.

The Control Panel assembly is located on the front cap of the radio. An ON-OFF-VOLUME control, a squelch and Channel Guard MONITOR slide switch, a red transmit indicator Light Emitting Diode (LED), and a frequency control switch (on multi-frequency radios) are provided on the Control Panel. A harness, terminated with a 7 pin connector, connects these controls to the System-Audio-Squelch Board.

CIRCUIT ANALYSIS

10 VOLT REGULATOR IC

The 10 Volt Regulator IC contains the following circuits:

- 10 Volt Regulator Reference Amplifiers
- Receiver Muting and Delay
- Transmitter Keying and Delay
- Receiver Oscillator Control
- Transmitter Disable

The 10 Volt Regulator includes regulator amplifier transistors in the IC (U902) and regulator pass transistor Q905. The regulator circuit provides a closely-controlled supply voltage for the transmitter exciter and the receiver, as well as for Channel Guard and Carrier Control Timer options when used.

Turning on the radio with ON-OFF switch S701 applies voltage (A+) from the battery (in mobile combinations) or the AC power supply (when the station option

is used) to pin 1 of IC U902. The regulator amplifier output at pin 2 of U902 is applied to the base of Q905, causing Q905 to conduct. The voltage at the collector of Q905 and pin 3 of U902 is the regulated 10 Volts output.

Receive Function

When the radio is in the receive mode, the transmitter oscillator control switch in the regulator IC U902 is turned off and the receiver oscillator control switch is turned on. The 10 Volt output of this switch is connected through pin 7 of U902 to the receiver oscillator control circuits.

VOLUME/SQUELCH HI from the IF/DETECT module is connected via the VOLUME control (R701) to the audio amplifier on the SAS board. The active filter (Q904) and de-emphasis network provide a 6 dB/Octave frequency response. The audio from the filter is applied to amplifier AR901. The amplifier provides 3 Watts output to the speaker.

When Channel Guard is used, the filter located on the Channel Guard module connects in series with the VOLUME control arm (by removing the jumper between H1 and H2 on the SAS board) and the input to the de-emphasis network. The Channel Guard filter provides a minimum of 17 dB attenuation of the CG tone frequencies.

Squelch Control Circuit

The hybrid squelch IC (U901) uses a custom flip-chip monolithic integrated circuit. The squelch IC contains the noise amplifier, active noise filter, detector, and the slow squelch circuit.

Noise from the IF/DET is coupled through the fixed squelch adjust control R901 to pin 1 of U901. This signal is applied to the noise amplifier and then to the active filter circuit.

The noise amplifier and active filter provide the gain and selectivity to distinguish between noise and audio. The filter output drives the active detector circuit to provide the squelch switching functions. Thermistor RT901 keeps the input to the active detector constant over wide variations in temperature. The slow squelch circuit provides a 200 millisecond squelch operation to prevent rapid squelch opening and closing in weak signal areas.

The squelch switch output at pin 7 of U901 is connected to the receiver mute control circuit. When the receiver is squelched, the output at pin 7 is near A-. This keeps Q902 turned off, allowing Q903 to conduct. Conduction of Q903 applies a low to Rx Mute control Q906

turning it on. With Q906 turned on a positive voltage is applied to AR901-2, turning the amplifier off and muting the receiver. When the receiver is quieted by an on-frequency signal (unscuelches), the voltage at pin 7 of U901 rises to approximately +7 Volts. This turns on Q902, preventing Q903 from conducting. The resulting low (R932, R933 and CR930) at pin 2 of AR901 turns on the amplifier and audio is heard at the speaker.

With the receiver unscuelched, the output of the squelch switch turns on the RUS switch. The output of the RUS switch is connected to the noise amplifier, providing a hysteresis loop in the squelch circuit. The RUS output increases the gain of the noise amplifier, preventing squelch closing on weak signals.

NOTE

In Channel Guard radios, the squelch circuit will operate only when an on-frequency signal with the correct Channel Guard tone is applied to the receiver.

Squelch Disable

Placing the Squelch switch S702 (located on the Control Panel) in the TEST position applies bias to the base of Q901 on the SAS board. The transistor is operated. Conduction of Q901 operates Q902, grounding the base of Q903 and preventing it from operating. As long as this condition remains, the squelch circuit is disabled. In Channel Guard radios, moving the Squelch switch S702 to the MON position applies ground to the CG DISABLE circuit on the Channel Guard board. This results in removing the low on the RX MUTE lead at J906-5 and the base of Q902, enabling the squelch circuit.

Transmitter Keying and Delay

Pressing the PTT (TRANSMIT) switch on the microphone connects pin 8 of U902 to A-. Capacitor C924 starts to charge. In 20 milliseconds C924 is charged to a voltage high enough to allow the time delay switch in U902 to turn on. This causes the transmitter oscillator control switch in U902 to turn on. +10 Volts is applied via pin 14 of U902 to the transmitter oscillator, keying the transmitter. The voltage at pin 7 of U902 goes low under these conditions, removing the receiver oscillator control voltage.

The 20 millisecond time delay in the transmitter oscillator keying circuit allows the antenna relay to energize before RF is applied to the relay.

Operating the PTT switch turns on the receiver muting and delay circuit in U902, applying A- to pin 6. Q902 is now prevented from operating, muting the receiver. C923 starts to charge from the +10 Volt line. When the PTT switch is released, C923 keeps the A- voltage at pin 6 for approximately 50 milliseconds. This delays the turn-on of the receiver audio at the end of a transmission.

Transmitter Disable

In radios equipped with a Carrier Control Timer, pin 11 of U902 connects to the TX DISABLE lead of the Carrier Control Timer. When the timing cycle on the timer runs out, A- is applied to pin 11, turning off the transmitter oscillator control voltage which turns off the transmitter.

CRYSTAL MODULE (5 PPM Oscillator)

Crystal modules determine the operating frequency of the transmitter and receiver. The plug-in module contains a crystal, a trimmer capacitor and a varicap for temperature compensation.

The quartz crystal used in the crystal module exhibits the traditional "S" curve characteristics of output frequency versus operating temperature as shown in Figure 1. In the mid-temperature range (-10°C to +50°C), the raw crystal characteristics are maintained. The compensation voltage which drives the crystal module varicap is approximately constant over this temperature range; consequently, the crystal almost solely determines the temperature characteristics. The crystals whose temperature characteristics lie toward the high limit of +4 parts per million (PPM) are rotated slightly. All others have little to no rotation.

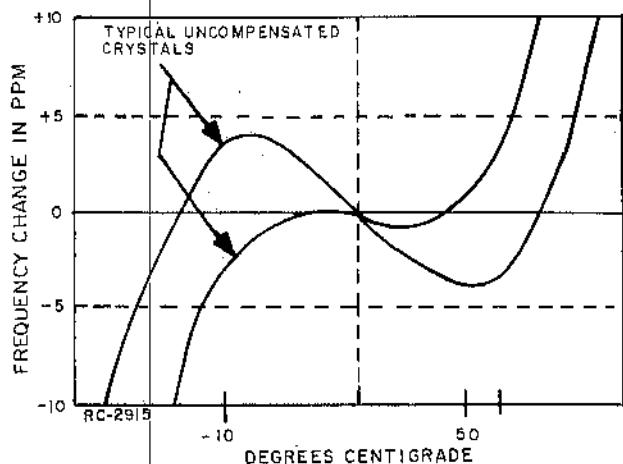


Figure 1 - Crystal Characteristics

The cold end temperature characteristic is "lifted" by a temperature-dependent increasing voltage. The compensator which drives the crystal module varicap produces a voltage which increases linearly from -10°C to -30°C . This voltage decreases the varicap capacity which, in turn, increases the module tuned circuit frequency to compensate for the decreasing frequency characteristics of the crystal.

The hot end crystal temperature characteristic shown in Figure 1 is increasing with temperature. Above 50°C , the hot end crystal characteristic is compensated for by a decreasing voltage from the compensator. This results in added capacity from the varicap, decreasing the module frequency to counteract the increasing frequency response of the crystal.

Compensation voltage from the exciter is applied to pin 4 of the crystal modules to maintain frequency stability within 5 parts-per-million (PPM) over a temperature range of -30°C to $+60^{\circ}\text{C}$.

SERVICE NOTE

Proper crystal module operation is dependent on the closely-controlled input voltages from the 10 Volt regulator. Should all of the crystal modules shift off-frequency, check the 10 Volt regulator.

The compensation voltage varies non-linearly with temperature to complement the temperature/frequency characteristics of the crystal. Listed below are typical minimum and maximum voltage readings to be expected at pin 4 of the crystal modules, as measured with a high impedance meter.

TEMPERATURE RANGE	OUTPUT VOLTAGE	
	MINIMUM	MAXIMUM
-30°C	4.9 Volts	6.0 Volts
-10° to $+50^{\circ}\text{C}$	3.7 Volts	4.3 Volts
75°C	3.3 Volts	3.8 Volts

Trimmer capacitor C3 is used to adjust the radio for the exact operating frequency. Refer to the applicable Alignment Procedure for details.

Operating voltage for the crystal module is supplied from the Tx or Rx OSC control circuit on the SAS board or through the biased PIN diode on the

multi-frequency board to pin 1 of the selected crystal module.

Multi-Frequency Kit (5 PPM Oscillators)

The Multi-Frequency Kit is provided in radios with more than one operating frequency. It contains the necessary circuitry to provide three additional transmit and three additional receive frequencies to the standard radio. The multi-frequency board utilizes crystal modules to determine the exact operating frequencies.

The transmit and receive oscillator circuits are identical, each using a single transistor in conjunction with the selected crystal module to comprise the oscillator circuit. Crystal modules are selected for operation by the frequency select lead from the control panel. PIN diodes are used to switch the output of the selected crystal module to the base of the appropriate transistor, Q2601 (receive) and Q2602 (transmit).

Since the oscillator circuits are identical, only the F2 circuits are described here. When F2 is selected by S703 at the control panel, A- is applied to the junction of R2603 and R2606 and to the junction of C2608 and R2611. PIN diodes CR2601 and CR2604 are now forward biased, applying the output of the crystal modules (pin 1) to the base of the common oscillator transistors Q2601 and Q2602. The selected crystal modules (Y2601 and Y2604) and transistor circuits comprise two Colpitts oscillators.

The oscillator control voltage, required for transmit oscillator operation, is controlled by the transmit keying and delay circuits on the SAS board. Pressing the PTT switch applies the transmit oscillator control voltage (+10 VDC) to the emitter-base circuit of Q2602, causing it to oscillate at the assigned F2 crystal frequency.

A plug-in coaxial cable (W2602) connects the output of the oscillator to J102 on the exciter board. When the PTT switch is released, the transmit oscillator control voltage is removed from Q2602 and the anode of CR2604. Q2602 stops oscillating, removing the input to the exciter.

When the PTT switch is released, the receive oscillator control voltage from the keying and delay circuit on the SAS board is applied to the emitter-base circuit of Q2601. Since the transmit and receive modules are selected simultaneously, Q2601 now oscillates at the F2 receiver crystal frequency and provides an output to J401 on the receive OSC/MULT board through cable W2601.

When a different frequency is selected, A- is removed from the junction of R2603-R2606 and the junction of R2611-C2608. This reverse biases PIN diodes CR2601 and CR2604, removing the crystal module outputs from the base circuits of the oscillators.

Compensator Circuit

The crystal modules on the Multi-Frequency Board are temperature compensated at both ends of the temperature range to provide instant frequency compensation. The temperature compensator is located on the transmitter exciter.

2 PPM UHF Transmit Oscillator Board

In those applications requiring 2 PPM UHF transmitter frequency stability, the 19C327107G1 Oscillator Board is required. This board accommodates one Integrated Circuit Oscillator Module (ICOM). The ICOM is enclosed in a dustproof, RF shielded can with the type (2C-ICOM) printed on top of the can. The 2C-ICOM contains an oscillator and a 2 PPM ($\pm 0.0002\%$) compensator IC.

Access to the oscillator trimmer is accomplished by prying up the plastic tab on the top of the can. The tabs can also be used to pull the ICOM out of the radio. The output of the ICOM oscillator is connected through cable W2102 to the XY101 position on the transmitter exciter board.

The 2C-ICOM is temperature compensated at both ends of the temperature

range to provide instant frequency compensation.

The cold end compensation circuit does not operate at temperatures above 0°C. When the temperature drops below 0°C, the circuit is activated. As the temperature decreases, the equivalent resistance decreases and the compensation voltage increases.

The increase in compensation voltage decreases the capacity of the varactor in the oscillator, increasing the output frequency of the ICOM.

The hot end compensation circuit does not operate at temperatures below +55°C. When the temperature rises above 55°C, the circuit is activated. As the temperature increases, the equivalent resistance decreases and the compensation voltage decreases. The decrease in compensation voltage increases the capacity of the varactor, decreasing the output frequency of the ICOM.


SERVICE NOTE

Proper ICOM operation is dependent on the closely-controlled input voltages from the 10 Volt regulator. Should the ICOM shift off frequency, check the 10 Volt regulator or the output of the ICOM.

GENERAL ELECTRIC COMPANY • MOBILE COMMUNICATIONS DIVISION
WORLD HEADQUARTERS • LYNCHBURG, VIRGINIA 24502 U.S.A.

GENERAL  ELECTRIC*
U.S.A.

SC



NOTE: LEAD ARRANGEMENT, AND NOT
CASE SHAPE, IS DETERMINING
FACTOR FOR LEAD IDENTIFICATION.

CONNECTION CHART		
WIRE	FROM	TO
DA	H1	H2
DB	H3	H4

Diagram of a radio receiver chassis showing internal components and wiring. The chassis is labeled "19801753091" and "0". Components include a vacuum tube (V1), a variable capacitor (L1), and a speaker (H3). Wires are labeled W1, W2, W3, H1, H2, H3, H4, and P404-9. A connection chart is provided below the chassis diagram.

CONNECTION CHART		
WIRE	TO	REMARKS
W1	H4	
W2	H1	CENTER COND.
W2	H2	SHIELD
W3	H3	

PARTIAL REFERENCE DESIGNATIONS ARE SHOWN. FOR COMPLETE DESIGNATION, PREFIX WITH 2100 SERIES
EXAMPLE: C1-C2101, R1-R2101...ETC.

(19C327108, Rev. 0)
(19B227340, Sh. 1, Rev. 0)
(19B227340, Sh. 2, Rev. 0)

VIEW IN DIRECTION OF ARROW "A" (WITH SHIELD REMOVED)


(198227337, Rev. 8)
(198226851, Sh. 1, Rev. 8)
(198226851, Sh. 2, Rev. 7)

CH BOARD 19C331617G1

CON

PARTIAL REFERENCE DESIGNATIONS ARE SHOWN.
FOR COMPLETE DESIGNATION PREFIX WITH 900 SERIES.
EXAMPLE: C1-C901, R1-R901, ETC.

LEAD IDENTIFICATION
FOR Q1-Q4, Q6




NOTE: LEAD ARRANGEMENT, AND NOT
CASE SHAPE, IS DETERMINING
FACTOR FOR LEAD IDENTIFICATION.

CONNECTION CHART		
WIRE	FROM	TO
DA	H1	H2
DA	H3	H4

(19C331619, Rev. 1)
(19A144404, Sh. 1, Rev. 0)
(19A144404, Sh. 2, Rev. 0)

R BOARD 19C327107G1


MULTI-FREQUENCY

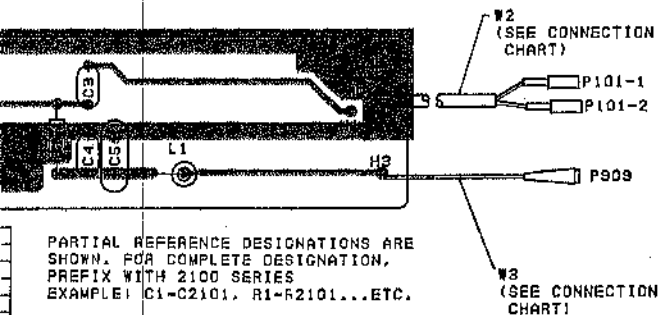


PARTIAL REFERENCE DESIGNATIONS ARE
SHOWN. FOR COMPLETE DESIGNATION,
PREFIX WITH 2100 SERIES
EXAMPLE: C1-C2101, R1-R2101...ETC.

(19C327108, Rev. 0)
(19B227340, Sh. 1, Rev. 0)
(19B227340, Sh. 2, Rev. 0)



CONNECTION CHART		
WIRE	TO	REMARKS
W1	H3	
W2	H1	CENTER COND
W2	H2	SHIELD
W3-W	H7	
W3-R	H6	
W3-BL	H5	
W3-BR	H4	
W4-BR	H8	
W4-R	H9	
W4-O	H10	
W4-Y	H11	
W4-BK	H12	
W4-G	H13	



AL MODULE

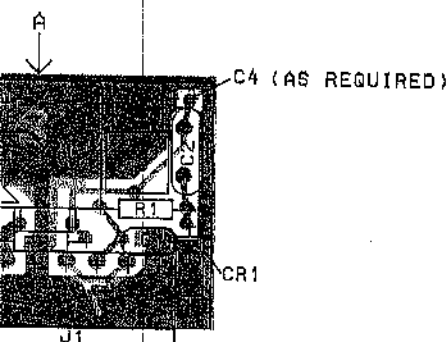


Rev. 8)
Sh. 1, Rev. 8)
Sh. 2, Rev. 7)



PARTIAL REFERENCE DI
SHOWN. FOR COMPLETE
PREFIX WITH 2600 SER
EXAMPLE: C1-C2601, R

(19C327140, Rev. 2)
(19A144155, Sh. 1)
(19A144155, Sh. 2)


CONTROL PANEL SINGLE FREQUENCY 19D423840G3

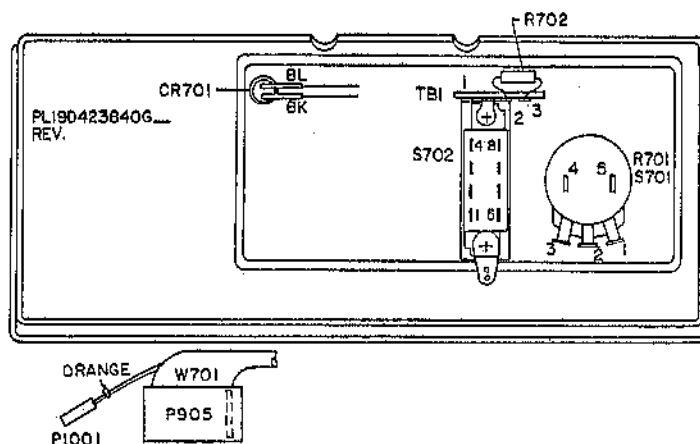

(19B227494, Rev. 2)

MULTI-FREQUENCY KIT 19C321954G1 & G2

CONNECTION CHART		
WIRE	TO	REMARKS
W1	H3	
W2	H1	CENTER COND
W2	H2	SHIELD
W3-W	H7	
W3-R	H6	
W3-BL	H5	
W3-BR	H4	
W4-BR	H8	
W4-R	H9	
W4-O	H10	
W4-Y	H11	
W4-BK	H12	
W4-G	H13	

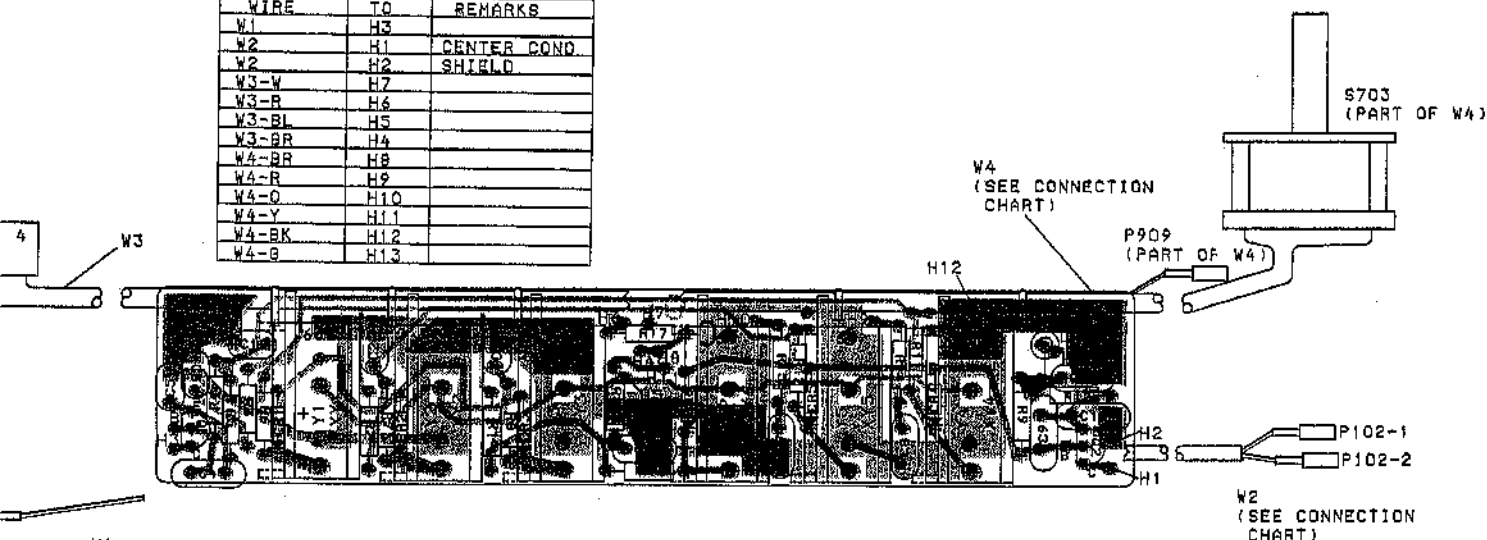


PARTIAL REFERENCE DESIGNATIONS ARE SHOWN. FOR COMPLETE DESIGNATION, PREFIX WITH 2600 SERIES
EXAMPLE: C1-C2601, R1-R2601....ETC.

(19C327140, Rev. 2)
(19A144155, Sh. 1, Rev. 0)
(19A144155, Sh. 2, Rev. 0)

— RUNS ON SOLDER SIDE
— RUNS ON BOTH SIDES
— RUNS ON COMPONENT SIDE

OUTLINE DIAGRAMS

CUSTOM MVP

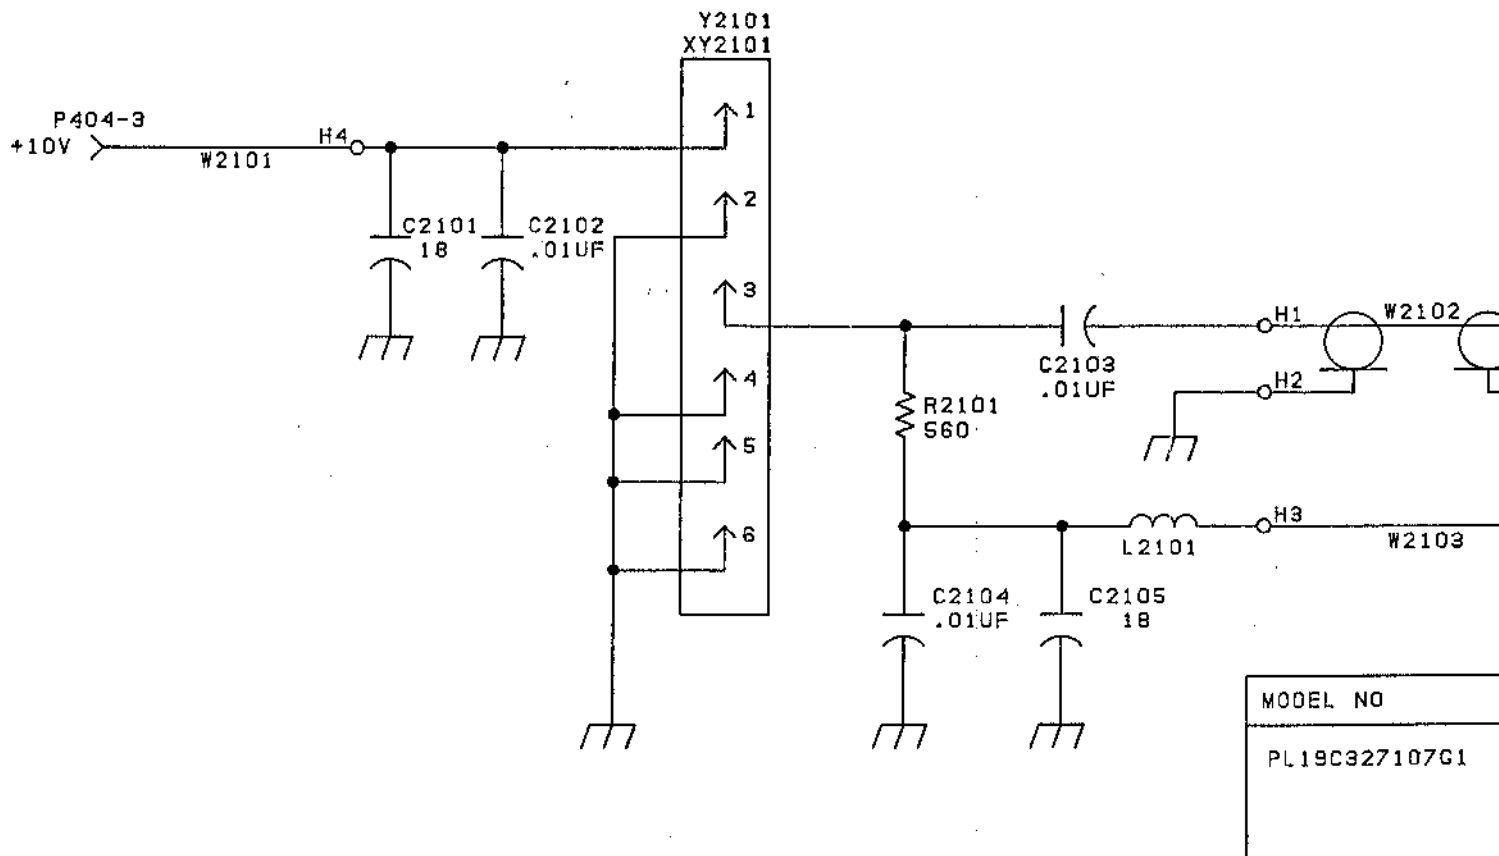


ALL RESISTORS ARE 1/4 WATT UNLESS OTHERWISE SPECIFIED AND RESISTOR VALUES IN OHMS UNLESS FOLLOWED BY K-1000 OHMS OR MEG-1,000,000 OHMS. CAPACITOR VALUES IN PICO FARADS (EQUAL TO MICROMICROFARADS) UNLESS FOLLOWED BY UF-MICROFARADS.

IN ORDER TO RETAIN PERFORMANCE, REPAIR SERVICE PART SHOWN A COMPONENT HAVING THE SAME PART NUMBER SHOWN ON THE PART LIST.

(19C327147, Rev. 1)

SCHEMATIC DIAGRAM

2 PPM OSCILLATOR BOARD 19C327107G1

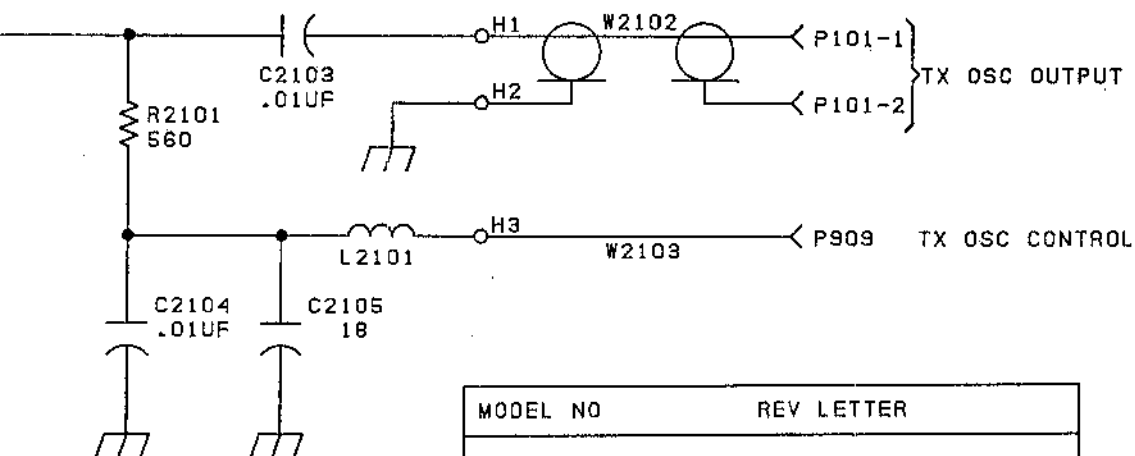

MODEL NO	REV LETTER
PL19C327107G1	

IN ORDER TO RETAIN RATED EQUIPMENT PERFORMANCE, REPLACEMENT OF ANY SERVICE PART SHOULD BE MADE ONLY WITH A COMPONENT HAVING THE SPECIFICATIONS SHOWN ON THE PARTS LIST FOR THAT PART.

SYMBOL	GE PART
C2101	19A700105
C2102 thru C2104	19A700005
C2105	19A700105
L2101	19A129775
P101	4036694P
P404-3	19A127045
P909	19A127045
R2101	19A700105
W2101	19A128945
W2102	19A130745
W2103	19A128945
XY2101	19A701785
	19B201075
	19D201075
	19A136705
Y2101	19A128935

*COMPONENTS ADD

PARTS LIST

LB130178E

2 PPM OSCILLATOR BOARD
19C327107G1

SYMBOL	GE PART NO.	DESCRIPTION
----- CAPACITORS -----		
C2101	19A700105P14	Mica: 18 pF $\pm 5\%$, 500 VDCW.
C2102 thru C2104	19A700005P7	Polyester: 0.01 μ F $\pm 10\%$, 50 VDCW.
C2105	19A700105P14	Mica: 18 pF $\pm 5\%$, 500 VDCW.
----- INDUCTORS -----		
L2101	19A129773G3	Coil.
----- PLUGS -----		
P101	4038634P1	Contact, electrical; sim to AMP 42428-2.
P404-3	19A127042P3	Solderless terminal: 24-27 AWG; sim to Malco 120-93-8.
P909	19A127042P3	Solderless terminal: 24-27 AWG; sim to Malco 120-93-8.
----- RESISTORS -----		
R2101	19A700106P57	Composition: 560 ohms $\pm 5\%$, 1/4 w.
----- CABLES -----		
W2101	19A128847G9	Single conductor; approx 3 inches long.
W2102	19A130744G4	2 conductor; approx 4 inches long.
W2103	19A128847G5	Single conductor.
----- SOCKETS -----		
XY2101	19A701785P1	Contact, electrical; sim to Molex 08-50-0404. (Quantity 8).
----- MISCELLANEOUS -----		
	19B201074P304	Tap screw, Phillips POZIDRIV®: No. 6-32 x 1/4.
	19B201074P305	Tap screw, Phillips POZIDRIV®: No. 6-32 x 5/16. (Secures 19A138706P1 support).
	19A138706P1	Support.
ASSOCIATED PARTS		
----- Tx ICOMS -----		
NOTE: When reordering specify ICOM Frequency		
For STANDARD LOW SIDE INJECTION FREQUENCY.		
ICOM FREQ. = <u>Operating Freq.</u>		
36		
Y2101	19A128393G15	Compensated: ± 2 PPM, 406-512 MHz.


< P101-1 }
 < P101-2 } TX OSC OUTPUT

< P909 TX OSC CONTROL

V LETTER

ATED EQUIPMENT
 MENT OF ANY
 BE MADE ONLY WITH
 HE SPECIFICATIONS
 IST FOR THAT PART.

*COMPONENTS ADDED, DELETED OR CHANGED BY PRODUCTION CHANGES.

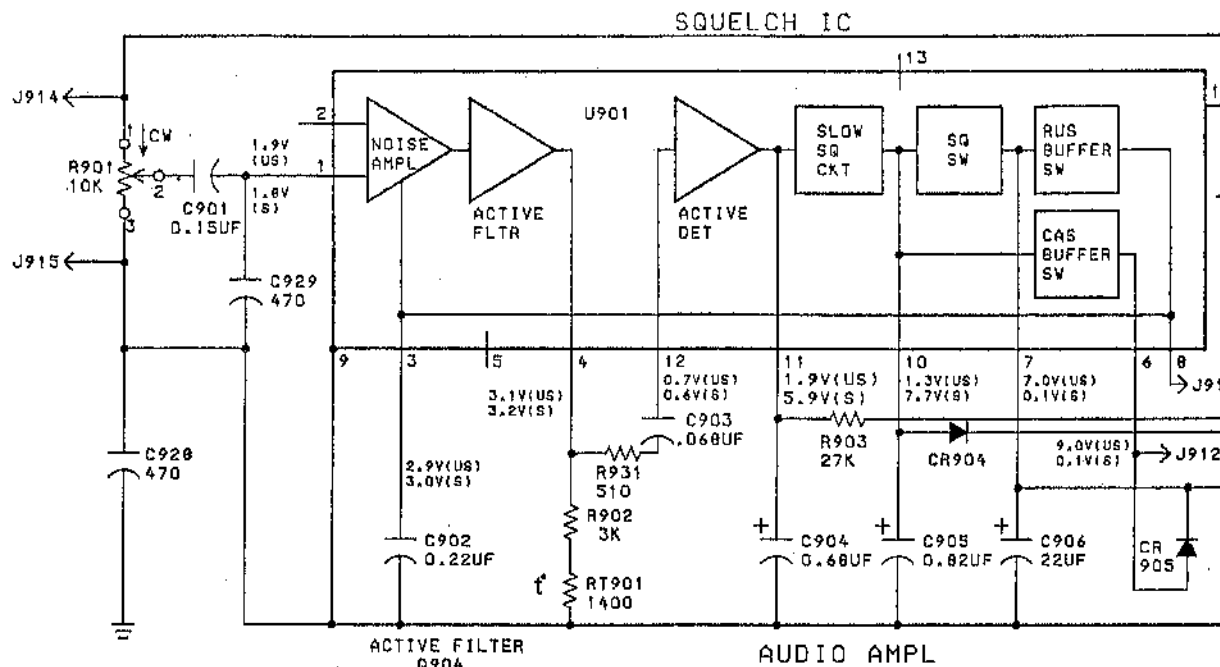


MODEL NO	REV LETTER
PL19C331417P1	

ALL RESISTORS ARE 1/4 WATT UNLESS OTHERWISE SPECIFIED AND RESISTOR VALUES IN OHMS UNLESS FOLLOWED BY K=1000 OHMS OR MEG=1,000,000 OHMS. CAPACITOR VALUES IN PICO FARADS (EQUAL TO MICROMICROFARADS) UNLESS FOLLOWED BY UF=MICROFARADS.

- NOTES:
1. REMOVE DA FROM H1 TO H2 FOR CHANNEL GUARD. (EXCEPT ENCODE ONLY)
 2. FOR SPEAKER MUTE FUNCTION WITH EXTERNAL DECODER, REMOVE DA FROM H3 TO H4.


SQUELCH IC

SQ DIS
Q901

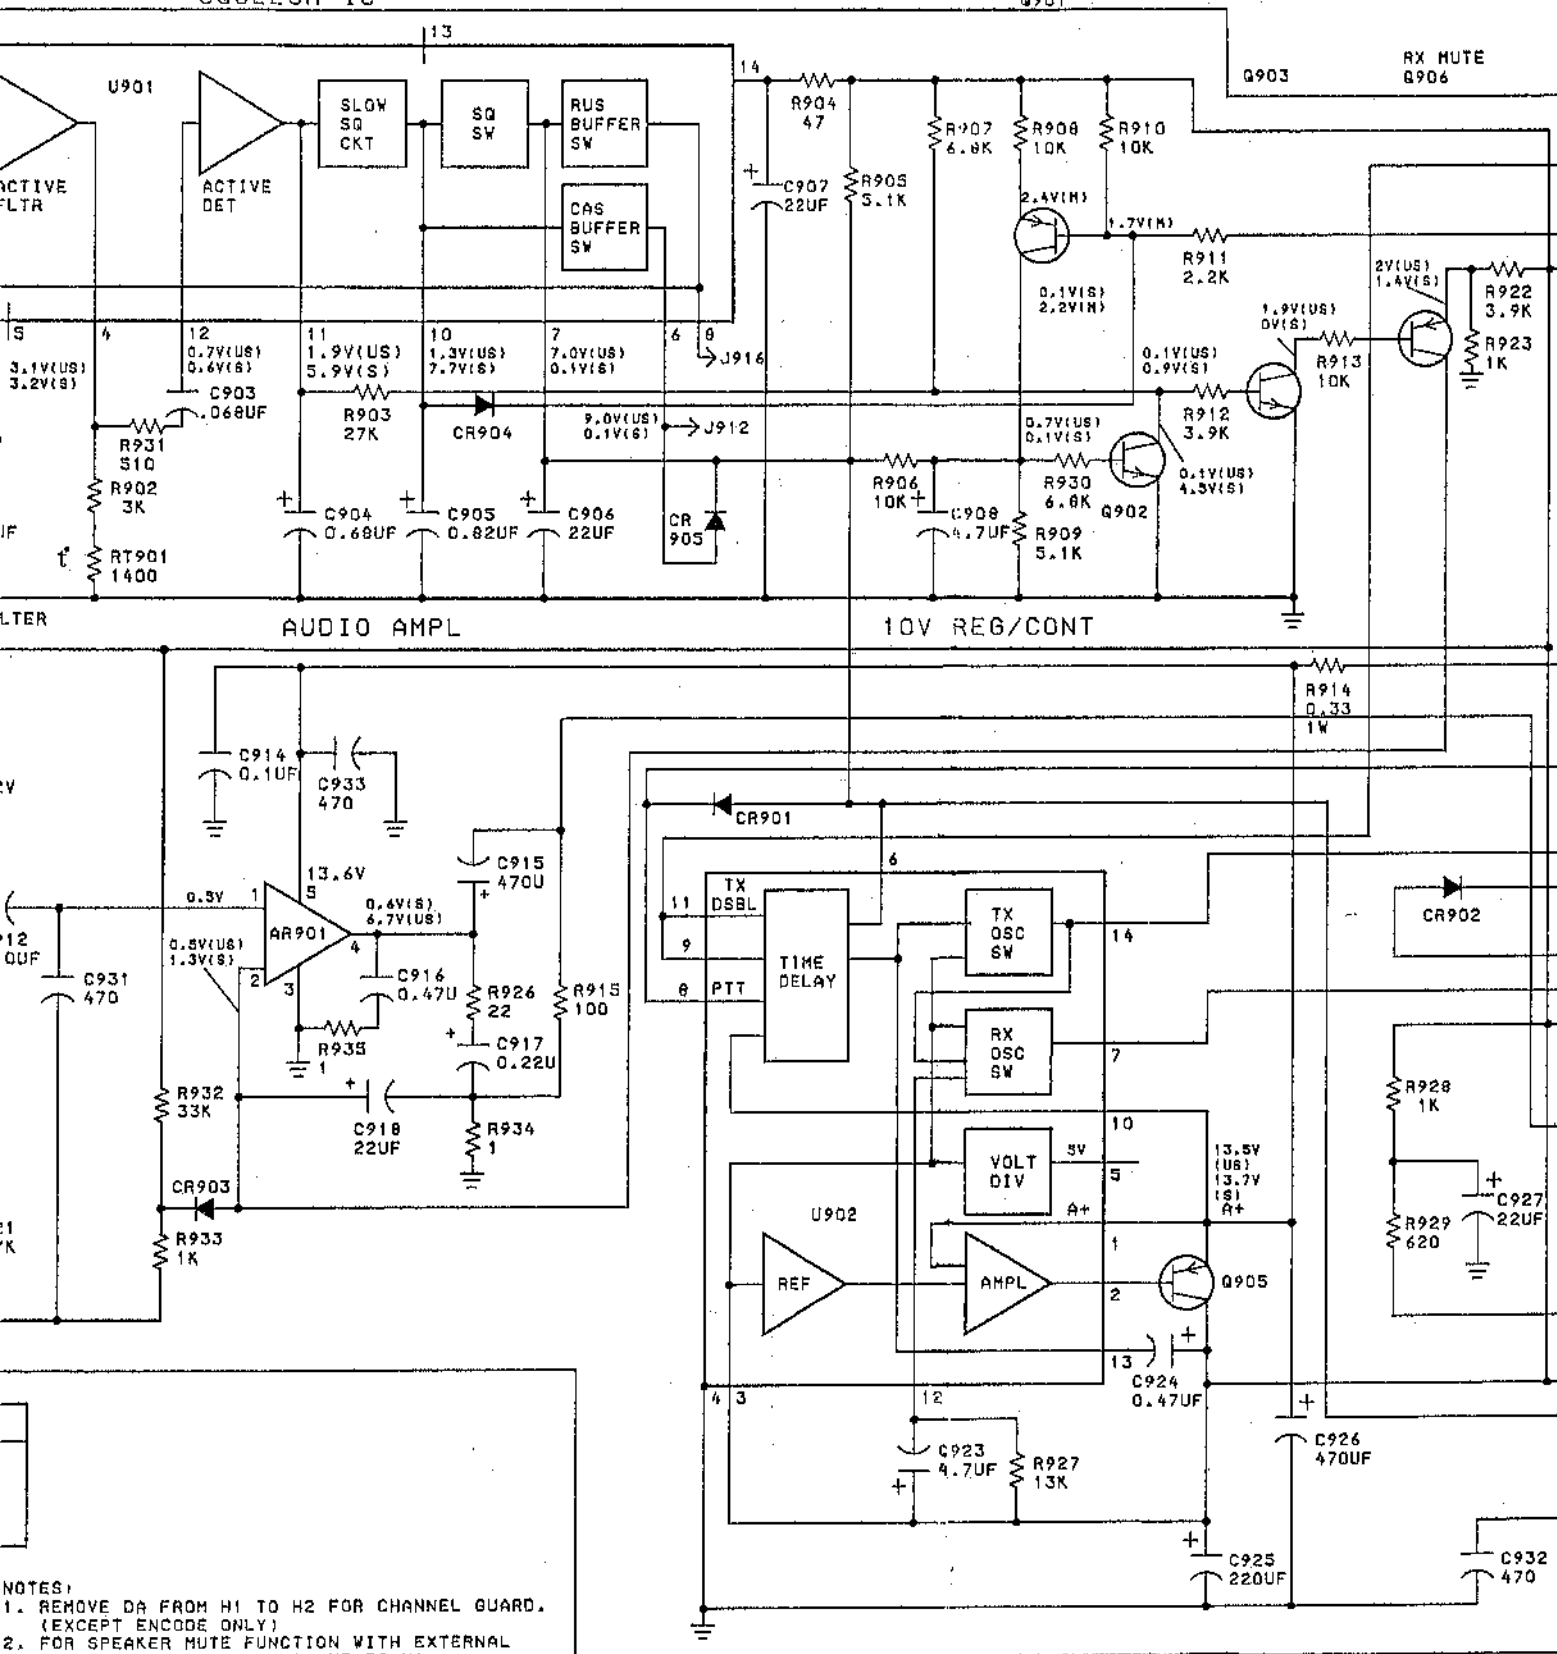

NOTES:

1. REMOVE DA FROM H1 TO H2 FOR CHANNEL GUARD. (EXCEPT ENCODE ONLY)
2. FOR SPEAKER MUTE FUNCTION WITH EXTERNAL DECODER, REMOVE DA FROM H3 TO H4.

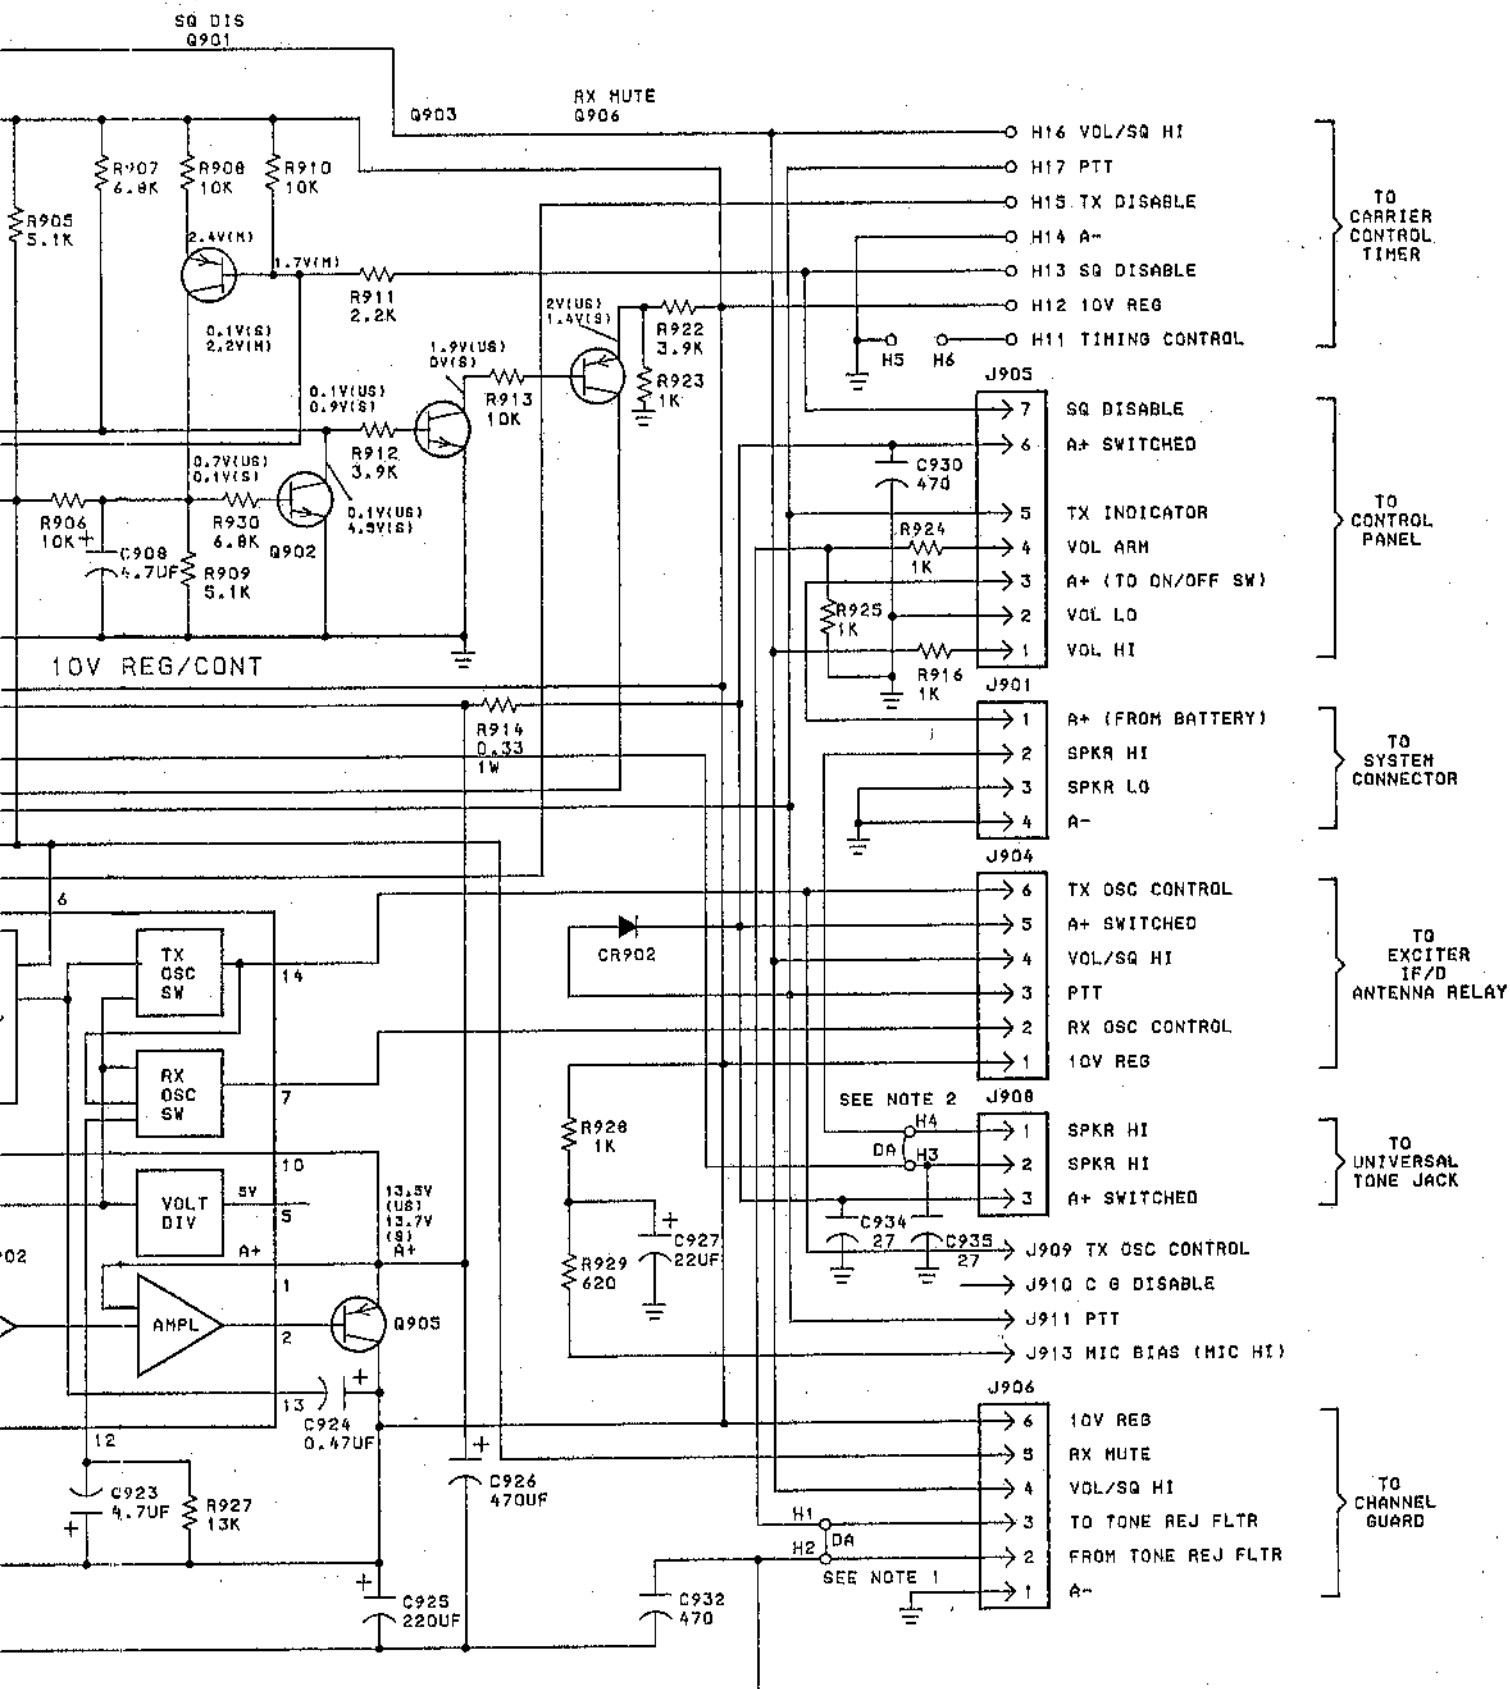

PARTS LIST


CUSTOM MVP
SYSTEM - AUDIO - SQUELCH BOARD
19C331817G1
198UE 4

SYMBOL	GE PART NO.	DESCRIPTION
AR901	19A134769P3	Linear: Audio Amplifier; sim to TDA2002H.
----- CAPACITORS -----		
CR01	19A116080P108	Polyester: 0.155 μ F $\pm$ 10%, 50 VDCW.
CR02	19A116080P109	Polyester: 0.22 μ F $\pm$ 10%, 50 VDCW.
CR03	T644ACP388K	Polyester: 0.068 μ F $\pm$ 10%, 50 VDCW.
CR04	19A143486P118	Tantalum: 0.68 μ F $\pm$ 10%, 35 VDCW.
CR05	19A143486P119	Tantalum: 0.82 μ F $\pm$ 10%, 35 VDCW.
CR06 and CR07	19A701534P8	Tantalum: 0.47 μ F $\pm$ 20%, 35 VDCW.
CR08	19A701534P8	Tantalum: 4.7 μ F $\pm$ 20%, 35 VDCW.
CR09	T644ACP322K	Polyester: 0.22 μ F $\pm$ 10%, 50 VDCW.
CR10 and CR11	T644ACP310K	Polyester: 0.01 μ F $\pm$ 10%, 50 VDCW.
CR12	19A701534P4	Tantalum: 1 μ F $\pm$ 20%, 35 VDCW.
CR13	19A700233P5	Ceramic: 470 pF $\pm$ 20%, 50 VDCW.
CR14	T644ACP410K	Polyester: 0.1 μ F $\pm$ 10%, 50 VDCW.
CR15	19A134730P3	Electrolytic: 470 μ F + 100 -10%, 18 VDCW.
CR16	19A700004P8	Metallized polyester: 0.47 μ F $\pm$ 10%, 63 VDCW.
CR17	19A116080P109	Polyester: 0.22 μ F $\pm$ 10%, 50 VDCW.
CR18	19A701534P8	Tantalum: 0.47 μ F $\pm$ 20%, 35 VDCW.
CR23	19A701534P6	Tantalum: 4.7 μ F $\pm$ 20%, 35 VDCW.
CR24	19A701534P3	Tantalum: 0.47 μ F $\pm$ 20%, 35 VDCW.
CR25	19A134730P2	Electrolytic: 220 μ F + 100 -10%, 25 VDCW.
CR26	19A134730P3	Electrolytic: 470 μ F + 100 -10%, 18 VDCW.
CR27	19A701534P8	Tantalum: 0.47 μ F $\pm$ 20%, 35 VDCW.
CR28 thru CR33	19A700233P5	Ceramic: 470 pF $\pm$ 20%, 50 VDCW.
CR34 and CR35	19A143491P27K0	Ceramic: 27 pF $\pm$ 10%, temp coef 0 PPM.
----- DIODES AND RECTIFIERS -----		
CR801	19A115250P1	Silicon, fast recovery, 225 mA, 50 PIV.
CR802	T324ADP1041	Rectifier, silicon, general purpose.
CR903 thru CR905	19A115250P1	Silicon, fast recovery, 225 mA, 50 PIV.
----- JACKS AND RECEPTACLES -----		
J901	19A116659P103	Connector, printed wiring: 4 contacts rated at 5 amps; sim to Molex 09-60-1041.
J904	19A116659P105	Connector, printed wiring: 6 contacts rated at 5 amps; sim to Molex 09-60-1061.
J905	19A116659P106	Connector, printed wire: 7 contacts rated at 5 amps; sim to Molex 09-60-1071.
J906	19A116659P105	Connector, printed wiring: 6 contacts rated at 5 amps; sim to Molex 09-60-1061.
J908	19A116659P101	Connector, printed wiring: 3 contacts rated at 5 amps; sim to Molex 09-60-1031.
J909 thru J916	19A701786P1	Contact, electrical; sim to Molex 08-60-0404.


SYMBOL	GE PART NO.	DESCRIPTION
----- TRANSISTORS -----		
Q801	19A700022P2	Silicon, PNP; sim to Type 2N3908.
Q802 thru Q804	19A700023P2	Silicon, NPN; sim to Type 2N3904.
Q805	19A116875P1	Silicon, PNP.
Q806	19A700022P2	Silicon, PNP; sim to Type 2N3908.
----- RESISTORS -----		
R901	19B209358P106	Variable, carbon film: approx 300 to 10K ohms $\pm$ 10%, 1/4 w; sim to CTS Type X-201.
R902	19A143400P42	Deposited carbon: 3K ohms $\pm$ 5%, 250 VDCW, 1/4 w.
R903	H212CRP327C	Deposited carbon: 27K ohms $\pm$ 5%, 1/4 w.
R904	H212CRP047C	Deposited carbon: 47 ohms $\pm$ 5%, 1/4 w.
R905	19A143400P45	Deposited carbon: 5.1K ohms $\pm$ 5%, 250 VDCW, 1/4 w.
R906	H212CRP310C	Deposited carbon: 10K ohms $\pm$ 5%, 1/4 w.
R907	H212CRP268C	Deposited carbon: 8.2K ohms $\pm$ 5%, 1/4 w.
R908	H212CRP310C	Deposited carbon: 10K ohms $\pm$ 5%, 1/4 w.
R909	19A143400P45	Deposited carbon: 5.1K ohms $\pm$ 5%, 250 VDCW, 1/4 w.
R910	H212CRP310C	Deposited carbon: 10K ohms $\pm$ 5%, 1/4 w.
R911	H212CRP222C	Deposited carbon: 2.2K ohms $\pm$ 5%, 1/4 w.
R912	H212CRP239C	Deposited carbon: 3.9K ohms $\pm$ 5%, 1/4 w.
R913	H212CRP310C	Deposited carbon: 10K ohms $\pm$ 5%, 1/4 w.
R914	19A700050P7	Wirewound: 0.33 ohms $\pm$ 10%, 2 w; sim to IRC/Type BWH.
R915	H212CRP110C	Deposited carbon: 100 ohms $\pm$ 5%, 1/4 w.
R916	H212CRP210C	Deposited carbon: 1K ohms $\pm$ 5%, 1/4 w.
R917	H212CRP333C	Deposited carbon: 33K ohms $\pm$ 5%, 1/4 w.
R918	H212CRP312C	Deposited carbon: 12K ohms $\pm$ 5%, 1/4 w.
R919	19A143400P06	Deposited carbon: 43K ohms $\pm$ 5%, 250 VDCW, 1/4 w.
R920	H212CRP333C	Deposited carbon: 33K ohms $\pm$ 5%, 1/4 w.
R921	H212CRP247C	Deposited carbon: 4.7K ohms $\pm$ 5%, 1/4 w.
R922	H212CRP239C	Deposited carbon: 3.9K ohms $\pm$ 5%, 1/4 w.
R923 thru R925	H212CRP210C	Deposited carbon: 1K ohms $\pm$ 5%, 1/4 w.
R926	H212CRP022C	Deposited carbon: 22 ohms $\pm$ 5%, 1/4 w.
R927	19A143400P50	Deposited carbon: 13K ohms $\pm$ 5%, 250 VDCW, 1/4 w.
R928	H212CRP210C	Deposited carbon: 1K ohms $\pm$ 5%, 1/4 w.
R929	19A143400P24	Deposited carbon: 620 ohms $\pm$ 5%, 250 VDCW, 1/4 w.
R930	H212CRP268C	Deposited carbon: 8.2K ohms $\pm$ 5%, 1/4 w.
R931	19A143400P33	Deposited carbon: 510 ohms $\pm$ 5%, 250 VDCW, 1/4 w.
R932	H212CRP333C	Deposited carbon: 33K ohms $\pm$ 5%, 1/4 w.
R933	H212CRP210C	Deposited carbon: 1K ohms $\pm$ 5%, 1/4 w.
R934 and R935	H212CRP310C	Deposited carbon: 1 ohms $\pm$ 5%, 1/4 w.
----- THERMISTORS -----		
RT901	54S0826P38	Thermistor: 1400 ohms $\pm$ 5%, color code green white; sim to Carborundum Type 723H-2.
----- INTEGRATED CIRCUITS -----		
U901	18D416560G3	Hybrid Squelch.
U902	18D416564G13	10-Volt Regulator.

IN ORDER TO RETAIN RATED EQUIPMENT PERFORMANCE, REPLACEMENT OF ANY SERVICE PART SHOULD BE MADE ONLY WITH A COMPONENT HAVING THE SPECIFICATIONS SHOWN ON THE PARTS LIST FOR THAT PART.

ALL RESISTORS ARE 1/4 WATT UNLESS OTHERWISE SPECIFIED AND RESISTOR VALUES IN OHMS UNLESS FOLLOWED BY K-1000 OHMS OR MEG-1,000,000 OHMS. CAPACITOR VALUES IN PICO FARADS (EQUAL TO MICROMICROFARADS) UNLESS FOLLOWED BY UF-MICROFARADS.

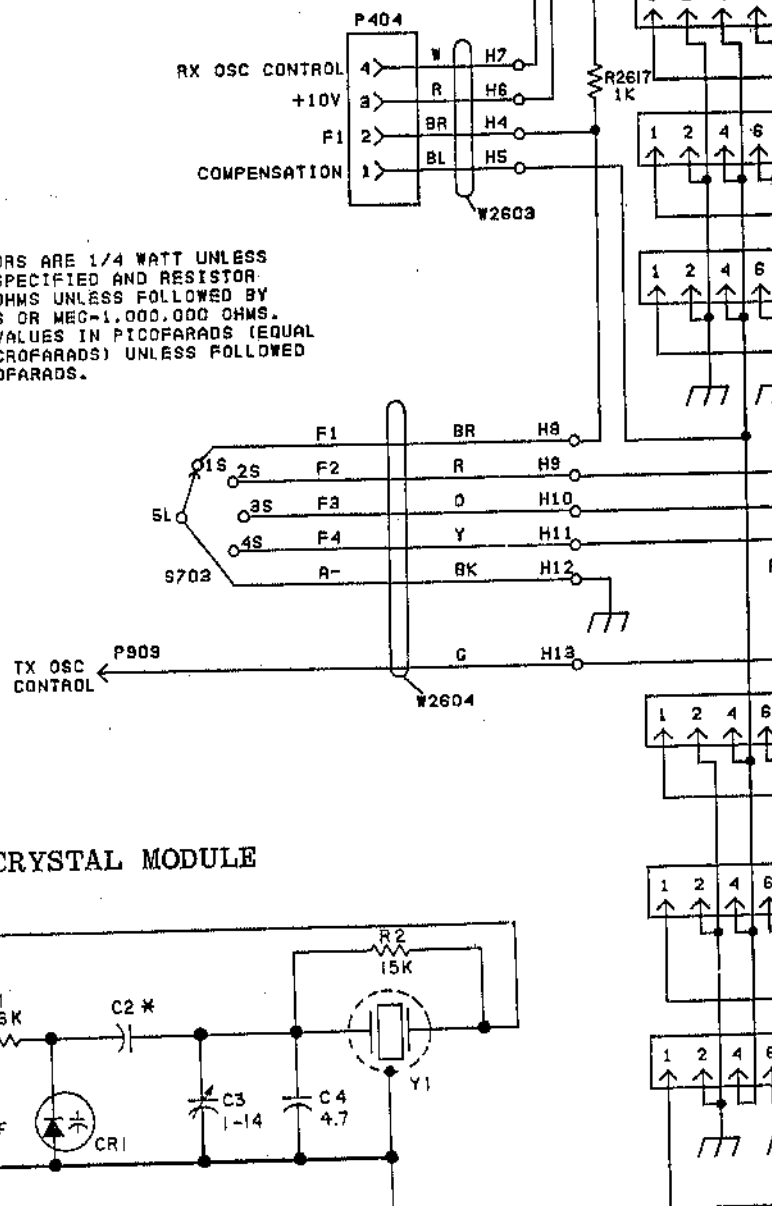

CRYSTAL MODULE

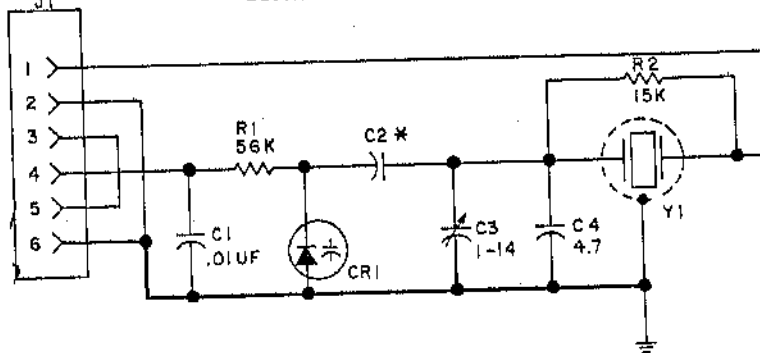


* SELECTED VALUE (43 TO 91)

MODEL NO	REV LETTER
PL19B226962 G1-27	

RETAIN RATED EQUIPMENT
REPLACEMENT OF ANY
T SHOULD BE MADE ONLY WITH
HAVING THE SPECIFICATIONS
E PARTS LIST FOR THAT PART.


RE 1/4 WATT UNLESS
FIED AND RESISTOR
UNLESS FOLLOWED BY
MEG-1,000,000 OHMS.
S IN PICO FARADS (EQUAL
ARADS) UNLESS FOLLOWED
OS.

CRYSTAL MODULE

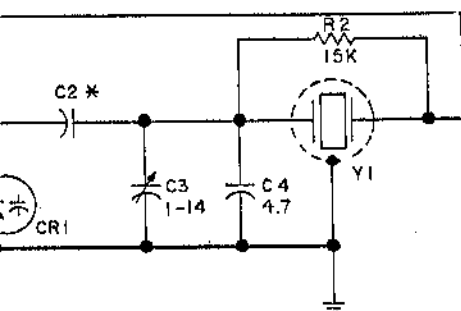


VALUE (43 TO 91)

REV	LETTER
-27	

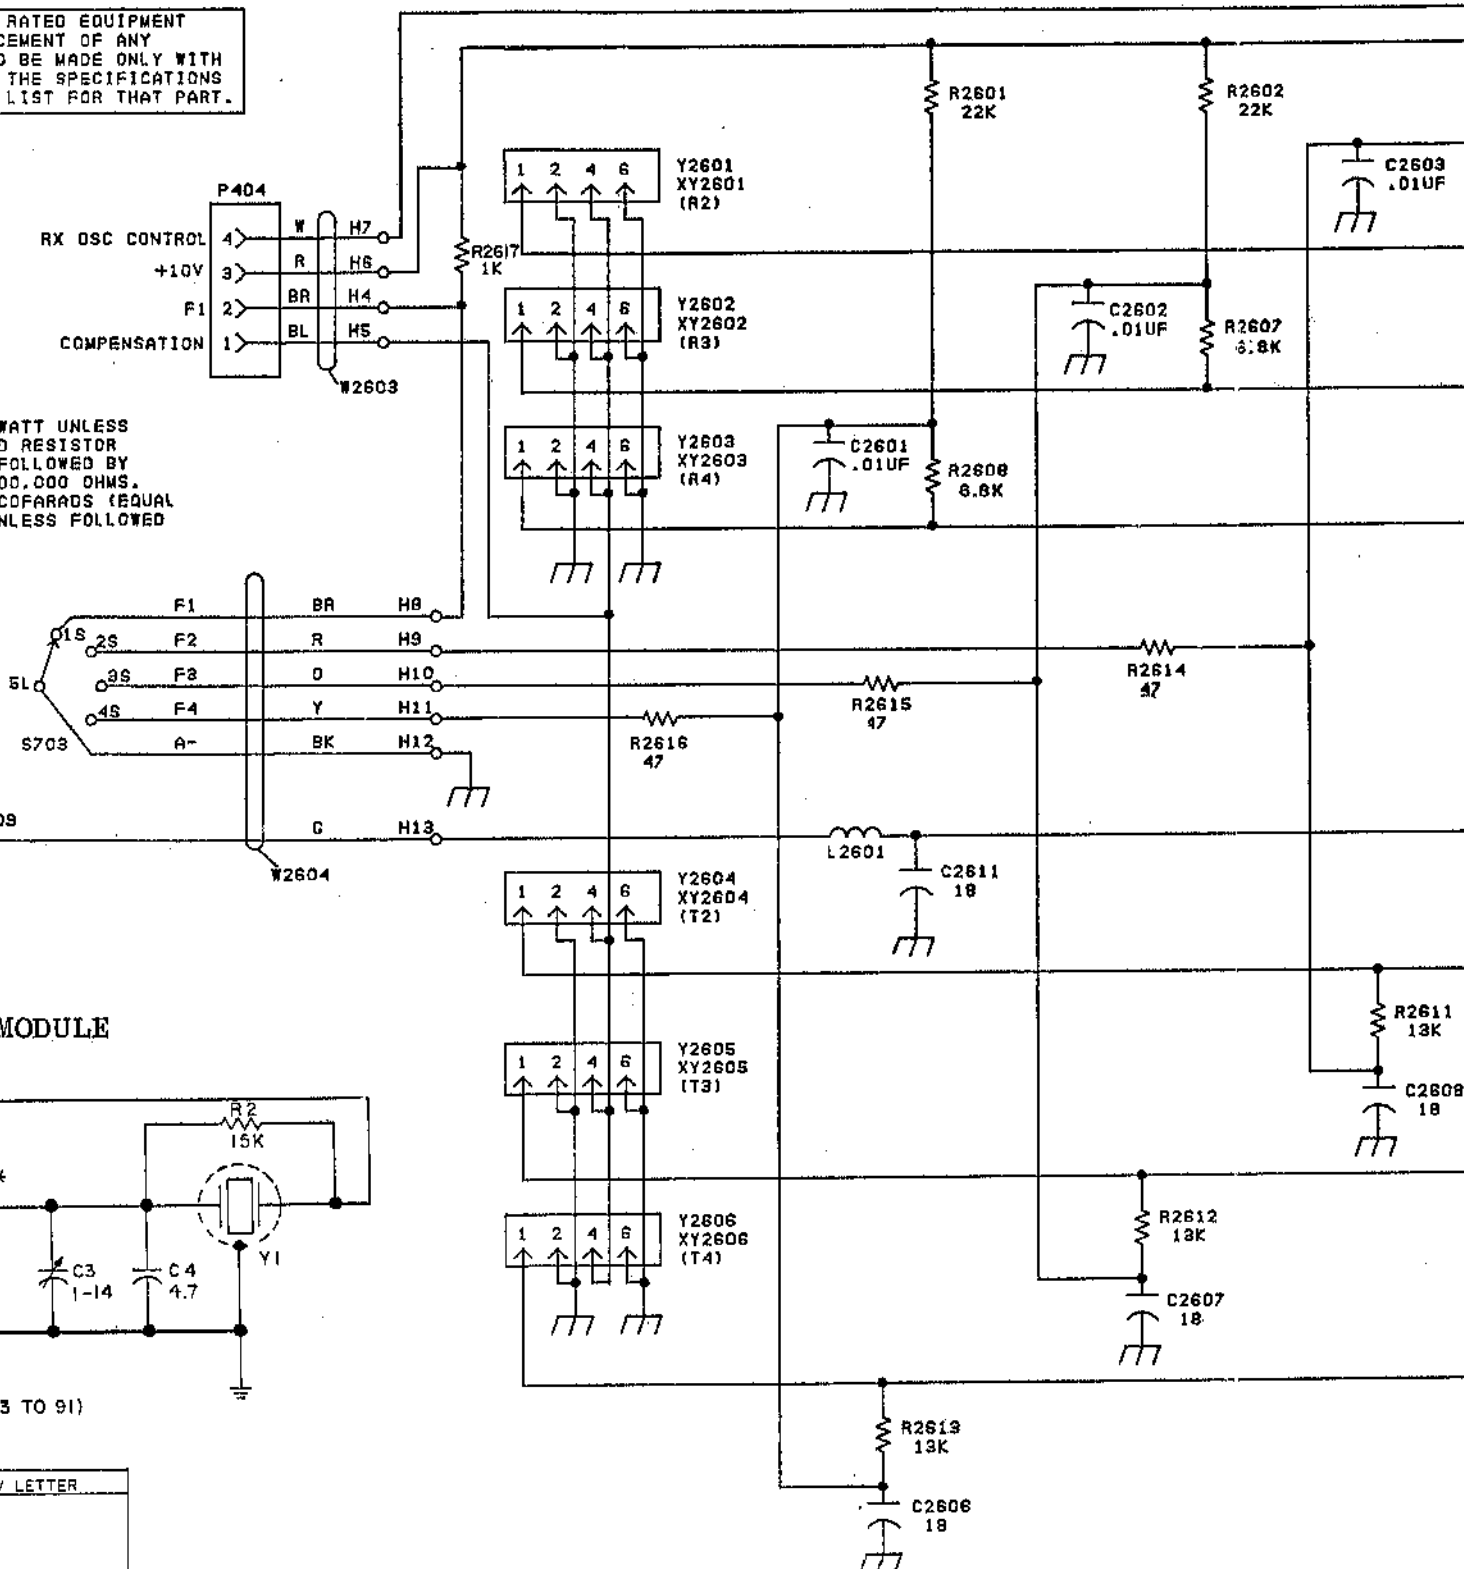

(19D423778, Rev. 4)

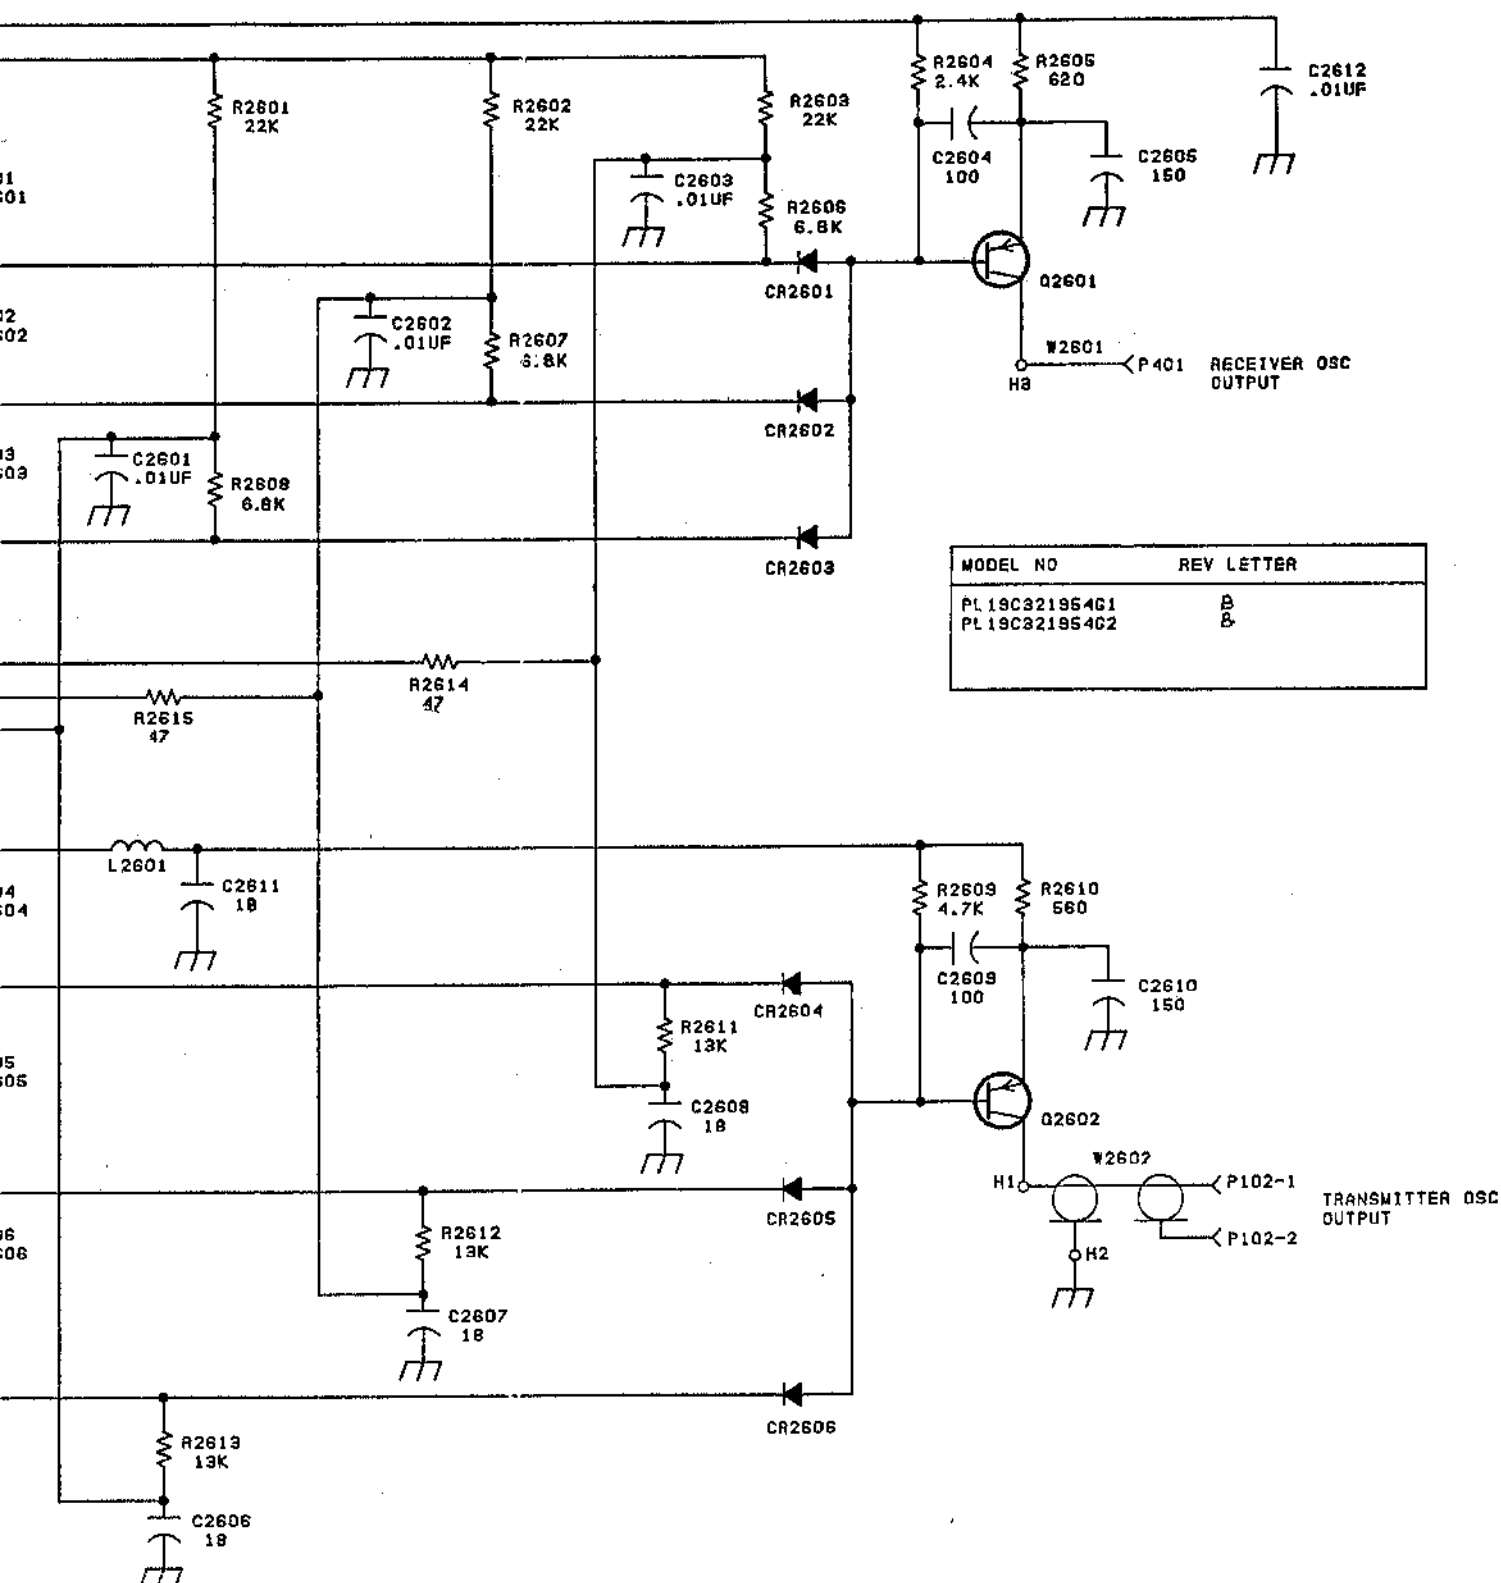

(19D423778, Rev. 4)

SCHEMATIC DIAGRAMS

CRYSTAL MODULE AND
MULTI-FREQUENCY KIT
19C321954G1 & G2

PARTS LIST


SYMBOL	GE PART NO.	DESCRIPTION
R2608*	19A700106P83	Composition: 6.8K ohms $\pm 5\%$, 1/4 W.
R2608*	3N152P133J	Earlier than REV A:
R2609	19A700106P78	Composition: 13K ohms $\pm 5\%$, 1/4 W.
R2610	19A700106P87	Composition: 800 ohms $\pm 5\%$, 1/4 W.
R2611	3N152P133J	Composition: 13K ohms $\pm 5\%$, 1/4 W.
R2612	19A700106P81	Composition: 47 ohms $\pm 5\%$, 1/4 W.
R2616	19A700106P83	Composition: 1K ohms $\pm 5\%$, 1/4 W.
R2617	19A700106P83	Composition: 1K ohms $\pm 5\%$, 1/4 W.
R2618		
R2619		
R2620		
R2621		
R2622		
R2623		
R2624		
R2625		
R2626		
R2627		
R2628		
R2629		
R2630		
R2631		
R2632		
R2633		
R2634		
R2635		
R2636		
R2637		
R2638		
R2639		
R2640		
R2641		
R2642		
R2643		
R2644		
R2645		
R2646		
R2647		
R2648		
R2649		
R2650		
R2651		
R2652		
R2653		
R2654		
R2655		
R2656		
R2657		
R2658		
R2659		
R2660		
R2661		
R2662		
R2663		
R2664		
R2665		
R2666		
R2667		
R2668		
R2669		
R2670		
R2671		
R2672		
R2673		
R2674		
R2675		
R2676		
R2677		
R2678		
R2679		
R2680		
R2681		
R2682		
R2683		
R2684		
R2685		
R2686		
R2687		
R2688		
R2689		
R2690		
R2691		
R2692		
R2693		
R2694		
R2695		
R2696		
R2697		
R2698		
R2699		
R2700		
R2701		
R2702		
R2703		
R2704		
R2705		
R2706		
R2707		
R2708		
R2709		
R2710		
R2711		
R2712		
R2713		
R2714		
R2715		
R2716		
R2717		
R2718		
R2719		
R2720		
R2721		
R2722		
R2723		
R2724		
R2725		
R2726		
R2727		
R2728		
R2729		
R2730		
R2731		
R2732		
R2733		
R2734		
R2735		
R2736		
R2737		
R2738		
R2739		
R2740		
R2741		
R2742		
R2743		
R2744		
R2745		
R2746		
R2747		
R2748		
R2749		
R2750		
R2751		
R2752		
R2753		
R2754		
R2755		
R2756		
R2757		
R2758		
R2759		
R2760		
R2761		
R2762		
R2763		
R2764		
R2765		
R2766		
R2767		
R2768		
R2769		
R2770		
R2771		
R2772		
R2773		
R2774		
R2775		
R2776		
R2777		
R2778		
R2779		
R2780		
R2781		
R2782		
R2783		
R2784		
R2785		
R2786		
R2787		
R2788		
R2789		
R2790		
R2791		
R2792		
R2793		
R2794		
R2795		
R2796		
R2797		
R2798		
R2799		
R2800		
R2801		
R2802		
R2803		
R2804		
R2805		
R2806		
R2807		
R2808		
R2809		
R2810		
R2811		
R2812		
R2813		
R2814		
R2815		
R2816		
R2817		
R2818		
R2819		
R2820		
R2821		
R2822		
R2823		
R2824		
R2825		
R2826		
R2827		
R2828		
R2829		
R2830		
R2831		
R2832		
R2833		
R2834		
R2835		
R2836		
R2837		
R2838		
R2839		
R2840		
R2841		
R2842		
R2843		
R2844		
R2845		
R2846		
R2847		
R2848		
R2849		
R2850		
R2851		
R2852		
R2853		
R2854		
R2855		
R2856		
R2857		
R2858		
R2859		
R2860		
R2861		
R2862		
R2863		
R2864		
R2865		
R2866		
R2867		
R2868		
R2869		
R2870		
R2871		
R2872		
R2873		
R2874		
R2875		
R2876		
R2877		
R2878		
R2879		
R2880		
R2881		
R2882		
R2883		
R2884		
R2885		
R2886		
R2887		
R2888		
R2889		
R2890		
R2891		
R2892		
R2893		
R2894		
R2895		
R2896		
R2897		
R2898		
R2899		
R2900		
R2901		
R2902		
R2903		
R2904		
R2905		
R2906		
R2907		
R2908		
R2909		
R2910		
R2911		
R2912		
R2913		
R2914		
R2915		
R2916		
R2917		
R2918		
R2919		
R2920		
R2921		
R2922		
R2923		
R2924		
R2925		
R2926		
R2927		
R2928		
R2929		
R2930		
R2931		
R2932		
R2933		
R2934		
R2935		
R2936		
R2937		
R2938		
R2939		
R2940		
R2941		
R2942		
R2943		
R2944		
R2945		
R2946		
R2947		
R2948		
R2949		
R2950		
R2951		
R2952		
R2953		
R2954		
R2955		
R2956		
R2957		
R2958		
R2959		
R2960		
R2961		
R2962		
R2963		
R2964		
R2965		
R2966		
R2967		
R2968		
R2969		
R2970		
R2971		
R2972		
R2973		
R2974		
R2975		
R2976		
R2977		
R2978		
R2979		
R2980		
R2981		
R2982		
R2983		
R2984		
R2985		
R2986		
R2987		
R2988		
R2989		
R2990		
R2991		
R2992		
R2993		
R2994		
R2995		
R2996		
R2997		
R2998		
R2999		
R3000		


*COMPONENTS ADDED, DELETED OR CHANGED BY PRODUCTION CHANGES

SYMBOL	GE PART NO.	DESCRIPTION
C2801 thru C2803	19A701824P632	Capacitors: 0.01 uF $\pm 10\%$, 50 VDCW.
C2804	19A701824P632	Ceramic disc: 100 pF $\pm 5\%$, 500 VDCW, temp coat 0 -750 PPM.
C2805	19A700105P35	Mitor: 150 pF $\pm 5\%$, 500 VDCW.
C2806*	19A701824P14	Ceramic disc: 18 pF $\pm 5\%$, 500 VDCW, temp coat 0 PPM.
C2806*	19A701824P14	In REV A & earlier:
C2806*	748B182P9	Silver mitor: 18 pF $\pm 5\%$, 500 VDCW; s'm to Electro Mottle Type DM-1B.
C2808	19A701824P632	Ceramic disc: 100 pF $\pm 5\%$, 500 VDCW, temp coat 0 -750 PPM.
C2810	19A700106P38	Mitor: 150 pF $\pm 5\%$, 500 VDCW.
C2811*	19A701824P14	Ceramic disc: 18 pF $\pm 5\%$, 500 VDCW, temp coat 0 PPM.
C2812	748B182P9	In REV A & earlier:
C2812	748B182P9	Silver mitor: 18 pF $\pm 5\%$, 500 VDCW; s'm to Electro Mottle Type DM-1B.
C2812	748B182P9	Polyester: 0.01 uF $\pm 10\%$, 50 VDCW.
C2812 thru C2816	19A18925P4	Diodes and Rectifiers: Silicon, pin: 50 volt Reverse Breakdown, 400 mW.
L2801	19A12977303	Coll.
P102	19A127032P2	Solderless terminal: 20-24 AWG; s'm to Helco 150-93-10. (Part of W2602A, W2602B).
P401	19A127042P2	Solderless terminal: 24-27 AWG; s'm to Helco 120-93-8. (Part of W2601).
P404	19A11895P4	Connector, printed wiring: 4 contacts; s'm to Molex 93-50-7041. (Part of W2603).
P509		(Part of W2604).
C2802 and C2803	19A700032P1	Silicon, PNP; s'm to Type 2N2906.
R2601 thru R2603	19A700108P55	Resistors
R2604*	3N152P42J	Composition: 2.4K ohms $\pm 5\%$, 1/4 W.
R2604*	3N152P47J	Earlier than REV A:
R2605*	3N152P21J	Composition: 4.7K ohms $\pm 5\%$, 1/4 W.
R2605*	3N152P21J	Composition: 820 ohms $\pm 5\%$, 1/4 W.
R2605*	3N152P21J	Earlier than REV A:


LB1300690
CRYSTAL MODULE (5 PPM)
1988Z688G1-0267 31-34' 38


[illegible]

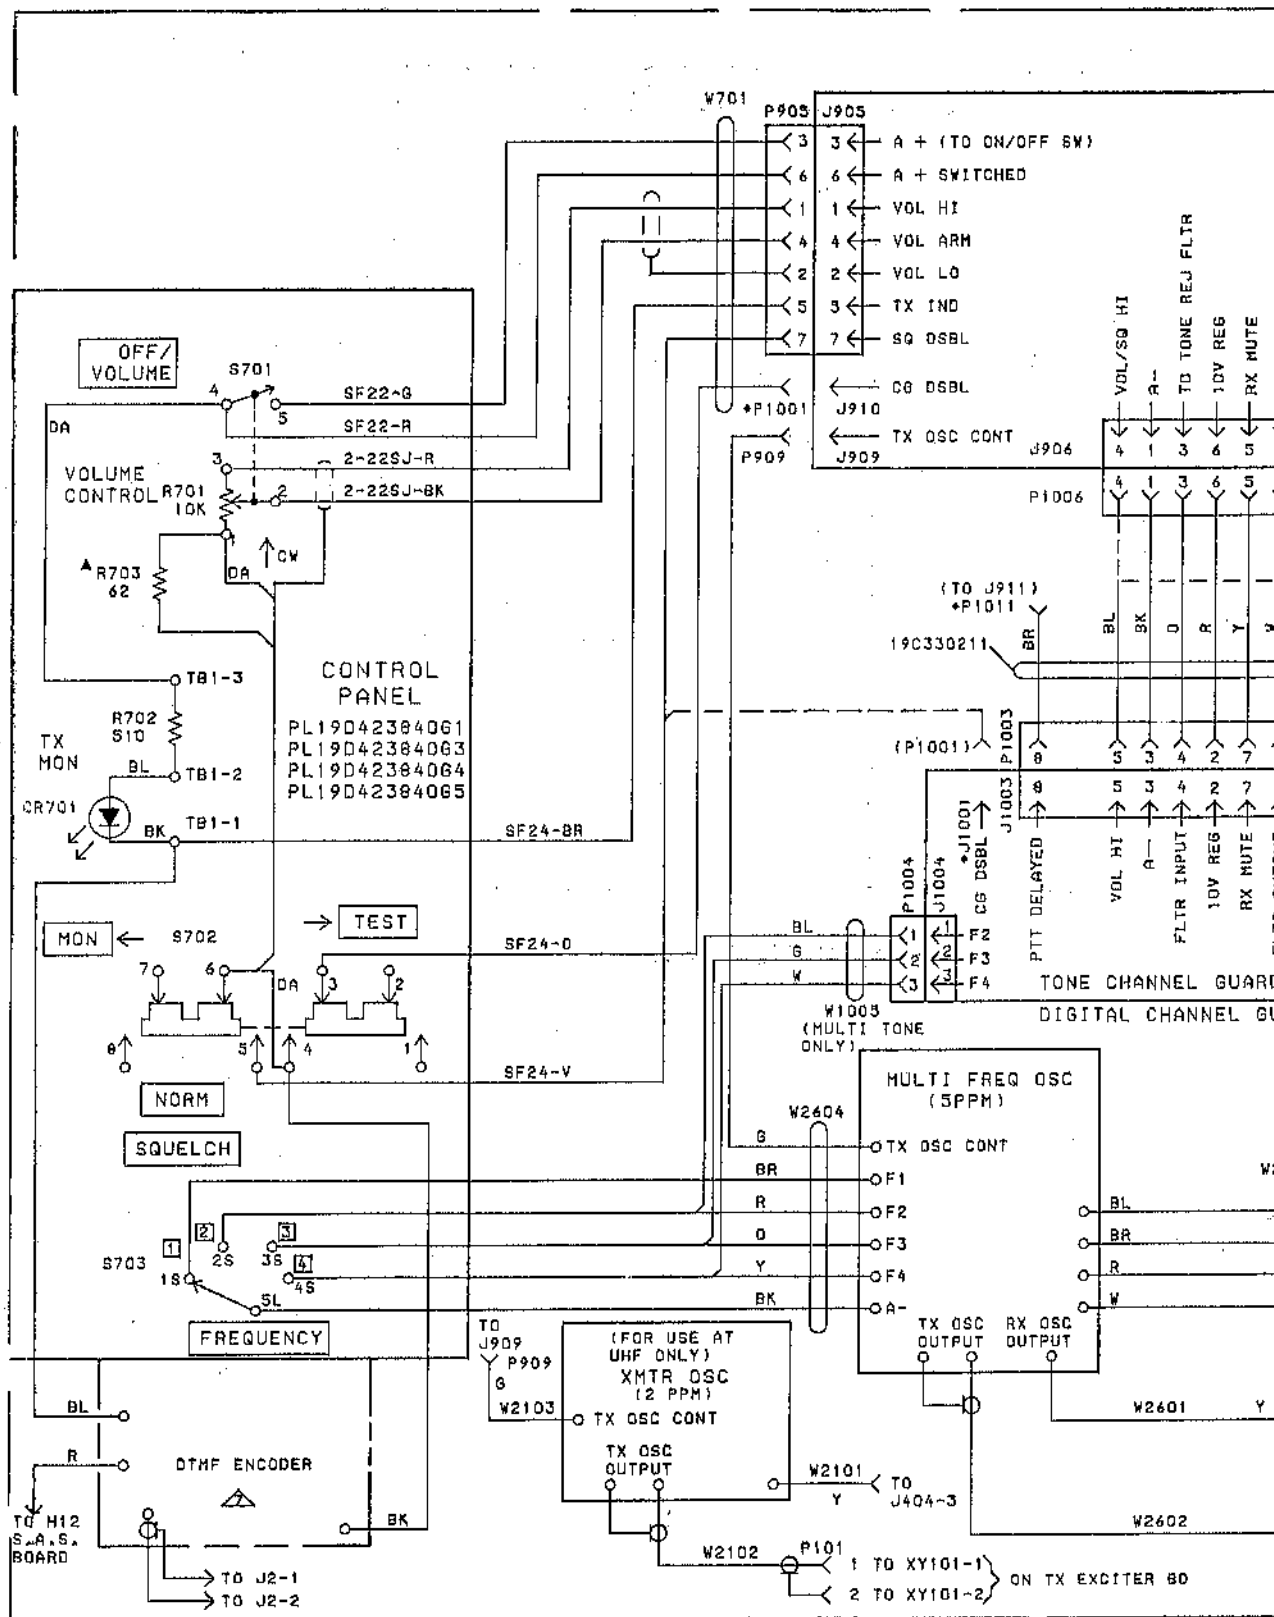


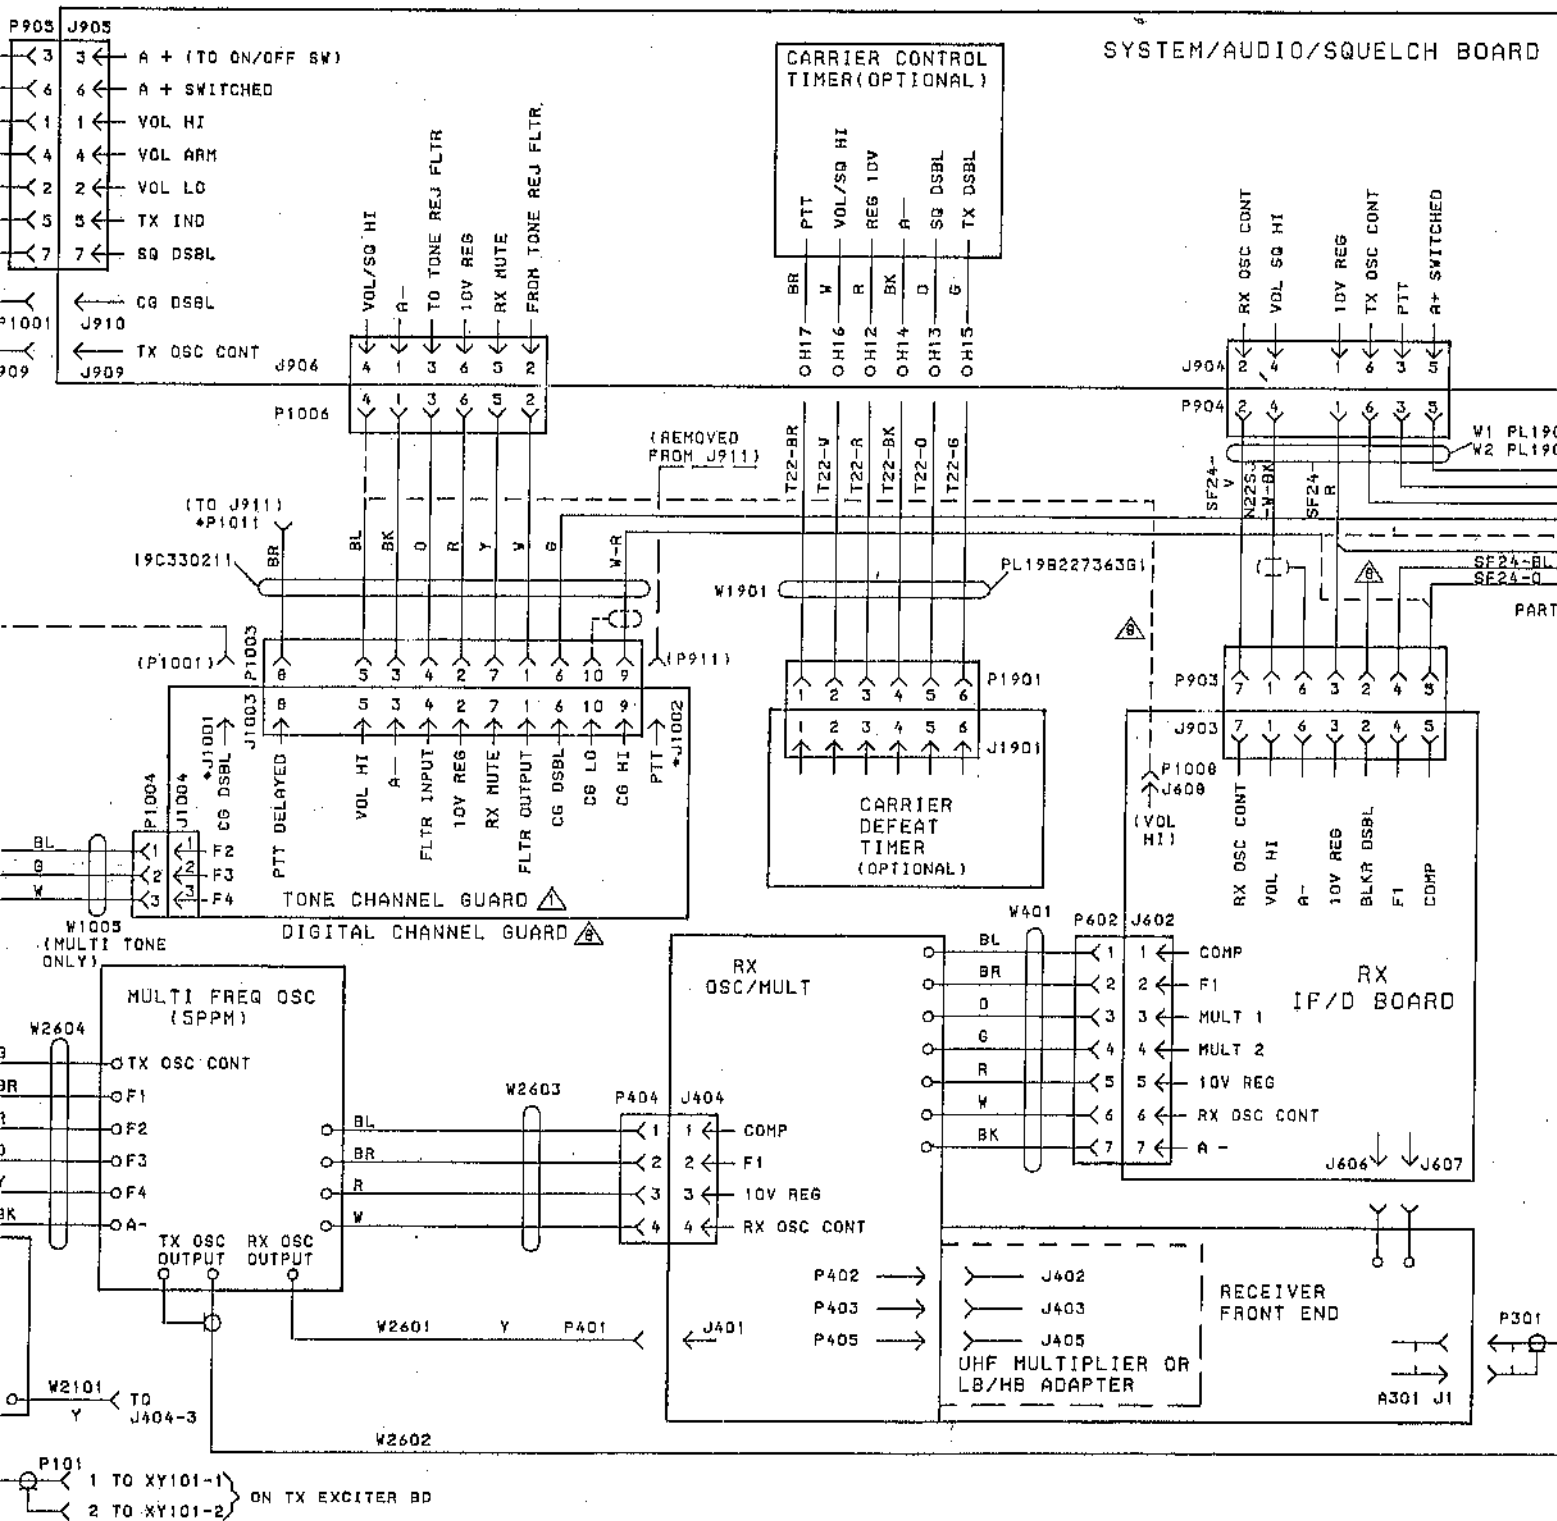

SYSTEM/AUDIO/SQUELCH BOARD

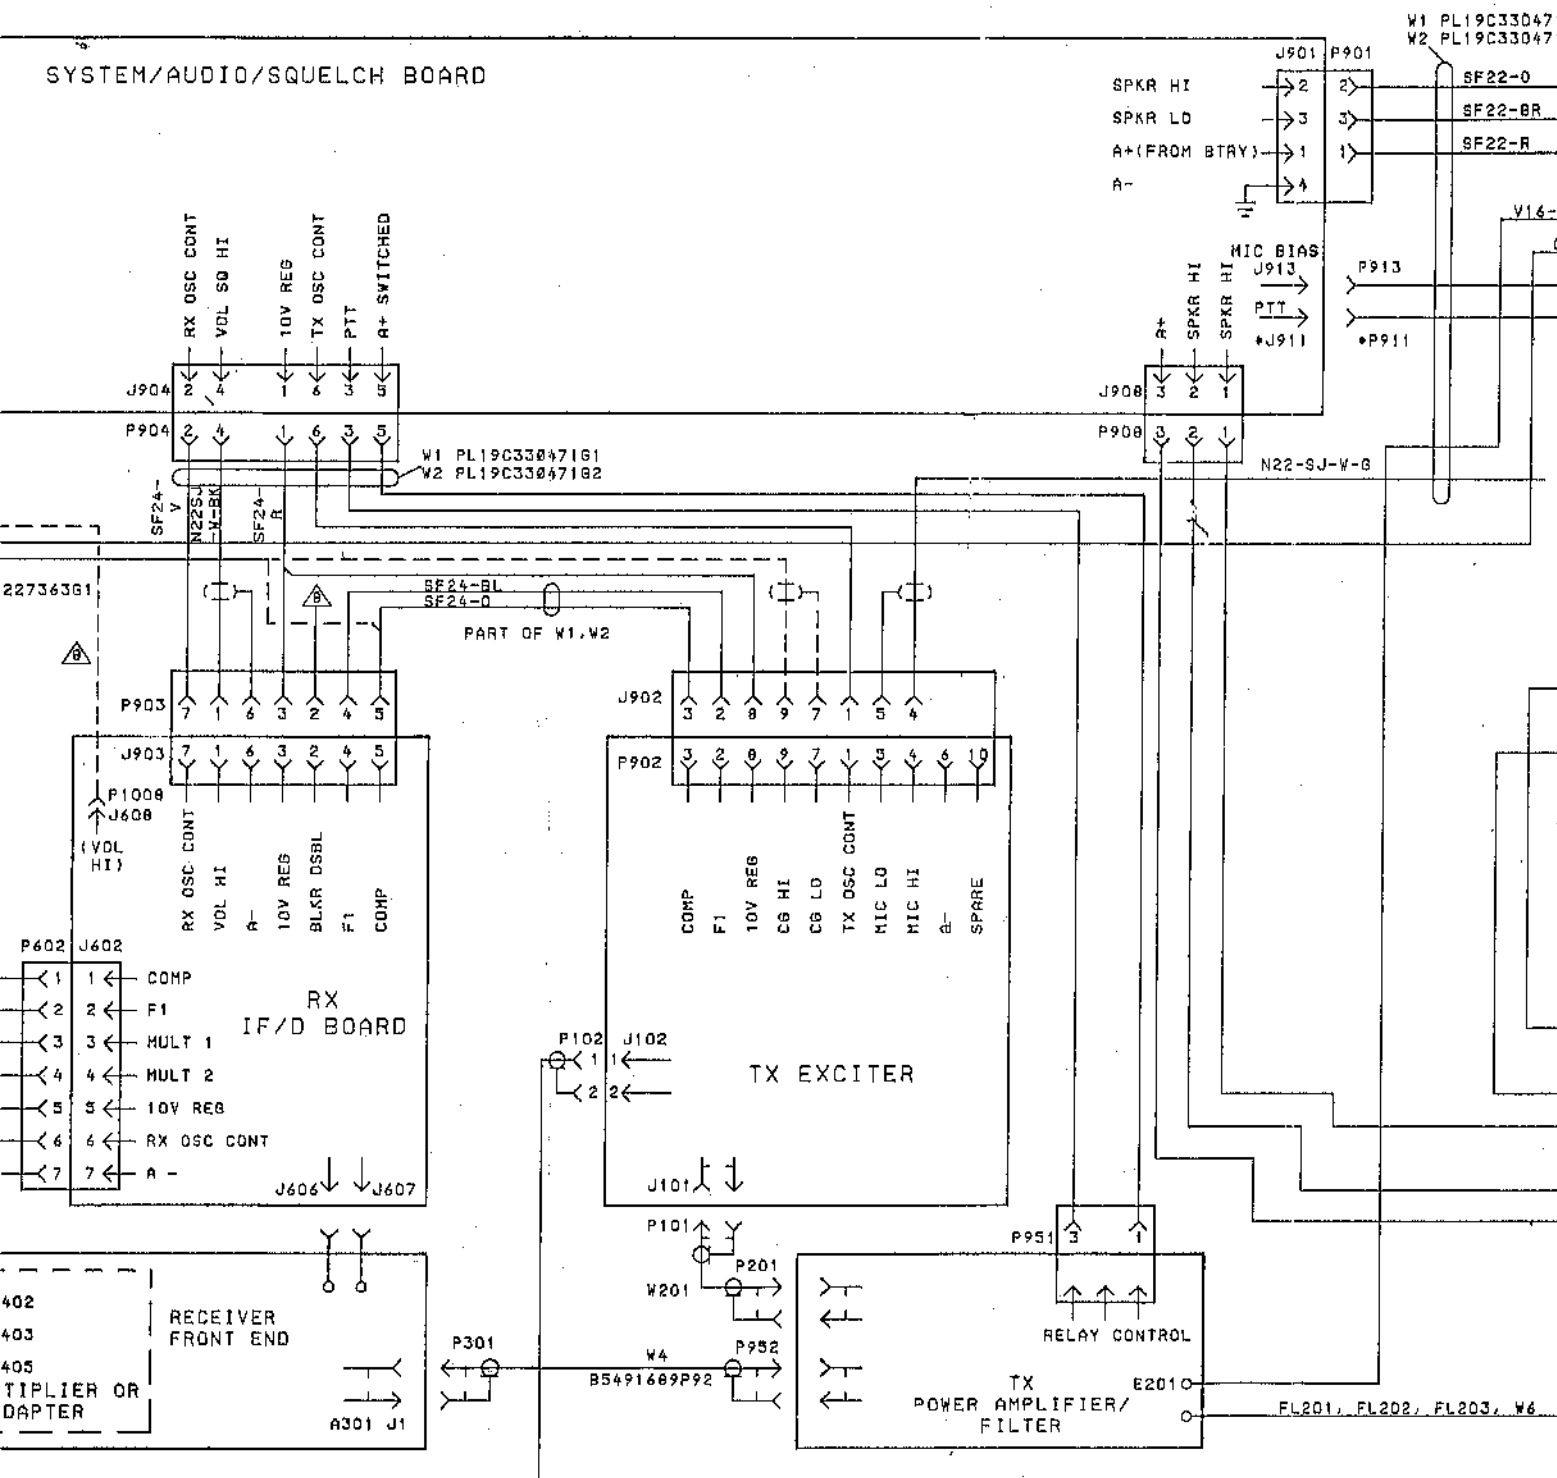

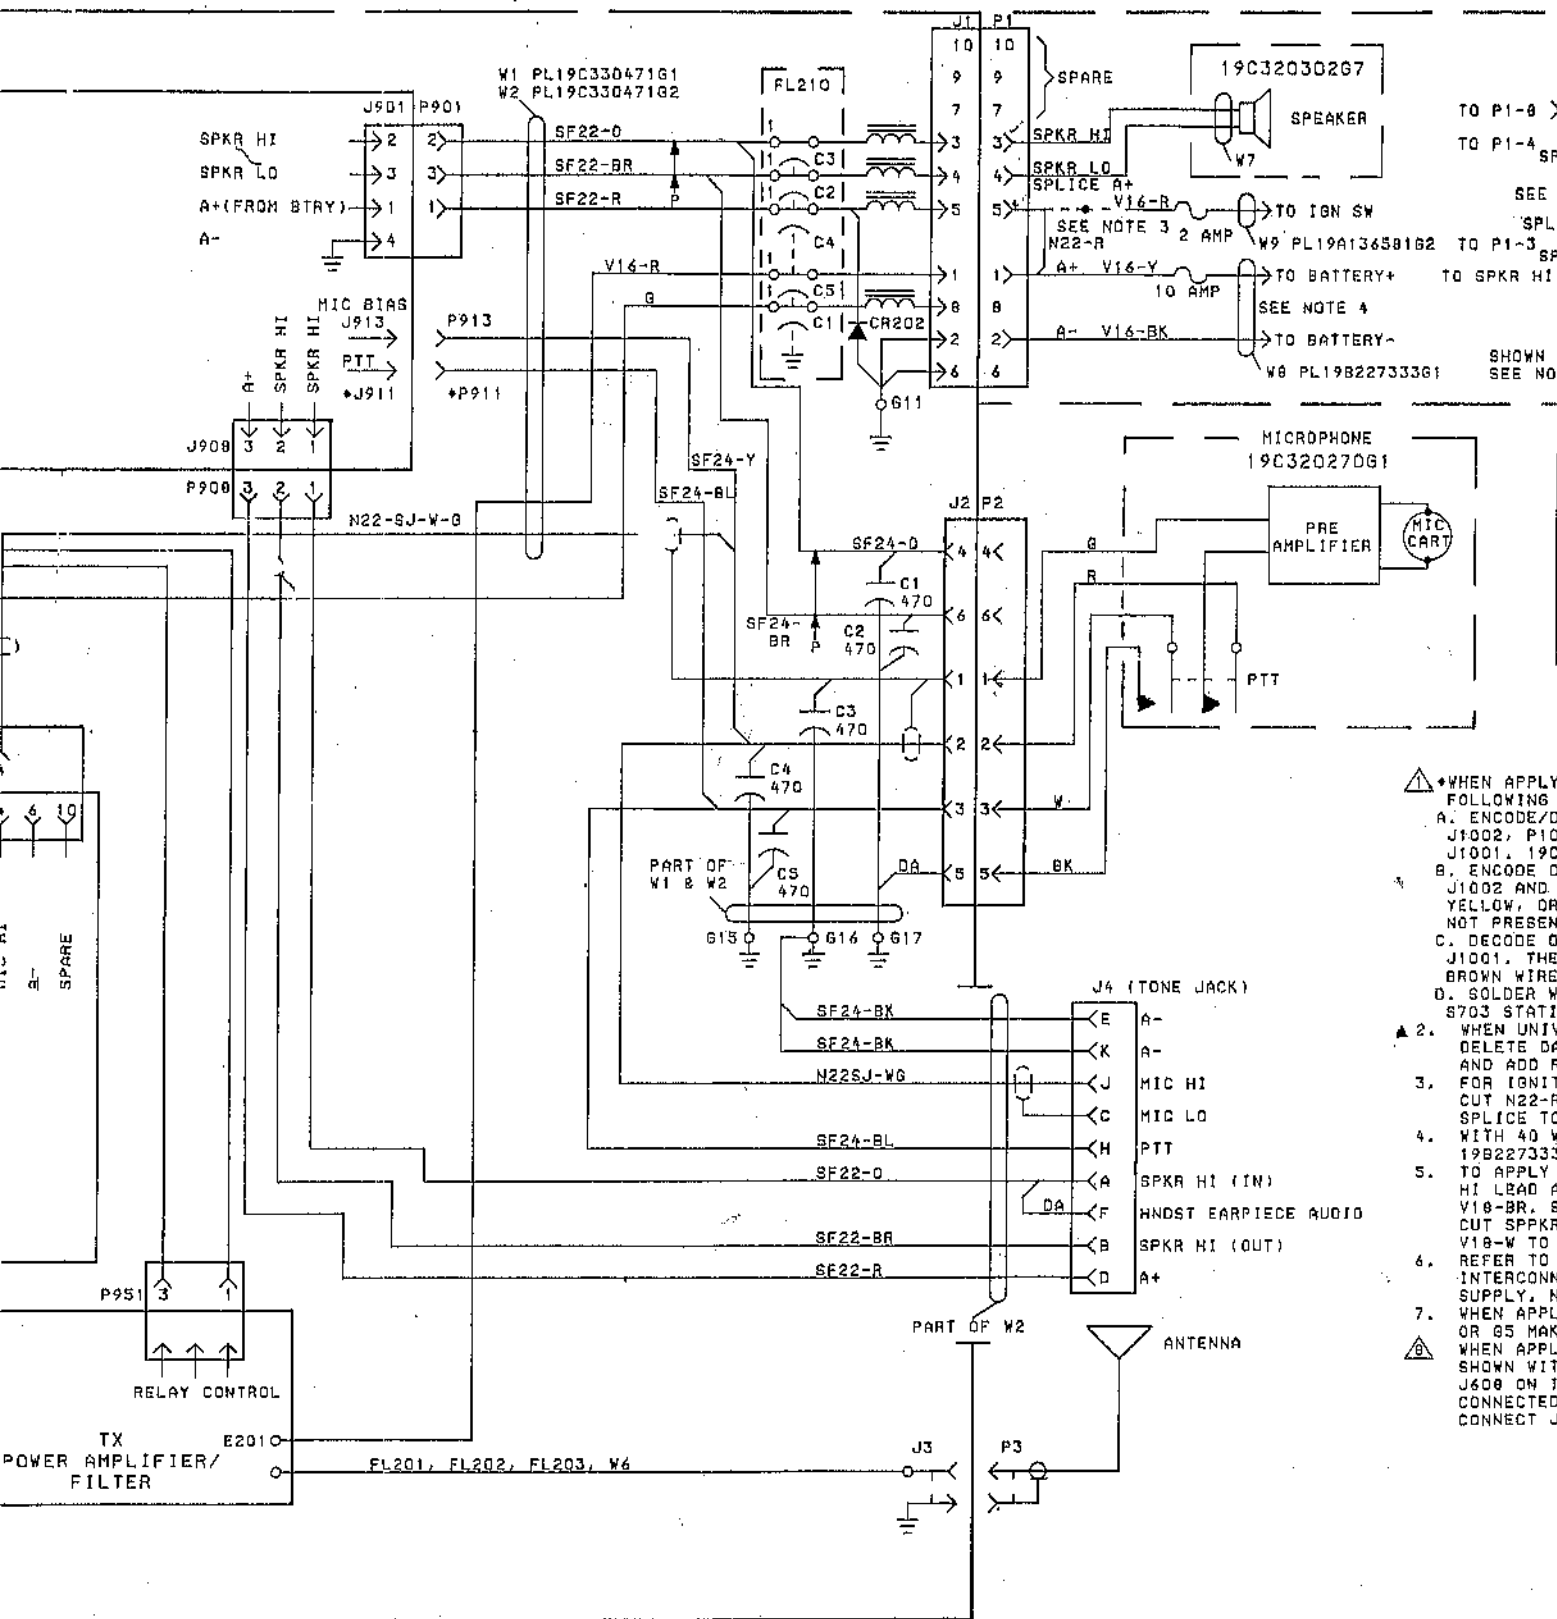

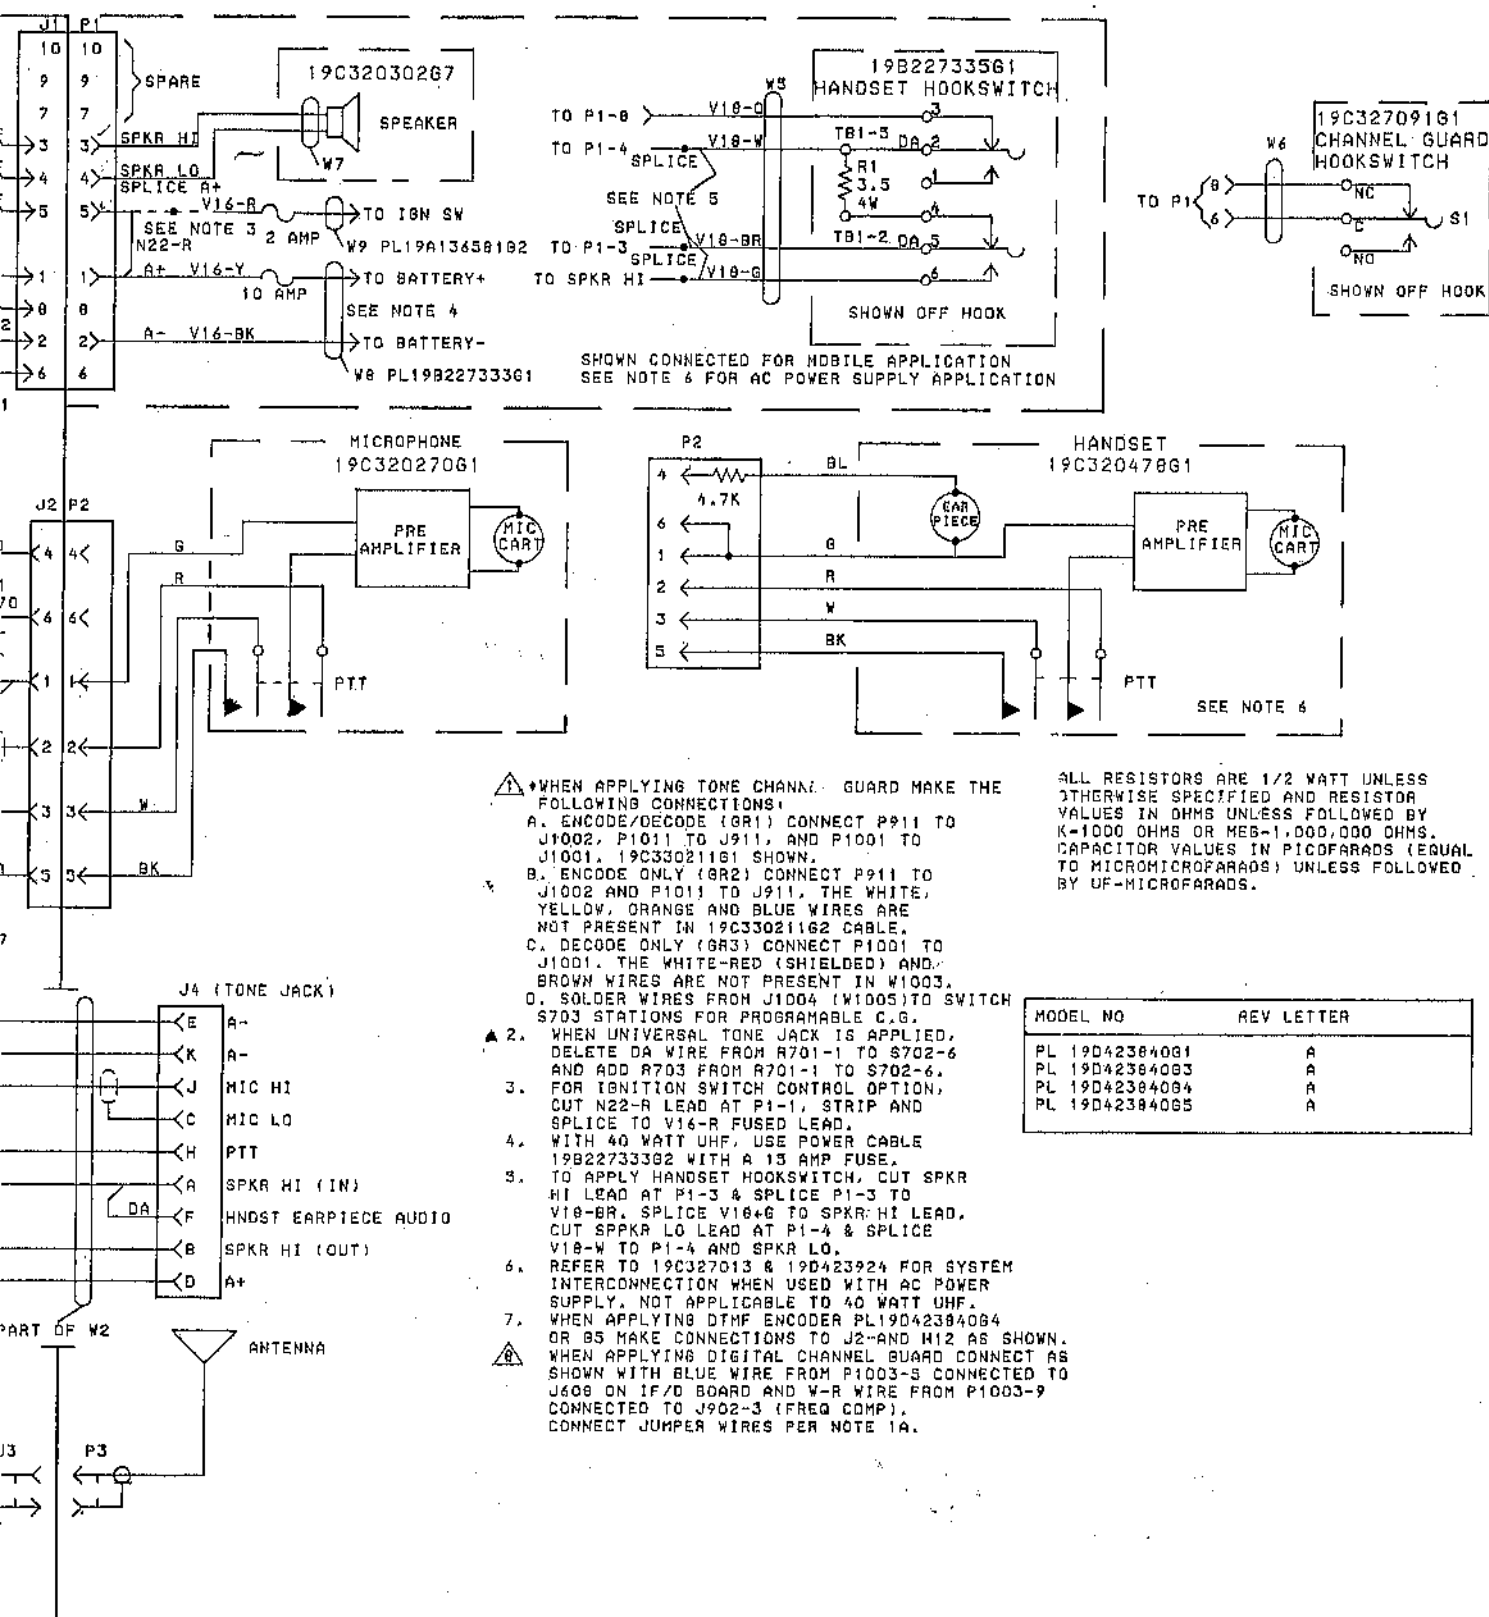

INTERCONNECTION DIAGRAM

29.7—512 MHz CUSTOM MVP

PARTS LIST

LBI30181L
CUSTOM MVP
AND
ASSOCIATED ASSEMBLIES

SYMBOL	GE PART NO.	DESCRIPTION
		CONTROL PANEL 19D423840G1 MULTI FREQ. 19D423840G3 SINGLE FREQ. 19D423840G4 MULTI FREQ & DTMP ENC. 19D423840G5 SINGLE FREQ & DTMP ENC.
		----- DIODES AND RECTIFIERS -----
CR701	19R219800G4	Diode, red light emitting.
		----- PLUGS -----
P005		Connector. Includes:
	19A116659PB2	Shell.
	19A116781P4	Contact, electrical: wire range No. 22-26 AWG; sim to Molex 08-50-0107. (Quantity 7).
P1001	19A127042P2	Solderless terminal: 20-24 AWG; sim to Malco 120-93-10.
		----- RESISTORS -----
R701		(Part of S701).
R702	3R77P511J	Composition: 510 ohms $\pm 5\%$, 1/2 w.
		----- SWITCHES -----
S701	5406870P35	Variable, carbon film: 10K ohms $\pm 20\%$; sim to Mallory LC(10K) PAC. (Includes R701).
S702	19A138564G1	Switch, slide: 2 poles, 3 positions, spring return; sim to Switchcraft 11D-1154.
		----- TERMINAL BOARDS -----
TB1	19B800558P1	Miniature, phen: 3 terminals.
		----- CABLES -----
W701		HARNESSE ASSEMBLY 19D423840G2 (Includes P005, P1001, R701, S701, S702)
		ASSOCIATED ASSEMBLIES
		POWER CABLE 19B227333G1
		----- PLUGS -----
P1		Connector. Includes:
	19A116884P11	Shell.
	19A116884P8	Contact, female: wire range No. 14-20 AWG; sim to AMP 60527-4.
		----- MISCELLANEOUS -----
	19A115884P10	Contact, female: wire range No. 22-30 AWG; sim to AMP 60509-4.
	19A136581G1	Fused load.
	19A136580G1	Load.
	7484390P1	Cartridge, quick blow: 10 amp at 250 v; sim to Bussmann ABC10.
	7484390P3	Cartridge, quick blow: 15 amp at 250 v; sim to Bussmann ABC15. (Used with 35 watt UHF Tx).

SYMBOL	GE PART NO.	DESCRIPTION
		TRANSMIT/RECEIVE SYSTEM HARNESSE 19C330471G1 STANDARD 19C330471G2 WITH TONE
		----- CAPACITORS -----
C1 thru C5	0404481P7	Ceramic disc: 470 pF $\pm 20\%$, 1000 VDCW; sim Type JF Discap.
		----- TERMINALS -----
G15	4036994P1	Terminal, solderless.
G16 and G17	40369835P6	Terminal, solder: sim to Shakeproof 2101.
		----- JACKS AND RECEPTACLES -----
J2	19B219827G1	Connector: 6 contacts.
J4	7480183P7	Plug: 8 contacts rated at 7.5 amps max; Winchester MSP-1S-H18CS.
		----- PLUGS -----
P001		Connector. Includes:
	19A116659PB4	Shell.
	19A116781P4	Contact, electrical: wire range No. 22-26 AWG; sim to Molex 08-50-0107. (Quantity 1).
	19A116781P3	Contact, electrical: wire range No. 16-20 AWG; sim to Molex 08-50-0106. (Quantity 2).
P002		Connector. Includes:
	19A116659PB1	Shell.
	19A116781P4	Contact, electrical: wire range No. 22-26 AWG; sim to Molex 08-50-0107. (Quantity 4).
P003		Connector. Includes:
	19A116659PB2	Shell.
	19A116781P4	Contact, electrical: wire range No. 22-26 AWG; sim to Molex 08-50-0107. (Quantity 5).
P004		Connector. Includes:
	19A116659PB0	Shell.
	19A116781P4	Contact, electrical: wire range No. 22-26 AWG; sim to Molex 08-50-0107. (Quantity 6).
	19A116781P3	Contact, electrical: wire range No. 16-20 AWG; sim to Molex 08-50-0106. (Quantity 2).
P008		Connector. Includes:
	19A116659P16	Shell.
	19A116781P4	Contact, electrical: wire range No. 22-26 AWG; sim to Molex 08-50-0107. (Quantity 3).
P011	19A127042P2	Solderless terminal: 20-24 AWG; sim to Malco 120-93-10.
P013	19A127042P2	Solderless terminal: 20-24 AWG; sim to Malco 120-93-10.
P051		Connector. Includes:
	19A116659P14	Shell.
	19A116781P4	Contact, electrical: wire range No. 22-26 AWG; sim to Molex 08-50-0107. (Quantity 2).
		----- RESISTORS -----
R703	3R77P620J	Composition: 82 ohms $\pm 5\%$, 1/2 w.
		----- MISCELLANEOUS -----
	19B209731P1	Encoder Pnd.
	4029840P5	Contact, electrical: 24-18 wire size; sim Malco 12021-7. (Hung in wiring from P001-P001-3).
	19B227467G1	Front cap. (G1 & G3).
	19B227467G2	Front cap. (G4 & G5).

PARTS LIST

LB130181L
CUSTOM MVP
AND
ASSOCIATED ASSEMBLIES

SYMBOL	GE PART NO.	DESCRIPTION
		CONTROL PANEL 18D423840G1 MULTI FREQ. 18D423840G3 SINGLE FREQ. 18D423840G4 MULTI FREQ & DTMF ENC. 18D423840G5 SINGLE FREQ & DTMF ENC. ----- DIODES AND RECTIFIERS ----- R701 19B210800G4 Diode, red light emitting. ----- PLUGS ----- P905 19A116650P82 Connector. Includes: Shell. 19A116781P4 Contact, electrical: wire range No. 22-26 AWG; sim to Molex 08-50-0107. (Quantity 7). P1001 19A127042P2 Solderless terminal: 20-24 AWG; sim to Malco 120-83-10. ----- RESISTORS ----- R701 (Part of S701). R702 3R77P811J Composition: 510 ohms $\pm 5\%$, 1/2 w. ----- SWITCHES ----- S701 5496870P35 Variable, carbon film: 10K ohms $\pm 20\%$; sim to Mallory LC(10K) PAC. (Includes R701). S702 19A136564G1 Switch, slide: 2 poles, 3 positions, spring return; sim to Switchcraft 11D-1154. ----- TERMINAL BOARDS ----- T81 19D800558P1 Miniature, phen: 3 terminals. ----- CABLES ----- W701 HARNESS ASSEMBLY 19D423840G2 (Includes P905, P1001, R701, S701, S702) ASSOCIATED ASSEMBLIES POWER CABLE 19S227833G1 ----- PLUGS ----- P1 Connector. Includes: Shell. 19A115884P11 Contact, female: wire range No. 14-20 AWG; sim to AMP 60B27-4. ----- MISCELLANEOUS ----- 19A116684P10 Contact, female: wire range No. 22-26 AWG; sim to AMP 60B08-4. 19A136561G1 Fused lead. 19A136580G1 Lead. 7484390P1 Cartridge, quick blow: 10 amp at 250 v; sim to Bussmann ABC10. 7484390P3 Cartridge, quick blow: 15 amp at 250 v; sim to Bussmann ABC15. (Used with 35 watt UHF Tx).

SYMBOL	GE PART NO.	DESCRIPTION
		TRANSMIT/RECEIVE SYSTEM HARNESS 18C330471G1 STANDARD 18C330471G2 WITH TONE ----- CAPACITORS ----- C1 thru C5 5494481P7 Ceramic disc: 470 pF $\pm 20\%$, 1000 VDCW; sim. to RMC Type JF Discap. ----- TERMINALS ----- G15 4038884P1 Terminal, solderless. G16 and G17 4038883P6 Terminal, solder: sim to Shakeproof 2101-08-00. ----- JACKS AND RECEPTACLES ----- J2 19B210827G1 Connector: 6 contacts. J4 7489183P7 Plug: 9 contacts rated at 7.5 amps max; sim to Winchester M9P-LS-H19CS. ----- PLUGS ----- P901 Connector. Includes: Shell. 19A116650P84 Contact, electrical: wire range No. 22-26 AWG; sim to Molex 08-50-0107. (Quantity 1). P902 19A116781P3 Contact, electrical: wire range No. 16-20 AWG; sim to Molex 08-50-0105. (Quantity 2). 19A116650P81 Connector. Includes: Shell. 19A116781P4 Contact, electrical: wire range No. 22-26 AWG; sim to Molex 08-50-0107. (Quantity 4). P903 Connector. Includes: Shell. 19A116650P82 Contact, electrical: wire range No. 22-26 AWG; sim to Molex 08-50-0107. (Quantity 5). P904 Connector. Includes: Shell. 19A116650P80 Contact, electrical: wire range No. 22-26 AWG; sim to Molex 08-50-0107. (Quantity 5). 19A116781P4 Contact, electrical: wire range No. 16-20 AWG; sim to Molex 08-50-0105. (Quantity 2). P905 Connector. Includes: Shell. 19A116650P16 Contact, electrical: wire range No. 22-26 AWG; sim to Molex 08-50-0107. (Quantity 3). P811 19A127042P2 Solderless terminal: 20-24 AWG; sim to Malco 120-83-10. P813 19A127042P2 Solderless terminal: 20-24 AWG; sim to Malco 120-83-10. P851 Connector. Includes: Shell. 19A116650P14 Contact, electrical: wire range No. 22-26 AWG; sim to Molex 08-50-0107. (Quantity 2). ----- RESISTORS ----- R703 3R77P820J Composition: 82 ohms $\pm 5\%$, 1/2 w. ----- MISCELLANEOUS ----- 19B208731P1 Encoder Pad. 40298840P5 Contact, electrical: 24-18 wire size; sim to Malco 12021-7. (Hung in wiring from P801-1 thru P901-3). 19B227467G1 Front cap. (G1 & G3). 19B227487G2 Front cap. (G4 & G5).

DESCRIPTION
TRANSMIT/RECEIVE SYSTEM HARNESS 19C330471G1 STANDARD 19C330471G2 WITH TONE ----- CAPACITORS ----- mic disc: 470 pF $\pm 20\%$, 1000 VDCW; sim. to RMC a JF Discap. ----- TERMINALS ----- inal, solderless. inal, solder: sim to Shakeproof 2101-06-00. ----- JACKS AND RECEPTACLES ----- ector: 6 contacts. : 9 contacts rated at 7.5 amps max; sim to hester MSP-LS-H19CS. ----- PLUGS ----- ector. Includes: 1. ect, electrical: wire range No. 22-26 AWG; to Molex 08-50-0107. (Quantity 1). ect, electrical: wire range No. 16-20 AWG; to Molex 08-50-0105. (Quantity 2). ector. Includes: 1. ect, electrical: wire range No. 22-26 AWG; to Molex 08-50-0107. (Quantity 4). ector. Includes: 1. ect, electrical: wire range No. 22-26 AWG; to Molex 08-50-0107. (Quantity 5). ector. Includes: 1. ect, electrical: wire range No. 22-26 AWG; to Molex 08-50-0107. (Quantity 5). ect, electrical: wire range No. 16-20 AWG; to Molex 08-50-0105. (Quantity 2). ector. Includes: 1. ect, electrical: wire range No. 22-26 AWG; to Molex 08-50-0107. (Quantity 3). erless terminal: 20-24 AWG; sim to Malco 93-10. erless terminal: 20-24 AWG; sim to Malco 93-10. ector. Includes: 1. ect, electrical: wire range No. 22-26 AWG; to Molex 08-50-0107. (Quantity 2). ----- RESISTORS ----- osition: 82 ohms $\pm 5\%$, 1/2 w. ----- MISCELLANEOUS ----- er Pad. ect, electrical: 24-18 wire size; sim to 12021-7. (Hung in wiring from P901-1 thru -3). cap. (G1 & G3). cap. (G4 & G5).

SYMBOL	GE PART NO.	DESCRIPTION
	NP280149	Faceplate. (4 Freq.).
	NP280237	Faceplate. (1 Freq.).
	19A136561P1	Dummy support. (Not Used).
	10B208581P1	Knob, push-on. (Used with S701 & dummy support).
	N402P13C13	Plain washer. (Used with dummy support). (Not Used).
	4035007P4	Retainer ring. (Used with dummy support). (Not Used).
	7165075P4	Hex nut, brass: thd, size No. 3/8-32. (Secures S701).
	19A134330P1	Knob, push-on. (Used with S702).
	19A116877P1	Bushing: sim to Hewlett-Packard No. 5082-4707. (Used with CR701).
	N84P9007C8	Machine screw, phillips: No. 4-40 x 7/16. (Secures S702).
	N404P11C8	Lockwasher, internal: No. 4. (Secures S702).
	7141225P2	Hex nut: No. 4-40. (Secures S702).

PARTS LIST

LB130194C
SPEAKER
19C330302G7

SYMBOL	GE PART NO.	DESCRIPTION
LS2	19A116910P1	----- LOUDSPEAKERS ----- Permanent magnet: 5 inch, 3.2 ohms $\pm 15\%$ imp, 5 w. max operating; sim to Pioneer 002009.
W5	19A136574G1	----- CABLES ----- Cable assembly: approx 4 feet long. Includes (2) 19A115884P8 contacts.
	19B219892G1	----- MISCELLANEOUS ----- Grille.
	19B227593G1	Housing.
	19C320014P1	Mounting bracket. (Located between housing and retaining bracket).
	19A116866P108	Screw, thread forming, assembled washer: Phillips POZIDRIV®, HI-LO thread, No. 7-19 x 1/2. (Secures speaker to housing).
	19A116866P112	Screw, thread forming, assembled washer: Phillips POZIDRIV®, HI-LO thread, No. 7-19 x 3/4. (Secures grille to housing).
	M130P1610D6	Screw, thread forming: No. 10-16 x 5/8. (Secures mounting bracket to mounting surface).

*COMPONENTS ADDED, DELETED OR CHANGED BY PRODUCTION CHANGES.

SYMBOL	GE PART NO.	
S1	19B209089P1	Sen 12 V SPD
	4033802P1	Pow
	19A115884P8	Con on c
	19B204721P1	Actu
	N193P1408C13	Tap
	7878243P11	Hex
	19B204726P1	Supp
	19A121416G1	Supp
	19A116398P1	Rive
	19A121416P2	Spac

*COMPONENTS ADDED, DELETED

SYMBOL	GE PART NO.	
P1 and P2	19A134152P1	Conn
	19A134152P11	Shel
		Cont (P1-
S703	5495454P45	Bot posi VDC
	19B201955P1	Spac
	7185075P4	Hex S703
	19B208391P1	Knob

*COMPONENTS ADDED, DELETED

PARTS LIST

LB130175C

CHANNEL GUARD HOOKSWITCH
19C327091G1

PARTS LIST

LB130174D

HANDSET HOOKSWITCH
19B227336G1

SYMBOL	GE PART NO.	DESCRIPTION
S1	19B209089P1	----- SWITCHES -----
		Sensitive: 10.1 amps at 125 VAC, or .5 amp at 12 VDC; sim to Cherry Electrical Products R42-13AB SPDT.
		HARNES ASSEMBLY 19C327091G2
		Power cable. 2 conductor, approx 4 feet long.
		Connector, plug: sim to AMP 60527-1. (Located on cable end).
		----- MISCELLANEOUS -----
		19B204721P1 Actuator spring.
		N183P1408C13 Tap screw: No. 8-18 x 1/2. (Quantity 2).
		7878243P11 Hex nut: No. 8-18. (Quantity 2).
		19B204726P1 Support, front.
		19A121418G1 Support, rear.
		19A115398P1 Rivet, tubular. (Secures S1).
		19A121419P2 Spacer.

*COMPONENTS ADDED, DELETED OR CHANGED BY PRODUCTION CHANGES.

PARTS LIST

LB130607B

W8
806-870 MHz CUSTOM MVP
4 FREQUENCY CABLE ASSEMBLY
19B232147G1

SYMBOL	GE PART NO.	DESCRIPTION
P1 and P2	19A134152P1	----- PLUGS -----
		Connector. Includes:
		Shell.
		Contact, electrical: sim to Molex 08-50-0113. (P1-1 thru P1-3, P2-1, P2-2).
		----- SWITCHES -----
		Rotary: 1 section, 1 pole, 2 to 4 with adj stop positions, non-shorting contacts, 2 amps at 25 VDC or 1 amp at 110 VAC; sim to Oak Type "A".
		----- MISCELLANEOUS -----
		19B201955P1 Spacer, threaded. (Quantity 2).
		7165075P4 Hex nut, brass: thd. size No. 3/8-32. (Secures S703 to mounting surface).
		19B208591P1 Knob, push on. (Used with S703 switch).

*COMPONENTS ADDED, DELETED OR CHANGED BY PRODUCTION CHANGES.

SYMBOL	GE PART NO.	DESCRIPTION
R1	5493035P10	----- RESISTORS -----
		Wirewound: 3.5 ohms $\pm 5\%$, 5 w; sim Hall Type HR.
		----- SWITCHES -----
		Handset, holder: 1 amp at 125 v; Telephone Components Inc. Brook-Tel
		----- TERMINAL BOARDS -----
		Terminal board, phen: 5 terminals.
		----- CABLES -----
		4 conductor, approx 30 inches long
		----- MISCELLANEOUS -----
		19A701883P18 Clip loop. (Used with W1).
		19B219852P1 Mounting plate.
		19A128586G1 Bumper.
		19A116723P106 Tap screw, Phillips POZIDRIVE: No. 8 (Secures clip loop).
		N193P1410P2 Tap screw: No. 8-18 x 5/8. (Secures hookswitch).
		N1901312C8 Cut screw: No. 8. (Secures bottom back plate).
		N84P13012C6 Machine screw, flat head: No. 6-32 (Secures upper housing to back plate).
		N80P15018C8 Machine screw: No. 6-32 x 1. (Secures bumpers to housing).
S1	19A136584G1	
TBI	7775500P56	
W1	19B227334G1	

*COMPONENTS ADDED, DELETED OR CHANGED BY PRODUCTION CHANGES.

PARTS LIST

MICROPHONE
19D000141G8
ISSUE 1

SYMBOL	GE PART NO.	DESCRIPTION
	19D416766P1	Connector case.
	19D416767P1	Connector Cover.
	19B219723G1	Thumb screw: lexan.
	19A701289P1	Retaining ring: 3/16 inches; sim to National Lockwasher WA 510. (Located on thumbcrew).
	19A129436P1	Pin contact. (Quantity 4).
	19A116937P1	Cable clamp: sim to Malco 21012-3.
	N136AP006Y8	Tap screw, phillips head, POZIDRIV®: No. 4-24 x 5/16. (Secures cable clamp).
	19B219749P2	Flex relief.
	19B890741P11	Microphones, transistorized, electret: 5% max distortion at 300-3000 Hz. Includes Kits MP104-MP106.
	MP104	Case Kit: housing, grille and hardware.
	MP106	Circuit Board Kit.
	MP108	Switch Kit.
		----- CARTRIDGES -----
	19J706041P1	Microphone cartridge: 200-550 ohms output imp., 1.5 to 10 VDC; sim to Primo EM-80.

PRODUCTION CHANGES

Changes in the equipment to improve performance or to simplify circuits are identified by a "Revision Letter," which is stamped after the model number of the unit. The revision stamped on the unit includes all previous revisions. Refer to the Parts List for descriptions of parts affected by these revisions.

REV. A - Control Panel 19D423840G1, 3

To improve Channel Guard Squelch operation. Add jumper wire between S702-2 and S702-3.

REV. A - Control Panel 19D423840G4, G5

To prevent alternator noise from being transmitted while using DTMF encoder. Changed location of power connection to regulated +10 Volts.


PARTS LIST

LB14481D

TRANSISTORIZED DYNAMIC MICROPHONE
19C320270G1, G2
(SEE RC2454)

SYMBOL	GE PART NO.	DESCRIPTION
1	RP127	Front Case Assembly. (INCLUDES ITEMS 14, 15).
2		Retaining spring. (Part of item 18).
3		Tap screw, phillips. (Part of item 16).
4		Retaining bar. (Part of item 18).
5	19D418786P1	Connector base.
6	19A129435P1	Contact.
7	19A701289P1	Retaining ring.
8	19D418787P1	Connector cover.
9	19B219723G1	Thumb screw: LoXan.
10	N196AP005Y6	Tap screw, phillips: No. 4 x 5/16.
11	19A116837P1	Cable clip.
12	19B219749P1	Strain relief.
13	RP128	Switch button kit.
14		Rear Case Assembly. (Part of item 1).
15		Tap screw, phillips. (Part of item 1).
16	19C321016G1	Cable assembly: Includes items 3-12 and cable RP129.
17	RP128	Switch Assembly.
18	RP130	Grille Assembly. (includes items 2, 19, 21).
19		"O" Ring. (Part of item 18).
20	RP117	Transistorized Cartridge.
21		Washer. (Located under cartridge- part of item 18).
22	19C321016G3	Connector assembly: Includes items 5-12.

*COMPONENTS ADDED, DELETED OR CHANGED BY PRODUCTION CHANGES.

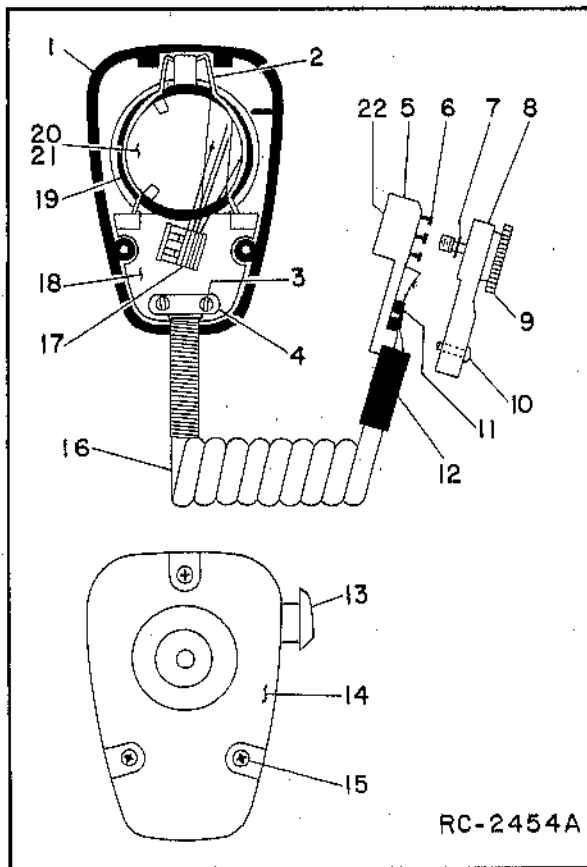


PARTS LIST

LB131128

LD14482D

TRANSISTORIZED DYNAMIC HANDSET
19C320478G1-4
(See RC-2457A)

SYMBOL	GE PART NO.	DESCRIPTION
1	RP142	Case Assembly. Includes items 1, 2, 4, 5, 11, 12, 26.
2		Adapter. Part of item 1.
3	RP140	Receiver Cartridge.
4		Receiver Cap. Part of item 1.
5		Washer. Part of item 1.
6		Escutcheon. Part of item 27.
7		Flat head screw, socket cap: No. 4-40 x 1/4. Part of item 27.
8		Actuator. Part of item 27.
9		Spring. Part of item 27.
10		Plunger bar. Part of item 27.
11		Transmitter cap. Part of item 1.
12		Washer. Part of item 1.
13	RP139	Transmitter cartridge.
14	19C321016G2	Cable assembly: Includes items 14-25 and cable RP141.
15	19B219748P1	Flex relief.
16	19A116837P1	Cable clamp: sim to Malco 21012-3.
17	3R77P472K	Resistor, (R1) Composition, 4700 ohms $\pm 10\%$, 1/2 w. (G3)
	19A700019P38	Resistor, (R1), Deposited carbon: 1.5K ohms $\pm 5\%$, 250 VDCW, 1/4 w. (G4)
18	19D416766P1	Connector case.
19	N138AP905Y8	Screw.
20	19A128436P1	Pin contact.
21	19A701288P1	Retaining ring. 3/16 inch, sim to National Lockwasher WA 510.
22	19D416787P1	Connector Cover.
23	19B219723G1	Thumb screw: Ioxan. (Secures cover, item 22 to case, item 18).
24		Screw. Part of item 14.
25		Cable clamp. Part of item 14.
26		Shield. Part of item 1.
27	RP143	Switch Assembly. Includes items 6-10.
28	19C321016G3	Connector assembly: Includes items 15, 16, 18-23. Does not include resistor, item 17.

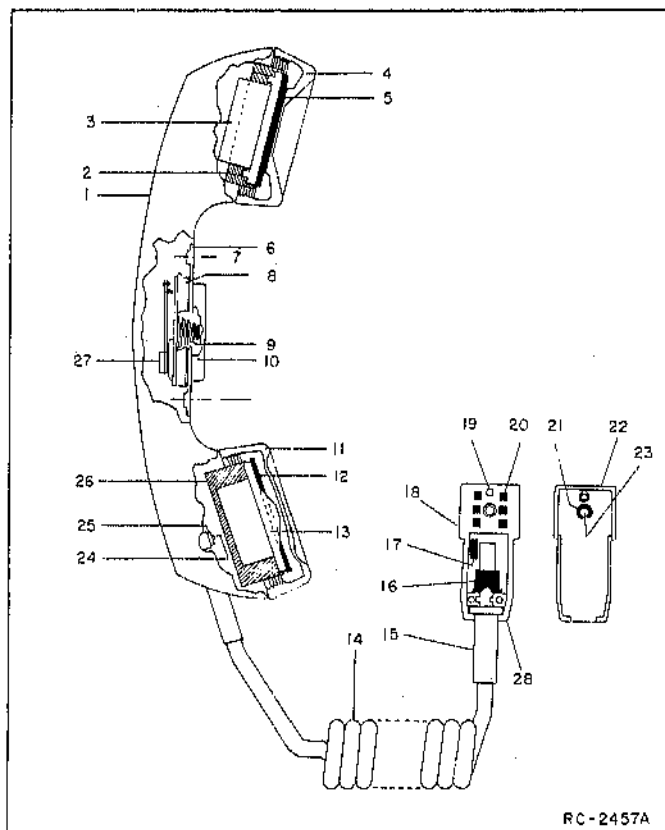

PRODUCTION CHANGES

Changes in the equipment to improve performance or to simplify circuits are identified by a "Revision Letter", which is stamped after the model number of the unit. The revision stamped on the unit includes all previous revisions. Refer to the Parts List for descriptions of parts affected by these revisions.

REV. A - Incorporated into initial shipment.

SERVICE SHEET



DYNAMIC MICROPHONE AND HANDSET

Issue 1

13

*COMPONENTS ADDED, DELETED OR CHANGED BY PRODUCTION CHANGES.

CHANNEL GUARD

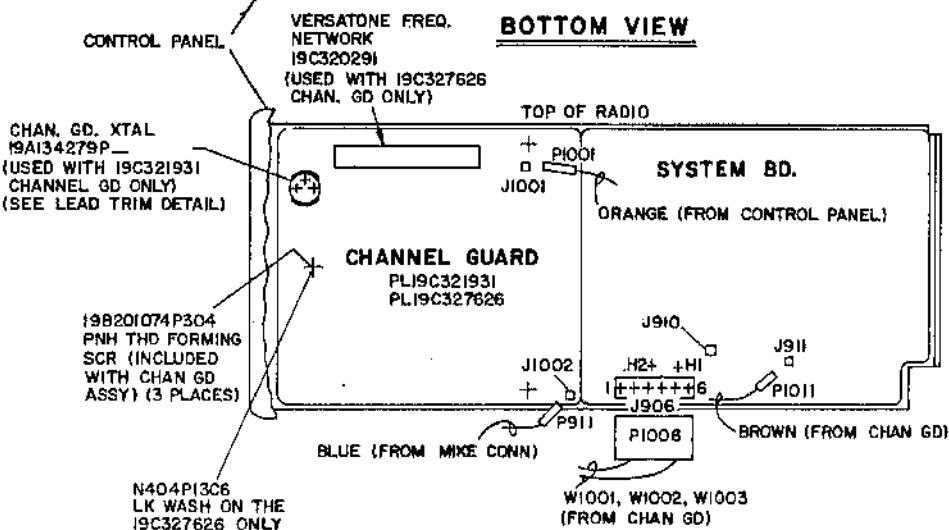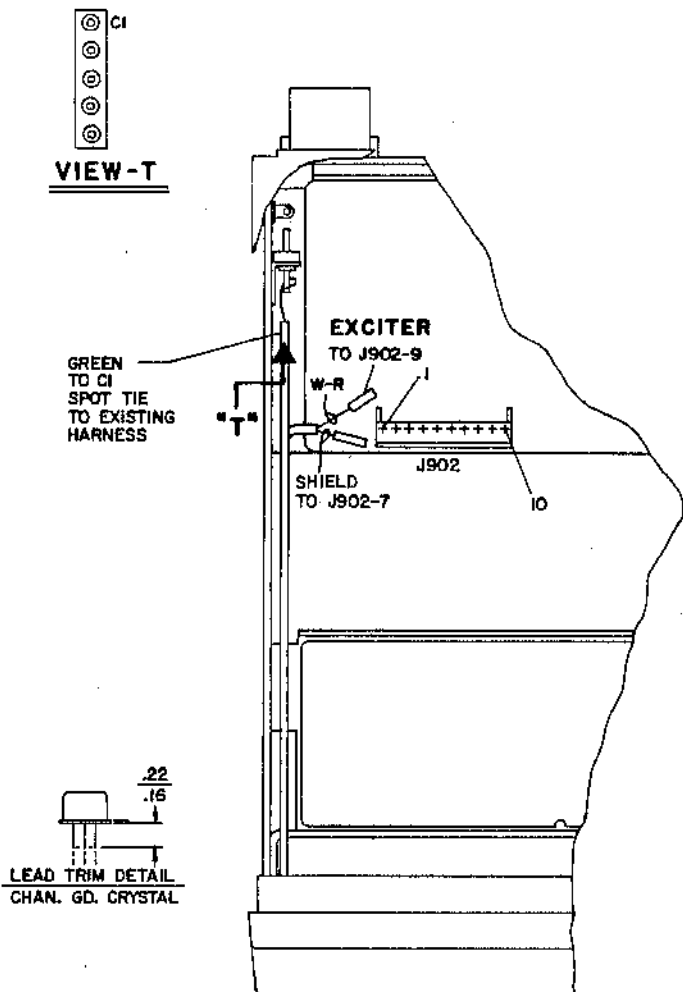

FRONT VIEW

SEE ALTERNATE FRONT VIEW
ON SH. 5 FOR SINGLE TONE
PROGRAMMABLE CHANNEL GD.

THE FOLLOWING CONNECTIONS AND MODIFICATIONS MUST BE MADE
WHEN INSTALLING CHANNEL GUARD

2 GROUP 1 ENCODE/DECODE

P1006 TO J906

GREEN WIRE TO C1

REMOVE DA BETWEEN H1 & H2 ON SYSTEM BD.

WHITE-RED CENTER COND. TO J902-9 SHIELD TO J902-7.

DISCONNECT BLUE WIRE (TERMINATED WITH P911) WHICH IS
CONNECTED TO J911 ON SYSTEM BD. AND CONNECT TO J1002
ON CHANNEL GUARD BD.

CONNECT BROWN WIRE (TERMINATED WITH P1011) FROM CHANNEL
GUARD BD. TO J911 ON SYSTEM BD.

DISCONNECT ORANGE WIRE (TERMINATED WITH P1001) WHICH IS
CONNECTED TO J910 ON SYSTEM BD. AND CONNECT TO J1001 ON
CHANNEL GUARD BD.

3 GROUP 2 ENCODE ONLY

P1006 TO J906

WHITE-RED CENTER COND. TO J902-9 SHIELD TO J902-7.

DISCONNECT BLUE WIRE (TERMINATED WITH P911) WHICH IS
CONNECTED TO J911 ON SYSTEM BD. AND CONNECT TO J1002 ON
CHANNEL GUARD BD.

CONNECT BROWN WIRE (TERMINATED WITH P1011) FROM CHANNEL
GUARD BD. TO J911 ON SYSTEM BD.

4 GROUP 3 DECODE ONLY

P1006 TO J906

GREEN WIRE TO C1 (REMOVE TERMINAL, STRIP & TIN)

REMOVE DA BETWEEN H1 & H2 ON SYSTEM BD.

DISCONNECT ORANGE WIRE (TERMINATED WITH P1001) WHICH IS
CONNECTED TO J910 ON SYSTEM BD. AND CONNECT TO J1001 ON
CHANNEL GUARD BD.

W2602
DRESS AS
SHOWN FOR
L BND

W2602
DRESS AS
SHOWN FOR
H BND

W2602
DRESS AS
SHOWN FOR
UHF

19B201074P304
PNH THD FORMING
SCR (3 PLS)
(NOTE 3)

CONTROL

(SEE N

SE
(RO

(19D42

INSTALLATION INSTRUCTIONS




MULTI-FREQUENCY KIT & CHANNEL GUARD

5 5 PPM MULTI-FREQ

SUPPORT- PL19B227473 (NOTE 3)
REMOVE 2 EXISTING SCREWS IN
EXCITER AND MOUNT SUPPORT
WITH HARDWARE SUPPLIED WITH
MULTI-FREQ ASSY (SEE DETAIL "C")

NOTES: APPLICABLE TO PT. 5 ONLY

1. WHEN INSTALLING MULTI-FREQ., THE FOLLOWING MODIFICATIONS MUST BE PERFORMED:
REMOVE JUMPER ON OSC/MULTR BD H9-H8.
2. THE FREQ. SWITCH STOP IS TO BE SET TO CONFORM WITH THE SIXTH DIGIT OF THE NOMENCLATURE.
ROTATE SWITCH FULLY COUNTERCLOCKWISE.
IF DIGIT VI IS "A", SET STOP IN POSITION 1 FOR SINGLE FREQ.
IF DIGIT VI IS "O", SET STOP IN POSITION 2 FOR 2 FREQ.
IF DIGIT VI IS "E", SET STOP IN POSITION 3 FOR 3 FREQ.
IF DIGIT VI IS "F", SET STOP IN POSITION 4 FOR 4 FREQ.
3. INCLUDED AS PART OF MULTI-FREQ ASSEMBLY.

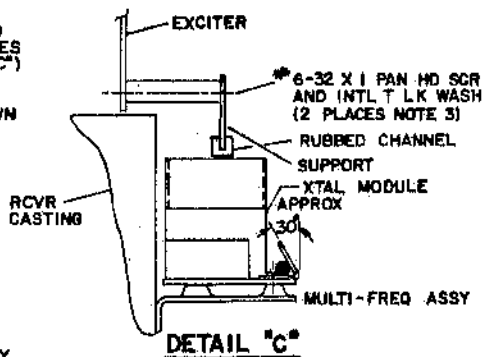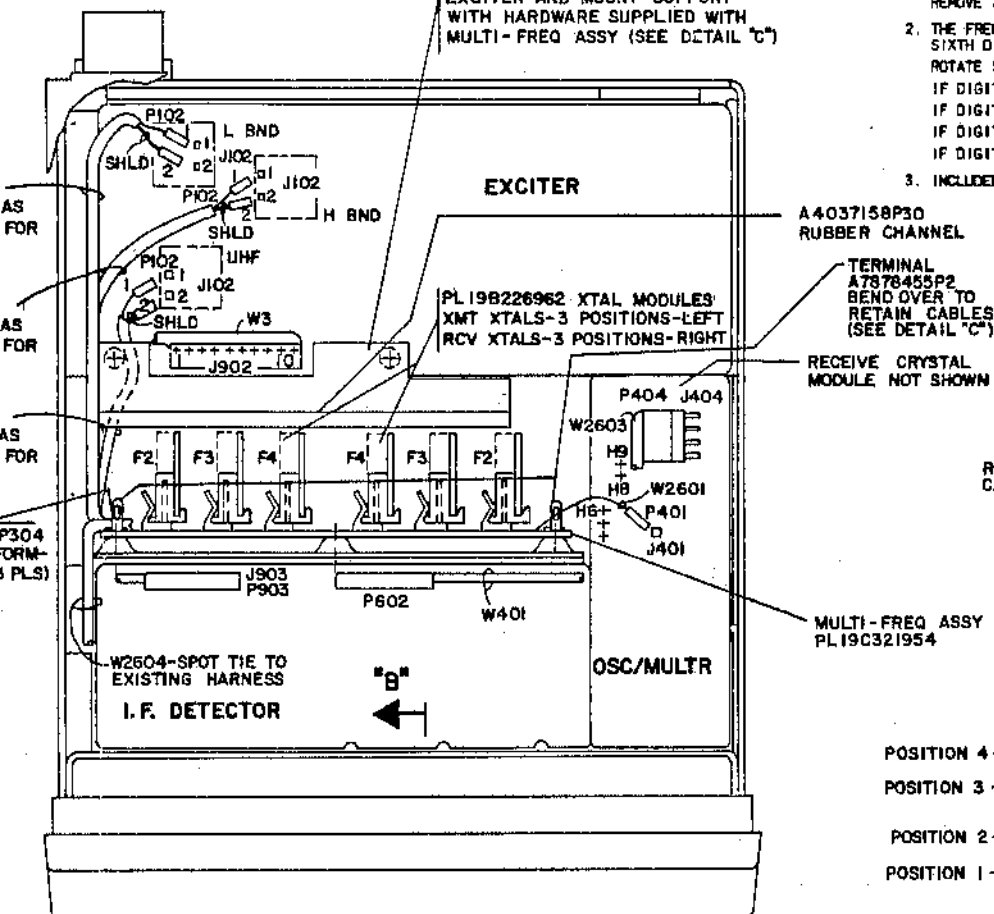


SWITCH (703) VIEWED FROM
SHAFT END (ENLARGED)
(SEE NOTE 2)


BOTTOM VIEW

"B"

CONTROL PANEL

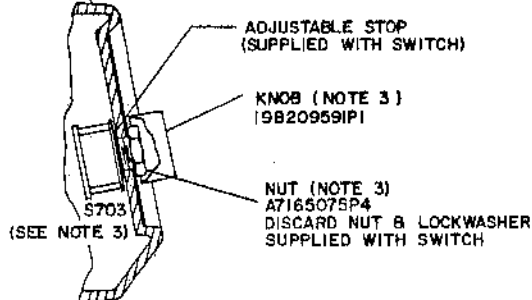

SECTION "B-B" (ROTATED 90° CCW)

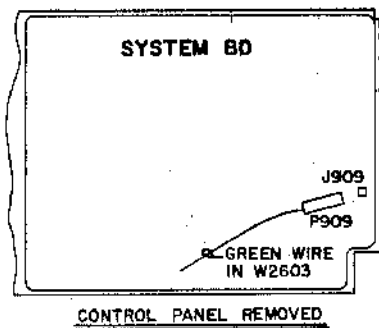


THESE INSTRUCTIONS COVER THE INSTALLATION OF CHANNEL GUARD HOOKSWITCH OPTION - PL19C327091G1 TO CUSTOM MVP MOBILE RADIO AND CUSTOM MVP DESK-TOP STATION.

IN MOBILE APPLICATIONS, ROUTE THE CABLE TO THE REAR OF THE RADIO AND INSERT THE CONNECTORS OF THE HOOKSWITCH CABLE INTO P1-6 AND P1-8. (SEE FIG. 1)

IN DESK-TOP STATION APPLICATIONS, REMOVE BLUE WIRE (FROM POWER SUPPLY) IN P1-8 AND CUT OFF FLUSH TO JACKET. THEN INSERT WIRES FROM CHANNEL GUARD HOOKSWITCH INTO P1-8 AND P1-6.

NOTE:

THE SWITCH ASSEMBLY IS WELD TOGETHER BY 8-32 HARDWARE FOR SHIPMENT. REMOVE AND DISCARD THIS HARDWARE; DRILL TWO HOLES WITH A #32 (1/8) DRILL AT THE CHOSEN LOCATION FOR THE HOOKSWITCH, USING THE HOOKSWITCH AS ITS OWN TEMPLATE. MOUNT THE HOOKSWITCH, USING THE #8 SELF-TAPPING SCREWS PROVIDED. THE MOBILE UNIT WILL NOW BE CHANNEL GUARD PROTECTED WITH THE MIKE ON THE HOOK; REMOVING THE MIKE WILL DISABLE CHANNEL GUARD FOR AUTOMATIC MONITORING OF THE FREQUENCY.

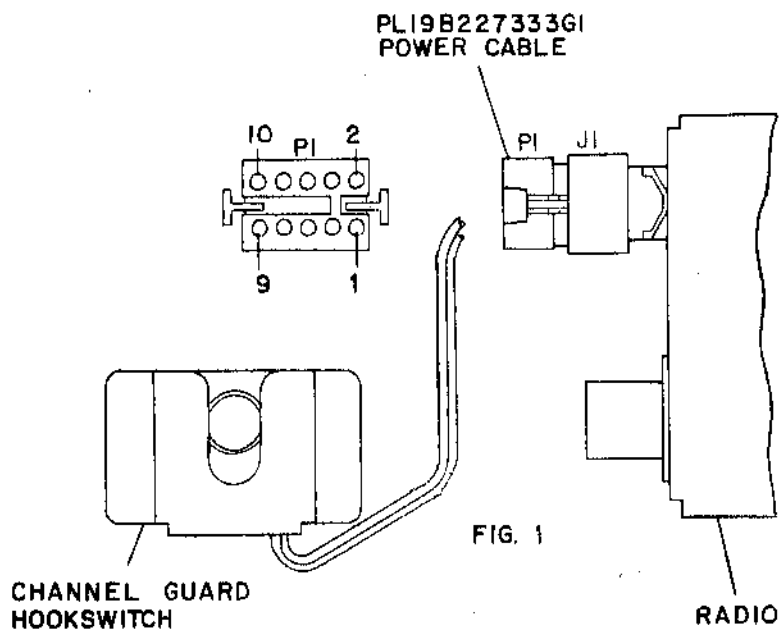

(19B227333G1, Rev. 2)

INSTALLATION INSTRUCTIONS

CHANNEL GUARD HOOKSWITCH