



Mobile Communications

MASTR[®] III RF PACKAGE, 800 MHz

TABLE OF CONTENTS

TRANSMIT SYNTHESIZER	LBI-39026
RECEIVE SYNTHESIZER	LBI-39027
RECEIVE RF MODULE	LBI-39028
IF MODULE	LBI-39029
POWER AMPLIFIER	LBI-39030

TABLE OF CONTENTS

	<u>Page</u>
SPECIFICATIONS	2
REGULATORY APPROVALS	3
MODULE NUMBERS	3
DUPLEX OPERATION CURVE	3

Station Specifications**RECEIVER**

SENSITIVITY (12 dB SINAD)	-119 dBm (0.25 μ V)
SELECTIVITY	-90 dB @25 kHz -20 dB @ 12.5 kHz
INTERMODULATION REJECTION	-85dB
INTERMEDIATE FREQUENCY	70.2 MHz (low side injection)
IMAGE REJECTION	-100 dB
SPURIOUS RESPONSE REJECTION	-100 dB
HUM & NOISE (300-3000Hz)	-55 dB -53 dB (NPSPAC)
AUDIO RESPONSE (de-emphasis)	+1/-3 dB of 6 dB/OCTAVE (@ Line Output) +21 -8 dB of 6 dB/OCTAVE (@ Local Speaker)
FREQUENCY SPREAD (RX BW) (Synthesizer)	806-825 MHz 500 kHz

TRANSMITTER

RATED POWER OUTPUT	100 Watts
FREQUENCY STABILITY	\pm 1.0 ppm
CONDUCTED SPURIOUS EMISSIONS	-36 dBm
MODULATION DEVIATION	\pm 5 kHz \pm 4 kHz (NPSPAC)
FM HUM & NOISE (300-3000 Hz)	-55 dB -53 dB (NPSPAC)
AUDIO RESPONSE (pre-emphasis)	+1/-3 dB of 6 dB/OCTAVE
FREQUENCY SPREAD (TX Power Amp) (Synthesizer)	851-870 MHz 500 kHz

REGULATORY APPROVALS


The following equipment authorization numbers have been granted:

<u>COUNTRY</u>	<u>REGULATORY APPROVAL</u>
United States	FCC AXATR-329
Canada	Pending

MODULE NUMBERS

TRANSMIT SYNTHESIZER	19D902780G5
RECEIVE SYNTHESIZER	19D902781G5
RX FRONT END MODULE	19D902782G5
IF MODULE	19D902783G5
POWER AMPLIFIER	19D901841G3

800 MHz MASTRIII Duplex Operation Curve

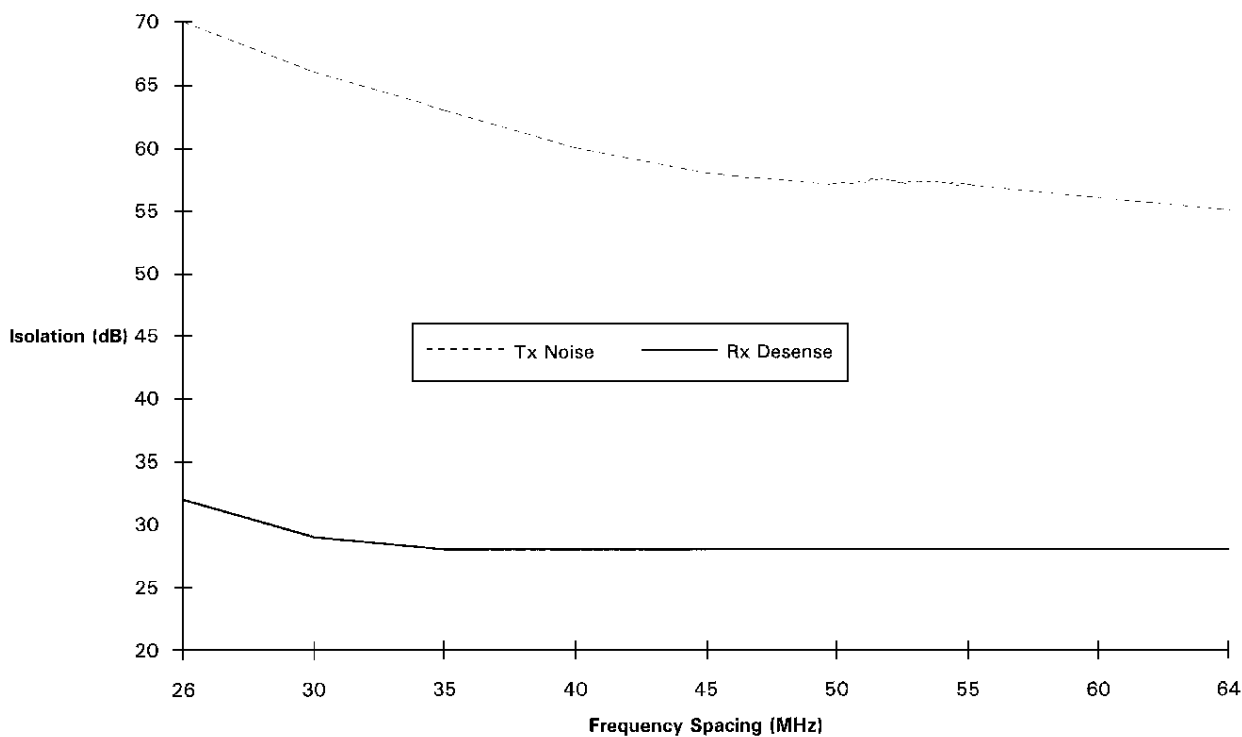

Ericsson GE Mobile Communications Inc.
 Mountain View Road • Lynchburg, Virginia 24502

Printed in U.S.A.

