


# MASTR

## Progress Line

132—174 MHz, 80-WATT TRANSMITTER MODEL 4ET58A30—41 & 4ET58B10—15

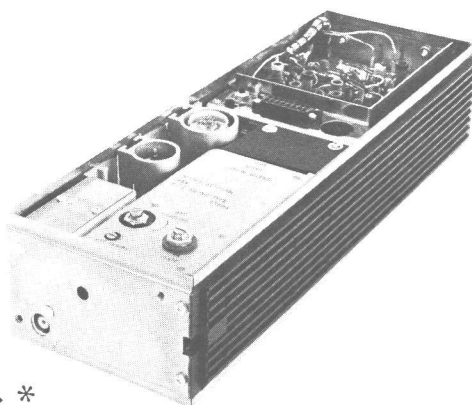

### SPECIFICATIONS \*

FCC filing Designation:

Frequency Range:

Power Output:

Crystal Multiplication Factor:

Frequency Stability:

Spurious & Harmonic Radiation:

Modulation:

Audio Frequency Characteristics:

Distortion:

Deviation Symmetry:

Narrow Band -  
Wide Band -

Tubes & Transistors:

Maximum Frequency Spacing

Duty Cycle: Mobile -

Station -

**ET-58-A (Narrow Band)**

**ET-58-B (Wide Band)**

132 — 174 MHz

80 watts minimum

12

$\pm 0.0005\%$  ( $-30^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$ )

At least 85 dB below rated power output

Adjustable from 0 to  $\pm 5$  KHz (Narrow Band) and 0 to  $\pm 15$  KHz (Wide Band) swing with instantaneous modulation limiting

Within  $\pm 1$  dB to  $-3$  dB of a 6 dB/octave pre-emphasis from 300 to 3000 Hz per EIA standards. Post limiter filter per FCC and EIA

Less than 5%

0.5 KHz maximum  
1.5 KHz maximum

80-watt Transmitter with no Options:

3 tubes  
8 transistors  
4 diodes

0.4%

20% transmit (one minute transmit, four minutes off)

Continuous

\*These specifications are intended primarily for the use of the serviceman. Refer to the appropriate Specification Sheet for the complete specifications.

## TABLE OF CONTENTS

SPECIFICATIONS .....	Cover
DESCRIPTION .....	1
CIRCUIT ANALYSIS .....	1
Power Inputs .....	1
Oscillator .....	1
Audio Amplifiers and Limiter .....	2
Phase Modulator .....	2
Amplifiers and 1st and 2nd Multipliers .....	2
3rd Multiplier .....	2
Amplifier 4 .....	2
Power Amplifier .....	3
Channel Guard .....	3
REDUCED POWER OPERATION .....	4
MAINTENANCE	
Disassembly .....	5
Alignment Procedure .....	7
Test Procedures .....	8
Power Output .....	8
Tone Deviation .....	8
Voice Deviation .....	8
Troubleshooting .....	9
OUTLINE DIAGRAM .....	10
SCHEMATIC DIAGRAM .....	11
PARTS LIST .....	12
PRODUCTION CHANGES .....	18

### ILLUSTRATIONS

Figure 1	Block Diagram .....	1
Figure 2	Top Cover Removed for Servicing .....	5
Figure 3	Bottom Cover Removed for Servicing .....	5

#### WARNING

No one should be permitted to handle any portion of the equipment that is supplied with high voltage; or to connect any external apparatus to the units while the units are supplied with power. KEEP AWAY FROM LIVE CIRCUITS.

## DESCRIPTION

The MASTR Progress Line FM Transmitter Types ET-58-A and B are crystal-controlled, phase-modulated transmitters designed for one-, two-, or four-frequency operation within the 132-174 megahertz band. The transmitter consists of the following modules:

- Transistorized Exciter Board, with audio, oscillator, modulator, amplifier and multiplier stages,
- Tubed multipliers and power amplifier stages,
- Optional transistorized Channel Guard Board. (ET-58-A only)

All input leads to the transmitter are individually filtered by the 20-pin feed-through by-pass connector J101. The output passes through a four-section, low-pass filter that features good shielding between sections, and Teflon® capacitors for fail-free operation with an open or shorted antenna.

A centralized metering jack (J102) is provided for use with General Electric Test Set 4EX3A10. The Test Set meters the multiplier, amplifier and PA stages as well as filament and regulated supply voltages. The metering jack also provides access to receiver audio, microphone and push-to-talk leads.

## POWER INPUTS

The following supply voltages are connected from the power supply to the transmitter through the 20-pin by-pass connector J101:

- Pin 3 — Filament voltage
- Pin 4 — +300 volts MULT B+
- Pin 5 — +650 volts PA B+
- Pin 8 — -45 volts bias
- Pin 14 — +10 volts for Channel Guard option (ET-58-A only)
- Pin 15 — -20 volts for Exciter Board

## CIRCUIT ANALYSIS

Eight silicon transistors and only three tubes are used in the transmitter. The frequency of the crystals used ranges from 11 to 14.5 megahertz, and the crystal frequency is multiplied twelve times.

## OSCILLATOR

A transistorized Colpitts oscillator (Q3) is used in the transmitter. The oscillator crystal is thermistor-compensated at both ends of the temperature range to provide instant frequency compensation, with a frequency stability of  $\pm 0.0005\%$  without

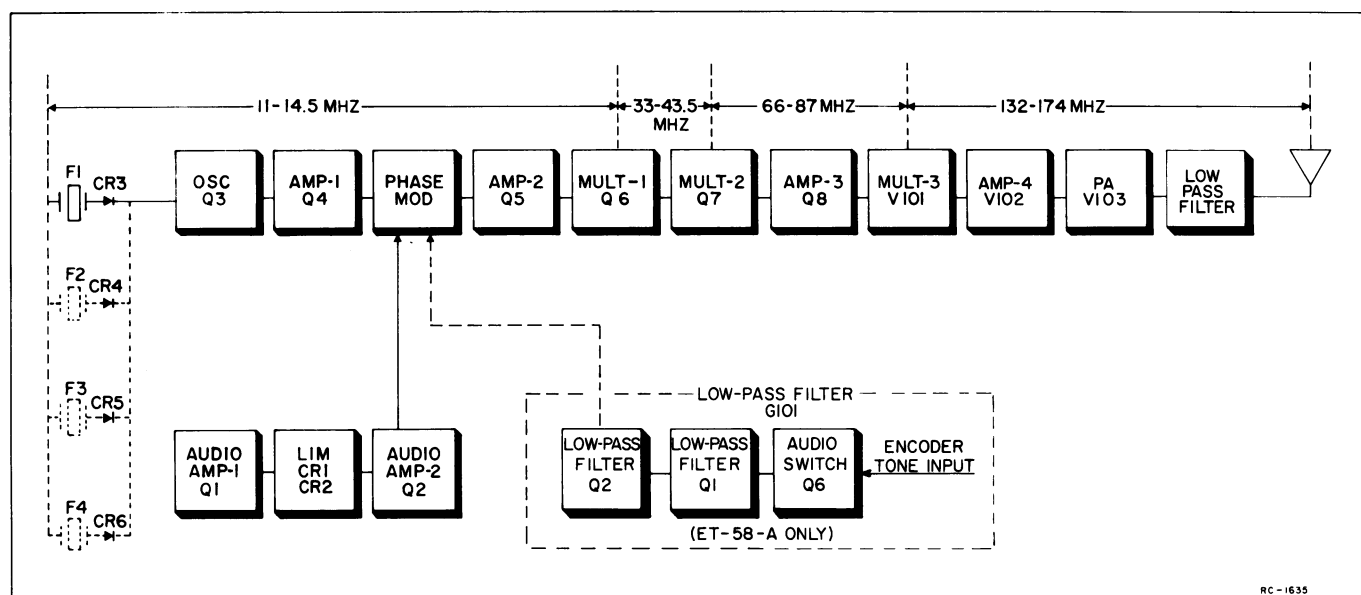


Figure 1 - Transmitter Block Diagram

crystal ovens or warmers.

In single-frequency transmitters, a jumper (from H1 to H2) connects the F1 crystal keying lead to ground to forward bias diode CR3. Forward biasing the diode reduces its impedance, and the crystal frequency is applied to the base of oscillator Q3. Feedback for the oscillator is developed across C34/C35. The oscillator output is coupled through an impedance matching emitter-follower amplifier stage (Q4) to the phase modulator.

In multi-frequency transmitters, the single oscillator transistor is used, and up to three additional crystal circuits, identical to the F1 crystal circuit, can be added. The keying jumper is removed and the proper crystal frequency is selected by switching the crystal keying lead to ground by means of a frequency selector switch on the Control Unit.

#### AUDIO AMPLIFIERS AND LIMITER

An audio signal from the microphone is coupled through C1 to the base of Class A audio amplifier Q1. The design of the microphone, in conjunction with C2 and R3, produces a 6-dB audio pre-emphasis. RF decoupling is provided by R10 and C75.

The amplified audio signal is RC coupled to the diode limiters, CR1 and CR2. These diodes operate in series and are normally in a forward conducting state. An audio signal of sufficient amplitude to cause limiting takes the diodes out of conduction, so that one diode conducts only on positive cycles and the other conducts only on negative cycles.

Following the limiter stage is a second Class A amplifier, Q2. The output of Q2 is coupled through MOD ADJUST potentiometer R12 to a combined post-limiter filter and de-emphasis network. This network consists of R15, R16, R17, C4, C7 and C8/C9. The output of the filter and de-emphasis network is applied directly to the phase modulator.

#### PHASE MODULATOR

The phase modulator uses varactor CV1 (voltage variable capacitor) in series with tuneable coil L1/L2. This network appears as a series-resonant circuit to the RF output of the oscillator. An audio signal applied to the modulator varies the bias of CV1, resulting in a phase-modulated output. The output of the modulator is coupled through blocking capacitor C41/C45 to the base of the second amplifier. For Channel Guard and wide band transmitters, a second modulator stage (L3/L4 and CV2) is cascaded with the first modulator. The output of the Channel Guard encoder is fed through CHANNEL GUARD MOD ADJUST R34 to the modulator stages.

The voice audio is also applied to both modulator stages.

#### AMPLIFIERS AND 1st AND 2nd MULTIPLIERS

The second amplifier (Q5) isolates the modulator from the loading effects of the first multiplier and provides amplification. The output is DC coupled to the first multiplier.

Following Q5 are two inductively coupled Class C, common-emitter multiplier stages (Q6 and Q7). Q6 is a tripler, with collector tank T1 tuned to three times the crystal frequency. Metering resistor R37 is for metering the MULT-1 stage at centralized metering jack J102.

Q7 operates as a doubler stage, with collector tank T3 tuned to six times the crystal frequency. Resistor R39 is for metering the MULT-2 stage at J102. The output of Q7 is inductively coupled through T3 and T4 to amplifier Q8. In 150.8—174 megahertz transmitters, capacitor C58 provides some high-side capacitive coupling.

Third amplifier Q8 is a neutralized straight-through amplifier. Feedback through C65 from the output link on T5 provides neutralization. This stage is metered at J102-3 across R43. The output is coupled to the grid tank of multiplier V101.

#### 3rd MULTIPLIER

The output of the transistorized Exciter is coupled by a short length of RF cable to the grid tank (Z101/Z102) of beam pentode V101. This stage operates as a doubler with the plate tank tuned to twelve times the crystal frequency. The plate tank is tuned by C106.

The grid of V101 is metered through metering resistor R102 at J102-4. R101 drops the bias voltage to approximately -18 volts to protect V101 against loss of drive. Plate voltage is supplied through L101.

When measuring grid current to V101, there will be a residual reading of approximately 0.18 volts without any drive. This is caused by the presence of fixed bias voltage to the grid of the tube.

#### AMPLIFIER 4

The output of the MULT-3 stage is coupled to the grid of the compactron beam power amplifier (V102) by a pi-network consisting of C106, L102/L103 and C107. The grid is metered at J102-5 through metering resistor R106. Bias voltage is supplied through R105 and L114.

When measuring the grid voltage, there will be a residual reading of approximately



0.45 volt without any drive to the stage. Neutralization is provided by C121. The plate tank is series-tuned by C111.

#### POWER AMPLIFIER

Drive from 4th amplifier V102 is inductively coupled to the grid power amplifier V103 through L104/L105 and L106/L107. For large changes in frequency (over  $\pm 0.2\%$ ), the physical spacing between the two coils must be adjusted by bending L104/L105. The coil should be adjusted for maximum coupling for the high end of the frequency range, and for minimum coupling for the low end of the frequency range.

The PA grid is metered at J102-6 through metering resistors R3 and R5. Bias voltage is applied to the control grids through R3 and R4.

Power amplifier V103 is a dual tetrode operating in a push-pull circuit. The PA plate is parallel-tuned by "butterfly" capacitor C112. High B-plus is applied through L113 to a center tap on the plate tank coil, L108/L109. C113 is a mechanical high-voltage by-pass capacitor.

The screen grid dropping resistors are R7 and R8. Plate current is metered from J102-1 to J102-9 across metering resistor R108.

#### WARNING

The meter leads are at plate potential (high B-plus) when metering the PA plate.

Placing the TUNE-OPERATE switch (S102) in the OPERATE position applies 300 volts to A119-J8 and -J10. The 300 volts appearing on each side of R8 effectively shorts the resistor out of the circuit, and the screen voltage is applied through R7 for normal operation of V102. With S102 in the TUNE position, the screen voltage is applied to A119-J8 only. Now, dropping resistors R7 and R8 are in series, to reduce the screen voltage. This reduces the plate dissipation of V103 while tuning the power amplifier stage.

Antenna coupling is achieved by varying the coupling between L108/L109 and L110/L111. C114 tunes the antenna circuit.

The RF output from the antenna coil is fed to low-pass filter FL101. This filter has a low insertion loss and a harmonic attenuation of at least -50 dB through all harmonics. The filter output is fed to the antenna changeover relay located on the front of the system frame.

#### CHANNEL GUARD

##### Low Pass Filter (G101)

In encode-decode combinations, low-pass filter G101 is assembled on a printed wiring

board that mounts on the underside of the MASTR transmitters. The filter is supplied by a regulated +10 volts and a regulated -20 volts. The +10 volts is applied continuously (even in the STANDBY position), and the -20 volts is applied only when the transmitter is keyed.

Keying the transmitter applies the encoder tone (from the receiver) to low-pass filter G101. Transistors Q1 and Q2 form a two-section, active low-pass filter that reduces tone distortion and power supply ripple. Q6 operates as a tone switch, applying the tone input to the filter whenever +10 volts is applied to J1 (Q6 base). Thermistor RT1 keeps the output constant over wide variations in temperature. The filter output is coupled to the tone modulator on the transmitter exciter board through Channel Guard MOD ADJUST R34. Instructions for setting R34 are contained in the Modulation Adjustment section of the Transmitter Alignment Procedure.

The channel can be monitored before transmitting a message by moving the CG-OFF switch on the Control Unit to the OFF position, or by removing the microphone or handset from the operational hang-up bracket.

#### NOTE

When Channel Guard decode only is desired, remove the wire that connects to J6 on the low-pass filter (Encoder Tone Input).

#### Encoder Model 4EH17A10 (Optional)

In encode only combinations, encoder Model 4EH17A10 mounts on the underside of the MASTR transmitter. The encoder is supplied by a regulated +10 volts and a regulated -20 volts. The +10 volts is applied to Q3, Q4 and Q5 continuously (even in the STANDBY position). The -20 volts is applied to Q1 and Q2 only when the transmitter is keyed.

The encoder tone is provided by selective oscillators Q3 and Q4, which oscillate continuously at a frequency determined by the tone network (FL1). Negative feedback, applied through the tone network to the base of Q3, prevents any gain in the stage except at the desired encode frequency.

Thermistor-resistor combination R14 and RT2 provides temperature compensation for the oscillator output. Limiter diodes CR1 and CR2 keep the tone amplitude constant.

Keying the transmitter applies -20 volts to the two-stage, active low-pass filter (Q1 and Q2) turning them on. The oscillator output is then coupled through emitter-follower Q5 to the low-pass filter. Thermistor RT1 keeps the filter output constant over wide variations in temperatures.

The output of the filter is applied to the tone modulator on the transmitter exciter board through Channel Guard MOD ADJUST R34. Instructions for setting R34 are contained in the Modulation Adjustment section of the Transmitter Alignment Procedure.

The channel can be monitored before transmitting a message by moving the CG-OFF switch on the Control Unit to the OFF position, or by removing the microphone or handset from the operational hang-up bracket.

## REDUCED POWER OPERATION

### STATION APPLICATIONS

Station power supply Model 4EP38A10 may be modified to operate at reduced power. Select one of the modifications ("A" thru "D") shown in the chart at the bottom of this page that meets the desired power limitations.

#### Transmitter Alignment Procedure

Tune the transmitter according to the standard Alignment procedure, but adjust the ANT COUPLING control by one of the two following methods:

**CAUTION** -- Do not allow the PA PLATE reading to exceed 0.7 volts.

**Method 1** - Measure the power output directly, using an RF wattmeter, and adjust the ANT COUPLING control for the required power output.

**Method 2** - The efficiency of the power amplifier is in modified transmitter will vary from about 47% to 60%. Use the highest anticipated efficiency (60%) and adjust

the ANT COUPLING control for the following PA PLATE reading:

$$\text{"PA PLATE" reading} = \frac{3 \times \text{desired power output}}{\text{efficiency} \times \text{PA plate voltage}}$$

Follow the standard transmitter Alignment Procedure for measuring the PA PLATE voltage.

### MOBILE APPLICATIONS

The mobile transmitter with power supply Model 4EP37A10 power supply may be operated at reduced power (120-watt plate input limitation) as required by Part 93 (Land Transportation Radio Services) and Part 21 (Domestic Public Radio Services) of FCC rules by using the following procedure.

#### Power Supply Modification\*

Move the jumper in the secondary of transformer T501 from T501-23 to T501-22. This modification provides a typical plate voltage of 550 volts.

#### Transmitter Alignment Procedure

Tune the transmitter according to the standard Alignment Procedure for maximum power output while maintaining 120 watts input to the PA. Refer to the PA POWER INPUT instructions on the transmitter Alignment Procedure to determine the PA input.

\*If Option 7041 is ordered, the power supply will be modified before shipment from the factory.

	PA POWER OUTPUT LIMIT	MODIFICATION OF POWER SUPPLY	TYPICAL PA PLATE VOLTAGE	MAX. PA PLATE POWER INPUT	MAX. EFFICIENCY
<b>A*</b>	65 watts	Interchange white wire at TB8-3 and green wire at H4 (on board A501).	467 VDC	109 watts	60%
<b>B</b>	40-58 watts	a) Remove jumper from TB8-4 to TB8-5. b) Add jumper from TB8-3 to TB8-5. c) Remove jumper from TB7-3 to TB7-4. d) Add jumper from TB7-2 to TB7-3.	415-435 VDC	101 watts	60%
<b>C</b>	35-40 watts	Remove fuse F502.	297-300 VDC	70 watts	60%
<b>D</b>	30-38 watts	a) Remove fuse F502. b) Remove jumper from TB7-3 to TB7-4. c) Add jumper from TB7-2 to TB7-3.	275-280 VDC	65 watts	60%

\* Modification "A" is required for operation under Part 93 (Land Transportation Radio Services) of FCC rules. If Option 7044 is ordered, the power supply will be modified before shipment from the factory.

## MAINTENANCE

### DISASSEMBLY

To service the transmitter from the top —

1. Pull locking handle down and pull radio about one inch out of mounting frame.
2. Pry up cover at rear of transmitter.
3. Slide cover back and lift off.

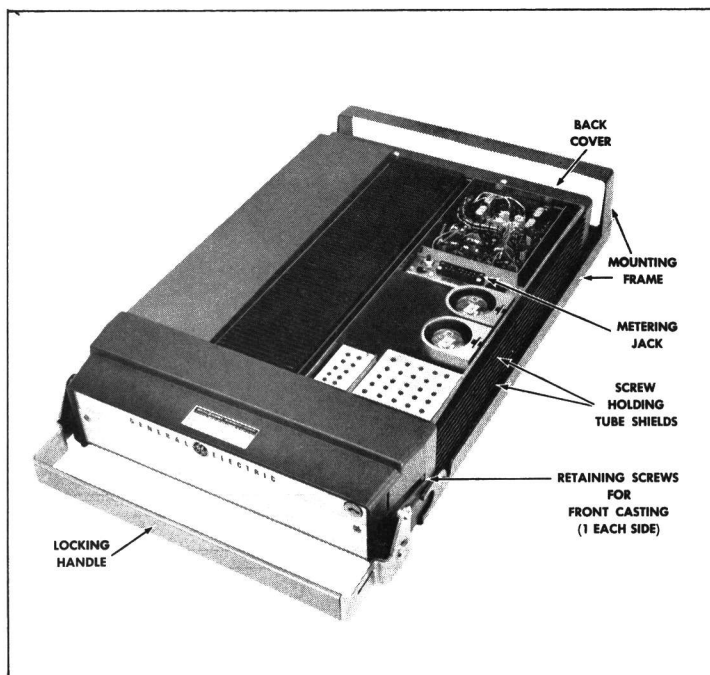


Figure 2 - Top Cover Removed

To service the transmitter from the bottom—

1. Pull locking handle down and pull radio out of mounting frame.
2. Remove the two screws in the bottom cover, and pry up at back of transmitter.
3. Slide cover back and lift off.

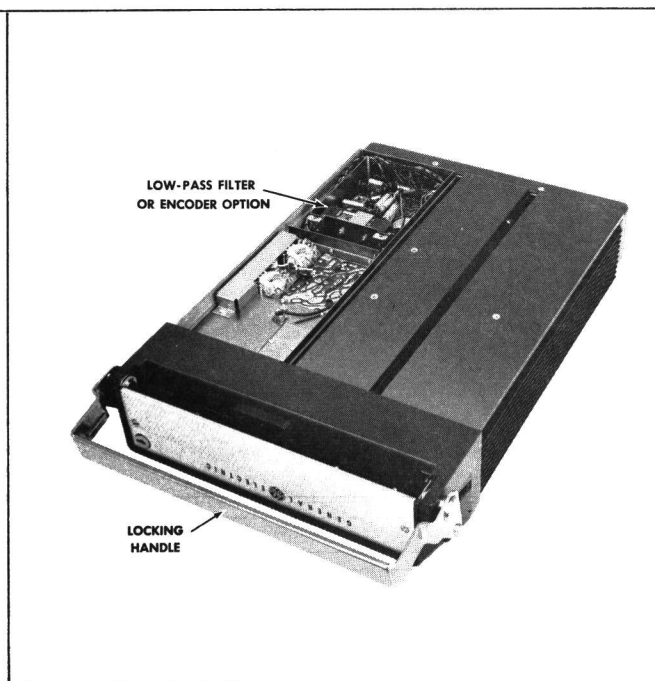


Figure 3 - Bottom Cover Removed

#### NOTE

The tube shields for the 80-watt transmitter are spring-loaded, and can be pulled off of the tube.

To remove transmitter from system frame —

1. Loosen the two retaining screws in the front casting (see Figure 2) and pull casting away from the system frame.

2. Remove the four screws in the back cover.
3. Remove the two screws holding the transmitter at each end of the system frame.
4. Disconnect the antenna jack in front of the transmitter and the 20-pin feed-thru connector at the back of the transmitter, and slide the unit out of the system frame.

## MODULATION LEVEL ADJUSTMENT

The MOD ADJUST (R12) was adjusted to the proper setting before shipment and should not normally require readjustment. This setting permits approximately 75% modulation for the average voice level. The audio peaks which would cause overmodulation are clipped by the modulation limiter. The limiter, in conjunction with the de-emphasis network, instantaneously limits the slope of the audio wave to the modulator, thereby preventing overmodulation while preserving intelligibility.

### TEST EQUIPMENT

1. An audio oscillator Model 4EX6A10
2. A frequency modulation monitor
3. An output meter or a VTVM
4. GE Test Set Models 4EX3A10 or 4EX8K10, 11

### PROCEDURE

1. Connect the audio oscillator and the meter across audio input terminals J5 (Green-Hi) and J6 (Black-Lo) on GE Test Set or across J1 (Mike High) and J2 (Mike Low) on the Exciter Board.
2. Apply a 1.0-volt signal at 1000 Hz to Test Set or across J1 and J2 on Exciter Board.
3. For transmitters without Channel Guard, set the MOD ADJUST (R12) for a 4.5-kilohertz swing (13.5 KHz) for wide band) with the deviation polarity which gives the highest reading as indicated on the frequency modulation monitor.
4. For transmitters with Channel Guard, set the Channel Guard MOD ADJUST (R34) for 0.75 KHz tone deviation. Then repeak L1/L2 and L3/L4 as shown in Step 1 of Transmitter Alignment Procedure. Reset tone deviation to 0.75 KHz deviation. Remove the tone to the transmitter by unplugging leads to J7 and J8 on Exciter Board, or by switching to a non-Channel Guard frequency in multifrequency units. Next, apply a 1.0 volt signal at 1000 Hz and set MOD ADJUST (R12) for 3.75 KHz deviation (4.5 KHz minus 0.75-KHz tone deviation).
5. For multi-frequency transmitters, set the deviation as described in Steps 3 or 4 on the channel producing the largest amount of deviation.

## PA PLATE POWER INPUT

For FCC purposes, the PA Plate power input can be determined by measuring the PA Plate voltage and the plate current indication, and using the following formula:

$$\text{ET-58-A \& B: } P_1 = \frac{\text{Plate Voltage} \times \text{Plate Current Indication}}{3.0}$$


Where:

$P_1$  is the power input in watts.

Plate voltage is measured with GE Test Set in position G, using the 1000-volt scale (or measured from J102-1 to -16 with multimeter).

Plate current indication is measured with GE Test Set in Position G, using the TEST 1 scale (or measured from J102-1 to -9 with multimeter).

3.0 is the value of the plate current metering resistor in ohms.

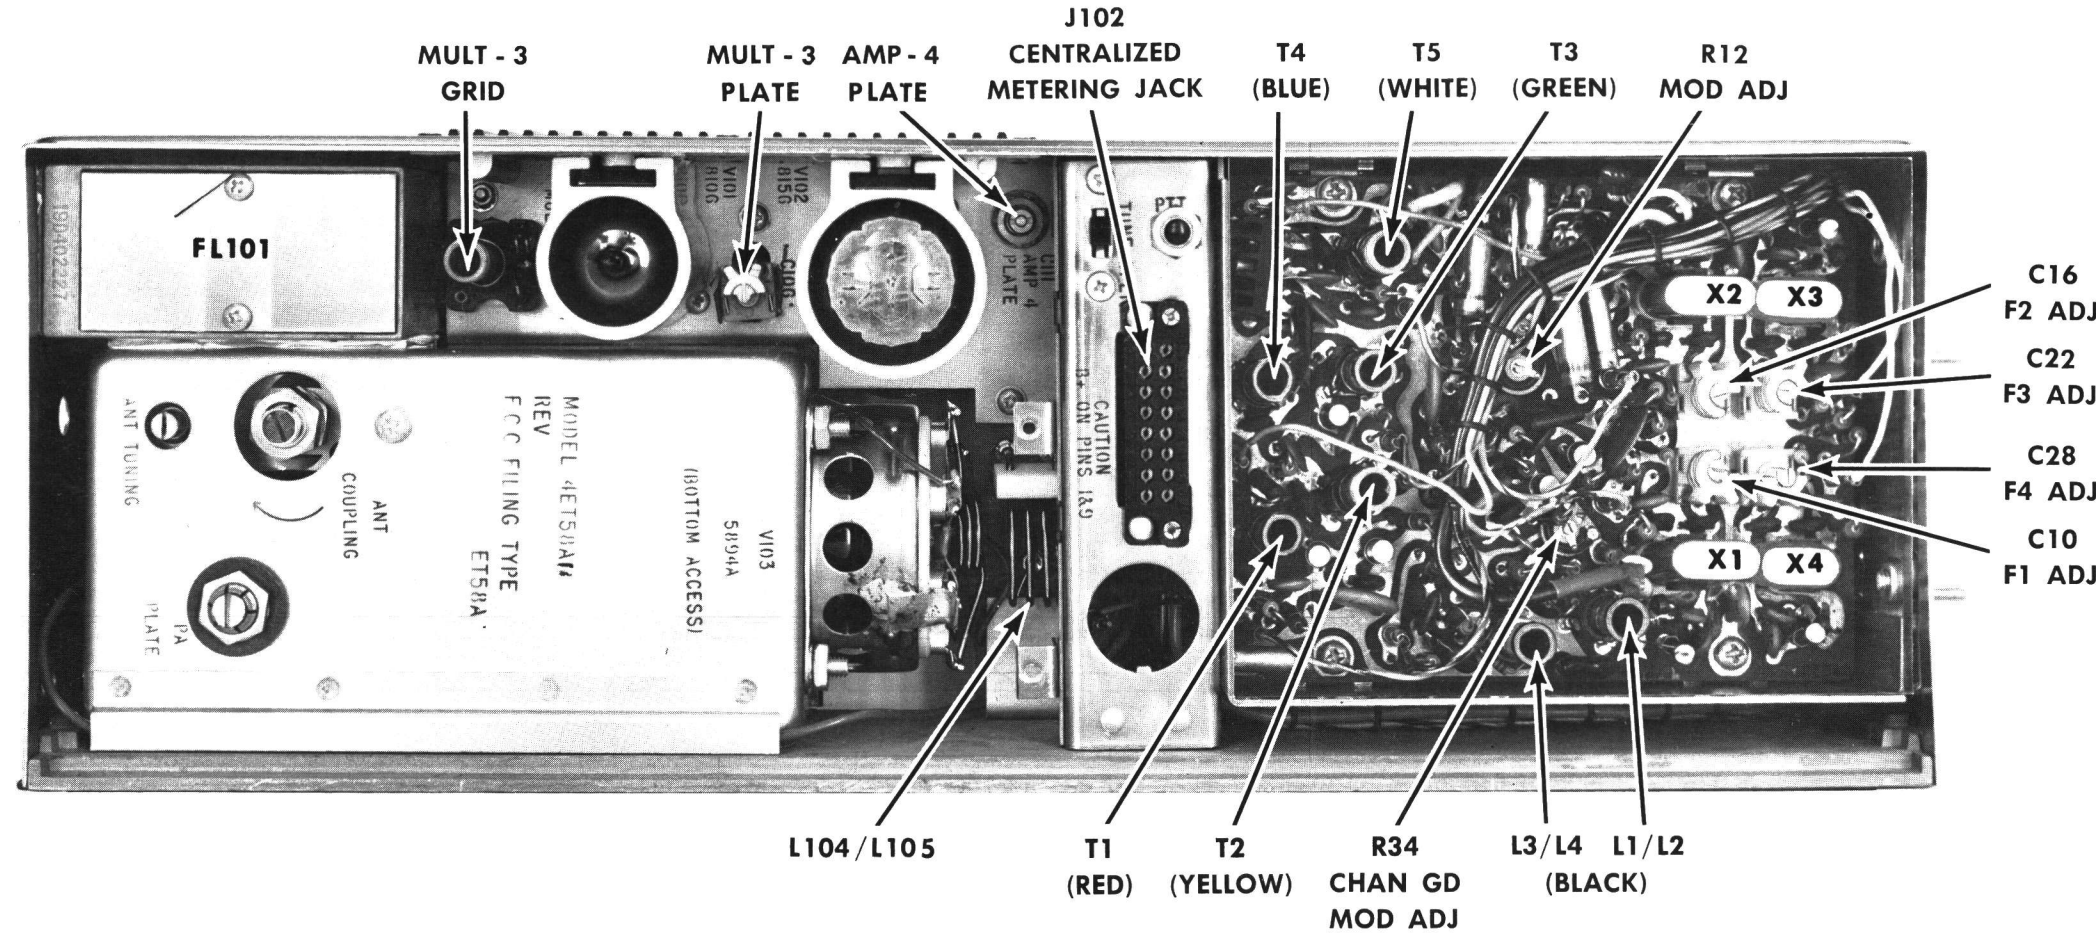

## TRANSMITTER ALIGNMENT

### EQUIPMENT REQUIRED

1. GE Test Set Models 4EX3A10, 4EX8K10 or 11, Station Metering Panel, or a 20,000 ohms-per-volt Multimeter with a 1-volt scale.

### PRELIMINARY CHECKS AND ADJUSTMENTS

1. Place crystal (operating frequency  $\pm$  12) in crystal socket XY1.
2. For a large change in frequency or a badly misaligned transmitter, set crystal trimmer C10 to mid-capacity. If multi-frequency transmitter, set all trimmers to mid-capacity and tune transmitter on channel with the highest frequency (except for Step 12).
3. Place the TUNE-OPERATE switch (S102) in the TUNE position.
4. Connect Test Set Model 4EX3A10 to the Transmitter Centralized Metering Jack J102. If using Multimeter, connect the positive lead to J102-16 (Ground) except for Steps 6 through 16.
5. For a large change in frequency or a badly misaligned transmitter, set the slugs in the Exciter coils at the bottom of the coil form, and the slug of MULT-3 GRID (Z101/Z102) at the top of the coil form.
6. All adjustments are made with the transmitter keyed.

STEP	METERING POSITION		TUNING CONTROL	TYPICAL METER READING	PROCEDURE
	GE TEST SET	Multimeter - at J102			
EXCITER BOARD					
1.	A (MULT-1)	Pin 10	L1/L2 (and L3/L4 with Channel Guard)	0.8 v (0.5 v Minimum)	Tuning the modulator is a critical adjustment. Carefully tune L1/L2 for maximum meter reading. For channel guard or wideband transmitters, alternately tune L1/L2 and L3/L4 for maximum meter reading.
2.	A (MULT-1)	Pin 10	T1	See Procedure	Tune T1 for a small peak in meter reading (not required unless changing frequency).
3.	B (MULT-2)	Pin 2	T2, T1 and T3	0.65 v (0.5 v Minimum)	Tune T2 and then T1 for maximum meter reading. Then tune T3 for minimum meter reading (not required unless changing frequency).
4.	C (AMPL-3)	Pin 3	T4, T3 and T5	0.6 v (0.5 v Minimum)	Tune T4 and then T3 for a maximum meter reading. Then tune T5 for minimum meter reading (not required unless changing frequency).
MULT-3 AND POWER AMPLIFIER					
5.	D (MULT-3)	Pin 4	MULT-3 GRID (Z101/Z102) & T5	0.6 v (0.45 v Minimum)	Tune MULT-3 GRID and then T5 for maximum meter reading.
6.	E (AMPL-4)	Pin 5	MULT-3 PLATE (C106)	0.55 v (0.45 v Minimum)	Tune MULT-3 PLATE for maximum meter reading.
7.	F (PA GRID)	Pin 14(+) and Pin 6 (-)	AMPL-4 PLATE (C111) and L104/L105	1.0 v Maximum (0.65 v Minimum)	Alternately tune AMPL-4 PLATE and adjust interstage coupling (L104/L105) for maximum meter reading (not over 1 volt).  NOTE Adjusting L104/L105 may not be required if there is no change in frequency. If adjustment is required, bend the mounting leads on L104/L105 to pivot the coil.
8.					Rotate ANT COUPLING fully counterclockwise.
9.	G (PA PLATE)	WARNING High B-plus on Pins 1 and 9.		Minimum	Carefully tune PA PLATE for minimum meter reading.
		Pin 1(+) and Pin 9(-)	PA PLATE (C112)		
10.					Place S102 (TUNE-OPERATE) switch in OPERATE position.
11.	G (PA PLATE)	Pin 1(+) and Pin 9(-)	ANT COUPLING	Minimum	Adjust ANT COUPLING clockwise for minimum meter reading.

## FOR SINGLE-FREQUENCY TRANSMITTERS

12.	G (PA PLATE)	Pin 1 (+) and Pin 9 (-)	PA PLATE (C112)	Minimum	Tune C112 (PA PLATE) for minimum meter reading.
13.	"	"	ANT TUNING and ANT COUPLING	0.55 v	Alternately tune ANT TUNING for maximum meter reading, and adjust ANT COUPLING clockwise for a meter reading of 0.55 volts.
14.	"	"	PA PLATE (C112)	Minimum	Retune PA PLATE for a minimum meter reading.
15.	"	"	ANT COUPLING	0.7 v	Adjust ANT COUPLING for a meter reading of 0.7 volts.
16.	F (PA GRID)	"	AMP-4 PLATE (C111)	Maximum	Retune AMP-4 PLATE for maximum meter reading.
FREQUENCY ADJUSTMENT					
17.					With no modulation, adjust crystal trimmer C10 (or C16, C22, C28 as required) for proper oscillator frequency. Next, refer to the MODULATION ADJUSTMENT.  NOTE For proper frequency control of the transmitter, it is recommended that all frequency adjustments be made when the equipment is at a temperature of approx. 75° F. In no case should frequency adjustments be made when the equipment is outside the temperature range of 50° to 90° F.

## FOR MULTI-FREQUENCY TRANSMITTERS

12.	G (PA PLATE)	Pin 1 (+) and Pin 9 (-)	PA PLATE (C112)	Minimum	Switch to the lowest frequency and tune PA PLATE for minimum meter reading.
13.	"	"	ANT TUNING (C114) and ANT COUPLING	0.7 v	Switch back to the highest frequency. Alternately tune ANT TUNING and adjust ANT COUPLING clockwise for a meter reading of 0.7 volts.
14.	E (AMPL-4)	Pin 5	MULT-3 PLATE (C106)	Maximum	Tune MULT-3 PLATE for maximum meter reading.
15.	F (PA GRID)	Pin 14 (+) and Pin 6 (-)	AMP-4 PLATE (C111)	Maximum	Tune AMP-4 PLATE for maximum meter reading.
16.	G (PA PLATE)	Pin 1 (+) and Pin 9 (-)		0.7 v Minimum	The PA PLATE reading should be approximately 0.7 volts on both frequencies. AMP-4 PLATE may be retuned slightly until this reading is obtained.
FREQUENCY ADJUSTMENT					
17.					With no modulation, adjust crystal trimmers C10 (C16, C22, or C28 as required) for proper oscillator frequency. Next, refer to the MODULATION ADJUSTMENT.  NOTE For proper frequency control of the transmitter, it is recommended that all frequency adjustments be made when the equipment is at a temperature of approx. 75° F. In no case should frequency adjustments be made when the equipment is outside the temperature range of 50° to 90° F.

## ALIGNMENT PROCEDURE

132—174 MHZ, 80-WATT MASTR TRANSMITTER  
MODELS 4ET58A30-41 & 4ET58B10-15



TEST PROCEDURES

These Test Procedures are designed to assist you in servicing a transmitter that is operating--but not properly. Problems encountered could be low power output, low B plus, tone and voice deviation, defective audio sensitivity and modulation adjust control set too high. By following the sequence of test steps starting with Step 1, the defect can be quickly

localized. Once a defect is pin-pointed, refer to the "Service Check" and the additional corrective measures included in the Transmitter Troubleshooting Procedure. Before starting with the Transmitter Test Procedures, be sure the transmitter is tuned and aligned to the proper operating frequency.

TEST EQUIPMENT REQUIRED


for test hookup as shown:

1. Wattmeter similar to:  
  
Bird #43  
Jones #711N
2. VTVM similar to:  
  
Triplet #850  
Heath #1M-21
3. Audio Generator similar to:  
  
GE Model 4EX6A10 or  
Heath #1G-72
4. Deviation Meter (with  
a .75 KHz scale) similar  
to:  
  
Measurements #140  
Lampkin #205A
5. Multimeter similar to:  
  
GE METERING TEST SET MODEL 4EX3A10 or  
Triplet #631 or  
20,000 ohms-per-volt voltmeter

STEP 1

POWER MEASUREMENT  
TEST PROCEDURE

1. Connect transmitter output to wattmeter as shown below:

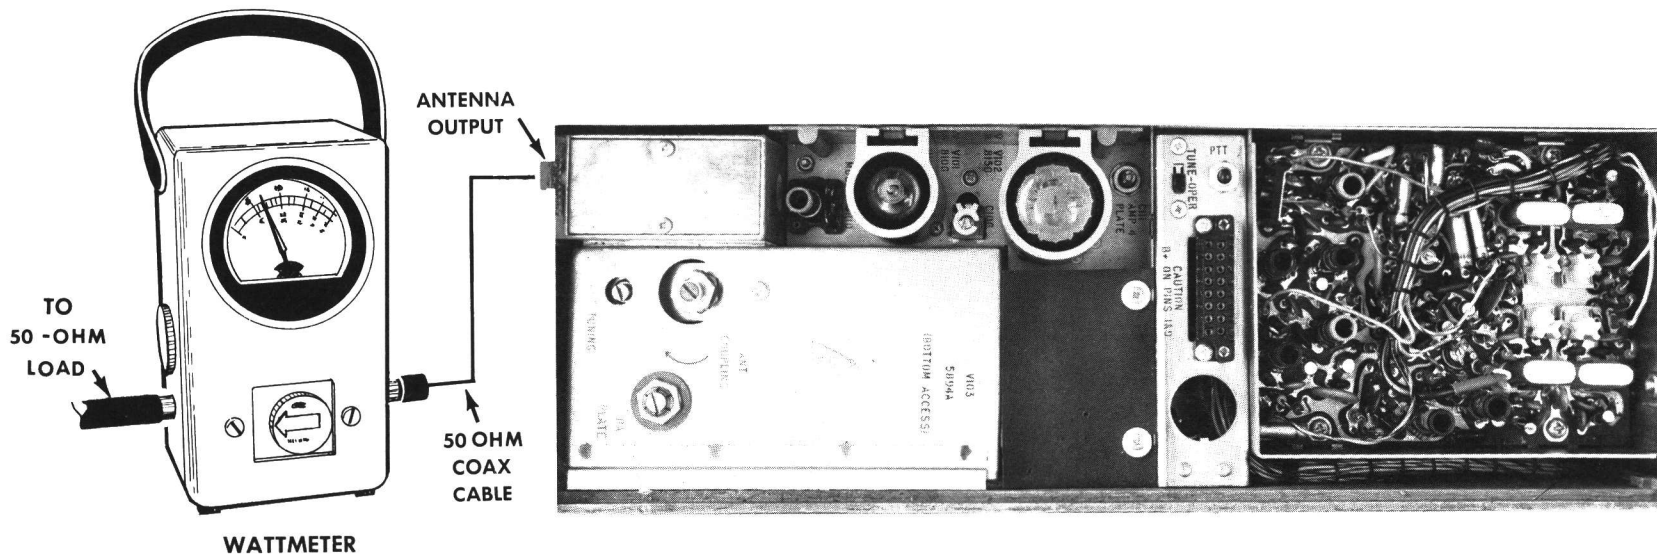

2. Key transmitter and check wattmeter for minimum reading of 80 watts.


SERVICE CHECK

Refer to Service Hints on Transmitter Troubleshooting Procedure.

STEP 2

TONE DEVIATION WITH CHANNEL GUARD  
TEST PROCEDURE

1. Setup Deviation Meter and monitor output of transmitter as shown below:

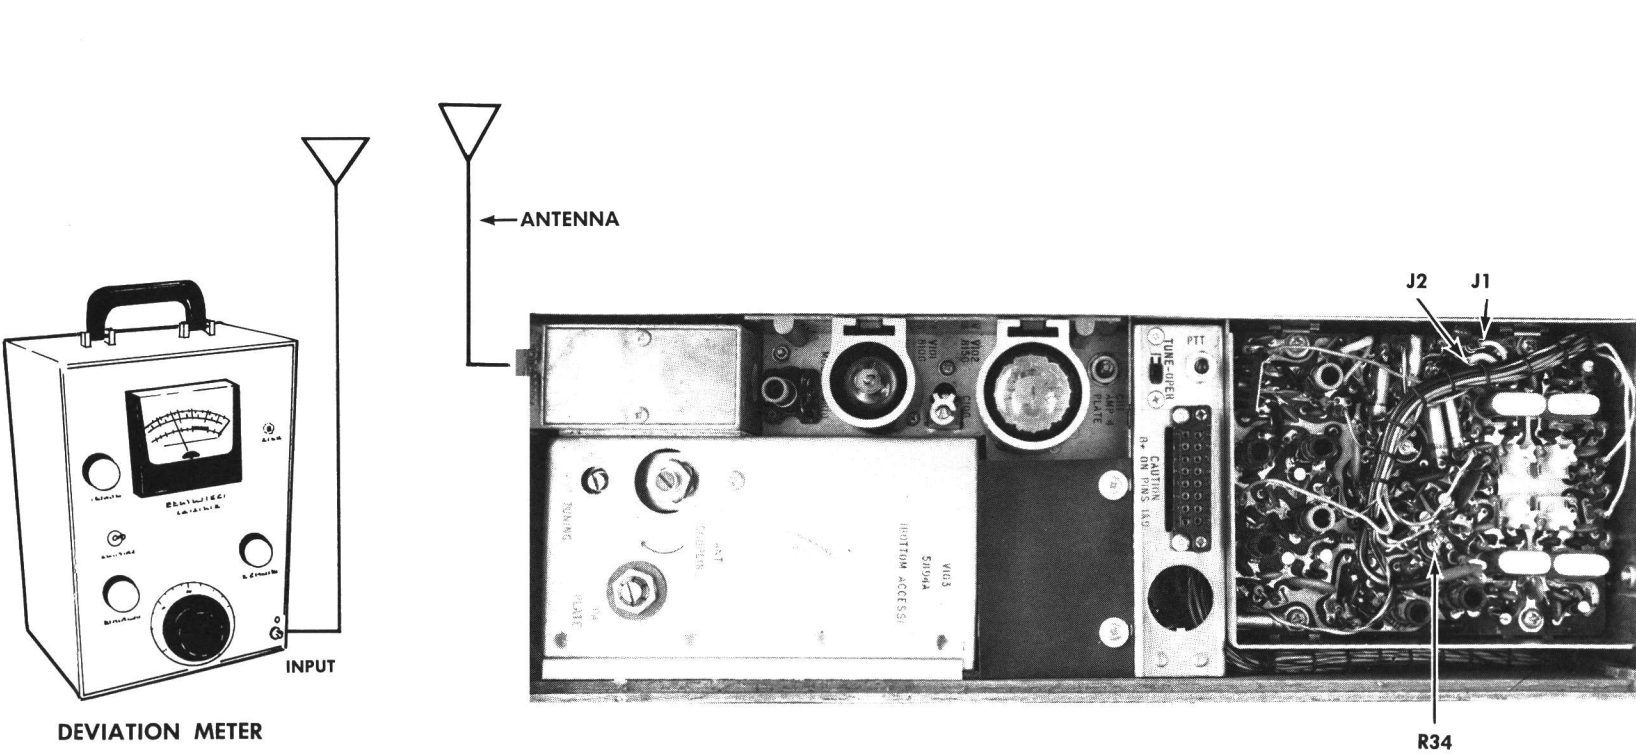

2. Unplug the MIC HI terminal from J1 on Transmitter Exciter Board.

3. Key transmitter and check for 0.75 KHz deviation. If reading is low or high, adjust Channel Guard MOD ADJUST (R34) for a reading of 0.75 KHz.

NOTES:

The Channel Guard MOD ADJUST (R34) may be adjusted for deviations up to 0.80 KHz for tone frequencies from 71.9 Hz to 82.5 Hz and deviations up to 1.0 KHz for all tone frequencies above 82.5 Hz.



NOTES:

1. On units supplied with Channel Guard, the Phase Modulator Tuning should be peaked carefully to insure proper performance. (Refer to Steps 1 and 2 in the Transmitter Alignment Chart).
2. The tone Deviation Test Procedures should be repeated everytime the Tone Frequency is changed.


SERVICE CHECK

If the 0.75 KHz deviation is not obtainable when adjusting R34, replace the Tone Transmitter reed.

STEP 3

VOICE DEVIATION AND SYMMETRY  
TEST PROCEDURE

1. Unplug the High and Low Mike leads from the Exciter Board Jacks J1 and J2.
2. Connect test equipment to transmitter as shown below:

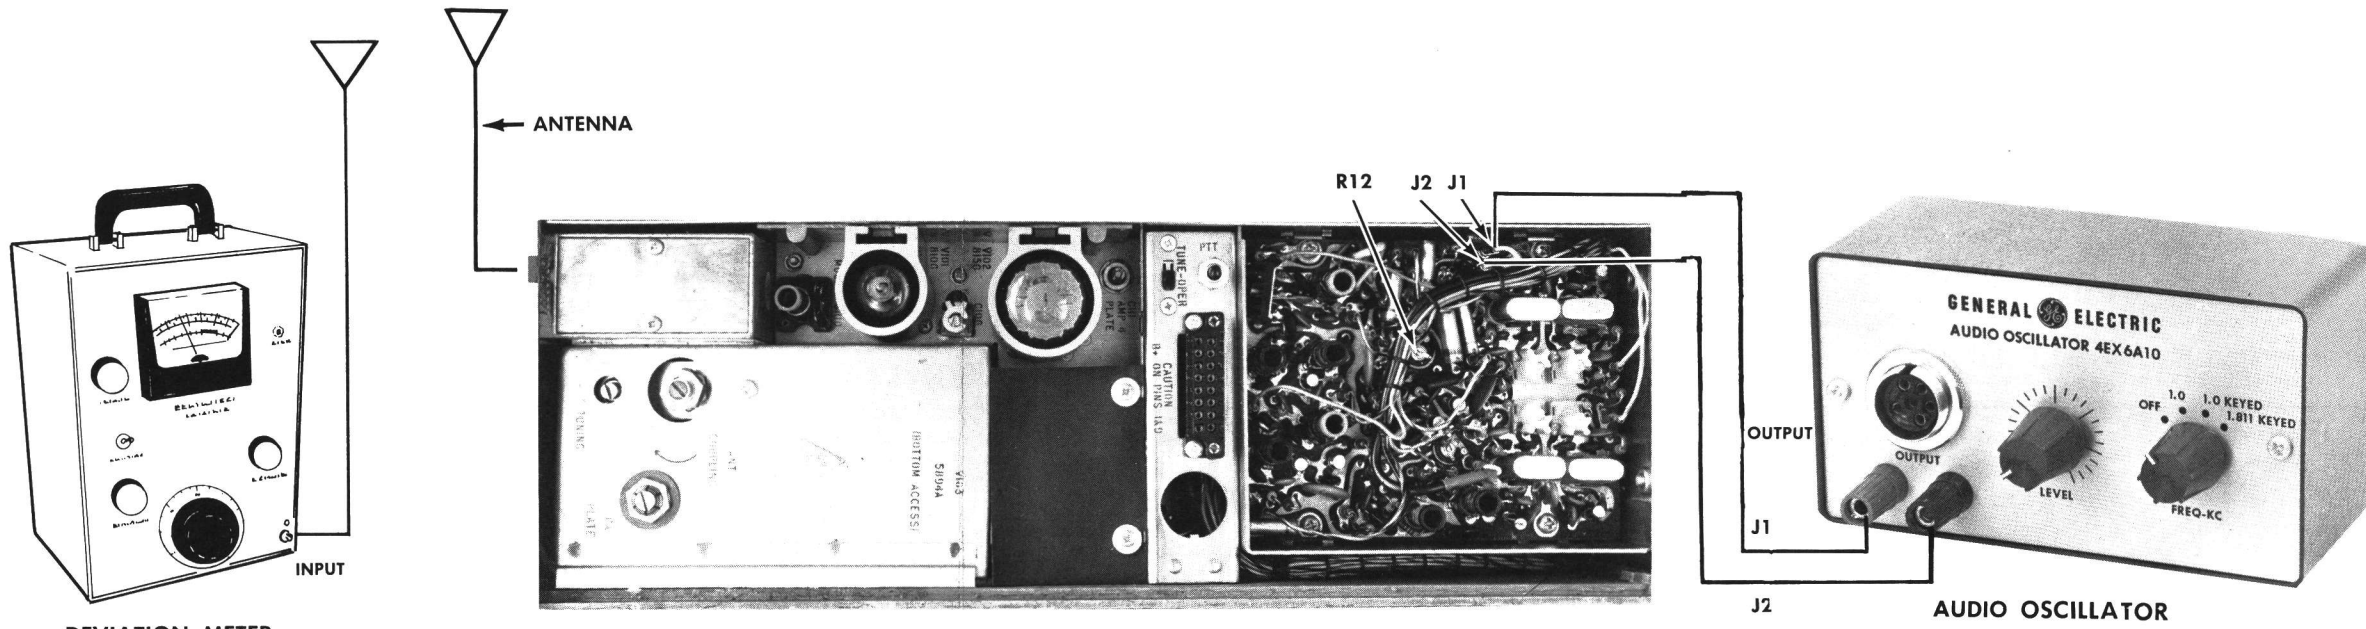



3. Set the generator output to 1.0 VOLTS RMS and frequency to 1 KHz.
4. Key the transmitter and adjust Deviation Meter to carrier frequency
5. Deviation reading should be  $\pm 4.5$  KHz. ( $\pm 13.5$  KHz wide band).
6. Adjust "Modulation Adjust Control" R12 until deviation reads 4.5 KHz (13.5 KHz wide band) on plus (+) or minus (-) deviation, whichever is greater. This adjustment should be made with the correct level of tone applied on Channel Guard transmitters.

NOTES:

--MASTR transmitters are adjusted for 4.5 KHz (13.5 KHz wide band) deviation at the factory. The factory adjustment will prevent the transmitter from deviating more than 5.0 KHz (15 KHz wide band) under the worst conditions of frequency, voltage and temperature.

If the deviation reading plus (+) and minus (-) differs by more than 0.5 KHz, (1.5 KHz wide band) check the following:

1. Recheck Step 1 as shown in the Transmitter Alignment Chart.
2. Check Audio Sensitivity by reducing generator output until deviation falls to 3.3 KHz (10 KHz wide band). Voltage should be LESS than 90 millivolts.

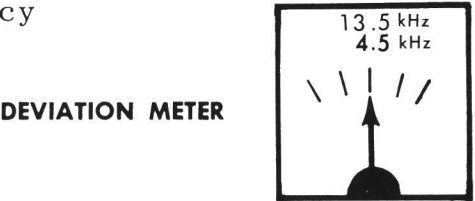

STEP 1 - QUICK CHECKS

POWER OUTPUT	CHECK VOLTAGES AT CENTRALIZED METERING JACK J102							PROBABLE DEFECT
	Multimeter- pin numbers							
	GE Test Set- A-G positions							
	Pins 10 & 16 A	Pins 2 & 16 B	Pins 3 & 16 C	Pins 4 & 16 D	Pins 5 & 16 E	Pins 6 & 14 F	Pins 1 & 9 G	
Low	0.8 v	0.65 v	0.6 v	0.6 v	0.55 v	Low	0.7 v	Weak 5894A or Loose Hard- ware in output tank circuit, or bad filter.
0	0.8 v	0.65 v	0.6 v	0.6 v	0.55 v	.37 v	0	Open 5894A
Low	0.8 v	0.65 v	0.6 v	0.6 v	0.55 v	Low	0.7 v	Weak 8156
0	0.8 v	0.65 v	0.6 v	0.6 v	.37 v	.37 v	0	Open Filament on 8156
0	0.8 v	0.65 v	Low	.18 v	.37 v	.37 v	0	Open Filament on 8106
0	0.8 v	0.65 v	0 or over 1.0 v	.18 v	.37 v	.37 v	0	Defective Q8
0	0.8 v	0 or over 1.0 v	0	.18 v	.77 v	.37 v	0	Defective Q7
0	over 1.2 v	0	0	.18 v	.37 v	.37 v	0	Shorted Q6 or Open Q5
0	0	0	0	.18 v	.37 v	.37 v	0	Defective Q3-Q6 or Modulator (see Note A)

NOTE A --- Localize trouble by checking:--	
1.	-20 volt DC supply at J102-12-16.
2.	Measure 12.1 VDC across Q4 emitter resistor R31 (1500 ohms), then:
(a)	Remove crystal- a slight variation in R31 voltage reading indicates Q3 and Q4 stages operating properly.
(b)	If no voltage is measured, check keying leads CR3-CR6, Q3, Q4.
(c)	With crystal removed, short Q5 base to emitter. A voltage reading above 1.0 volt indicates Q5 and Q6 are operating properly. Defect may be in Modulator.
(d)	If modulator is defective, check voltage variable diodes CV1 and CV2.

STEP 2  
CHECK TYPICAL DC VOLTAGES


EQUIPMENT REQUIRED  
● G.E. TEST MODEL 4EX3A10  
OR  
● 20,000 OHM-PER-VOLT METER

STEP 3  
CHECK AUDIO AC VOLTAGES

EQUIPMENT REQUIRED  
● AUDIO OSCILLATOR  
● AC VTVM

STEP 4  
AUDIO & OSC. WAVEFORMS

EQUIPMENT REQUIRED  
● AUDIO OSCILLATOR  
● OSCILLOSCOPE

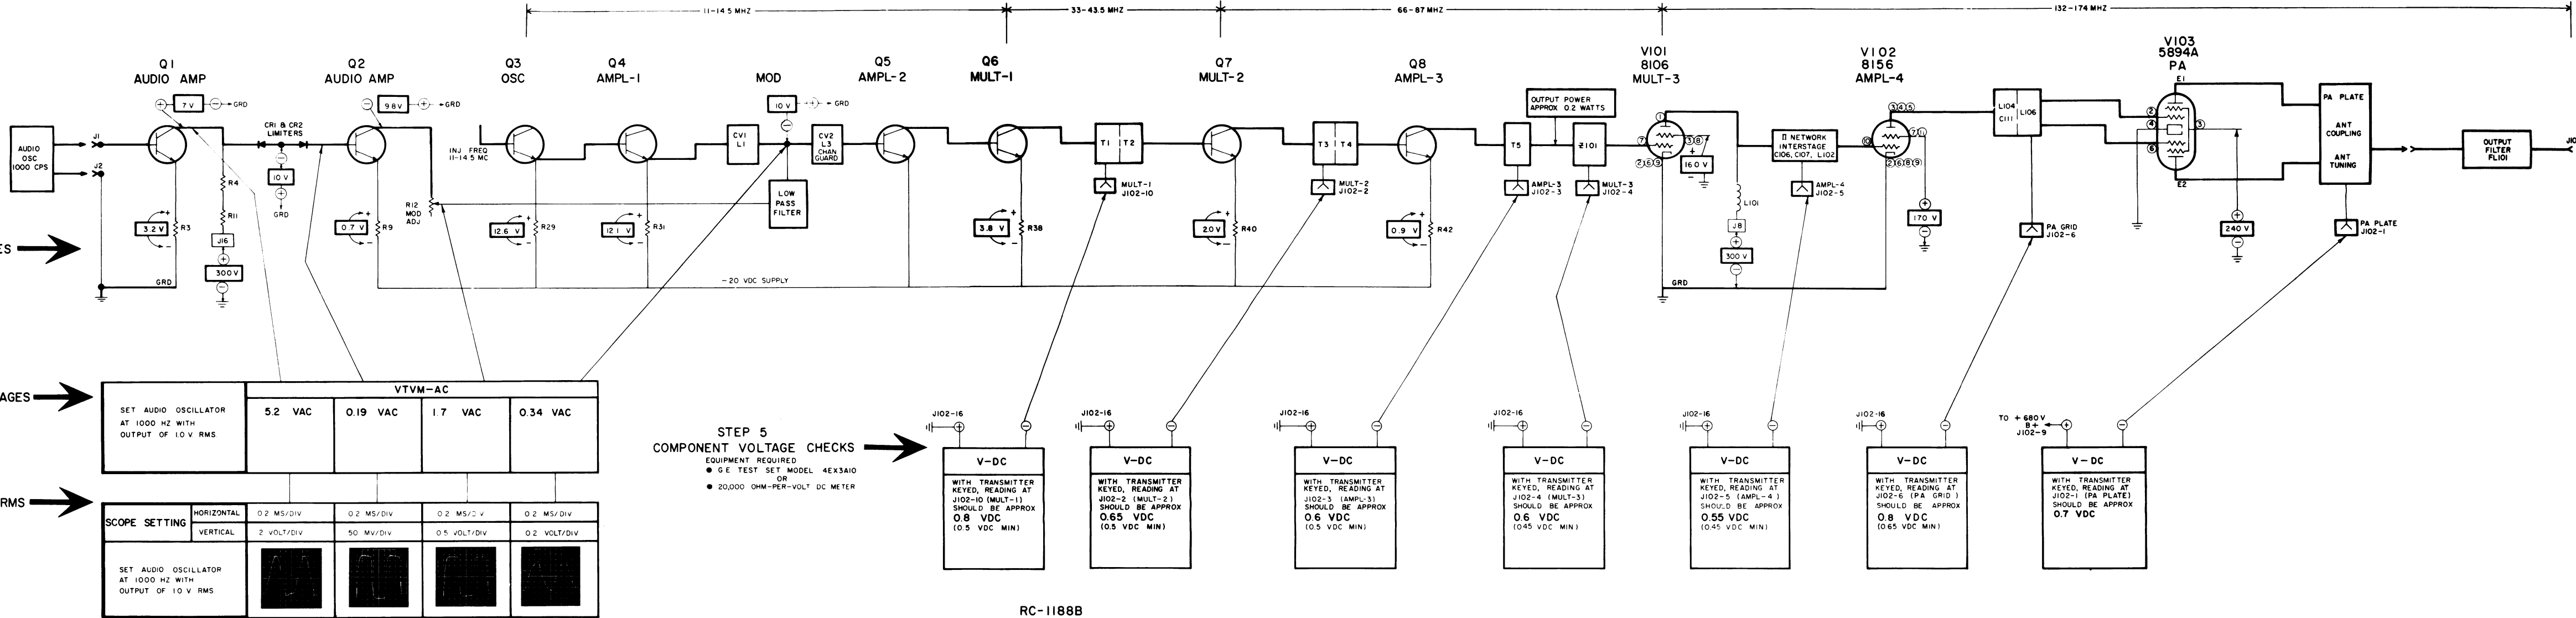


RC-1188B

TROUBLESHOOTING PROCEDURE

132-174 MHZ, 80-WATT MASTR TRANSMITTER  
MODELS 4ET58A30-41 & 4ET58B10-15



EXCITER  
A101-A112

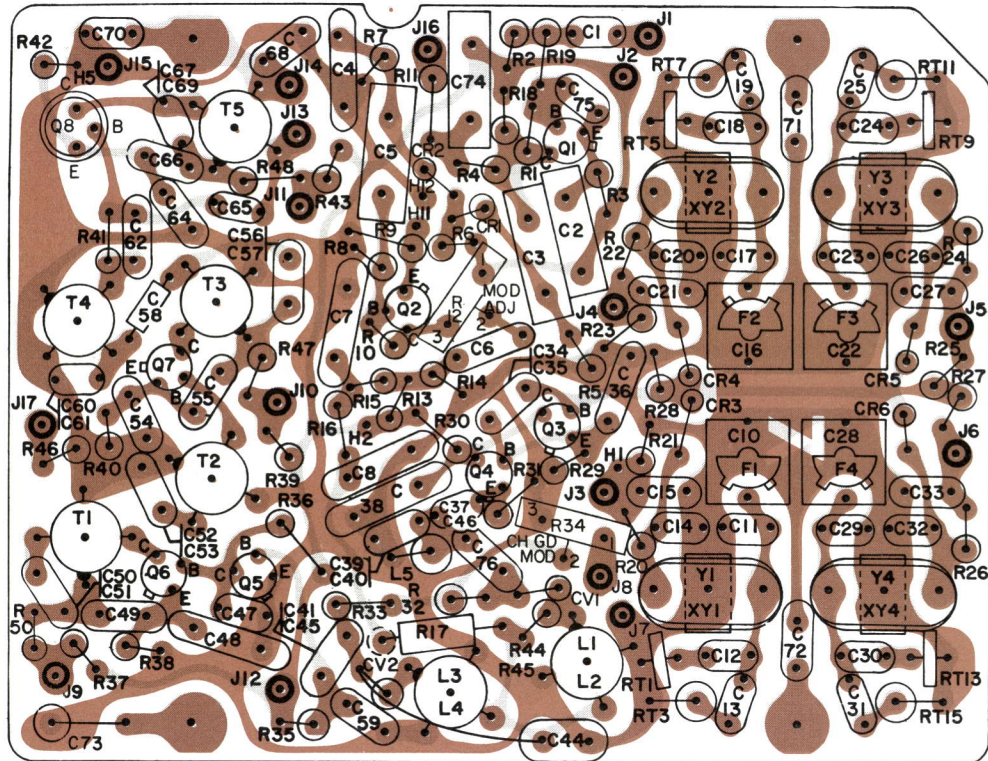

(19C303483, Sh. 1, Rev. 7)  
(19C303483, Sh. 2, Rev. 7)

EXCITER READINGS TAKEN TO CHASSIS GROUND				
TRANSISTOR	EMITTER	BASE	COLLECTOR	
	-	+	-	+
Q1	6.5K	6.8K	240K	12K 50K 20K
Q2	6.2K	4K	70K 10K	9.8K 10K
Q3	5K	2.7K	9K 2.7K	100 100
Q4	7K	5K	9K 2.7K	100 100
Q5	5K	2.7K	70K 6.8K	3.7K 2.3K
Q6	4K	3.2K	3.7K 2.3K	175 175
Q7	5.2K	2.9K	5K 2.7K	465 465
Q8	5K	2.7K	5K 2.7K	67 67


EXCITER READINGS TAKEN TO 20 VOLT LINE (J15 BLUE LEAD)				
TRANSISTOR	EMITTER	BASE	COLLECTOR	
	-	+	-	+
Q1	11K	14K	240K 30K	50K 35K
Q2	1K	1K	70K 4.3K	14K 18K
Q3	2.6K	2.4K	10K 5.5K	2.7K 5.1K
Q4	1.5K	1.5K	2.6K 2.5K	2.7K 5.1K
Q5	0	0	70K 3.2K	8.2K 3.8K
Q6	340	360	8K 3.6K	3K 5.1K
Q7	60	180	0 0	2.3K 5.9K
Q8	27	27	47 47	2.6K 5K

RESISTANCE READINGS

ALL READINGS ARE TYPICAL READINGS MEASURED WITH A 20,000 OHM-PER-VOLT METER AND J101 DISCONNECTED. + OR - SIGNS SHOW METER LEAD GROUNDING.

FOR READINGS OF:	USE SCALE:
1-100Ω	X 1
100-1KΩ	X 10
1K-50KΩ	X 1,000
50-∞Ω	X 100,000

TOP VIEW

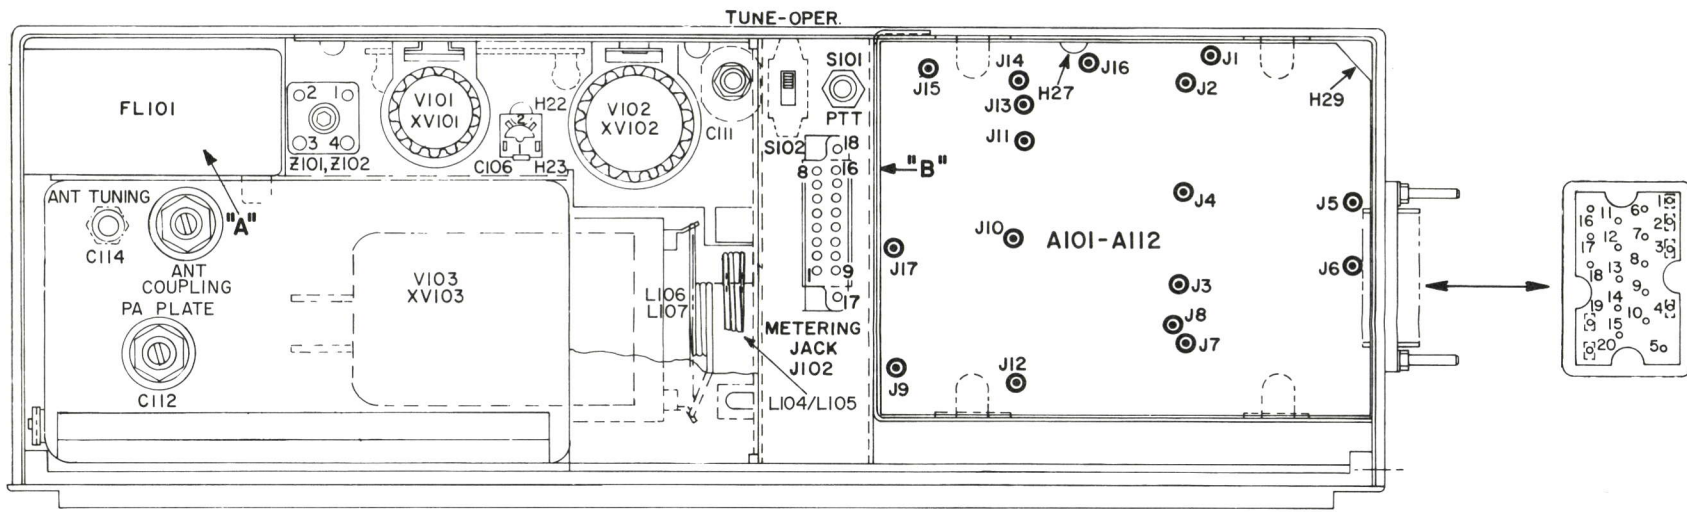


READINGS AT J101 TAKEN TO CHASSIS GROUND.


PIN	-	+
1	0	0
2	1.4Ω	1.4Ω
3	550K	500K
4	∞	∞
5	∞	∞
6	∞	∞
7	∞	∞
8	50K	50K
9	∞	∞
10	∞	∞
11	∞	∞
12	0/30K	0/15K
13	∞	∞
14	4.9K	2.7K
15	∞/30K	∞/15K
16	∞/30K	∞/15K
17	∞/30K	∞/15K
18	∞/30K	∞/15K
19	0	0
20	∞	∞

\* 1ST READING FOR SINGLE FREQ  
2ND READING FOR MULTI-FREQ.

VIEW AT "A"

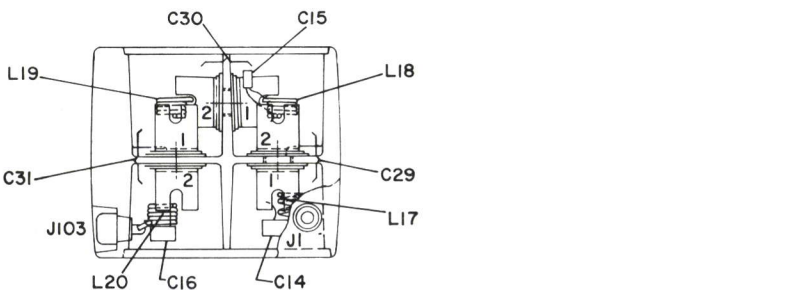



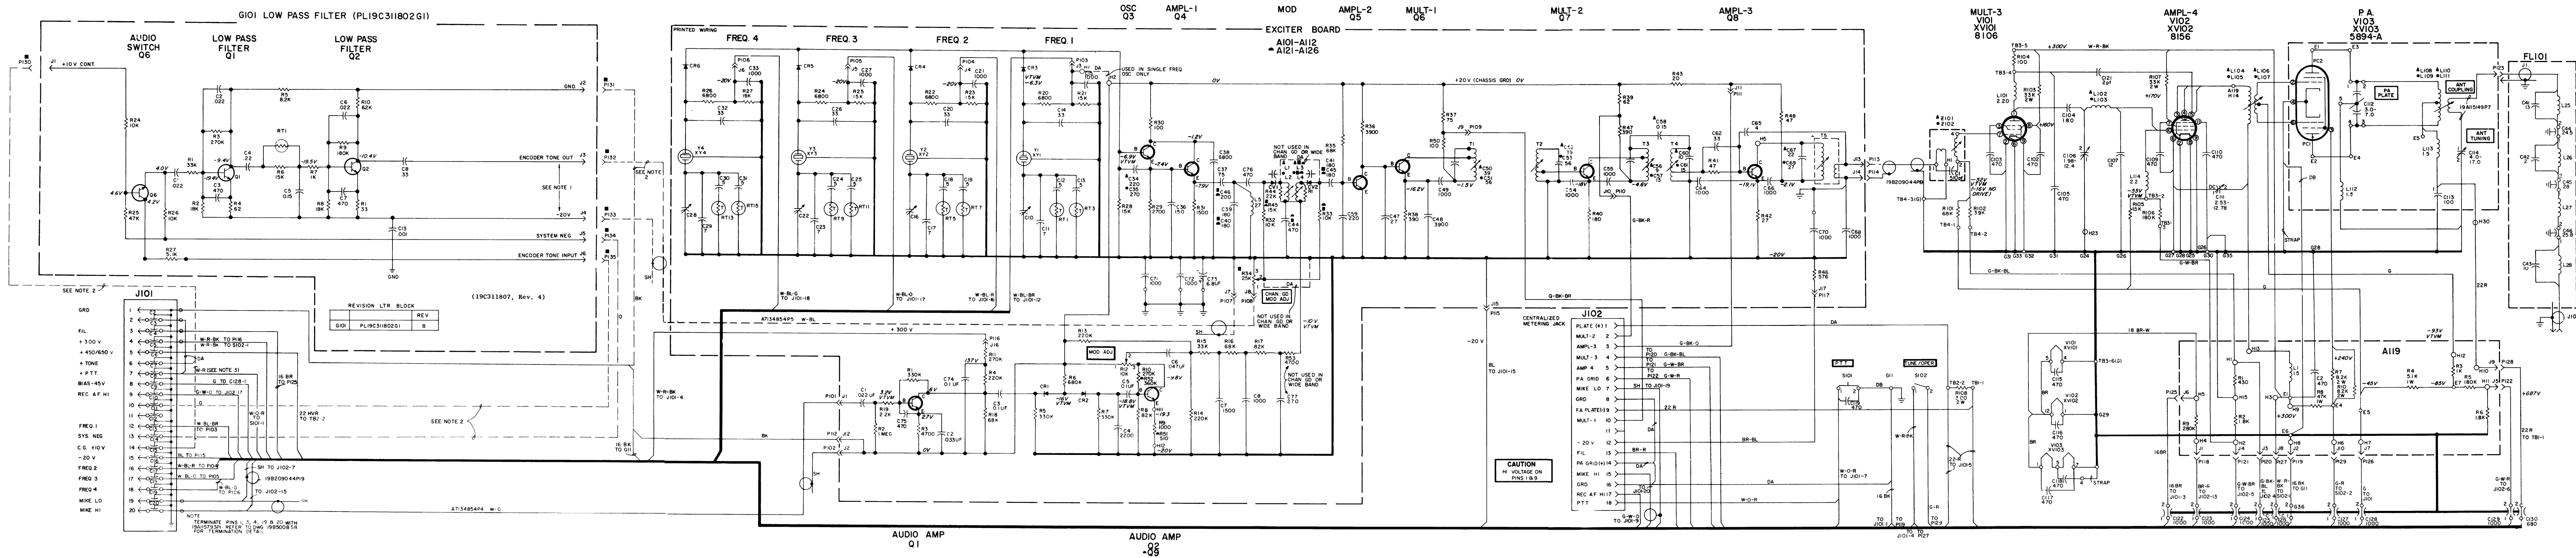

# SCHEMATIC DIAGRAM

132—174 MHZ, 80-WATT MASTR TRANSMITTER  
MODELS 4ET58A30-41 & 4ET58B10-15



PARTS LIST

LBI-3878C  
132-174 MHz TRANSMITTER  
MODELS 4ET58A30 - 4ET58A41  
MODELS 4ET58B10 - 4ET58B11

SYMBOL	GE PART NO.	DESCRIPTION
A101 thru A126		EXCITER BOARD ASSEMBLY A101 Model 4ET58A30 19D402308-G1 Rev D A102 Model 4ET58A31 19D402308-G2 Rev D A103 Model 4ET58A32 19D402308-G3 Rev D A104 Model 4ET58A33 19D402308-G4 Rev D A105 Model 4ET58A34 19D402308-G5 Rev D A106 Model 4ET58A35 19D402308-G6 Rev D A107 Model 4ET58A36 19D402308-G7 Rev E A108 Model 4ET58A37 19D402308-G8 Rev E A109 Model 4ET58A38 19D402308-G9 Rev E A110 Model 4ET58A39 19D402308-G10 Rev E A111 Model 4ET58A40 19D402308-G11 Rev E A112 Model 4ET58A41 19D402308-G12 Rev E A121 Model 4ET58B10 19D402308-G13 Rev D A122 Model 4ET58B11 19D402308-G14 Rev D A123 Model 4ET58B12 19D402308-G15 Rev D A124 Model 4ET58B13 19D402308-G16 Rev D A125 Model 4ET58B14 19D402308-G17 Rev D A126 Model 4ET58B15 19D402308-G18 Rev D
		----- CAPACITORS -----
C1	5491189-P102	Polyester: .022 $\mu$ f $\pm$ 20%, 50 VDCW.
C2	19B209243-P4	Polyester: .033 $\mu$ f $\pm$ 20%, 50 VDCW.
C3	19B209243-P7	Polyester: 0.1 $\mu$ f $\pm$ 20%, 50 VDCW.
C4	7491395-P114	Ceramic disc: .0022 $\mu$ f $\pm$ 10%, 500 VDCW.
C5	19B209243-P7	Polyester: 0.1 $\mu$ f $\pm$ 20%, 50 VDCW.
C6	19B209243-P5	Polyester: .047 $\mu$ f $\pm$ 20%, 50 VDCW.
C7	7491395-P111	Ceramic disc: .0015 $\mu$ f $\pm$ 10%, 500 VDCW.
C8	5493367-P100K	Silver mica: .001 $\mu$ f $\pm$ 10%, 100 VDCW; sim to Electro Motive Type DM-20.
C10	5491271-P106	Variable, subminiature: approx 2.1-12.7 pf, 750 v peak; sim to EF Johnson 189.
C11	5496219-P7	Ceramic disc: 5 pf $\pm$ 0.5 pf, 500 VDCW, temp coef 0 PPM.
C12 and C13	19C300685-P93	Ceramic disc: 5 pf $\pm$ 0.1 pf, 500 VDCW, temp coef 0 PPM.
C14	5496219-P751	Ceramic disc: 33 pf $\pm$ 5%, 500 VDCW, temp coef -750 PPM.
C15	5494481-P111	Ceramic disc: .001 $\mu$ f $\pm$ 20%, 1000 VDCW; sim to RMC Type JF Discap.
C16	5491271-P106	Variable, subminiature: approx 2.1-12.7 pf, 750 v peak; sim to EF Johnson 189.
C17	5496219-P7	Ceramic disc: 7 pf $\pm$ 0.5 pf, 500 VDCW, temp coef 0 PPM.
C18 and C19	19C300685-P93	Ceramic disc: 5 pf $\pm$ 0.1 pf, 500 VDCW, temp coef 0 PPM.
C20	5496219-P751	Ceramic disc: 33 pf $\pm$ 5%, 500 VDCW, temp coef -750 PPM.
C21	5494481-P111	Ceramic disc: .001 $\mu$ f $\pm$ 20%, 1000 VDCW; sim to RMC Type JF Discap.
C22	5491271-P106	Variable, subminiature: approx 2.1-12.7 pf, 750 v peak; sim to EF Johnson 189-6-5.
C23	5496219-P7	Ceramic disc: 7 pf $\pm$ 0.5 pf, 500 VDCW, temp coef 0 PPM.
C24 and C25	19C300685-P93	Ceramic disc: 5 pf $\pm$ 0.1 pf, 500 VDCW, temp coef 0 PPM.
C26	5496219-P751	Ceramic disc: 33 pf $\pm$ 5%, 500 VDCW, temp coef -750 PPM.
C27	5494481-P111	Ceramic disc: .001 $\mu$ f $\pm$ 20%, 1000 VDCW; sim to RMC Type JF Discap.
C28	5491271-P106	Variable, subminiature: approx 2.1-12.7 pf, 750 v peak; sim to EF Johnson 189.

SYMBOL	GE PART NO.	DESCRIPTION
C29	5496219-P7	Ceramic disc: 7 pf $\pm$ 0.5 pf, 500 VDCW, temp coef 0 PPM.
C30 and C31	19C300685-P93	Ceramic disc: 5 pf $\pm$ 0.1 pf, 500 VDCW, temp coef 0 PPM.
C32	5496219-P751	Ceramic disc: 33 pf $\pm$ 5%, 500 VDCW, temp coef -750 PPM.
C33	5494481-P111	Ceramic disc: .001 $\mu$ f $\pm$ 20%, 1000 VDCW; sim to RMC Type JF Discap.
C34	5496372-P50	Ceramic disc: 220 pf $\pm$ 5%, 500 VDCW, temp coef -2200 PPM.
C35	5496372-P54	Ceramic disc: 270 pf $\pm$ 5%, 500 VDCW, temp coef -2200 PPM.
C36	5496219-P467	Ceramic disc: 150 pf $\pm$ 5%, 500 VDCW, temp coef -220 PPM.
C37	5496372-P327	Ceramic disc: 75 pf $\pm$ 10%, 500 VDCW, temp coef -4700 PPM.
C38	5494481-P131	Ceramic disc: 6800 pf $\pm$ 20%, 1000 VDCW; sim to RMC Type JF Discap.
C39	5496372-P145	Ceramic disc: 180 pf $\pm$ 10%, 500 VDCW, temp coef -3300 PPM.
C40	5496372-P345	Ceramic disc: 180 pf $\pm$ 10%, 500 VDCW, temp coef -4700 PPM.
C41	5493366-P180K	Mica: 180 pf $\pm$ 10%, 100 VDCW; sim to Electro Motive Type DM15.
C44	5493366-P470J	Silver mica: 470 pf $\pm$ 5%, 100 VDCW; sim to Electro Motive Type DM-15.
C45	5496372-P45	Ceramic disc: 180 pf $\pm$ 10%, 500 VDCW, temp coef -2200 PPM.
C46	5496372-P347	Ceramic disc: 200 pf $\pm$ 10%, 500 VDCW, temp coef -4700 PPM.
C47	5496219-P749	Ceramic disc: 27 pf $\pm$ 5%, 500 VDCW, temp coef -750 PPM.
C48	5494481-P129	Ceramic disc: 3900 pf $\pm$ 20%, 1000 VDCW; sim to RMC Type JF Discap.
C49	5494481-P111	Ceramic disc: .001 $\mu$ f $\pm$ 20%, 1000 VDCW; sim to RMC Type JF Discap.
C50	5496219-P253	Ceramic disc: 39 pf $\pm$ 5%, 500 VDCW, temp coef -80 PPM.
C51	5496219-P257	Ceramic disc: 56 pf $\pm$ 5%, 500 VDCW, temp coef -80 PPM.
C52	5496219-P253	Ceramic disc: 39 pf $\pm$ 5%, 500 VDCW, temp coef -80 PPM.
C53	5496219-P257	Ceramic disc: 56 pf $\pm$ 5%, 500 VDCW, temp coef -80 PPM.
C54 and C55	5494481-P111	Ceramic disc: .001 $\mu$ f $\pm$ 20%, 1000 VDCW; sim to RMC Type JF Discap.
C56	5496219-P440	Ceramic disc: 9 pf $\pm$ 0.25 pf, 500 VDCW, temp coef -220 PPM.
C57	5496219-P343	Ceramic disc: 13 pf $\pm$ 5%, 500 VDCW, temp coef -150 PPM.
C58	5491601-P35	Tubular: 0.15 pf $\pm$ 10%, 500 VDCW; sim to Quality Components Type MC.
C59	5493366-P220K	Silver mica: 220 pf $\pm$ 10%, 100 VDCW; sim to Electro Motive Type DM-15.
C60	5496219-P241	Ceramic disc: 10 pf $\pm$ 5%, 500 VDCW, temp coef -80 PPM.
C61	5496219-P244	Ceramic disc: 15 pf $\pm$ 5%, 500 VDCW, temp coef -80 PPM.
C62	5496219-P51	Ceramic disc: 33 pf $\pm$ 5%, 500 VDCW, temp coef 0 PPM.
C64	5494481-P111	Ceramic disc: .001 $\mu$ f $\pm$ 20%, 1000 VDCW; sim to RMC Type JF Discap.
C65	5496219-P35	Ceramic disc: 4 pf $\pm$ 0.25 pf, 500 VDCW, temp coef 0 PPM.
C66	5494481-P111	Ceramic disc: .001 $\mu$ f $\pm$ 20%, 1000 VDCW; sim to RMC Type JF Discap.
C67	5496219-P247	Ceramic disc: 22 pf $\pm$ 5%, 500 VDCW, temp coef -80 PPM.
C68	5494481-P111	Ceramic disc: .001 $\mu$ f $\pm$ 20%, 1000 VDCW; sim to RMC Type JF Discap.

SYMBOL	GE PART NO.	DESCRIPTION
C69	5496219-P249	Ceramic disc: 27 pf $\pm$ 5%, 500 VDCW, temp coef -80 PPM.
C70 thru C72	5494481-P111	Ceramic disc: .001 $\mu$ f $\pm$ 20%, 1000 VDCW; sim to RMC Type JF Discap.
C73	5496267-P18	Tantalum: 6.8 $\mu$ f $\pm$ 20%, 35 VDCW; sim to Sprague Type 150D.
C74	19A15414-P13	Tubular, polyester: 0.1 $\mu$ f $\pm$ 20%, 200 VDCW.
C75	5494481-P107	Ceramic disc: 470 pf $\pm$ 20%, 1000 VDCW; sim to RM Type JF Discap.
C76	5493366-P470K	Mica: 470 pf $\pm$ 10%, 100 VDCW; sim to Electro Motive Type DM-15.
C77	5493366-P270K	Mica: 270 pf $\pm$ 10%, 100 VDCW; sim to Electro Motive Type DM-15.
		----- DIODES AND RECTIFIERS -----
CR1 and CR2	19A115250-P1	Silicon.
CR3 thru CR6	19A115603-P1	Silicon.
CV1 and CV2	5495769-P8	Silicon, capacitive.
		----- JACKS AND RECEPTACLES -----
J1 thru J17	4033513-P4	Contact, electrical; sim to Bead Chain L93-3.
		----- INDUCTORS -----
L1	19B204526-G2	Coil. Includes tuning slug 5491798-P2.
L2	19B204526-G1	Coil. Includes tuning slug 5491798-P2.
L3	19B204526-G4	Coil. Includes tuning slug 5491798-P2.
L4	3R152-P333J	Composition: 33,000 ohms $\pm$ 5%, 1/4 w.
L5	7488079-P48	Coil. Includes tuning slug 5491798-P2.
		----- CAPACITORS -----
L6	19B204526-G3	Coil. Includes tuning slug 5491798-P2.
L7	3R152-P333J	Composition: 33,000 ohms $\pm$ 5%, 1/4 w.
		----- JACKS AND RECEPTACLES -----
L8	7488079-P48	Coil. Includes tuning slug 5491798-P2.
		----- TRANSISTORS -----
Q1 and Q2	19A115123-P1	Silicon, NPN; sim to Type 2N2712.
Q3 thru Q5	19A115330-P1	Silicon, NPN.
Q6 and Q7	19A115328-P1	Silicon, NPN.
Q8	19A115328-P1	Silicon, NPN.
Q9	19A115362-P1	Silicon, NPN; sim to Type 2N2925.
		----- RESISTORS -----
R1	3R77-P334K	Composition: 0.33 megohm $\pm$ 10%, 1/2 w.
R2	3R77-P105K	Composition: 1 megohm $\pm$ 10%, 1/2 w.
R3	3R77-P472K	Composition: 4700 ohms $\pm$ 10%, 1/2 w.
R4	3R77-P224K	Composition: 0.22 megohm $\pm$ 10%, 1/2 w.
R5	3R77-P334K	Composition: 0.33 megohm $\pm$ 10%, 1/2 w.
R6	3R77-P684K	Composition: 0.68 megohm $\pm$ 10%, 1/2 w.
R7	3R77-P334K	Composition: 0.33 megohm $\pm$ 10%, 1/2 w.
R8	3R77-P623K	Composition: 82,000 ohms $\pm$ 10%, 1/2 w.
R9	3R77-P102K	Composition: 1000 ohms $\pm$ 10%, 1/2 w.
R10 and R11	3R77-P274K	Composition: 0.27 megohm $\pm$ 10%, 1/2 w.


SYMBOL	GE PART NO.	DESCRIPTION
R12*	19B209358-P106	Variable, carbon film: approx 75 to 10,000 ohms $\pm$ 10%, 0.25 w; sim to CTS Type X-201.
		In Models 4ET58A30-35 of REV C and earlier: In Models 4ET58A36-41 of REV D and earlier: In Models 4ET58B10-15 of REV C and earlier: Variable, carbon film: .01 megohm $\pm$ 20%, 0.1 w, sim to Centralab Series 4.
R13 and R14	3R77-P224K	Composition: 0.22 megohm $\pm$ 10%, 1/2 w.
R15	3R77-P333K	Composition: 33,000 ohms $\pm$ 10%, 1/2 w.
R16	3R77-P683K	Composition: 68,000 ohms $\pm$ 10%, 1/2 w.
R17	3R77-P623K	Composition: 82,000 ohms $\pm$ 10%, 1/2 w.
R18	3R77-P683K	Composition: 68,000 ohms $\pm$ 10%, 1/2 w.
R19	3R77-P222K	Composition: 2200 ohms $\pm$ 10%, 1/2 w.
R20	3R77-P682K	Composition: 6800 ohms $\pm$ 10%, 1/2 w.
R21	3R77-P153K	Composition: 15,000 ohms $\pm$ 10%, 1/2 w.
R22	3R77-P682K	Composition: 6800 ohms $\pm$ 10%, 1/2 w.
R23	3R77-P153K	Composition: 15,000 ohms $\pm$ 10%, 1/2 w.
R24	3R77-P682K	Composition: 6800 ohms $\pm$ 10%, 1/2 w.
R25	3R77-P153K	Composition: 15,000 ohms $\pm$ 10%, 1/2 w.
R26	3R77-P682K	Composition: 6800 ohms $\pm$ 10%, 1/2 w.
R27 and R28	3R77-P153K	Composition: 15,000 ohms $\pm$ 10%, 1/2 w.
J1 thru J17	4033513-P4	Contact, electrical; sim to Bead Chain L93-3.
		----- INDUCTORS -----
L1	19B204526-G2	Coil. Includes tuning slug 5491798-P2.
L2	19B204526-G1	Coil. Includes tuning slug 5491798-P2.
L3	19B204526-G4	Coil. Includes tuning slug 5491798-P2.
R1	3R152-P333J	Composition: 33,000 ohms $\pm$ 5%, 1/4 w.
L4	19B204526-G3	Coil. Includes tuning slug 5491798-P2.
R1	3R152-P333J	Composition: 33,000 ohms $\pm$ 5%, 1/4 w.
R35	3R77-P683K	Composition: 68,000 ohms $\pm$ 10%, 1/2 w.
R36	3R77-P392K	Composition: 3900 ohms $\pm$ 10%, 1/2 w.
R37	3R77-P750J	Composition: 75 ohms $\pm$ 5%, 1/2 w.
R38	3R77-P391K	Composition: 390 ohms $\pm$ 10%, 1/2 w.
R39	3R77-P620J	Composition: 62 ohms $\pm$ 5%, 1/2 w.
R40	3R77-P181K	Composition: 180 ohms $\pm$ 10%, 1/2 w.
R41	3R77-P470K	Composition: 47 ohms $\pm$ 10%, 1/2 w.
R42	3R77-P270K	Composition: 27 ohms $\pm$ 10%, 1/2 w.
R43	3R77-P200J	Composition: 20 ohms $\pm$ 5%, 1/2 w.
R44	3R77-P223K	Composition: 22,000 ohms $\pm$ 10%, 1/2 w.
R45	3R77-P153K	Composition: 15,000 ohms $\pm$ 10%, 1/2 w.
R46	19A116278-P474	Metal film: 576,000 ohms $\pm$ 2%, 1/2 w.
R47	3R77-P391K	Composition: 390 ohms $\pm$ 10%, 1/2 w.
R48	3R77-P470K	Composition: 47 ohms $\pm$ 10%, 1/2 w.
R50	3R77-P101K	Composition: 100 ohms $\pm$ 10%, 1/2 w.
R51	3R77-P511J	Composition: 510 ohms $\pm$ 5%, 1/2 w.
R52	3R77-P364J	Composition: 0.36 megohm $\pm$ 5%, 1/2 w.
R53	3R152-P472K	Composition: 4700 ohms $\pm$ 10%, 1/4 w.
		----- THERMISTORS -----
RT1	19B209284-P6	Disc: 75 ohms res nominal at 25°C, color code blue.
RT3	19B209284-P2	Rod: 21,400 ohms res nominal at 25°C, color code red.
RT5	19B209284-P6	Disc: 75 ohms res nominal at 25°C, color code blue.
RT7	19B209284-P2	Rod: 21,400 ohms res nominal at 25°C, color code red.

SYMBOL	GE PART NO.	DESCRIPTION
RT9	19B209284-P6	Disc: 75 ohms res nominal at 25°C, color code blue.
RT11	19B209284-P2	Rod: 21,400 ohms res nominal at 25°C, color code red.
RT13	19B209284-P6	Disc: 75 ohms res nominal at 25°C, color code blue.
RT15	19B209284-P2	Rod: 21,400 ohms res nominal at 25°C, color code red.
		----- TRANSFORMERS -----
T1	19B204534-G1	Coil. Includes tuning slug 5491798-P4.
T2	19B204531-G1	Coil. Includes tuning slug 5491798-P4.
T3	19B204535-G1	Coil. Includes tuning slug 5491798-P4.
T4	19B204535-G2	Coil. Includes tuning slug 5491798-P4.
T5	19B204537-G1	Coil. Includes tuning slug 5491798-P4.
		----- SOCKETS -----
XY1 thru XY4		Refer to Mechanical Parts (RC-1628).
		----- CRYSTALS -----
Y1 thru Y4	19B206175-P6	Quartz: freq range 11,000 to 12,566 KHz, temp range -30°C to +85°C. (132-150.8 MHz Transmitter)
Y1 thru Y4	19B206175-P7	Quartz: freq range 12,566 to 14,500 KHz, temp range -30°C to +85°C. (150.8-174 MHz Transmitter)
		----- COMPONENT BOARD ASSEMBLY -----
AI19	19C303615-G1	Component Board Assembly
		----- CAPACITORS -----
C2	5494481-P7	Ceramic disc: 470 pf $\pm$ 20%, 500 VDCW; sim to RMC Type JF Discap.
		----- JACKS AND RECEPTACLES -----
J1 thru J10	4033513-P4	Contact, electrical; sim to Bead Chain L93-3.
L1	7488079-P34	Choke, RF: 1.5 $\mu$ h $\pm$ 10%, 0.28 ohm DC res; sim to Jeffers 4412-7K.
R1	3R77-P431J	Composition: 430 ohms $\pm$ 5%, 1/2 w.
R2	3R77-P182K	Composition: 1800 ohms $\pm$ 10%, 1/2 w.
R3	3R77-P102K	Composition: 1000 ohms $\pm$ 10%, 1/2 w.
R4	3R78-P512J	Composition: 5100 ohms $\pm$ 5%, 1 w.
R5	3R77-P184K	Composition: 0.18 megohm $\pm$ 10%, 1/2 w.
R6	3R77-P182K	Composition: 1800 ohms $\pm$ 10%, 1/2 w.
R7	3R78-P822K	Composition: 8200 ohms $\pm$ 10%, 1/2 w.
R8	3R78-P473K	Composition: 47,000 ohms $\pm$ 10%, 1 w.
R9	19A116278-P444	Metal film: 0.28 megohms $\pm$ 2%, 1/2 w.
R10	3R79-P822K	Composition: 8200 ohms $\pm$ 10%, 2 w.
		----- OSCILLATORS -----
GI01	19B209284-P6	Disc: 75 ohms res nominal at 25°C, color code blue.
		----- CAPACITORS -----
CI*	19B209243-P103	Polyester: 0.022 $\mu$ f $\pm$ 10%, 50 VDCW.
		In Models earlier than Rev A: Polyester: 0.015 $\mu$ f $\pm$ 20%, 50 VDCW.
	19B209243-P2	

SYMBOL	GE PART NO.	DESCRIPTION
C2	19B209243-P3	Polyester: 0.022 $\mu$ f $\pm$ 20%, 50 VDCW.
C3	5494481-P107	Ceramic disc: 470 pf $\pm$ 20%, 1000 VDCW; sim to RMC Type JF Discap.
C4	19B209243-P9	Polyester: 0.22 $\mu$ f $\pm$ 20%, 50 VDCW.
C5	19B209243-P8	Polyester: 0.15 $\mu$ f $\pm$ 20%, 50 VDCW.
C6	19B209243-P3	Polyester: .022 $\mu$ f $\pm$ 20%, 50 VDCW.
C7	5494481-P107	Ceramic disc: 470 pf $\pm$ 20%, 1000 VDCW; sim to RMC Type JF Discap.
C8	19B209243-P14	Polyester: 0.33 $\mu$ f $\pm$ 20%, 250 VDCW.
C13	5494481-P111	Ceramic disc: .001 $\mu$ f $\pm$ 10%, 1000 VDCW; sim to RMC Type JF Discap.
		----- JACKS AND RECEPTACLES -----
J1 thru J6	4033513-P4	Contact, electrical; sim to Bead Chain L93-3.
		----- TRANSISTORS -----
Q1 and Q2	19A115123-P1	Silicon, NPN; sim to Type 2N2712.
Q6	19A115123-P1	Silicon, NPN; sim to Type 2N2712.
		----- RESISTORS -----
R1	3R77-P333K	Composition: 33,000 ohms $\pm$ 10%, 1/2 w.
R2	3R77-P183K	Composition: 18,000 ohms $\pm$ 10%, 1/2 w.
R3	3R77-P274K	Composition: 0.27 megohm $\pm$ 10%, 1/2 w.
R4	3R77-P620J	Composition: 62 ohms $\pm$ 5%, 1/2 w.
R5	3R77-P822K	Composition: 8200 ohms $\pm$ 10%, 1/2 w.
R6	3R77-P153K	Composition: 15,000 ohms $\pm$ 10%, 1/2 w.
R7	3R77-P102K	Composition: 1000 ohms $\pm$ 10%, 1/2 w.
R8	3R77-P183K	Composition: 18,000 ohms $\pm$ 10%, 1/2 w.
R9	3R77-P184K	Composition: 0.18 megohm $\pm$ 10%, 1/2 w.
R10	3R77-P622J	Composition: 6200 ohms $\pm$ 5%, 1/2 w.
R11	3R77-P330K	Composition: 33 ohms $\pm$ 10%, 1/2 w.
R24	3R77-P103K	Composition: 10,000 ohms $\pm$ 10%, 1/2 w.
R25	3R77-P473K	Composition: 47,000 ohms $\pm$ 10%, 1/2 w.
R26	3R77-P103K	Composition: 10,000 ohms $\pm$ 10%, 1/2 w.
R27*	3R77-P512K	Composition: 5100 ohms $\pm$ 10%, 1/2 w. Added by Rev B.
		----- THERMISTORS -----
RT1	5490828-P30	Rod: 0.33 megohm $\pm$ 10% res, 1 w max; sim to Globar Type 783H-3.
		CHANNEL GUARD INSTALLATION KIT 19A127174-G2
		----- MISCELLANEOUS -----
	19B201074-P304	Tap screw, 6-32 x 1/4. (4)
	19B205480-G2	Harness. Includes:
P130 thru P135	4029840-P2	Contact, electrical; sim to Amp 42827-2.
		CHASSIS AND PA ASSEMBLY 19E500858-G1 and G2 REV B
		----- CAPACITORS -----
C102 and C103	5494481-P7	Ceramic disc: 470 pf $\pm$ 20%, 1000 VDCW; sim to RMC Type JF Discap.
C104	5496203-P446	Ceramic disc: 180 pf $\pm$ 5%, 500 VDCW, temp coef -5600 PPM.
C105	5494481-P7	Ceramic disc: 470 pf $\pm$ 20%, 1000 VDCW; sim to RMC Type JF Discap.

## PARTS LIST

SYMBOL	GE PART NO.	DESCRIPTION
2	4033089-P1	Clip (Part of XY1-XY4).
3	19A115793-P1	Contact, electrical; sim to Malco 2700. (Part of XY1-XY4).
4	19C311172-P2	Crystal socket. (Part of XY1-XY4).
5	19C303395-G4	Chassis heat sink.
6	19A121571-P1	Insulator.
7	19C303613-G1	Tuning chassis.
8	19A121527-P1	Plate.
9	7120754-P1	Fiber washer; sim to Mallory 203. (Used with C112 and C113).
10	7165075-P2	Hex nut: 3/8 - 32. (Used with C112).
11	7115130-P9	Lockwasher; sim to Shakeproof 1220-2. (Part of post assembly and C112).
12	19A121516-P1	Teflon insulator. (Used with C112 and C113).
13	19A121520-P1	Plate (Used with C112 and C113).
14	4031530-P1	Bearing: No. 32. (Part of post assembly).
15	4031532-P1	Cup washer. (Part of post assembly).
16	19C303599-P1	Heat sink.
17	19A121523-P1	Heat sink. (Used with V101).
18	19B205622-P1	Spring. (Used with V101 and V102).
19	7165167-P5	Tube shield insert; sim to Atlas 106-332-5. (Used with V101).
20	7165167-P9	Tube shield insert; sim to Atlas 106-332-5. (Used with V102).
21	19A121189-P3	Post. (Part of post assembly).
22	19B204791-P1	Post assembly bracket. (Used with C114).
23	19A121523-P2	Heat sink. (Used with V102).
24	19B204395-G3	Chassis.
25	4036555-P1	Insulator, disc: nylon. (Used with Q8 on A101-A112, A121-A126).
26		Not Used.
27	7165167-P3	Tube shield insert. (Used with V103).
28	19B204792-P1	Heat sink. (Used with V103).
29	19C303495-G8	Station top cover. (except Repeaters and VM).
	19C303673-G3	Station top cover. (Repeaters and VM only).
	19C303396-G1	Mobile top cover.
30	19B204793-P1	Heat sink. (Used with V103).
31	19A121529-P1	Contact. (Used with V103).
32	19B204435-P2	Plate line. (Used with V103).
33	19A121676-P1	Guide pin. (Used with J101).
34	5493361-P5	Spring washer; sim to Shakeproof 3502-10-58.
35	N509P608C13	Dowel pin, spring.
36	19A121465-P1	Post.
37	N402P39C13	Washer.
38	19B204756-P1	Insulator, ceramic.
39	19C303605-P1	Tuning cover.
40	4031531-P1	Locknut: No. 32. (Part of post assembly).
41	4031527-P2	Collar. (Part of post assembly).
42	N910P18C13	Retaining ring. (Part of post assembly).
43	7893938-P1	Nut: no. 38. (Part of post assembly).
44	4029030-P10	Channel, rubber.
45	19C303495-G7	Station Bottom Cover.
	19C303396-G3	Mobile Bottom Cover.
46	19A121065-P1	Support. (Used with FL1 and XFL1).
47	19A121257-G1	Angle. (Used with FL1 and XFL1).
48	19B204435-P1	Plate line. (Used with V103).
49	19A121547-P1	Plate.
50	19B204776-P1	Angle support.

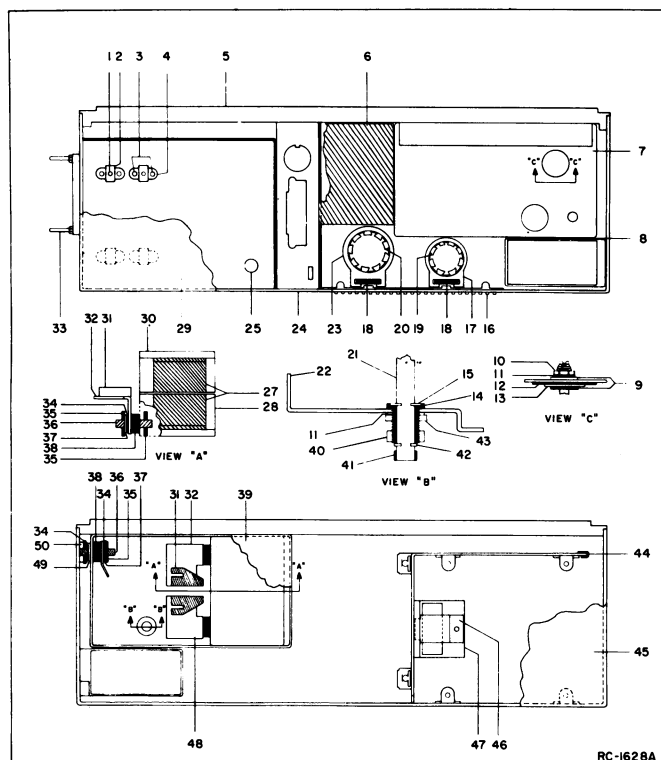

## PRODUCTION CHANGES

Changes in the equipment to improve performance or to simplify circuits are identified by a "Revision Letter", which is stamped after the model number of the unit. The revision stamped on the unit includes all previous revisions. Refer to the Parts List for descriptions of parts affected by these revisions.

REV. A thru C - (Exciter Board A101-A106 & A121-A126)  
REV. A thru D - (Exciter Board A107-A112)

Incorporated into initial shipment.

REV. A - (Channel Guard Low Pass Filter G101)

To improve operation. Changed C1.

REV. B - (Channel Guard Low Pass Filter G101)

To reduce input to filter to prevent a square wave output. Added R27.

REV. D - (Exciter Board A101-A106 & A121-A126)

REV. E - (Exciter Board A107-A112)

To improve stability and facilitate adjustment of modulation limiting and Channel Guard levels. Changed R12 and R34.

(Chassis & PA Assembly 19E500858-G1 & G2)

REV. A - To eliminate FM noise caused by mechanical vibration of the driver output and PA grid coils. Changed L104/L105.

REV. B - To improve performance of transmitter. Changed FL101.

REV. E - (Exciter Board A101-A106 & A121-A126)

REV. F - (Exciter Board A107-A112)

To facilitate manufacturing. Deleted the heat sink and mechanical parts to mount Q8. Added parts to mount Q8 on the board.

REV. A - (Channel Guard Encoder G102)

Incorporated into initial shipment.

## PARTS LIST

## PARTS LIST

LBI-3936D

CHANNEL GUARD ENCODER G102  
4EH17A10 19C311802-G2

SYMBOL	GE PART NO.	DESCRIPTION
----- CAPACITORS -----		
C1*	19B209243-P103	Polyester: 0.022 $\mu$ f $\pm$ 10%, 50 VDCW. Earlier than REV A:
	19B209243-P2	Polyester: 0.015 $\mu$ f $\pm$ 20%, 50 VDCW.
C2	19B209243-P3	Polyester: 0.022 $\mu$ f $\pm$ 20%, 50 VDCW.
C3	5494481-P107	Ceramic disc: 470 pf $\pm$ 20%, 1000 VDCW; sim to RMC Type JF Discap.
C4	19B209243-P9	Polyester: 0.22 $\mu$ f $\pm$ 20%, 50 VDCW.
C5	19B209243-P8	Polyester: 0.15 $\mu$ f $\pm$ 20%, 50 VDCW.
C6	19B209243-P3	Polyester: 0.022 $\mu$ f $\pm$ 20%, 50 VDCW.
C7	5494481-P107	Ceramic disc: 470 pf $\pm$ 20%, 1000 VDCW; sim to RMC Type JF Discap.
C8	19B209243-P14	Polyester: 0.33 $\mu$ f $\pm$ 20%, 250 VDCW.
C9	5496267-P1	Tantalum: 6.8 $\mu$ f $\pm$ 20%, 6 VDCW; sim to Sprague Type 150D.
C10	19B209243-P117	Polyester: 0.22 $\mu$ f $\pm$ 10%, 50 VDCW.
C11 thru C13	5494481-P111	Ceramic disc: .001 $\mu$ f $\pm$ 20%, 1000 VDCW; sim to RMC Type JF Discap.
----- DIODES AND RECTIFIERS -----		
CR1 and CR2	19A115250-P1	Silicon.
----- TONE NETWORKS -----		
FL1		TONE FREQUENCY NETWORK 19B205280
	19B205280-G1	71.9 Hz
	19B205280-G2	77.0 Hz
	19B205280-G3	82.5 Hz
	19B205280-G4	88.5 Hz
	19B205280-G5	94.8 Hz
	19B205280-G6	100.0 Hz
	19B205280-G7	103.5 Hz
	19B205280-G8	107.2 Hz
	19B205280-G9	110.9 Hz
	19B205280-G10	114.8 Hz
	19B205280-G11	118.8 Hz
	19B205280-G12	123.0 Hz
	19B205280-G13	127.3 Hz
	19B205280-G14	131.8 Hz
	19B205280-G15	136.5 Hz
	19B205280-G16	141.3 Hz
	19B205280-G17	146.2 Hz
	19B205280-G18	151.4 Hz
	19B205280-G19	156.7 Hz
	19B205280-G20	162.2 Hz
	19B205280-G21	167.9 Hz
	19B205280-G22	173.8 Hz
	19B205280-G23	179.9 Hz
	19B205280-G24	186.2 Hz
	19B205280-G25	192.8 Hz
	19B205280-G26	203.5 Hz
----- JACKS AND RECEPTACLES -----		
J1 thru J6	4033513-P4	Contact, electrical; sim to Bead Chain L93-3.
----- TRANSISTORS -----		
Q1 and Q2	19A115123-P1	Silicon, NPN; sim to Type 2N2712.
Q3 thru Q5	19A115362-P1	Silicon, NPN; sim to Type 2N2925.
----- RESISTORS -----		
R1	3R77-P333K	Composition: 33,000 ohms $\pm$ 10%, 1/2 w.
R2	3R77-P183K	Composition: 18,000 ohms $\pm$ 10%, 1/2 w.

SYMBOL	GE PART NO.	DESCRIPTION
R3	3R77-P274K	Composition: 0.27 megohms $\pm$ 10%, 1/2 w.
R4	3R77-P620J	Composition: 62 ohms $\pm$ 5%, 1/2 w.
R5	3R77-P622K	Composition: 6200 ohms $\pm$ 10%, 1/2 w.
R6	3R77-P153K	Composition: 15,000 ohms $\pm$ 10%, 1/2 w.
R7	3R77-P102K	Composition: 1000 ohms $\pm$ 10%, 1/2 w.
R8	3R77-P183K	Composition: 18,000 ohms $\pm$ 10%, 1/2 w.
R9	3R77-P184K	Composition: 0.18 megohms $\pm$ 10%, 1/2 w.
R10	3R77-P622J	Composition: 6200 ohms $\pm$ 5%, 1/2 w.
R11	3R77-P330K	Composition: 33 ohms $\pm$ 10%, 1/2 w.
R12	5495948-P365	Deposited carbon: 46,400 ohms $\pm$ 1%, 1/2 w; sim to Texas Instrument CDI/2MM.
R13	3R77-P682J	Composition: 6800 ohms $\pm$ 5%, 1/2 w.
R14	3R77-P244J	Composition: 0.24 megohms $\pm$ 5%, 1/2 w.
R15	19A116278-P233	Metal film: 2150 ohms $\pm$ 2%, 1/2 w.
R16	19A116278-P301	Metal film: 10,000 ohms $\pm$ 2%, 1/2 w.
R17	19A116278-P65	Metal film: 46.4 ohms $\pm$ 2%, 1/2 w.
R18	19A116278-P329	Metal film: 19,600 ohms $\pm$ 2%, 1/2 w.
R19	19A116278-P285	Metal film: 7500 ohms $\pm$ 2%, 1/2 w.
R20	19A116278-P412	Metal film: 130,000 ohms $\pm$ 2%, 1/2 w.
R21	19A116278-P269	Metal film: 5110 ohms $\pm$ 2%, 1/2 w.
R22	19A116278-P117	Metal film: 147 ohms $\pm$ 2%, 1/2 w.
R23	3R77-P102K	Composition: 1000 ohms $\pm$ 10%, 1/2 w.
----- THERMISTORS -----		
RT1	5490828-P30	Thermistor: 330,000 ohms $\pm$ 10%, color code black and gray; sim to Global Type 783H-3.
RT2	5490828-P36	Thermistor: 55,000 ohms $\pm$ 10%, color code black and red; sim to Global Type 723B.
----- CABLES -----		
W1		(Part of XF11).
----- SOCKETS -----		
XF1	19A121920-G3	Reed, mica-filled phen: 7 pins rated at 1 amp at 500 VRMS with 4-1/4 inches of cable.
ENCODER INSTALLATION KIT 19A127174-G1		
----- MISCELLANEOUS -----		
	N404P13C13	Lockwasher, no. 6.
	N80P13005C13	Machine screw, no. 6-32 x 5/16.
	19B201074-P304	Tap screw, no. 6-32 x 1/4.
	N210P13C13	Nut, no. 6-32.
	19B205480-G2	Harness. Includes:
P130 thru P135	4029840-P2	Contact, electrical; sim to Amp 42827-2.

\*COMPONENTS ADDED, DELETED OR CHANGED BY PRODUCTION CHANGES

## ORDERING SERVICE PARTS

Each component appearing on the schematic diagram is identified by a symbol number, to simplify locating it in the parts list. Each component is listed by symbol number, followed by its description and GE Part Number.

Service Parts may be obtained from Authorized GE Communication Equipment Service Stations or through any GE Radio Communication Equipment Sales Office. When ordering a part, be sure to give:

1. GE Part Number for component
2. Description of part
3. Model number of equipment
4. Revision letter stamped on unit

---

These instructions do not purport to cover all details or variations in equipment nor to provide for every possible contingency to be met in connection with installation, operation or maintenance.

Should further information be desired, or should particular problems arise which are not covered sufficiently for the purchaser's purposes, contact the nearest Radio Communication Equipment Sales Office of the General Electric Company.

---

**MAINTENANCE MANUAL**

LBI-3868

*Progress Is Our Most Important Product*



MOBILE RADIO DEPARTMENT LYNCHBURG, VIRGINIA 24502 CABLE GEOMPROD  
(In Canada, Canadian General Electric Company, Ltd., 100 Wingold Avenue, Toronto 19, Ontario)

PRINTED IN U.S.A.

DF-3125