

MAINTENANCE MANUAL RF BOARD**188D5062G2 (403-440 MHz)****188D5062G1 (440-470 MHz)****188D5062G3 (470-512 MHz)****188D5062G4 (485-505 MHz, 12.5 kHz SPACING)****TABLE OF CONTENTS**

| | <u>Page</u> |
|---------------------------------|-------------|
| DESCRIPTION | Front Cover |
| CIRCUIT ANALYSIS | 1 |
| Synthesizer | 1 |
| Transmit Circuit | 1 |
| Receive Circuit | 1 |
| SERVICE NOTES | 3 |
| Transmit Circuit | 3 |
| Receive Circuit | 3 |
| Synthesizer Circuit | 3 |
| PA Module Replacement | 4 |
| PARTS LIST | 5 |
| PRODUCTION CHANGES | 7 |
| IC DATA | 7 |
| OUTLINE DIAGRAMS | 10, 17 |
| SCHEMATIC DIAGRAMS | 11- 16 |

DESCRIPTION

The RF Board for the MDX radio consists of the following circuits:

- A frequency synthesizer for generating the transmit carrier frequency and the receive circuit first mixer injection frequency
- The transmit exciter, PA and power control stages
- The receive circuit front end, IF and FM detector
- Voltage regulators

The 403-512 MHz range of UHF frequencies is covered by four groups of RF Boards:

1. 188D5062G2: 403-440 MHz
2. 188D5062G1: 440-470 MHz
3. 188D5062G3: 470-512 MHz
4. 188D5062G4: 485-505 MHz, 12.5 kHz spacing

The RF Board is mounted in the bottom of the frame assembly. Refer to the Combination Manual for the mechanical layout of the radio. Figure 1 provides a block diagram of the receive and transmit circuits. Figure 2 provides a block diagram of the synthesizer.

Transmit circuit adjustments for frequency, power and deviation are accessible from the topside of the board, as are IF alignment, second oscillator and audio level adjustments for the receive circuit. Chip components on the bottom of the board provide optimum RF performance, while being accessible for easy servicing by removing the "friction fit" bottom shields.

Selected use of sealed modules permits small board size as well as RF and mechanical protection for sensitive circuitry. Modules are not repairable and must be replaced if they are determined to be damaged.

Ericsson Inc.
Private Radio Systems
Mountain View Road
Lynchburg, Virginia 24502
1-800-528-7711
(Outside USA, 804-528-7711)

Printed in U.S.A.

CIRCUIT ANALYSIS

SYNTHESIZER CIRCUIT

The synthesizer circuit generates all transmit and receive RF frequencies for the MDX Conventional mobile radio. This circuit uses a phase-locked VCO module (U201), feeding a doubler circuit to generate the transmit RF operating frequency.

While transmitting, the VCO operates at 1/2 the actual transmitter frequency (201.5-256.0 MHz to produce 403-512 MHz).

While receiving, the VCO operates at 1/2 of the difference between the receive frequency and the 45 MHz IF (179.0-233.5 MHz for 403-512 MHz).

Transistor Q201 doubles the VCO output frequency with input and output filters broadly fixed tuned to allow the VCO second harmonic to pass, while rejecting all other frequencies. The doubled signal is amplified by Q201 to a level of +10 dBm. This signal feeds the receive circuit first mixer and is attenuated to +3 dBm by resistor R202 to feed the transmit exciter module.

The synthesizer frequency is controlled by a microprocessor located on the Audio/Logic Board. Frequency stability is maintained by a Temperature Compensated (X)crystal Oscillator (TCXO) module. The oscillator has a stability of ± 2.5 PPM (0.00025%) over the temperature range of -30°C to +60°C and determines the overall frequency stability of the radio.

The VCO output is also buffered by transistor Q204 to feed the divide by 128/129 dual modulus prescaler U205. The prescaler feeds the FIN input of Phase-Lock-Loop (PLL) U206. Inside of U206, the prescaled signal is further divided down to 6.25 kHz or 5 kHz to be compared with a reference signal. This reference signal is derived from the 12.8 MHz of TCXO module U204. PLL U206 divides the 12.8 MHz TCXO frequency down to the 6.25 kHz or 5 kHz reference frequency.

Divider circuits in U206 are programmed by three inputs from the Audio/Logic Board, which are buffered and inverted by transistors Q208, Q209 and Q210. The S ENABLE pulse (5 milliseconds) activates switch U202 to more rapid channel acquisition during channel changes.

A **LOCK DET** signal from the PLL goes to the microprocessor for processing to prevent transmission when the VCO is not on frequency and to provide an error message to the user. During receive, an unlocked synthesizer is indicated by **SYN LOCK** displayed in the LED display and by a quick, pulsed alert tone. The microprocessor will continually try to reload the frequency information into the PLL until the synthesizer locks. During transmit, only a slower pulsed alert tone will be heard. Once unlocked in transmit, the synthesizer will not be reloaded. The transmitter PTT switch must be unkeyed and then keyed again to attempt to relock.

Audio modulation from the Audio/Logic Board is applied to the VCO module through **DEVIATION ADJUST** potentiometer R226. **VCO TUNE** potentiometer R218 adjusts the operating frequency range of the VCO by varying a negative bias from diodes D202 and D203.

Low frequency modulation is applied to TCXO U204 through **LOW FREQUENCY ADJUST** potentiometer R255.

TRANSMIT CIRCUIT

The transmit circuit consists of a fixed-tuned exciter module, a 10 watt PA module, a PIN diode switch, a low pass filter, a directional coupler, a power control circuit and a transmit voltage switch.

Exciter Module

Figure 1 shows the synthesizer driving the receive mixer at +10 dBm and is attenuated by resistor R202 to +3 dBm for driving the exciter input. Exciter module A102 operates from a switched 8 volt supply. A different exciter module is required for each of the three band splits. No tuning is required. Both input and output ports operate at 50 ohms impedance. The exciter module provides typically 20 dB of gain and 200 mW of output power to drive the power amplifier module.

Power Amplifier Module

The PA module U101 requires a drive of 200 mW from the exciter module to deliver up to 10 watts of power output. The module is mounted to the rear heat sink. The PA module output drive the 40 watt PA Board through connector J103. The power control circuit controls the PA module output power. The power output for the 485-505 MHz band is set for 25 watts.

PIN Diode Switch, Low Pass Filter and Directional Coupler

The output from the PA Board feeds transmit PIN diode switch D104 through J102. In transmit, switched 8 volts is applied through inductor L102, turning on PIN diodes D104 and D401. The DC path is completed through resistors R401 and R420 with the bias current set at about 40 mA. Diode D104 couples the PA Board power from J102 to low pass filter A101. Diode D401 provides an RF path to ground to protect the receiver input.

The lowpass filter reduces the harmonic output from the transmit circuit. The low pass filter feeds the directional coupler, W101 and W102. The directional coupler provides a sample of transmit power for the power control circuit. The coupler output feeds antenna jack J101.

Power Control Circuit

The Power control circuit samples the output power to the antenna to maintain a constant power level across the band. Also, a thermistor senses the heat sink temperature to reduce the power output level above 70°C. The circuit controls the supply voltage to one of the amplifier stages in PA module U101.

Directional coupler W101 and W102 provides a sample of transmit power to diode D101. Diode D101, resistor R106 and capacitor C104 produce a positive DC voltage proportional to the transmit output power level. This DC level feeds the (-) input of amplifier U103-B. Power Set potentiometer R111 and temperature sensor U105 along with buffer U104 determine the DC level to the (+) input of U103-B. Amplifier U103-B amplifiers the difference between the (-) and (+) inputs, forcing the output power level to equal the power set level by varying the drive to transistors Q102, then Q101. Transistor Q101 supplies the control voltage to PA module U101. For example, if the output power level begins to drop below the power set level, the output of U103-B increases positively, causing Q102 to conduct less. The base of Q101 rises, increasing the control voltage to the PA module, which increases the output power level back to the desired set level.

Transistor Q104, capacitor C123 and resistor R105 improve the transient stability of the power control loop when the transmit circuit is keyed.

Transmit Switch

During transmit, the Audio /Logic Board microprocessor pulls the DPTT line low causing the output of amplifier U103-A to go low. Transistor Q103 turns on to supply SW 8V to the exciter module, the power control circuit and the PIN diode switch. During receive, the output of U103-A supplies 12 volts to receive circuit RF pre-amplifier transistor Q401.

RECEIVE CIRCUIT

The dual conversion receive circuit consists of a front end section, a 45 MHz first IF circuit and a 455 kHz second IF circuit with an FM detector circuit. All audio processing and squelch functions are accomplished on the Audio/Logic Board.

Front End Section

RF is coupled from antenna jack J101 through the directional coupler and the low pass filter to PIN diode D401. In transmit, **SW 8V** is applied through inductor L102, turning on PIN diodes D104 and D401, with the DC path completed through resistors R401 and R402. Diode D401 provides an RF path to ground for the receive input while in transmit. In receive, D401 is off, allowing RF to pass by D401 unattenuated.

Receive front end filtering is provided by RF filters Z401 and Z402. Both filters are fixed tuned, 3-pole, helical filters with 20 MHz bandwidths. These filters do not require tuning unless a different 20 MHz segment of the band split is required. RF amplifier transistor Q401 is a common emitter circuit with 15 dB of gain. Inductor L402 and capacitors C405 and C406 provide a broad band match from Z401 to the transistor input. Diode D402 protects the amplifier from high input signal levels. Inductors L403 and L404 plus the associated capacitors provide a broad band impedance match from the amplifier output to RF filter Z402.

Test Point **TP401** is a 50-ohm point for measuring front end gain or to align the receive circuit to another segment of the band split. The front end gain from antenna jack J101 to TP401 is typical 10 dB.

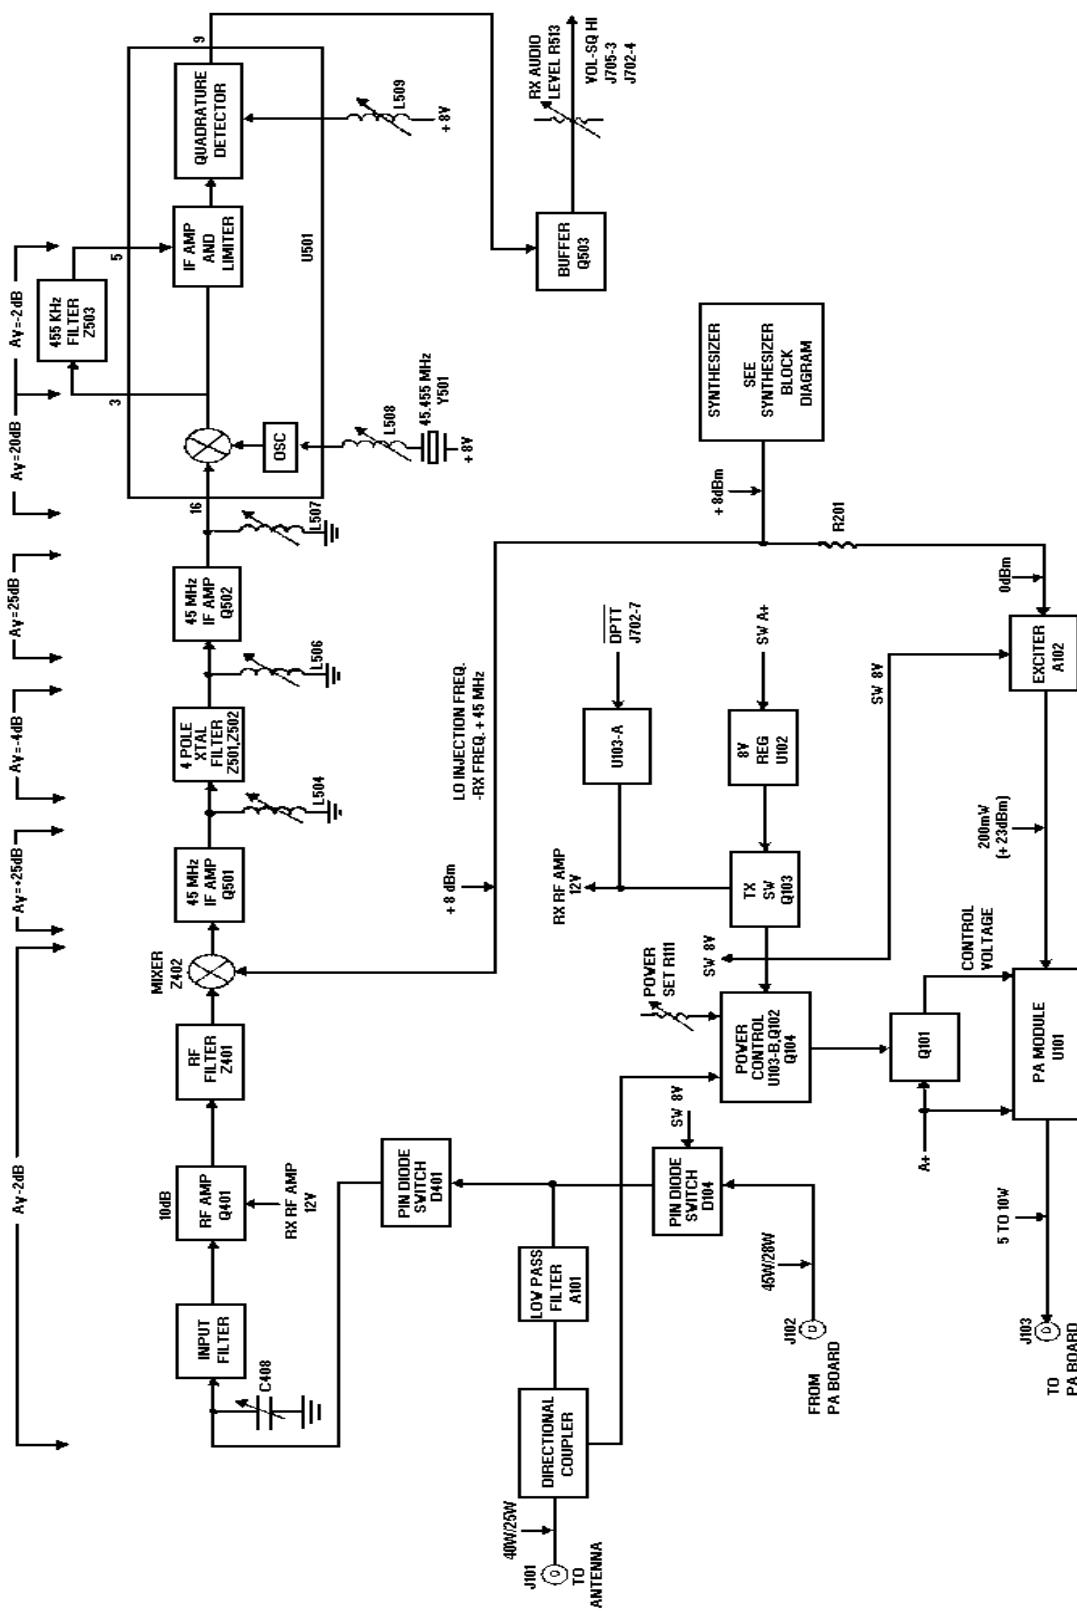


Figure 1 - TX And RX Block Diagram

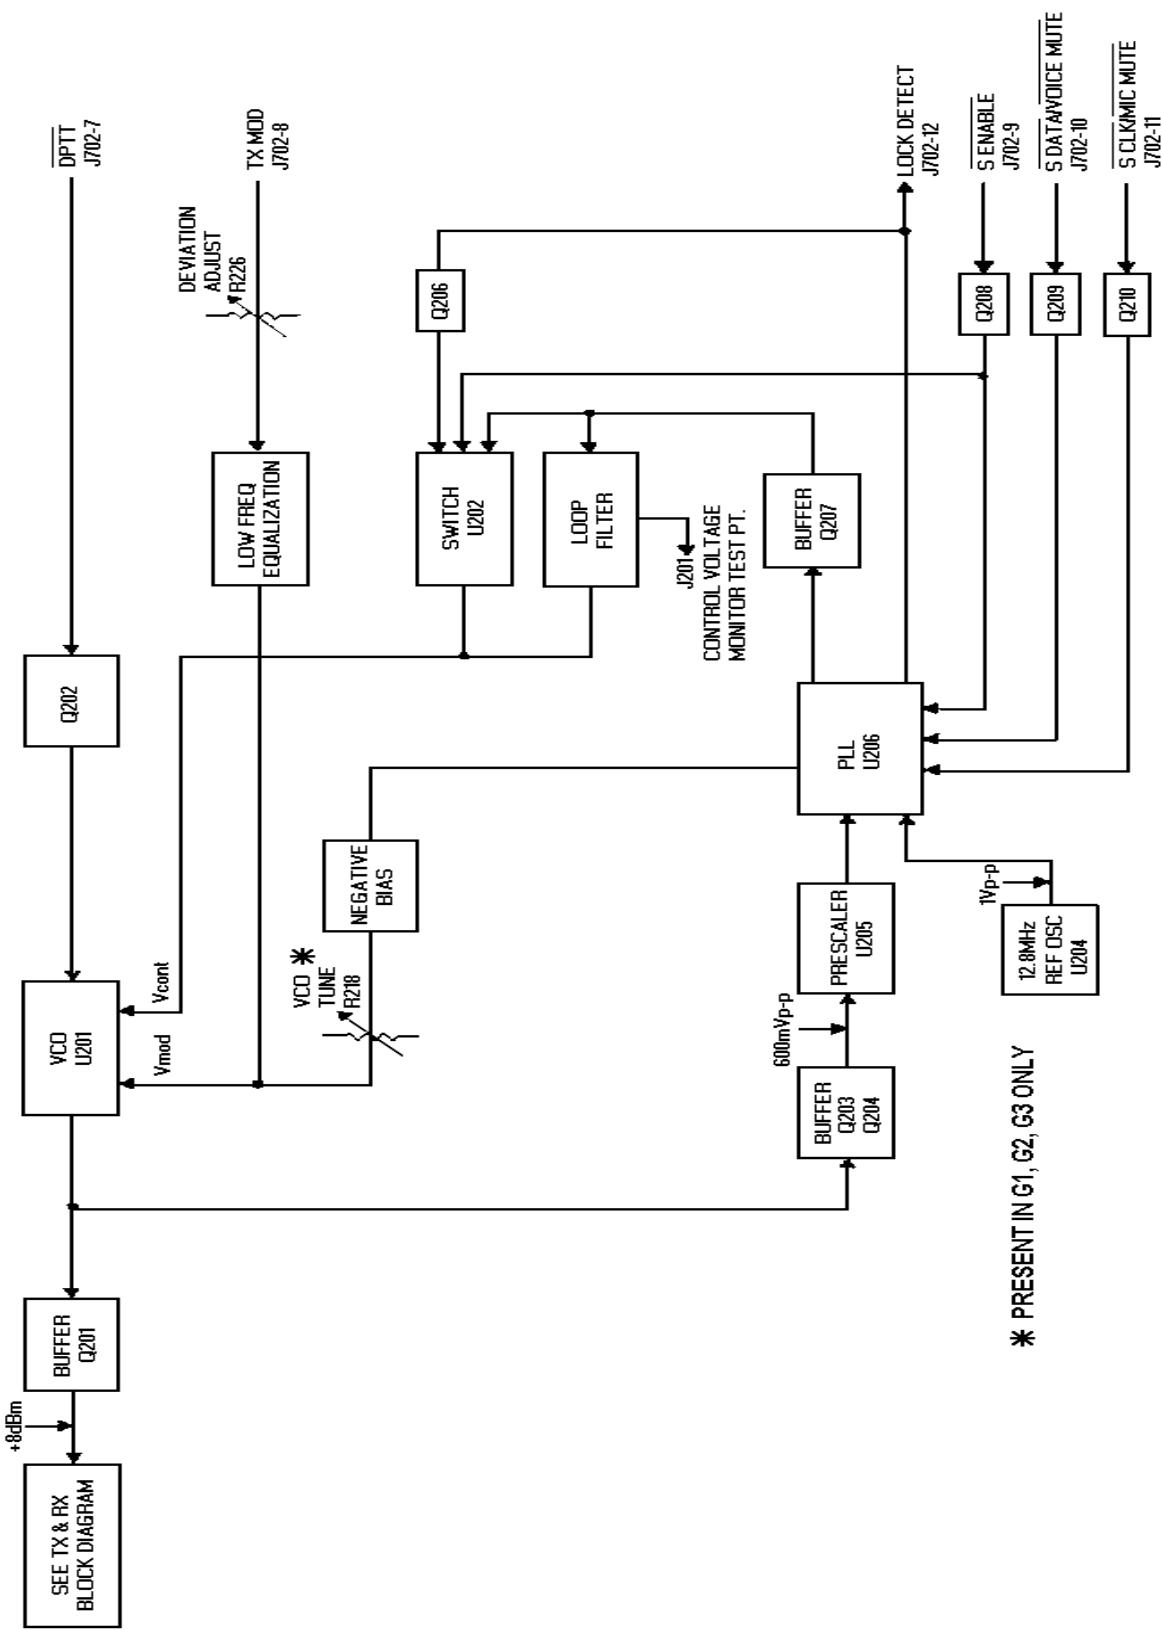


Figure 2 - Frequency Synthesizer Block Diagram

* PRESENT IN G1, G2, G3 ONLY

Mixer Z403, is a doubly balanced diode mixer. This mixer is driven by a local oscillator signal of +10 dBm or greater to provide a good inter modulation performance, spurious performance and local oscillator isolation. The mixer conversion loss is typically 6 dB.

45 MHz IF

The first 45 MHz IF amplifier transistor Q501 is a junction FET operated in the common gate mode. This configuration offers a typical input impedance of 75 ohms. The output circuitry is turned by inductor L504 and loaded to provide the proper source termination for the four-pole crystal filter which follows.

The output of the crystal filter is matched by second IF amplifier transistor Q502. This port is also tuned by inductor L506 and loaded to provide the proper filter termination. Transistor Q502 is a dual gate FET operation at a bias current of about 10 millamps. The output of Q502 is tuned by inductor L507 for maximum gain at 45 MHz and is loaded by the 2nd mixer in the U501 chip. This Q502 stage has a relatively high input and output impedance and provides high isolation within the active device.

Converter/IF/Detector IC

The IF IC, U501, is a MC3361 chip. Pins 1 and 2 connect to an internally biased oscillator transistor. The external circuitry of this oscillator transistor includes crystal Y501 and forms an oscillator circuit operating at 45.455 MHz. The frequency of this third mode oscillator is adjusted by inductor L508. The 45 MHz IF signal is translated to 455 kHz and appears at Pin 3 of U501. This IF signal is filtered by 6-pole ceramic filter Z503 and drives the internal 455 kHz amplifier and limiter. The limited 455 kHz, in turn, drives an internal quadrature detector. The phase shift network needed by the quadrature detector is provided by inductor L509. The audio output port is Pin 9 on U501. Inductor L509 is adjusted for maximum audio output level. The audio signal at Pin 9 is filtered by resistor R512 and capacitor C519 to reduce IF feed through. Buffer amplifier Q503 drives audio potentiometer R513. This allows a VOL/SQ HI signal of which the amplitude may be set for proper system operation using R513.

Power Distribution

UN switched 13.8 Volts (A+) is supplied to the RF Board through connector J704 and feeds power control transistor Q101 and PA module U101.

Switched 13.6 Volts (A+) is supplied to the RF Board through connectors J702 and J705 and feeds regulators U102, U207 and U502. Regulator U102 supplies 8 Volts to the transmit switch, synthesizer 5 volt regulator U203 and the Audio/Logic Board through connector J702. Regulator U207 supplies 8.5 Volts to the synthesizer. Regulator U502 supplies 8 Volts to the receive circuit.

SERVICE NOTES

TRANSMIT CIRCUIT

Most transmit circuit problems can be isolated by checking the TX power gains shown in Figure 1- RX and TX Block Diagram. The PA Board may be bypassed by placing a jumper cable between J103 and J102 on the RF Board. The PA module U101 is capable of producing 10 watt output

Transmit DC Measurements

1. First ensure that DPTT is low when the microphone PTT is keyed low.
2. Check for approximately 8 Volts at L105 feeding the Exciter Module. If not present, troubleshoot the TX switch circuitry, TX Switch transistor Q103 and U103.
3. Check for approximately 7 Volts across resistors R401 and R402. If not present, check the PIN diodes D104 and D401 and the conduction path from R401 to Q103.
4. Check for an adjustable voltage of 0 to 12 Volts on Pin 2 of PA module U101. At maximum power, with Power Set adjustment R111 fully clockwise, Pin 2 should be at 12 Volts. If not present, check the power control circuitry (U103, Q101, Q102 and Q104).
5. Check for 13.6 Volts on Pins 3 and 4 of PA module U101 and ensure a good mechanical and electrical ground from the PA module to the bracket and casting.

RECEIVE CIRCUIT

To isolate a receiver circuit problem refer to the Receive Circuit Symptoms and Checks chart as follows:

| SYMPTOMS | CHECKS |
|-------------------|--|
| • No Audio | <ol style="list-style-type: none"> 1. U502 regulator. 2. The level and frequency of the first mixer injection frequency. 3. The level and frequency of the second mixer injection frequency. 4. Quadrature detector circuit. 5. Quadrature detector coil tuning. |
| • Poor SINAD | <ol style="list-style-type: none"> 1. Consult Figure 1 - RX and TX Block Diagram for RX stage gains and troubleshoot. NOTE: Use a high impedance RF probe when measuring gain at TP401. A 50-ohm probe may be used if C415 is removed. DO NOT adjust Z401 or Z402 without sweep equipment or the 20 MHz sensitivity bandwidth will be sharply reduced. 2. Input cable. 3. PIN Diode switch is shorted. |
| • Distorted Audio | <ol style="list-style-type: none"> 1. Both mixer injection frequencies. 2. Quadrature detector coil tuning. 3. Crystal filter source and load tuning. 4. Z503: 455 kHz ceramic filter. |

RECEIVE FRONT END TUNING

Each receive front end has been preset to a fixed 20 MHz segment of each split. To adjust the front end for another 20 MHz segment of the split, a sweep tuning procedure will be required to maintain the necessary bandwidth.

1. Apply a sweep signal generator (or tracking generator) with markers set for the desired 20 MHz bandwidth at antenna jack J101.
2. Measure the RF signal at TP401 with a high impedance RF probe. A 50-ohm RF probe may be used at TP401 if coupling capacitor C415 is removed (If damaged, C415 may be replaced by a short piece of hookup wire).
3. Connect the RF sweep detector/display (or spectrum analyzer) to the RF probe.
4. Tune the slugs of Z401 and Z402 for the required 20 MHz bandwidth. Ripple will be 1 dB to 2 dB typical.

Reduce the RF input level, if necessary, to keep Q401 out of saturation and protection diode D402 off. The filter response will not change at lower RF input levels if the front end has been tuned up correctly.

SYNTHESIZER CIRCUIT

DC Analysis

An 8.5 Vdc is supplied by regulator U207 and serves as the biasing voltage for transistor circuits Q204, Q206, Q207, Q208, Q209 and Q210. Resistor R207 decouples the 8.3 volts for use in VCO module U201. The 10 milliamp current drain of this module results in approximately 6.5 Vdc on Pin 4. Transistor Q201 also draws approximately 25 milliamps, resulting in a collector voltage of 3.7 Vdc at the junction of resistor R204 and capacitor C201. Lack of VCO RF output will modify this voltage.

Regulator U203 uses the 8 volts from transmit regulator U102 to generate 5 volts for U204 and U205.

Wave forms

Wave forms associated with the synthesizer were measured with a 10 meg-ohm, 30 pF probe. Use DC coupling (see Figures 3-8).

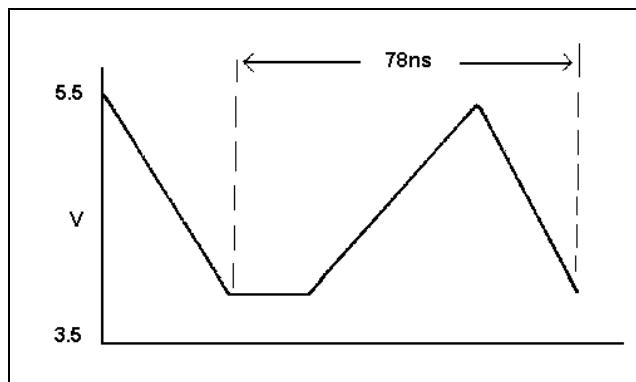


Figure 3 - REFERENCE OSCILLATOR Input To U206, Pin 2)

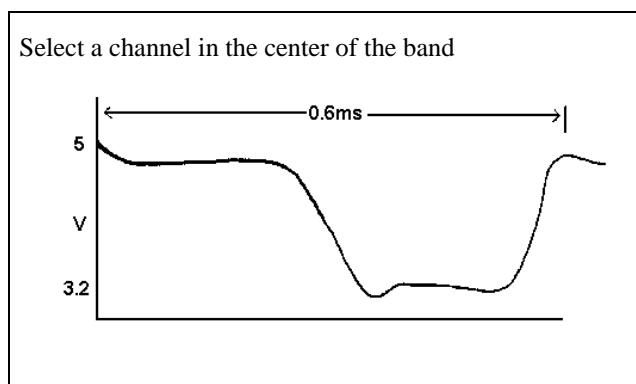


Figure 4 - Fin (Input to U206, Pin 10)

The top of the ramp is approximately 0.8 Vdc greater than the control voltage on PD out, Pin 17. A channel in the center of the band is shown.

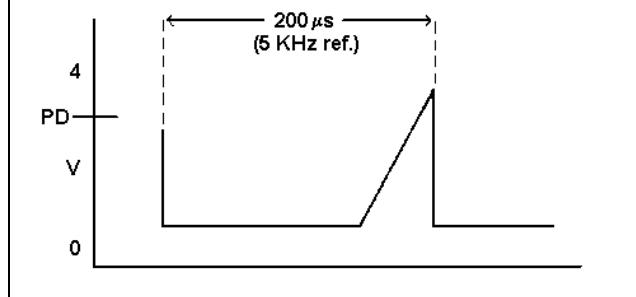


Figure 5 - RAMP (Generated in U206 and appears on Pin 15)

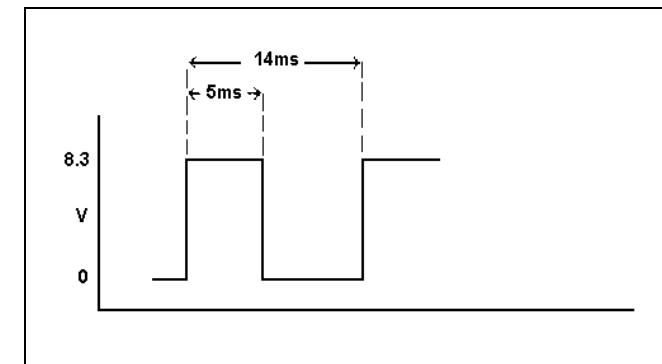


Figure 6 - S ENABLE (Input to U206, Pin 13) (Radio in SCAN on a single channel)

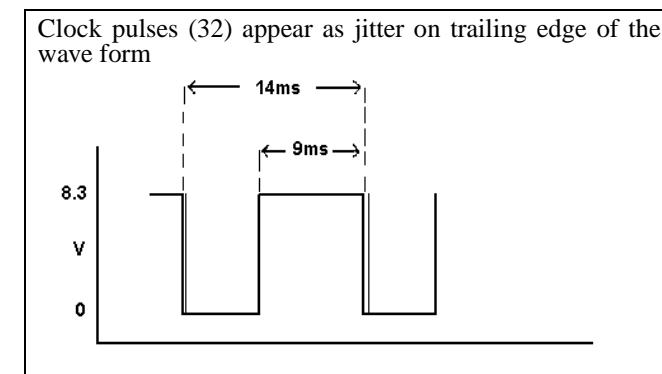


Figure 7 - S CLOCK (Input to U206, Pin 11) (Radio in SCAN on a single channel)

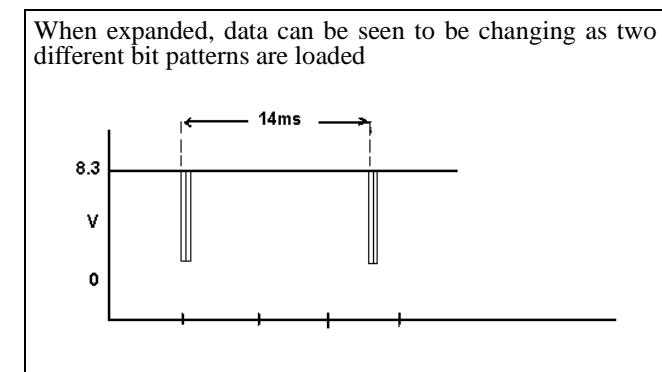


Figure 8 - S DATA (Input to U206, Pin 12) (Radio in SCAN on a single channel)

Module Isolation**Reference Oscillator U204:**

Look for a wave form similar to the reference (Figure 3) on Pin 2. If wave form is not present, the oscillator module is probably defective.

VCO U201:

Connect a DC power supply to Pin 3. With 2.5 Vdc on Pin 3, the output of U201 (Pin 5) should be approximately 197 MHz. With 6.5 Vdc on Pin 3, the output should be approximately 212 MHz. These values are correct for the 440-470 MHz split, with the ranges 179-194 MHz and 212-233 MHz being correct for the lower and upper split, respectively.

Power output of the VCO can be measured by connecting a coax directly to the module, between Pin 5 and ground. The output should be approximately 0 dBm with capacitor C237 still connected in the circuit. In transmit, a negative bias should exist on Pin 1. If not present, check transistors Q202, Q203 and capacitor C206 before removing the VCO.

Prescaler U205:

Connect Pin 3 of the VCO to 4.5 Vdc. With the radio in receive, monitor the frequencies of the VCO at the connection of capacitor C210 and resistor R211. DC short Pin 1 of U205 to ground to cause divide by 129 to occur. The frequency output at Pin 3 should be the VCO frequency divided by 129. Tie Pin 1 to Pin 7 (5 volts) to cause divide 128 to occur. Check Pin 3 to verify that this occurs. Improper division may indicate a defective prescaler.

Bilateral Switch U202:

The bilateral switch is used to short around parts of the loop filter during channel scan. A shorted (to ground or adjacent gate) gate may be isolated by comparing voltages through the loop filter to those of a functioning radio. Defective gates might be suspected when the radio does not change frequency quickly enough.

Phase-Lock-Loop U206:

There are no other specific checks which aid in evaluation of U206. Usually, it is suspected only if all other checks are

OK. Before changing, inspect chip components for mechanical damage and check resistance through the loop filter.

Transistor Q201:

After checking for proper DC operation, measure the frequency and gain from the VCO, Pin 5 to R202/C203. The gain should be approximately 10 dB at 2 times the VCO frequency.

PA MODULE REPLACEMENT**To Remove PA Module U101**

1. Unsolder the five leads from U101, using either solder removal braid, or a mechanical de-soldering tool. These leads are fragile and can be bent very easily. DO NOT unsolder the shield that wraps around the module.
2. Remove the RF Board from the radio chassis assembly. Refer to the disassembly procedure provided in the Service Section. Carefully slide the module out of the shield and away from the board.

To Install PA Module U101

1. Apply some silicone grease to the metal side of the replacement module.
2. Carefully insert the five leads from the module into the five corresponding printed wire board holes and slide the module into the shield. DO NOT solder the leads yet.
3. Slide the RF Board assembly back into the radio frame. Reinstall all hardware, harnesses, cables, etc. Replace all screws.
4. Install the two PA bracket screws before soldering the four modules leads. Trim excess wire.

| RF BOARD | | |
|-------------------------------|---------------|--|
| 188D5062G2 (403-440 MHz) | | |
| 188D5062G1 (440-470 MHz) | | |
| 188D5062G3(470-512 MHz) | | |
| Issue 6 | | |
| SYMBOL | PART NO. | DESCRIPTION |
| TRANSMIT EXCITER BOARD | | |
| 19C851643G1 - 403-440 MHz | | |
| 19C851643G2 - 440-470 MHz | | |
| 19C851643G3 - 470-512 MHz | | |
| ---CAPACITORS--- | | |
| A102 | | |
| C1 and C2 | 19A702061P77 | Ceramic: 470pF, ±5%, 50 VDCW, temp coef 0 ± 30 PPM/°C. |
| C3 | 19A702061P17 | Ceramic: 12pF, ±5%, 50 VDCW, temp coef 0 ± 30 PPM/°C (Used in Group 1). |
| C3 | 19A702061P13 | Ceramic: 10pF, ±5%, 50 VDCW, temp coef 0 ± 30 PPM/°C (Used in Group 2). |
| C3 | 19A702061P11 | Ceramic: 6.8pF, ±0.5pF, 50 VDCW, temp coef 0 ± 60 PPM/°C (Used in Group 3). |
| C4 | 19A702061P13 | Ceramic: 10pF, ±5%, 50 VDCW, temp coef 0 ± 30 PPM/°C (Used in Group 1). |
| C4 | 19A702061P11 | Ceramic: 6.8pF, ±0.5pF, 50 VDCW, temp coef 0 ± 60 PPM/°C (Used in Groups 2 and 3). |
| C5 | 19A702061P61 | Ceramic: 100pF, ±5%, 50 VDCW, temp coef 0 ± 30 PPM/°C (Used in Group 1). |
| C5 | 19A702061P45 | Ceramic: 47pF, ±5%, 50 VDCW, temp coef 0 ± 30 PPM/°C (Used in Groups 2 and 3). |
| C6 | 19A702061P10 | Ceramic: 5.6pF, ±0.5pF, 50 VDCW, temp coef 0 ± 60 PPM/°C (Used in Group 1). |
| C6 | 19A702061P9 | Ceramic: 4.7pF, ±0.5pF, 50 VDCW, temp coef 0 ± 60 PPM/°C (Used in Groups 2 and 3). |
| C7 | 19A702061G12 | Ceramic: 8.2pF, ±0.5pF, 50 VDCW, temp coef 0 ± 60 PPM/°C (Used in Group 1). |
| C7 | 19A702061P11 | Ceramic: 6.8pF, ±0.5pF, 50 VDCW, temp coef 0 ± 60 PPM/°C (Used in Groups 2 and 3). |
| C8 thru C10 | 19A702061P77 | Ceramic: 470pF, ±5%, 50 VDCW, temp coef 0 ± 30 PPM/°C. |
| C11 | 19A702052P14 | Ceramic: 0.01 μF ±10%, 50 VDCW. |
| C12 | 19A702061P12 | Ceramic: 8.2 pF ±0.5pF, 50 VDCW, temp coef 0 ±60 PPM/°C (Used in Group 1). |
| ---DIODES--- | | |
| D1 | 19A70252P2 | Silicon PIN: sim to MMBV3401. |
| ---INDUCTORS--- | | |
| L1 | | Part of printed wire board 19C851644P1. |
| L2 | 19B800891P6 | Coil: RF: 0.084 H; sim to Paul Smith SK-890-1. |
| L3 thru L5 | | Part of printed wire board 19C851644P1. |
| ---TRANSISTORS--- | | |
| Q1 | 19A704708P2 | Silicon NPN: sim to NEC2SC3356. |
| Q2 | 19A701940P1 | Silicon NPN: sim to MRF-559. |
| ---RESISTORS--- | | |
| R1 | 19B800607P471 | Metal Film: 470 ohms ±5%, 1/8 Watt. |
| R2 | 19B800607P222 | Metal Film: 2.2K ohms ±5%, 1/8 Watt. |
| R3 | 19B800607P102 | Metal Film: 1K ohms ±5%, 1/8 Watt. |
| R4 | 19B800607P330 | Metal Film: 33 ohms ±5%, 1/8 Watt. |
| R5 | 19B800607P272 | Metal Film: 2.7K ohms ±5%, 1/8 Watt. |
| R6 | 19B800607P331 | Metal Film: 330 ohms ±5%, 1/8 Watt. |
| R7 | 19B800607P100 | Metal Film: 10 ohms ±5%, 1/8 Watt. |

*COMPONENTS ADDED, DELETED OR CHANGED BY PRODUCTION CHANGES

| SYMBOL | PART NO. | DESCRIPTION | SYMBOL | PART NO. | DESCRIPTION | SYMBOL | PART NO. | DESCRIPTION |
|----------------|---------------|--|---------------|---------------|---|--------|--------------|--|
| R8 | 19B800607P100 | Metal Film: 10 ohms ±5%, 1/8 Watt. ---CAPACITORS--- | C142 | 19A702236P38 | Ceramic: 33 pF ±5%, 50 VDCW, temp coef 0 ± 30 PPM/°C. (Used in G3). | C246 | 19A702061P73 | Ceramic: 330pF ±5%, 50 VDCW, temp coef 0 ± 30 PPM/°C. |
| C101 | 19A705108P36 | Mica: 91pF ±5% 500 VDCW, temp coef 0 + 50 PPM/°C. | C201 | 19A702052P14 | Ceramic: 0.01μF ±10%, 50 VDCW. | C247 | 19A702052P14 | Ceramic: 0.01μF ±10%, 50 VDCW. |
| C103 | 19A702061P19 | Ceramic: 13pF ±5%, 50 VDCW, temp coef 0 ± 30 PPM/°C (Used in Group 2). | C202 | 19A702061P99 | Ceramic: 1000pF ±5%, 50 VDCW, temp coef 0 ± 30 PPM/°C. | C248 | 19A702061P73 | Ceramic: 330pF ±5%, 50 VDCW, temp coef 0 ± 30 PPM/°C. |
| C103 | 19A702061P17 | Ceramic: 12pF ±5%, 50 VDCW, temp coef 0 ±30 PPM/°C (Used in Groups 1 and 3). | C203 | 19A702061P11 | Ceramic: 6.8 pF ±5 pF, 50 VDCW, temp coef 0 ± 60 PPM/°C. | C249 | 19A702061P73 | Ceramic: 0.01μF ±10%, 50 VDCW. |
| C104 | 19A702061P99 | Ceramic: 1000pF ±5%, 50 VDCW, temp coef 0 ± 30 PPM/°C. | C204 | 19A702052P26 | Ceramic: 0.1 μF ±10%, 50 VDCW. | C250 | 19A702052P14 | Ceramic: 0.01μF ±10%, 50 VDCW. |
| C105 | 19A702052P14 | Ceramic: 0.01μF ±10%, 50 VDCW. | C205 | 19A701534P17 | Tantalum: 47μF ±20%, 10 VDCW. | C251 | 19A703314P10 | Electrolytic: 10μF -10 +50%, 50 VDCW; Sim to Panasonic LS Series. |
| C106 | 19A702061P73 | Ceramic: 330pF ±5%. 50 VDCW, temp coef 0 ± 30 PPM/°C. | C206 | 19A702052P5 | Ceramic: 1000pF ±10%, 50 VDCW. | C252 | 19A701534P4 | Tantalum: 1μF ±20%, 35 VDCW. |
| C107 | 19A701534P8 | Tantalum: 22μF ±20%, 16 VDCW. | C207 | 19A701534P8 | Tantalum: 22μF ±20%, 16 VDCW. | C253 | 19A701534P7 | Tantalum: 10μF ±20%, 16 VDCW. |
| C108 | 19A701534P16 | Tantalum: 6.8μF ±20%, 35 VDCW. | C208 | 19A702052P14 | Ceramic: 0.01μF ±10%, 50 VDCW. | C254 | 19A701534P4 | Tantalum: 1μF ±20%, 35 VDCW. |
| C109 and C110 | 19A702052P14 | Ceramic: 0.01μF ±10%, 50 VDCW. | C210 | 19A702052P14 | Ceramic: 0.01μF ±10%, 50 VDCW. | C402 | 19A705108P9 | Mica: 6.8pF ±0.25pF. 500 VDCW, temp coef 0 +200 PPM/°C (Used in Groups 1 and 3). |
| C111 | 19A701534P16 | Tantalum: 6.8μF ±20%, 35 VDCW. | C211 | 19A702061P33 | Ceramic: 27pF ±5%, 50 VDCW, temp coef 0 ± 30 PPM/°C. | C402 | 19A705108P14 | Mica: 11pF ±5%, 500 VDCW, temp coef 0 +200 PPM/°C (Used in Group 2). |
| C113 thru C115 | 19A702061P73 | Ceramic: 330pF ±5%. 50 VDCW, temp coef 0 ± 30 PPM/°C. | C212 | 19A702052P5 | Ceramic: 1000pF ±10%, 50 VDCW. | C403 | 19A702236P15 | Ceramic: 3.9pF ±0.25pF @3kHz, temp coef 0 ± 30 PPM/°C. |
| C116 | 19A702061P61 | Ceramic: 100pF ±5%, 50 VDCW, temp coef 0 ± 30 PPM/°C (Used in Groups 1 and 3). | C213 and C214 | 19A702052P14 | Ceramic: 0.01μF ±10%, 50 VDCW. | C404 | 19A702061P63 | Ceramic: 120pF ±5%, 50 VDCW, temp coef 0 ± 30 PPM/°C (Used in Group 2). |
| C116 | 19A702236P13 | Ceramic: 3.3pF ±0.5pF, 50 VDCW, temp coef 0 ± 120 PPM/°C (Used in Group 2). | C215 | 19A700004P1 | Metallized Polyester: 0.068 μF ±10%, 63 VDCW. | C405 | 19A702061P13 | Ceramic: 10pF ±5%, 50 VDCW, temp coef 0 ± 30 PPM/°C (Used in Group 2). |
| C117 | 19A702052P22 | Ceramic: 0.047μF ±10%, 50 VDCW. | C216 | 19A702052P14 | Ceramic: 0.01μF ±10%, 50 VDCW. | C406 | 19A702061P10 | Ceramic: 5.6pF ±5%, 50 VDCW, temp coef 0 ± 30 PPM/°C (Used in Group 1). |
| C118 | 19A703314P10 | Electrolytic: 10μF -10 +50%, 50 VDCW; Sim to Panasonic LS Series. | C217 | 19A700004P11 | Metallized Polyester: 1μF ±10%, 63 VDCW. | C406 | 19A702061P9 | Ceramic: 4.7pF ±5%, 50 VDCW, temp coef 0 ± 30 PPM/°C (Used in Group 3). |
| C119 | 19A702061P73 | Ceramic: 330pF ±5%. 50 VDCW, temp coef 0 ± 30 PPM/°C. | C218 | 19A702061P29 | Ceramic: 22pF ±5%, 50 VDCW, temp coef 0 ± 30 PPM/°C. | C407 | 19A702052P26 | Ceramic: 0.1μF ±10%, 50 VDCW. |
| C120 | 19A702236P50 | Ceramic: 100pF ±5%, 50 VDCW, temp coef 0 ± 30 PPM/°C. | C219 | 19A702061P93 | Ceramic: 2200pF ±5%, 50 VDCW, temp coef 0 ± 30 PPM/°C. | C408 | 19A702061P99 | Ceramic: 0.1μF ±10%, 50 VDCW, temp coef 0 ± 30 PPM/°C. |
| C121 | 19A702052P26 | Ceramic: 0.1μF ±10%, 50 VDCW. | C220 | 19A702052P14 | Ceramic: 0.01μF ±10%, 50 VDCW. | C409 | 19A702236P11 | Ceramic: 2.7pF ±0.25pF, 50 VDCW, temp coef 0 ± 30 PPM/°C (Used in Groups 1 and 3). |
| C122 | 19A702052P28 | Ceramic: 0.022μF ±10%, 50 VDCW. | C225 | 19A702061P103 | Ceramic: 4700pF ±5%, 50 VDCW, temp coef ±30 PPM/°C at 85°C. | C409 | 19A702236P10 | Ceramic: 2.2pF ±0.25pF, 50 VDCW, temp coef 0 ± 30 PPM/°C (Used in Group 2). |
| C123 | 19A702052P14 | Ceramic: 0.01μF ±10%, 50 VDCW. | C226 | 19A701534P17 | Tantalum: 47μF ±20%, 10 VDCW. | C410 | 19A702236P15 | Ceramic: 3.9pF ±0.25pF, 50 VDCW, temp coef 0 ± 30 PPM/°C (Used in Group 1). |
| C124 | 19A705108P36 | Mica: 91pF ±5% 500 VDCW, temp coef 0 + 50 PPM/°C. | C227 | 19A702052P14 | Ceramic: 0.01μF ±10%, 50 VDCW. | C410 | 19A702236P21 | Ceramic: 6.8pF ±0.5pF, 50 VDCW, temp coef 0 ± 60 PPM/°C (Used in Group 2). |
| C125 and C126 | 19A702061P73 | Ceramic: 330pF ±5%. 50 VDCW, temp coef 0 ± 30 PPM/°C. | C228 | 19A702061P9 | Ceramic: 4.7pF ±0.5pF, 50 VDCW, temp coef 0 ± 60 PPM/°C. | C410 | 19A702236P17 | Ceramic: 4.7pF ±0.5pF, 50 VDCW, temp coef 0 ± 60 PPM/°C (Used in Group 3). |
| C127 | 19A702061P93 | Ceramic: 2200pF ±5%, 50 VDCW. | C229 | 19A702061P61 | Ceramic: 100pF ±5%, 50 VDCW, temp coef 0 ± 30 PPM/°C. | C411 | 19A702061P11 | Ceramic: 4.7pF ±0.5pF, 50 VDCW, temp coef 0 ± 60 PPM/°C (Used in Groups 1 and 2). |
| C130 | 19A705108P3 | Mica: 3.9pF ±0.25 pF, 500 VDCW, temp coef 0 +200 PPM/°C (Used in G1, G3). | C230 | 19A702052P26 | Ceramic: 0.1μF ±10%, 50 VDCW. | C411 | 19A702061P7 | Ceramic: 4.7pF ±0.5pF, 50 VDCW, temp coef 0 ± 120 PPM/°C (Used in Group 3). |
| C130 | 19A705108P1 | Mica: 3.3 pF ±0.25pF, 500 VDCW, temp coef 0 +200 PPM/°C (Used in G2). | C231 | 19A703314P10 | Electrolytic: 10μF -10 +50%, 50 VDCW; Sim to Panasonic LS Series. | C412 | 19A702061P10 | |

| SYMBOL | PART NO. | DESCRIPTION |
|----------------|--------------|---|
| C419 | 19A702236P15 | Ceramic: 3.9pF ± 0.25 pF, 50 VDCW, temp coef 0 ± 30 PPM/ $^{\circ}$ C. |
| C421 | 19A702236P52 | Ceramic: 120pF ± 5 %, 50 VDCW, temp coef 0 ± 30 PPM/ $^{\circ}$ C (Used in Groups 1 and 2). |
| C421 | 19A702236P50 | Ceramic: 100pF ± 5 %, 50 VDCW, temp coef 0 ± 30 PPM/ $^{\circ}$ C (Used in Group 3). |
| C502 | 19A702061P99 | Ceramic: 1000pF ± 5 %, 50 VDCW, temp coef 0 ± 30 PPM/ $^{\circ}$ C (Used in Group 3). |
| C503 | 19A702052P14 | Ceramic: 0.01 μ F ± 10 %, 50 VDCW. |
| C504 | 19A702061P29 | Ceramic: 22pF ± 10 %, 50 VDCW, temp coef 0 ± 30 PPM/ $^{\circ}$ C. |
| C505 | 19A702061P25 | Ceramic: 18pF ± 5 %, 50 VDCW, temp coef 0 ± 30 PPM/ $^{\circ}$ C. |
| C506 | 19A701534P7 | Tantalum: 10 μ F ± 20 %, 16 VDCW. |
| C507 thru C509 | 19A702052P14 | Ceramic: 0.01 μ F ± 10 %, 50 VDCW. |
| C510 | 19A702061P6 | Ceramic: 2.7pF ± 0.5 pF, 50 VDCW, temp coef 0 ± 150 PPM/ $^{\circ}$ C. |
| C511 | 19A702052P14 | Ceramic: 0.01 μ F ± 10 %, 50 VDCW. |
| C512 | 19A702061P1 | Ceramic: 1pF ± 0.5 pF, 50 VDCW, temp coef 0 ± 30 PPM/ $^{\circ}$ C. |
| C513 | 19A702061P12 | Ceramic: 8.2pF ± 0.5 pF, 50 VDCW, temp coef 0 ± 60 PPM/ $^{\circ}$ C. |
| C514 | 19A702061P33 | Ceramic: 27pF ± 5 %, 50 VDCW, temp coef 0 ± 30 PPM/ $^{\circ}$ C. |
| C515 and C516 | 19A702061P29 | Ceramic: 22pF ± 10 %, 50 VDCW, temp coef 0 ± 30 PPM/ $^{\circ}$ C. |
| C517 and C518 | 19A702052P26 | Ceramic: 0.1 μ F ± 10 %, 50 VDCW. |
| C519 | 19A702052P5 | Ceramic: 1000pF ± 10 %, 50 VDCW. |
| C520 | 19A702052P14 | Ceramic: 0.01 μ F ± 10 %, 50 VDCW. |
| C521 | 19A703314P10 | Electrolytic: 10 μ F ± 10 %, 50 VDCW; Sim to Panasonic LS Series. |
| C522 | 19A702052P26 | Ceramic: 0.1 μ F ± 10 %, 50 VDCW. |
| C523 and C524 | 19A701534P4 | Tantalum: 1 μ F ± 20 %, 35 VDCW. |
| C525 | 19A701534P7 | Tantalum: 10 μ F ± 20 %, 16 VDCW. |
| | | ---DIODES--- |
| D101 | 19A705377P1 | Silicon, Hot Carrier: sim to MMB0201. |
| D104 | 344A3316P1 | Silicon PIN: sim to MA4P1250. |
| D106 | 19A702526P2 | Silicon: Schottky Barrier; sim to Bat 17. |
| D202 and D203 | 19A702526P2 | Silicon: Schottky Barrier; sim to Bat 17. |
| D401 | 344A3316P1 | Silicon PIN: sim to MA4P1250. |
| D402 | 19A700155P2 | Silicon, fwd Current: 100 mA, 35 PIV. |
| D501 and D502 | 19A700028P1 | Silicon: 75 mA, 75 PIV; sim to 1N4148. |
| | | ---JACKS--- |
| J101 thru J103 | 19A705512P1 | RF jack. |
| J201 and J501 | 19A700072P1 | Printed wire: 2 contacts rated at 2.5 amps; sim to Molex 22-03-2021. |
| J702 | 19A704779P11 | Connector; sim to Molex 22-17-2122. |
| J704 | 19A700072P29 | Printed wire: 3 contacts rated at 2.5 amps; sim to Molex 22-03-2031. |

| SYMBOL | PART NO. | DESCRIPTION |
|----------------|--------------|---|
| J705 | 19A700072P30 | Printed wire: 4 contacts rated at 2.5 amps; sim to Molex 22-27-2041. |
| | | ---INDUCTORS--- |
| L102 | 19A700024P7 | Coil, RF: 330nH ± 5 %. |
| L103 thru L106 | 19A704921P1 | Coil. |
| L120 | 19A705470P3 | Coil, RF: 15 μ H ± 20 %, sim to Toko 380NB-15nH (Used in Groups 1 and 3). |
| L120 | 19A705470P8 | Coil, RF: 39 μ H ± 20 %, sim to Toko 380NB-39nH (Used in Group 2). |
| L130 and L131 | 19B800891P1 | Coil, RF choke: sim to Paul Smith SK-890-1. |
| L202 and L203 | 19A705470P6 | Coil: 27nH; sim to Toko 380NB-27nH (Used in Groups 1 and 2). |
| L202 and L203 | 19A705470P5 | Coil: 22nH; sim to Toko 380NB-22nH (Used in Group 3). |
| L401 | 19B800891P2 | Coil, RF Choke: sim to Paul Smith SK-890-1. |
| L402 | 19B800891P1 | Coil, RF Choke: sim to Paul Smith SK-890-1. |
| L403 | 19B800890P3 | Coil, RF: 11.7 μ H ± 5 %, sim to Paul Smith SK-896-1. |
| L404 | 19B800891P2 | Coil, RF Choke: sim to Paul Smith SK-890-1. |
| L405 | 19B800891P1 | Coil, RF Choke: sim to Paul Smith SK-890-1. |
| L502 and L503 | H343CLP10022 | Coil, Fixed: 10 μ H ± 10 %. (G2, G3). |
| L503 | H343CLP10022 | Coil, Fixed: 10 μ H ± 10 . (G1). |
| L504 | 19B801413P4 | Coil, 39MHz. |
| L505 | 19B209420P21 | Coil, RF: 4.7 μ H ± 5 %, 1.20 ohms DC res max; sim to Jeffers 4436-8J. |
| L506 thru L508 | 19B801413P4 | Coil, 39MHz. |
| L509 | 19B801415P2 | Transformer: 455 KHz; sim to AEPD 162B3277P17. |
| | | ---TRANSISTORS--- |
| Q101 | 344A3224P1 | Silicon, NPN: sim to Motorola MJP3055. |
| Q102 | 19A703197P2 | Silicon, PNP: sim to MMBT4403 Low profile Pkg. |
| Q103 | 19A704972P1 | Silicon, PNP: sim to Motorola 2N4918. |
| Q104 | 19A700076P2 | Silicon, PNP: sim to MMBT3904 Low profile Pkg. |
| Q105 | 19A700059P2 | Silicon PNP: sim to MMBT3906 Low Profile Pkg. (Used in Groups 1 and 3). |
| Q201 | 19A704708P2 | Silicon, NPN: sim to NEC 2SC3356. |
| Q202 | 19A700059P2 | Silicon, PNP: sim to MMBT3906 Low profile Pkg. |
| Q203 | 19A700076P2 | Silicon, PNP: sim to MMBT3904 Low profile Pkg. |
| Q204 | 19A704708P2 | Silicon, NPN: sim to NEC 2SC3356. |
| Q206 | 19A700076P2 | Silicon, PNP: sim to MMBT3904 Low profile Pkg. |
| Q207 | 19A700059P2 | Silicon, PNP: sim to MMBT3906 Low profile Pkg. |
| Q208 | 19A700023P2 | Silicon, NPN: sim to 2N3904. |
| Q209 and Q210 | 19A702084P2 | Silicon, NPN: sim to MPS 2369. |
| Q401 | 19A704708P2 | Silicon, NPN: sim to NEC 2SC3356. |
| Q501 | 19A702524P2 | N-Type, Field Effect; sim to MMBFU310. |
| Q502 | 19A116818P3 | N-Channel, Field Effect; sim to Type 3N1877. |
| Q503 | 19A700023P2 | Silicon, NPN: sim to 2N3904. |

| SYMBOL | PART NO. | DESCRIPTION |
|--------|---------------|--|
| R101 | 19B800607P103 | ---RESISTORS--- |
| R102 | 19B800607P510 | Metal Film: 10K ohms ± 5 %, 1/8 Watt. |
| R102 | 19B800607P560 | Metal Film: 51 ohms ± 5 %, 1/8 Watt. (Used in Group 2). |
| R103 | 19B800607P821 | Metal Film: 56 ohms ± 5 %, 1/8 Watt. (Used in Groups 1 and 3). |
| R104 | 19B800607P223 | Metal Film: 820 ohms ± 5 %, 1/8 Watt. |
| R105 | 19B800607P473 | Metal Film: 22K ohms ± 5 %, 1/8 Watt. |
| R106 | 19B800607P102 | Metal Film: 47K ohms ± 5 %, 1/8 Watt. |
| R107 | 19B800607P394 | Metal Film: 1K ohms ± 5 %, 1/8 Watt. |
| R108 | 19B800607P123 | Metal Film: 390K ohms ± 5 %, 1/8 Watt. |
| R109 | 19B800607P394 | Metal Film: 12K ohms ± 5 %, 1/8 Watt. |
| R110 | H212CRP210C | Metal Film: 390K ohms ± 5 %, 1/8 Watt. |
| R111 | 19B800779P8 | Variable: 4.7K ohms ± 25 %, 100 VDCW, 0.3 Watt. |
| R112 | 19B800607P103 | Metal Film: 10K ohms ± 5 %, 1/8 Watt. |
| R113 | 19B800607P221 | Metal Film: 1K ohms ± 5 %, 1/8 Watt. |
| R114 | 19B800607P103 | Metal Film: 10K ohms ± 5 %, 1/8 Watt. |
| R115 | 19B800607P562 | Metal Film: 5.6K ohms ± 5 %, 1/8 Watt. |
| R116 | 19B800607P183 | Metal Film: 18K ohms ± 5 %, 1/8 Watt. |
| R117 | 19B800607P221 | Metal Film: 220 ohms ± 5 %, 1/8 Watt. |
| R118 | 19A702931P326 | Metal Film: 18.2K ohms ± 5 %, 1/8 Watt. |
| R119 | 19B800607P100 | Metal Film: 10 ohms ± 5 %, 1/8 Watt. |
| R120 | 19B800607P100 | Metal Film: 10 ohms ± 5 %, 1/8 Watt. |
| R121 | 19B800607P100 | Metal Film: 10 ohms ± 5 %, 1/8 Watt. |
| R122 | 19B800607P821 | Metal Film: 820 ohms ± 5 %, 1/8 Watt. |
| R123 | 19B800607P100 | Metal Film: 10 ohms ± 5 %, 1/8 Watt. |
| R124 | 19B800607P471 | Metal Film: 470 ohms ± 5 %, 1/8 Watt. |
| R125 | 19A702931P259 | Metal Film: 4020 ohms ± 5 %, 1/8 Watt. |
| R126 | 19A702931P201 | Metal Film: 1000 ohms ± 5 %, 1/8 Watt. |
| R127 | 19A702931P262 | Metal Film: 4320 ohms ± 5 %, 1/8 Watt. |
| R128 | 19B800607P1 | Metal Film: 0 ohms ± 5 %, 1/8 Watt. |
| R129 | 19B800607P153 | Metal Film: 15K ohms ± 5 %, 1/8 Watt. |
| R130 | 19B801251P394 | Metal Film: 390K ohms ± 5 %, 1/8 Watt. (Used in G1, G3). |
| R140 | 19A702931P301 | Metal Film: 10K ohms ± 1 %, 1/8 Watt. |
| R141 | 19A702931P210 | Metal Film: 1.24K ohms ± 1 %, 1/8 Watt. |
| R142 | 19B800607P221 | Metal Film: 220 ohms ± 5 %, 1/8 Watt. |
| R202 | 19B800607P100 | Metal Film: 10 ohms ± 5 %, 1/8 Watt. |
| R203 | 19B800607P560 | Metal Film: 56 ohms ± 5 %, 1/8 Watt. |
| R204 | 19B800607P221 | Metal Film: 220 ohms ± 5 %, 1/8 Watt. |
| R205 | 19B800607P332 | Metal Film: 3.3K ohms ± 5 %, 1/8 Watt. |
| *R206 | 19B800607P222 | Metal Film: 2.2K ohms ± 5 %, 1/8 Watt. |
| R207 | 19B800607P181 | Metal Film: 180 ohms ± 5 %, 1/8 Watt. |
| R208 | 19B800607P473 | Metal Film: 47K ohms ± 5 %, 1/8 Watt. |
| R209 | 19B800607P332 | Metal Film: 3.3K ohms ± 5 %, 1/8 Watt. |
| | | |

| SYMBOL | PART NO. | DESCRIPTION |
|-----------------------------|--------------|--|
| ----INTEGRATED CIRCUITS---- | | |
| U101 | 19A705457P1 | RF Power Amplifier Module. Part of next higher assembly (Used in Group 2). |
| U101 | 19A705457P2 | RF Power Amplifier Module. Part of next higher assembly (Used in Group 1). |
| U101 | 19A705457P3 | RF Power Amplifier Module. Part of next higher assembly (Used in Group 3). |
| U102 | RYT1246003/4 | IC; sim to LM35. |
| U103 and U104 | 19A701789P2 | Linear: Dual Op Ampl.; sim to MM358. |
| U105 | RYT1246003/4 | IC LM35. |
| U201 | 19D901958G4 | Voltage Controlled Oscillator (Used in Group 1). |
| U201 | 19D901958G3 | Voltage Controlled Oscillator (Used in Group 2). |
| U201 | 19D901958G5 | Voltage Controlled Oscillator (Used in Group 3). |
| U202 | 19A700029P44 | Digital: Bilateral Switch. |
| U203 | 19A704971P1 | Linear: 5-Volt Regulator; sim to MC78L05ACP. |
| U204 | 19B801351P27 | Crystal Oscillator, temperature compensated. |
| U205 | 19A704287P2 | Prescaler: 128, 129; sim to MC12018. |
| U206 | 19B800902P4 | Digital: Synthesizer, CMOS Serial Input. |
| U207 | 344A3820P1 | 8-Volt Regulator. |
| U501 | 19A704619P1 | Linear: Osc/Mixer/IF/Det/Ampl; sim to MC3361AP. |
| U502 | 19A704073P2 | Linear: 8-Volt Regulator; sim to MC78L08CP. |
| U503 | 344A3820P1 | 8-Volt Regulator. |
| ----CRYSTALS---- | | |
| Y501 | 19A705376P5 | Crystal, Fixed Frequency: 45.455 MHz ± 10 PPM. |
| ----FILTERS---- | | |
| Z401 and Z402 | 19A705458P4 | Helical, UHF: 403-450 MHz. (Used in Group 2). |
| Z401 and Z402 | 19A705458P1 | Helical, UHF: 450-470 MHz. (Used in Group 1). |
| Z401 and Z402 | 19A705458P2 | Helical, UHF: 470-492 MHz. (Used in Group 3). |
| Z403 | 19B801025P1 | Balanced Mixer (Double); sim to Mini-Circuits SEL-1. |
| Z501 and Z502 | 19A705613G6 | Monolithic Crystal: 45.000 MHz; sim to Toyocom 45E2B2. |
| Z503 | 19B801021P2 | Bandpass filter: 455 kHz ± 1.5 kHz; sim to Murata CFW-455E. |
| ----MISCELLANEOUS---- | | |
| 350A1232P1 | CLIP. | |
| 19B801566P1 | SHIELD. | |
| 19B801566P2 | SHIELD. | |
| 13 | 19B801566P17 | SHIELD. |
| 14 | 19B801578P1 | SHIELD. Used with Q502. |

PRODUCTION CHANGES

Changes in the equipment to improve or to simplify circuits are identified by a "Revision Letter", which is stamped after the model number of the unit. The revision stamped on the unit includes all previous revisions. Refer to the Parts List for descriptions of parts affected by these revisions.

REV. A - RF BOARD 188D5062G1

Incorporated in initial shipments.

REV. B - RF BOARD 188D5062G1

To improve radio performance at temperature extremes. Changed C108, C111 & C134 (19A703314P10) to tantalum 6.8uF. C103 was 12pF (19A702061P17). R202 was 33 ohm (19B801607P330).

PRODUCTION CHANGES - Cont.**REV. A - RF BOARD 188D5062G2**

To update parts list and schematic.

REV. B - RF BOARD 188D5062G2**REV. D - RF BOARD 188D5062G1**

To improve performance of radio and prevent shorts on PWB. New PWB.

REV. A - RF BOARD 188D5062G3**REV. C - RF BOARD 188D5062G2****REV. E - RF BOARD 188D5062G1**

To improve power flatness across the bandsplits. Component C130, C131, C132, C142, R202, R206, R124, R140 and R141 changed. C143, C144 and R130 added.

REV. A - C - RF BOARD 188D5062G4

Incorporated in initial shipments.

REV. B - RF BOARD 188D5062G3**REV. D - RF BOARD 188D5062G2, 4****REV. F - RF BOARD 188D5062G1**

To reduce synthesizer kick and eliminate transmitter oscillations, C143 and C144 deleted. R224 was changed from 4.7K ohms (19B800607P102). In Group 2 resistor R130 was deleted.

REV. G - RF BOARD 188D5062G1**REV. E - RF BOARD 188D5062G2**

To fix erratic data modulation, moved C207 from component side to solder side of board (- to C208 and + to ground).

REV. H - RF BOARD 188D5062G1

To improve receiver spurious response due to 2nd IF image, R501 was 180 ohms (19B800607P181) and deleted L502 (H343CLP10022). L503 relocated to solder side of board. New shields added to Q502 and to solder side of board.

**RF BOARD
188D5062G4 (485-505 MHz)
Issue 2**

| SYMBOL | PART NO. | DESCRIPTION |
|------------------------|--------------|--|
| ----- ASSEMBLIES ----- | | |
| A102 | | TRANSMIT EXCITER BOARD 19C851643G3 |
| ----- CAPACITORS ----- | | |
| C1 and C2 | 19A702061P77 | Ceramic: 470 pF + or - 5%, 50 VDCW, temp coef 0 + or - 30 PPM. |
| C3 and C4 | 19A702061P11 | Ceramic: 6.8 pF + or - 0.5 pF, 50 VDCW, temp or - 60 PPM. |
| | 19A702061P45 | Ceramic: 47 pF + or - 5%, 50 VDCW, temp coef 0 + or - 30 PPM. |
| C6 | 19A702061P9 | Ceramic: 4.7 pF + or - 0.5 pF, 50 VDCW, temp or - 60 PPM. |
| C7 | 19A702061P11 | Ceramic: 6.8 pF + or - 0.5 pF, 50 VDCW, temp or - 60 PPM. |
| C8 thru C10 | 19A702061P77 | Ceramic: 470 pF + or - 5%, 50 VDCW, temp coef 0 + or - 30 PPM. |
| C11 | 19A702052P14 | Ceramic: 0.01 uF + or - 10%, 50 VDCW. |
| ----- DIODES ----- | | |
| D1 | 19A702525P2 | Silicon, PIN: sim to MMBV3401. |

PRODUCTION CHANGES - Cont.**REV. A - RF BOARD 188D5062G2**

Part of PWB.

REV. C - RF BOARD 188D5062G1

Coil, RF: .084 uH; sim to Paul Smith SK-890-1.

REV. D - RF BOARD 188D5062G1

Part of PWB.

REV. E - RF BOARD 188D5062G1

----- TRANSISTORS -----

Q1

Silicon, NPN: sim to NEC 2SC3356.

Q2

Silicon, NPN: sim to MRF-559.

REV. F - RF BOARD 188D5062G1

----- RESISTORS -----

R1

Metal film: 470 ohms + or - 5%, 1/8 w.

R2

Metal film: 2.2K ohms + or - 5%, 1/8 w.

R3

Metal film: 1K ohms + or - 5%, 1/8 w.

R4

Metal film: 33 ohms + or - 5%, 1/8 w.

R5

Metal film: 2.7K ohms + or - 5%, 1/8 w.

R6

Metal film: 330 ohms + or - 5%, 1/8 w.

R7 and R8

Metal film: 10 ohms + or - 5%, 1/8 w.

REV. G - RF BOARD 188D5062G1

----- CAPACITORS -----

C101

Capacitor, Mica Chip: 91pF + or - 5%, 500 VDCW, temp coef 0

C103

Ceramic: 12 pF + or - 5%, 50 VDCW, temp coef 0 + or - 30 PPM.

C104

Ceramic: 1000 pF + or - 5%, 50 VDCW, temp coef 0 + or - 30 PPM/C.

C105

Ceramic: 0.01 uF + or - 10%, 50 VDCW.

C106

Ceramic: 330 pF + or - 5%, 50 VDCW, temp coef 0 + or - 30 PPM/C.

C107

Tantalum: 22 uF + or - 20%, 16 VDCW.

C108

Tantalum: 6.8 uF + or - 20%, 35 VDCW.

C109 and C110

Ceramic: 0.01 uF + or - 10%, 50 VDCW.

C111

Tantalum: 6.8 uF + or - 20%, 35 VDCW.

C112

Ceramic: 10 pF + or - .5 pF, 50 VDCW, temp coef -30 PPM/C.

C113 thru C115

Ceramic: 330 pF + or - 5%, 50 VDCW, temp coef 0 + or - 30 PPM/C.

C116

Ceramic: 100 pF + or - 5%, 50 VDCW, temp coef 0 + or - 30 PPM.

C117

Ceramic: 0.047 uF + or - 10%, 50 VDCW.

C118

Tantalum: 10 uF + or - 20%, 16 VDCW.

C119

Ceramic: 330 pF + or - 5%, 50 VDCW, temp coef 0 + or - 30 PPM/C.

C120

Ceramic: 100 pF + or - 5%, 50 VDCW, temp coef 0 + or - 30 PPM/C.

C121

Ceramic: 0.1uF + or - 10%, 50 VDCW

| SYMBOL | PART NO. | DESCRIPTION |
|---------------|--------------|---|
| C230 | 19A702052P26 | Ceramic: 0.1uF + or - 10%, 50 VDCW |
| C231 | 19A703314P10 | Electrolytic: 10 uF -10+50%, 50 VDCW; sim to Panasonic LS Series. |
| C232 | 19A702052P14 | Ceramic: 0.01 uF + or - 10%, 50 VDCW. |
| C233 | 19A702061P77 | Ceramic: 470 pF + or - 5%, 50 VDCW, temp coef 0 + or - 30 PPM. |
| C234 | 19A702052P14 | Ceramic: 0.01 uF + or - 10%, 50 VDCW. |
| C236 | 19A702052P14 | Ceramic: 0.01 uF + or - 10%, 50 VDCW. |
| C237 | 19A702061P17 | Ceramic: 12 pF + or - 5%, 50 VDCW, temp coef 0 + or - 30 PPM. |
| C238 | 19A702061P9 | Ceramic: 4.7 pF + or - 0.5 pF, 50 VDCW, temp or -60 PPM. |
| C239 | 19A702061P11 | Ceramic: 6.8 pF + or - 0.5 pF, 50 VDCW, temp or -60 PPM. |
| C240 | 19A702061P25 | Ceramic: 18 pF + or -5%, 50 VDCW, temp coef 0 + or -30 PPM/C. |
| C241 | 19A702061P73 | Ceramic: 330 pF + or -5%, 50 VDCW, temp coef 0 + or -30 PPM/C. |
| C242 | 19A702052P26 | Ceramic: 0.1uF + or - 10%, 50 VDCW |
| C245 | 19A703314P10 | Electrolytic: 10 uF -10+50%, 50 VDCW; sim to Panasonic LS Series. |
| C246 | 19A702061P73 | Ceramic: 330 pF + or -5%, 50 VDCW, temp coef 0 + or -30 PPM/C. |
| C247 | 19A702052P14 | Ceramic: 0.01 uF + or - 10%, 50 VDCW. |
| C248 and C249 | 19A702061P73 | Ceramic: 330 pF + or -5%, 50 VDCW, temp coef 0 + or -30 PPM/C. |
| C250 | 19A702052P14 | Ceramic: 0.01 uF + or - 10%, 50 VDCW. |
| C251 and C252 | 19A703314P10 | Electrolytic: 10 uF -10+50%, 50 VDCW; sim to Panasonic LS Series. |
| C253 | 19A701534P4 | Tantalum: 1 uF + or - 20%, 35 VDCW. |
| C254 | 19A701534P7 | Tantalum: 10 uF + or -20%, 16 VDCW. |
| C255 | 19A701534P4 | Tantalum: 1 uF + or - 20%, 35 VDCW. |
| C256 | 19A700233P9 | Ceramic: 2200 pF + or -20%, 50 VDCW. |
| C402 | 19A705108P9 | Mica: 6.8 pF + or -25 pF, 500 VDCW. |
| C403 | 19A702236P15 | Ceramic: 3.9 pF + or -25 pF, 50 VDCW, temp or -30 PPM/C. |
| C404 | 19A702061P63 | Ceramic: 120 pF + or -5%, 50 VDCW, temp coef 0 + or -30 PPM. |
| C405 | 19A702061P11 | Ceramic: 6.8 pF + or - 0.5 pF, 50 VDCW, temp or -60 PPM. |
| C406 | 19A702061P9 | Ceramic: 4.7 pF + or - 0.5 pF, 50 VDCW, temp or -60 PPM. |
| C407 | 19A702052P26 | Ceramic: 0.1uF + or - 10%, 50 VDCW |
| C408 | 19A702061P99 | Ceramic: 1000 pF + or -5%, 50 VDCW, temp coef 0 + or -30 PPM/C. |
| C409 | 19A702236P11 | Ceramic: 2.7 pF + or -0.25 pF, 50 VDCW, temp or -30 PPM. |
| C410 | 19A702236P17 | Ceramic: 4.7 pF + or - 5%, 50 VDCW, temp coef 0 + or -30 PPM. |
| C411 | 19A702061P7 | Ceramic: 3.3 pF + or - 0.5 pF, 50 VDCW, temp or -120 PPM. |
| C412 | 19A702236P11 | Ceramic: 2.7 pF + or -0.25 pF, 50 VDCW, temp or -30 PPM. |

| SYMBOL | PART NO. | DESCRIPTION |
|--------------------|--------------|---|
| C413 | 19A702061P17 | Ceramic: 12 pF + or - 5%, 50 VDCW, temp coef 0 + or - 30 PPM. |
| C414 | 19A702236P21 | Ceramic: 6.8 pF + or -0.5 pF, 50 VDCW, temp or -60 PPM. |
| C415 and C416 | 19A702061P63 | Ceramic: 120 pF + or -5%, 50 VDCW, temp coef 0 + or -30 PPM. |
| C417 | 19A702236P15 | Ceramic: 3.9 pF + or -.25 pF, 50 VDCW, temp or -30 PPM/C. |
| C419 | 19A702236P15 | Ceramic: 3.9 pF + or -.25 pF, 50 VDCW, temp or -30 PPM/C. |
| C421 | 19A702236P50 | Ceramic: 100 pF + or -5%, 50 VDCW, temp coef 0 + or -30 PPM/C. |
| C502 | 19A702236P52 | Ceramic: 120 pF, + or -5%, 50 VDCW. |
| C503 | 19A702052P14 | Ceramic: 0.01 uF + or - 10%, 50 VDCW. |
| C504 | 19A702061P29 | Ceramic: 22 pF + or - 5%, 50 VDCW, temp coef 0 + or - 30 PPM. |
| C505 | 19A702061P25 | Ceramic: 18 pF + or -5%, 50 VDCW, temp coef 0 + or -30 PPM/C. |
| C506 | 19A701534P7 | Tantalum: 10 uF + or -20%, 16 VDCW. |
| C507 thru C509 | 19A702052P14 | Ceramic: 0.01 uF + or - 10%, 50 VDCW. |
| C510 | 19A702061P6 | Ceramic: 2.7 pF + or - 0.5 pF, 50 VDCW, temp or -120 PPM. |
| C512 | 19A702061P1 | Ceramic: 1 pF + or -0.5 pF, 50 VDCW. |
| C513 | 19A702061P12 | Ceramic: 8.2 pF + or - 0.5 pF, 50 VDCW, temp or -60 PPM. |
| C514 | 19A702061P33 | Ceramic: 27 pF + or -5%, 50 VDCW, temp coef 0 + or -30 PPM/C. |
| C515 and C516 | 19A702061P29 | Ceramic: 22 pF + or - 5%, 50 VDCW, temp coef 0 + or - 30 PPM. |
| C517 and C518 | 19A702052P26 | Ceramic: 0.1uF + or - 10%, 50 VDCW |
| C519 | 19A702052P5 | Ceramic: 1000 pF + or -10%, 50 VDCW. |
| C520 | 19A702052P14 | Ceramic: 0.01 uF + or - 10%, 50 VDCW. |
| C521 | 19A703314P10 | Electrolytic: 10 uF -10+50%, 50 VDCW; sim to Panasonic LS Series. |
| C522 | 19A702052P26 | Ceramic: 0.1uF + or - 10%, 50 VDCW |
| C523 and C524 | 19A701534P4 | Tantalum: 1 uF + or - 20%, 35 VDCW. |
| C525 | 19A701534P7 | Tantalum: 10 uF + or -20%, 16 VDCW. |
| C526 | 19A702236P1 | Ceramic: 0.5 pF + or -1 pF, 50 VDCW, temp coef -30 PPM. |
| ----- DIODES ----- | | |
| D101 | 19A705377P1 | Silicon, Hot Carrier: sim to MMB0201. |
| D104 | 344A3316P1 | Silicon, Pin. |
| D106 | 19A702526P2 | Silicon: Schottky Barrier; sim to BAT 17. |
| D202 and D203 | 19A702526P2 | Silicon: Schottky Barrier; sim to BAT 17. |
| D401 | 344A3316P1 | Silicon, Pin. |
| D402 | 19A700155P2 | Silicon: 100 mA, 35 PIV; sim to BAT 18. |

| SYMBOL | PART NO. | DESCRIPTION |
|-------------------------|--------------|--|
| D501 and D502 | 19A700028P1 | Silicon: 75 mA, 75 PIV; sim to 1N4148. |
| J101 thru J103 | 19A705512P1 | ----- JACKS ----- |
| J201 | 19A700072P1 | Connector, RF SMB Series: sim to AMP No. 221111-1. |
| J501 | 19A700072P1 | Printed wire: 2 contacts rated @ 2.5 amps; sim to Molex 22-03-2021. |
| J702 | 19A704779P11 | Connector; sim to Molex 22-17-2122. |
| J704 | 19A700072P29 | Printed wire: 3 contacts rated at 2.5 amps; sim to Molex 22-27-2031. |
| J705 | 19A700072P30 | Printed wire: 4 contacts rated at 2.5 amps; sim to Molex 22-27-2041. |
| ----- INDUCTORS ----- | | |
| L102 | 19A700024P7 | Coil, RF: 330 nH + or - 10%. |
| L103 thru L106 | 19A704921P1 | Coil. |
| L120 | 19A705470P3 | Coil, Fixed: 15 nH; sim to Toko 380NB-15nM. |
| L130 and L131 | 19B800891P1 | Coil, RF Choke: sim to Paul Smith SK-890-1. |
| L202 and L203 | 19A705470P5 | Coil, Fixed: 22 nH; sim to Toko 380NB-22nM. |
| L401 | 19B800891P2 | Coil, RF Choke: sim to Paul Smith SK-890-1. |
| L402 | 19B800891P1 | Coil, RF Choke: sim to Paul Smith SK-890-1. |
| L403 | 19B800890P3 | Coil, RF: 11.7 uH + or -5%, sim to Paul Smith SK-896-1. |
| L404 | 19B800891P2 | Coil, RF Choke: sim to Paul Smith SK-890-1. |
| L405 | 19B800891P1 | Coil, RF Choke: sim to Paul Smith SK-890-1. |
| L502 | 19A705470P35 | Coil, Fixed: 6.8uH; sim to Toko 380LB-6R8M. |
| L503 | H343CLP10022 | Coil, Fixed: 10 uH + or - 10%. |
| L504 | 19B801413P4 | Coil, 39 MHz. |
| L505 | 19B209420P21 | Coil, RF: 4.7 uH + or - 5%, 1.20 ohms DC res Jeffers 4436-8J. |
| L506 thru L508 | 19B801413P4 | Coil, 39 MHz. |
| L509 | 19B801415P2 | Transformer, 455 KHz.: sim to AEPD 162B3277P17. |
| L510 | 19A705470P13 | Coil: 0.10 uH + or -20%. |
| ----- DIODES ----- | | |
| Q101 | 344A3225P1 | Silicon, NPN: sim to MJF3055. |
| Q102 | 19A703197P2 | Silicon, PNP; sim to MMBT4403 low profile. |
| Q103 | 19A704972P1 | Silicon, PNP: sim to Motorola 2N4918. (Used in |
| Q104 | 19A700076P2 | Silicon, NPN: sim to MMBT3904, low profile. |
| Q105 | 19A700059P2 | Silicon, PNP: sim to MMBT3906, low profile. |
| Q201 | 19A704708P2 | Silicon, NPN: sim to NEC 2SC3356. |
| ----- TRANSISTORS ----- | | |


| SYMBOL | PART NO. | DESCRIPTION |
|-----------------------|---------------|--|
| Q202 | 19A700059P2 | Silicon, PNP: sim to MMBT3906, low profile. |
| Q203 | 19A700076P2 | Silicon, NPN: sim to MMBT3904, low profile. |
| Q204 | 19A704708P2 | Silicon, NPN: sim to NEC 2SC3356. |
| Q206 | 19A700076P2 | Silicon, NPN: sim to MMBT3904, low profile. |
| Q207 | 19A700059P2 | Silicon, PNP: sim to MMBT3906, low profile. |
| Q208 thru Q210 | 19A700076P2 | Silicon, NPN: sim to MMBT3904, low profile. |
| Q401 | 19A704708P2 | Silicon, NPN: sim to NEC 2SC3356. |
| Q501 | 19A702524P2 | N-Type, field effect; sim to MMBFU310. |
| Q502 | 19A116818P3 | N Channel, field effect; sim to Type 3N1877. |
| Q503 | 19A700023P2 | Silicon, NPN: sim to 2N3904. |
| ----- RESISTORS ----- | | |
| R101 | 19B800607P103 | Metal film: 10K ohms + or -5%, 1/8 w. |
| R102 | 19B800607P560 | Metal film: 56 ohms + or -5%, 1/8 w. |
| R103 | 19B800607P821 | Metal film: 820 ohms + or -5%, 1/8 w. |
| R104 | 19B800607P223 | Metal film: 22K ohms + or -5%, 1/8 w. |
| R105 | 19B800607P473 | Metal film: 47K ohms + or -5%, 1/8 w. |
| R106 | 19B800607P102 | Metal film: 1K ohms + or -5%, 1/8 w. |
| R107 | 19B800607P | |

| SYMBOL | PART NO. | DESCRIPTION |
|----------------------|-------------------------------|--|
| R202 | 19B800607P101 | Metal film: 100 ohms + or -5%, 1/8 w. |
| R203 | 19B800607P560 | Metal film: 56 ohms + or -5%, 1/8 w. |
| R204 | 19B800607P221 | Metal film: 220 ohms + or -5%, 1/8 w. |
| R205 | 19B800607P332 | Metal film: 3.3K ohms + or -5%, 1/8 w. |
| R206 | 19B800607P222 | Metal film: 2.2K ohms + or -5%, 1/8 w. |
| R207 | 19B800607P181 | Metal film: 180 ohms + or -5%, 1/8 w. |
| R208 | 19B800607P473 | Metal film: 47K ohms + or -5%, 1/8 w. |
| R209 and R210 | 19B800607P332 | Metal film: 3.3K ohms + or -5%, 1/8 w. |
| R211 | 19B800607P101 | Metal film: 100 ohms + or -5%, 1/8 w. |
| R213 | 19B800607P103 | Metal film: 10K ohms + or -5%, 1/8 w. |
| R214 | 19B800607P331 | Metal film: 330 ohms + or -5%, 1/8 w. |
| R215 | 19B800607P822 | Metal film: 8.2K ohms + or -5%, 1/8 w. |
| R216 | 19B800607P222 | Metal film: 2.2K ohms + or -5%, 1/8 w. |
| R217 | 19B800607P101 | Metal film: 100 ohms + or -5%, 1/8 w. |
| R218 | 19B800607P683 | Metal film: 68K ohms + or -5%, 1/8 w. |
| R219 | 19B800607P273 | Metal film: 27K ohms + or -5%, 1/8 w. |
| R221 | 19B800607P154 | Metal film: 150K ohms + or -5%, 1/8 w. |
| R222 | 19B800607P333 | Metal film: 33K ohms + or -5%, 1/8 w. |
| R223 | 19B800607P105 | Metal film: 1M ohms + or -5%, 1/8 w. |
| R224 | 19B800607P102 | Metal film: 1K ohms + or -5%, 1/8 w. |
| R226 | 19B800779P4 | Variable: 1K ohms + or -25%, 100VDCW, .3 w. |
| R227 | 19B800607P473 | Metal film: 47K ohms + or -5%, 1/8 w. |
| R228 | 19B800607P223 | Metal film: 22K ohms + or -5%, 1/8 w. |
| R229 | 19B800607P183 | Metal film: 18K ohms + or -5%, 1/8 w. |
| R230 | 19B800607P332 | Metal film: 3.3K ohms + or -5%, 1/8 w. |
| R231 | 19B800607P472 | Metal film: 4.7K ohms + or -5%, 1/8 w. |
| R232 | 19B800607P103 | Metal film: 10K ohms + or -5%, 1/8 w. |
| R233 | 19B800607P332 | Metal film: 3.3K ohms + or -5%, 1/8 w. |
| R234 | 19B800607P472 | Metal film: 4.7K ohms + or -5%, 1/8 w. |
| R235 | 19B800607P183 | Metal film: 18K ohms + or -5%, 1/8 w. |
| R236 | 19B800607P471 | Metal film: 470 ohms + or -5%, 1/8 w. |
| R237 thru R239 | 19B800607P103 | Metal film: 10K ohms + or -5%, 1/8 w. |
| R240 thru R242 | 19B800607P154 | Metal film: 150K ohms + or -5%, 1/8 w. |
| R245 | 19B800607P223 | Metal film: 22K ohms + or -5%, 1/8 w. |
| R246 | 19B800607P102 | Metal film: 1K ohms + or -5%, 1/8 w. |
| R249 | 19B800607P100 | Metal film: 10 ohms + or -5%, 1/8 w. |
| R251 thru R254 | 19B800607P100 | Metal film: 10 ohms + or -5%, 1/8 w. |
| R255 R256 | 19B800779P16 19B800607P103 | Variable: 100K ohms + or -25%, 100 VDCW, .3 watt. Metal film: 10K ohms + or -5%, 1/8 w. |
| R401 | 19B801486P151 | Metal film: 150 ohms + or -5%, 1/2 w. |

| SYMBOL | PART NO. | DESCRIPTION |
|---------------------------------|---------------|---|
| R403 | 19B800607P102 | Metal film: 1K ohms + or -5%, 1/8 w. |
| R404 | 19B800607P472 | Metal film: 4.7K ohms + or -5%, 1/8 w. |
| R405 | 19B800607P271 | Metal film: 270 ohms + or -5%, 1/8 w. |
| R406 | 19B800607P471 | Metal film: 470 ohms + or -5%, 1/8 w. |
| R501 | 19B800607P181 | Metal film: 180 ohms + or -5%, 1/8 w. |
| R502 | 19B800607P270 | Metal film: 27 ohms + or -5%, 1/8 w. |
| R503 | 19B800607P472 | Metal film: 4.7K ohms + or -5%, 1/8 w. |
| R504 | 19B800607P270 | Metal film: 27 ohms + or -5%, 1/8 w. |
| R505 | 19B800607P683 | Metal film: 68K ohms + or -5%, 1/8 w. |
| R506 | 19B800607P823 | Metal film: 82K ohms + or -5%, 1/8 w. |
| R507 | 19B800607P183 | Metal film: 18K ohms + or -5%, 1/8 w. |
| R508 | 19B800607P1 | Metal film: Jumper. |
| R509 | 19B800607P272 | Metal film: 2.7K ohms + or -5%, 1/8 w. |
| R510 | 19B800607P270 | Metal film: 27 ohms + or -5%, 1/8 w. |
| R511 | 19B800607P473 | Metal film: 47K ohms + or -5%, 1/8 w. |
| R512 | 19B800607P822 | Metal film: 8.2K ohms + or -5%, 1/8 w. |
| R513 | 19B800779P4 | Variable: 1K ohms + or -25%, 100VDCW, .3 w. |
| R514 | 19B800607P682 | Metal film: 6.8K ohms + or -5%, 1/8 w. |
| R515 | 19B800607P821 | Metal film: 820 ohms + or -5%, 1/8 w. |
| ----- INTEGRATED CIRCUITS ----- | | |
| U101 | 19A705457P3 | PA Module: 470-512 MHz; sim to M57704SH. |
| U102 | 19A134717P3 | Linear: 8 Volt Regulator; sim to MC7808CT. |
| U103 and U104 | 19A701789P2 | Linear: Dual Op Amp; sim to LM358. |
| U105 | RYT1246003/4 | Sensor Temperature; sim to LM35. |
| U201 | 19D901958G5 | Voltage Controlled Oscillator. |
| U202 | 19A700029P44 | Digital: BILATERAL SWITCH. |
| U203 | 19A704971P1 | Linear: +5 Volt Regulator; sim to MC78L05ACP. |
| U204 | 19B801351P16 | Crystal, Oscillator: 12.8 MHz. |
| U205 | 19A704287P2 | Prescaler: /128, /129; sim to MC12018. |
| U206 | 19B800902P4 | Digital: Synthesizer, CMOS Serial Input. |
| U207 | 344A3820P1 | Voltage Regulator: Linear, 8.5 Vdc.; sim to SGS 4885CX. |
| U501 | 19A704619P1 | Linear: Osc/Mixer/IF/Det/Amp; sim to MC3361AP. |
| U502 | 19A704073P2 | Linear: 8 Volt Regulator; sim to MC78L08CP. |
| U503 | 344A3820P1 | Voltage Regulator: Linear, 8.5 Vdc.; sim to SGS 4885CX. |
| ----- CRYSTALS ----- | | |
| Y501 | 19A705376P5 | Crystal, Fixed Frequency: 45.455 MHz + or -10 PPM. |
| ----- FILTER ----- | | |
| Z401 and Z402 | 19A705458P10 | FILTER, HELICAL: 485-505 MHz; sim to 302LXP-18065. |
| Z403 | 19B801025P4 | MIX, BALANCED; sim to Mini-Circuits SRA-1W. |
| Z501 | 19A705613G42 | Filter, Crystal. |


| SYMBOL | PART NO. | DESCRIPTION |
|---------------------------|--------------|---|
| Z502 | 19A705613G42 | Filter, Crystal. |
| Z503 | 19B801021P4 | Filter, bandpass: 455 kHz; sim to Murata CFZM-455F. |
| ----- MISCELLANEOUS ----- | | |
| 13 | 19B801566P17 | SHIELD. |
| 14 | 19B801578P1 | CLIP, SHIELD. |

RF POWER AMPLIFIER U101
19A705457P1 (M57704M (403-440 MHz))
19A705457P2 (M57794H (440-470 MHz))
19A705457P3 (M57704SH (470-512 MHz))

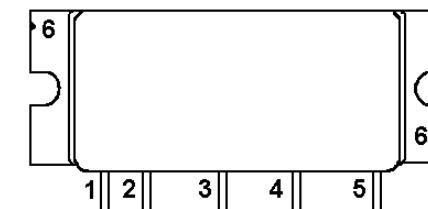

1. Pin
2. Vcc1 - 1ST STAGE
3. Vcc - 2ND STAGE
4. Vcc - OUTPUT STAGE
5. Pout
6. FIN - GROUND


8 VOLT REGULATOR U102, U105
RYT1246003/4 (LM35)





PINS:

- 1 - Vcc
- 2 - VOUT
- 3 - GND




DUAL OPERATIONAL AMPLIFIER U103
19A701789P2 (LM358)

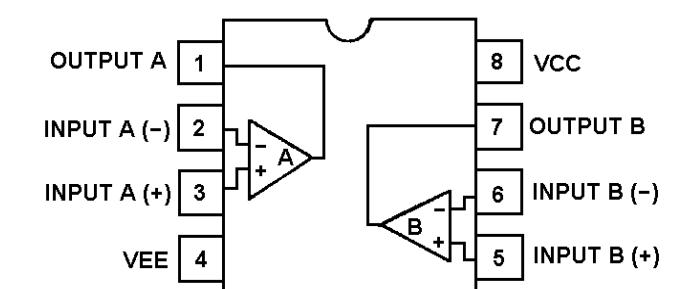

VOLTAGE CONTROLLED OSCILLATOR U201
 19D901958G3 (403-440 MHz)
 19D901958G4 (440-470 MHz)
 19D901958G5 (470-512 MHz)

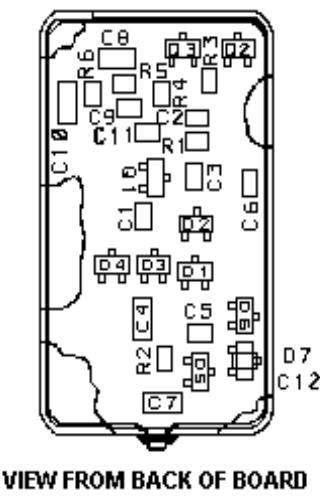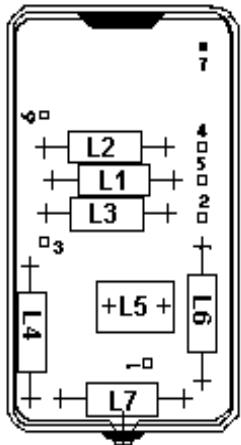


BILATERAL SWITCH U202
 19A700029P44

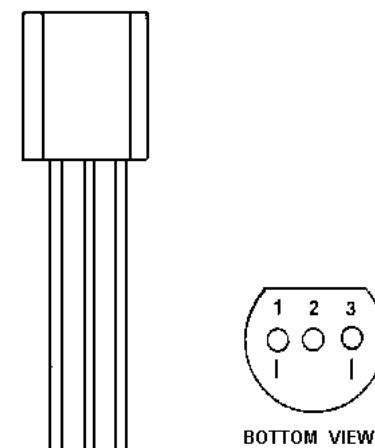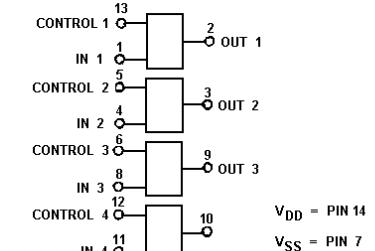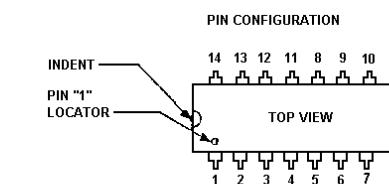

PIN IDENTIFICATION
 PIN 1. OUTPUT
 PIN 2. GROUND
 PIN 3. INPUT


TEMPERATURE COMPENSATED CRYSTAL OSCILLATOR U204
 19B801351P27

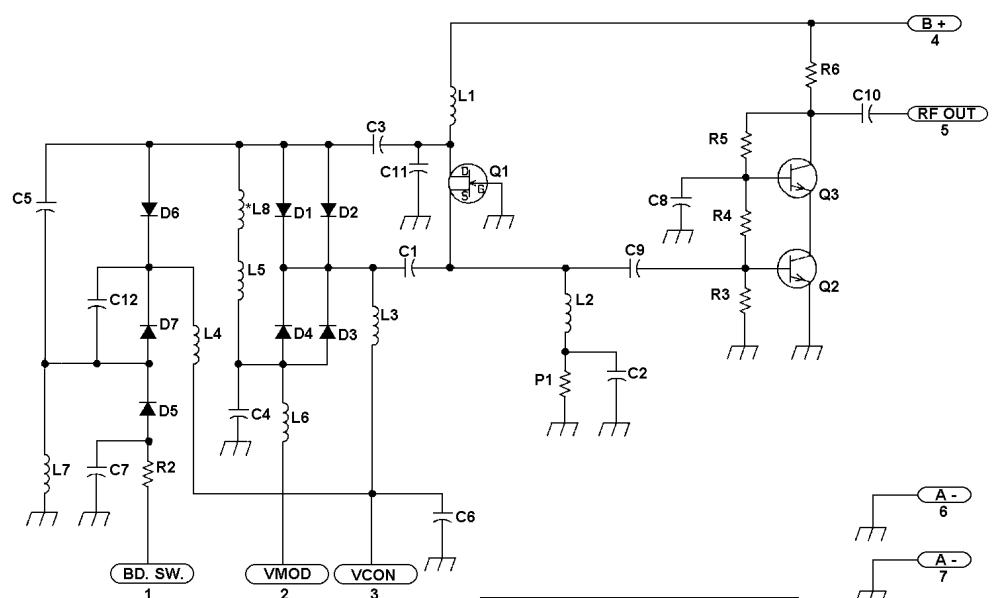

*L8 IS PART OF PWB.

NOTES:
 1. C12 AND D7 ARE NEVER USED SIMULTANEOUSLY.
 D7 IS USED IN GROUPS 1, 3, 4, 5. C12 IS USED IN
 GROUP 2.


| MODEL NO. | REV. LETTER |
|---------------|-------------|
| PL19D901958G1 | |
| PL19D901958G2 | A |
| PL19D901958G3 | A |
| PL19D901958G4 | A |
| PL19D901958G5 | A |

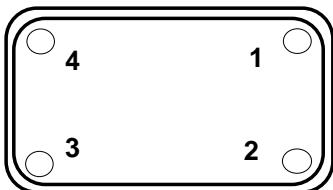


PIN CONNECTIONS

1. COMMON AND CASE
2. OUTPUT
3. +Vcc
4. MODULATION


PRESCALER U205
19A704287P2

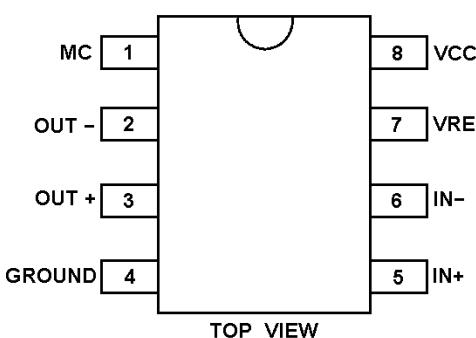


VOLTAGE REGULATOR U207, U503
344A3820P1

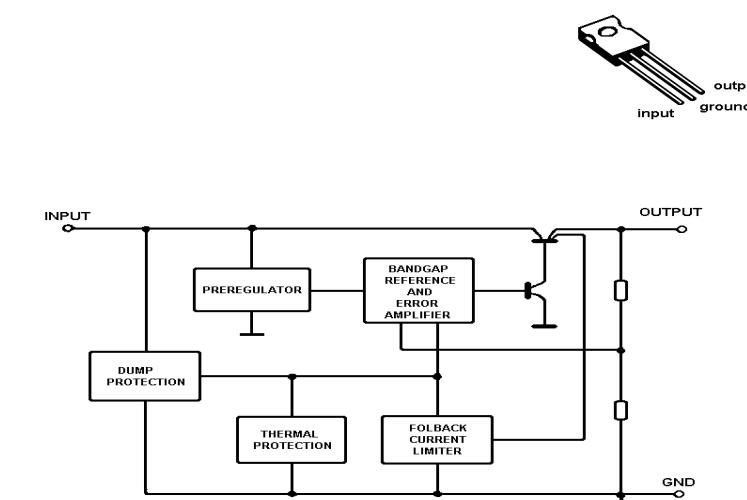


SYNTHESIZER U206 PIN CONFIGURATION
19B800902P4

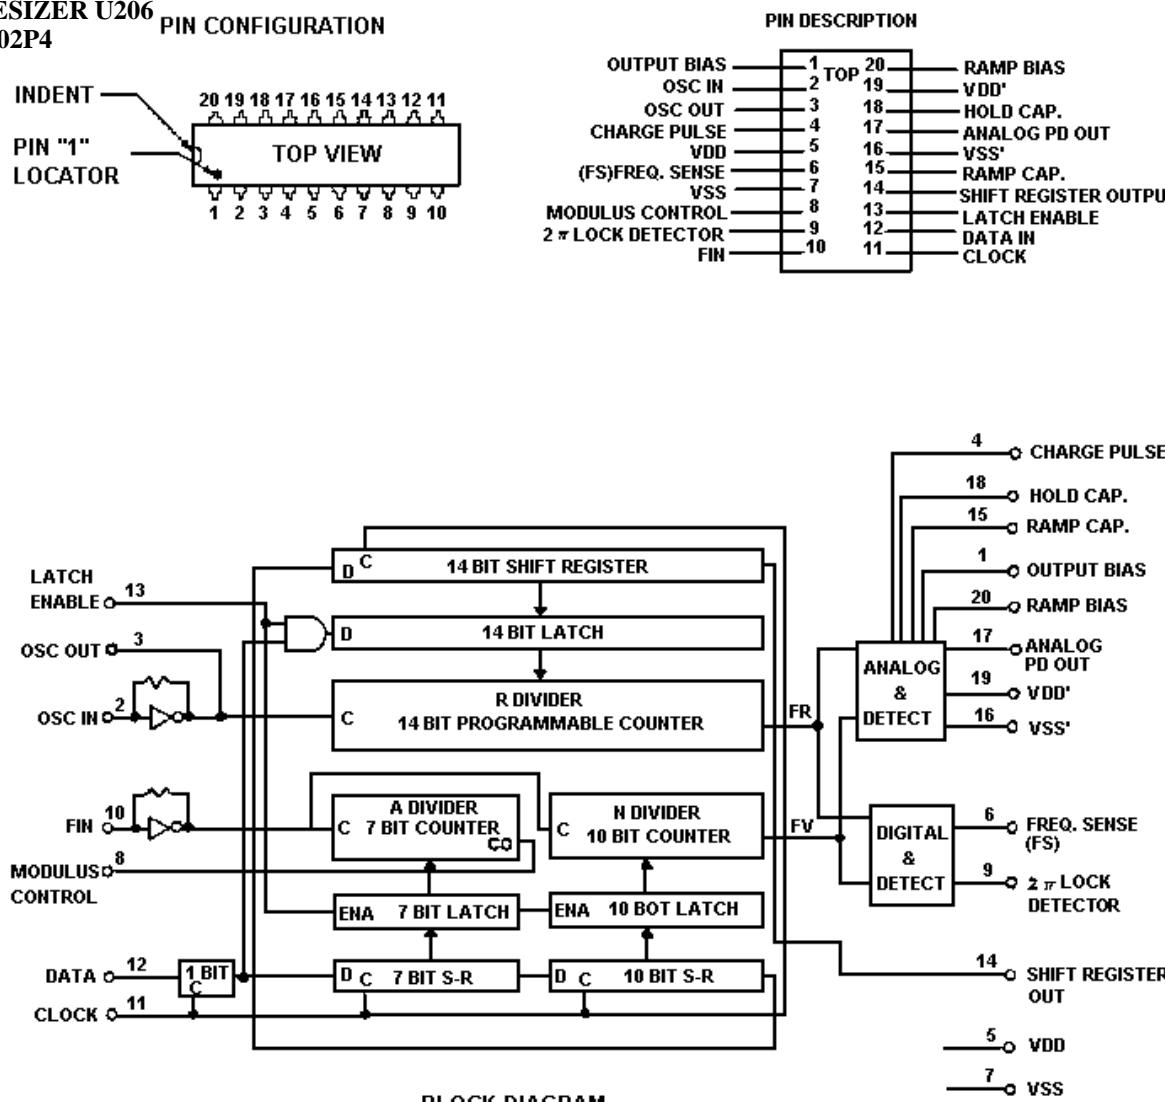


OSC/MIXER/IF/DET/AMP U501
19A704619P1 (MC3361AP)

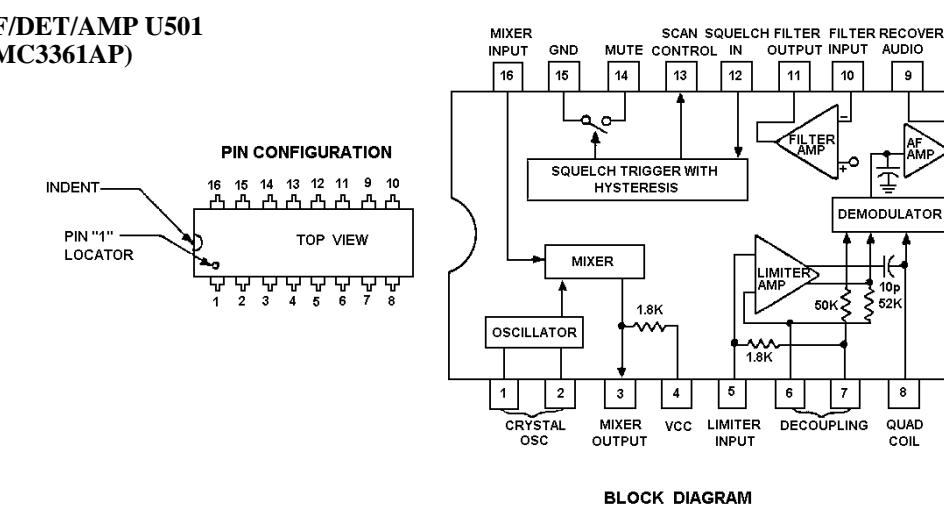


8 VOLT REGULATOR U502
19A704073P2 (MC78L05ACP)

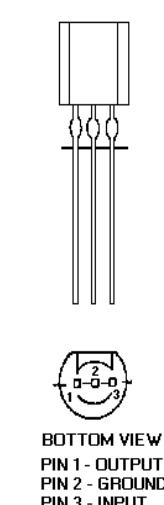

VIEW FROM COMPONENT SIDE

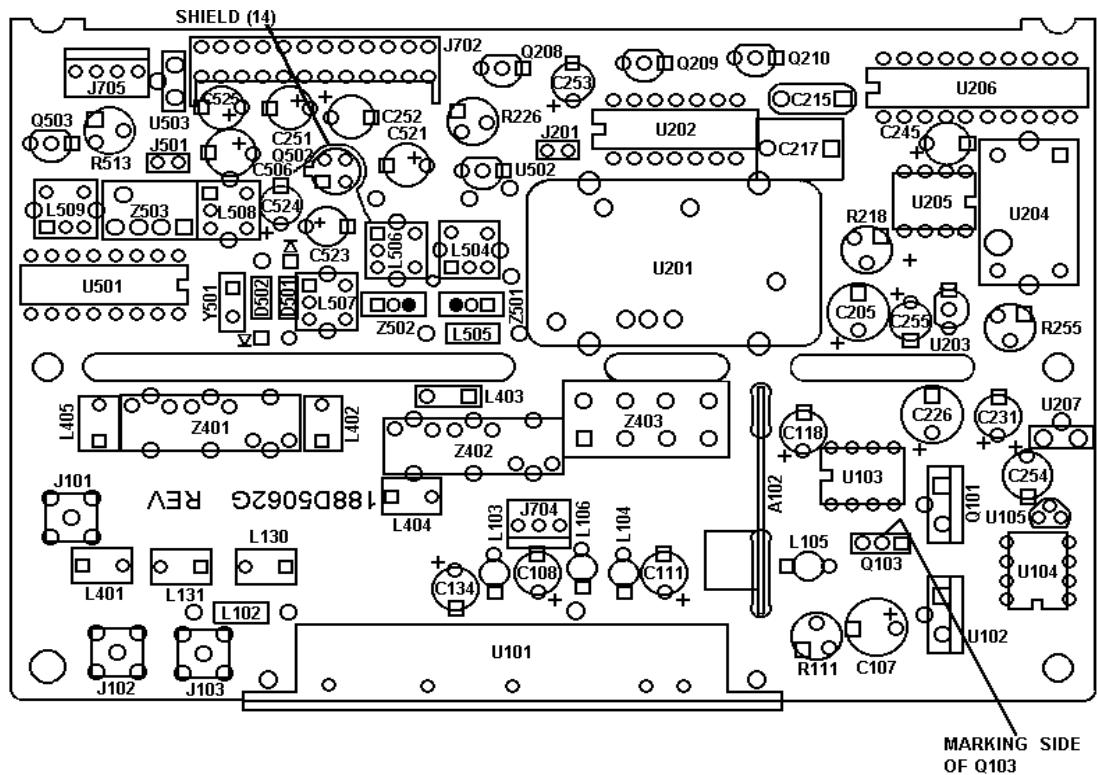


VIEW FROM SOLDER SIDE

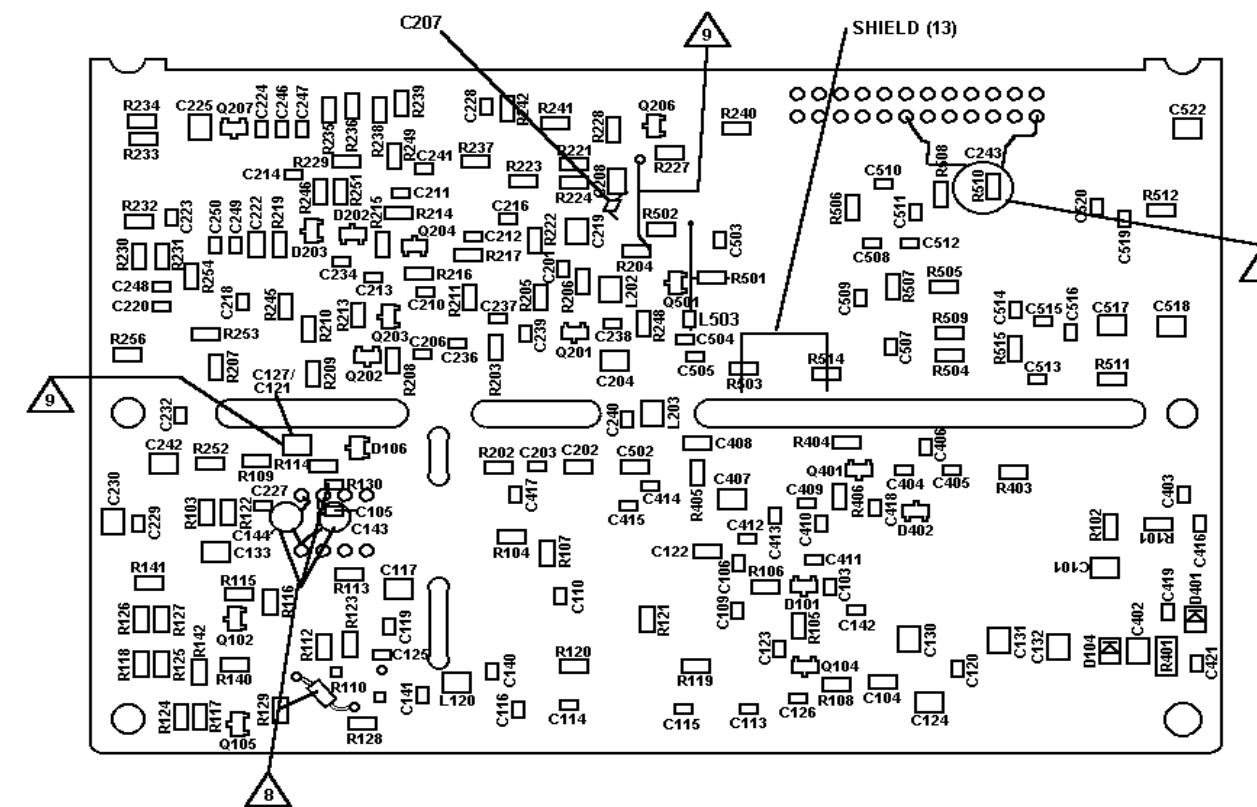

 HAND SOLDER R110 AS SHOWN.


**9. PIGGY BACK C127 ON C121 AS SHOWN AND HAND SOLDER.
CUT RUN AT R204 WHERE SHOWN
ADD ADD JUMPER WIRE FROM
R204 TO C253 AS SHOWN.
ADD C243 AS SHOWN.**

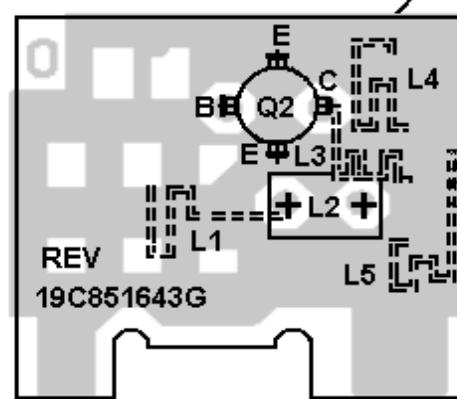

**RF BOARD
188D5062G1-G3**



(188D5062, Sh. 1, Rev. 7)

(19B851143, Rev. 1)
(19A705441, Sh. 1, Rev. 0)
(19A705441, Sh. 2, Rev. 1)

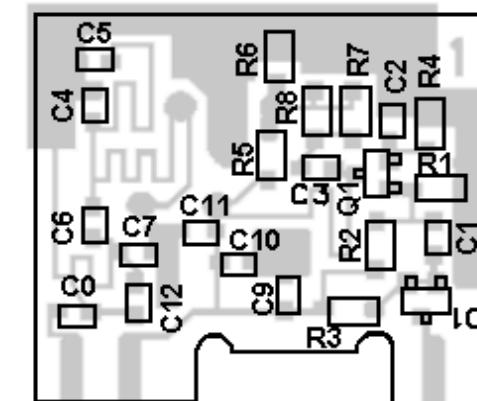


| COMPONENT | 403-440 MHZ SPLIT (G2) | 440-470 MHZ SPLIT (G1) | 470-512 MHZ SPLIT (G3) |
|-----------|------------------------|------------------------|------------------------|
| C103 | 13 | 12 | 12 |
| C130 | 3.3 | 3.9 | 3.3 |
| C131 | 15 | 12 | 12 |
| C132 | 2.2 | 3.9 | 3.0 |
| C402 | 11 | 6.8 | 6.8 |
| C419 | 3.9 | 3.9 | 3.9 |
| C421 | 120 | 120 | 100 |
| R102 | 51 | 56 | 56 |
| C116 | 3.3 | 100 | 100 |
| C140 | - | 5.6 | 5.6 |
| C141 | - | 5.6 | 5.6 |
| L120 | 39 | 15 | 15 |
| - | - | - | - |
| - | - | - | - |
| - | - | - | - |
| C142 | 12 | 12 | 33 |
| C127 | - | - | 2200pF |

| MODEL NO. | REV. LETTER |
|------------|-------------|
| 188D5062G1 | H |
| 188D5062G2 | E |
| 188D5062G3 | B |

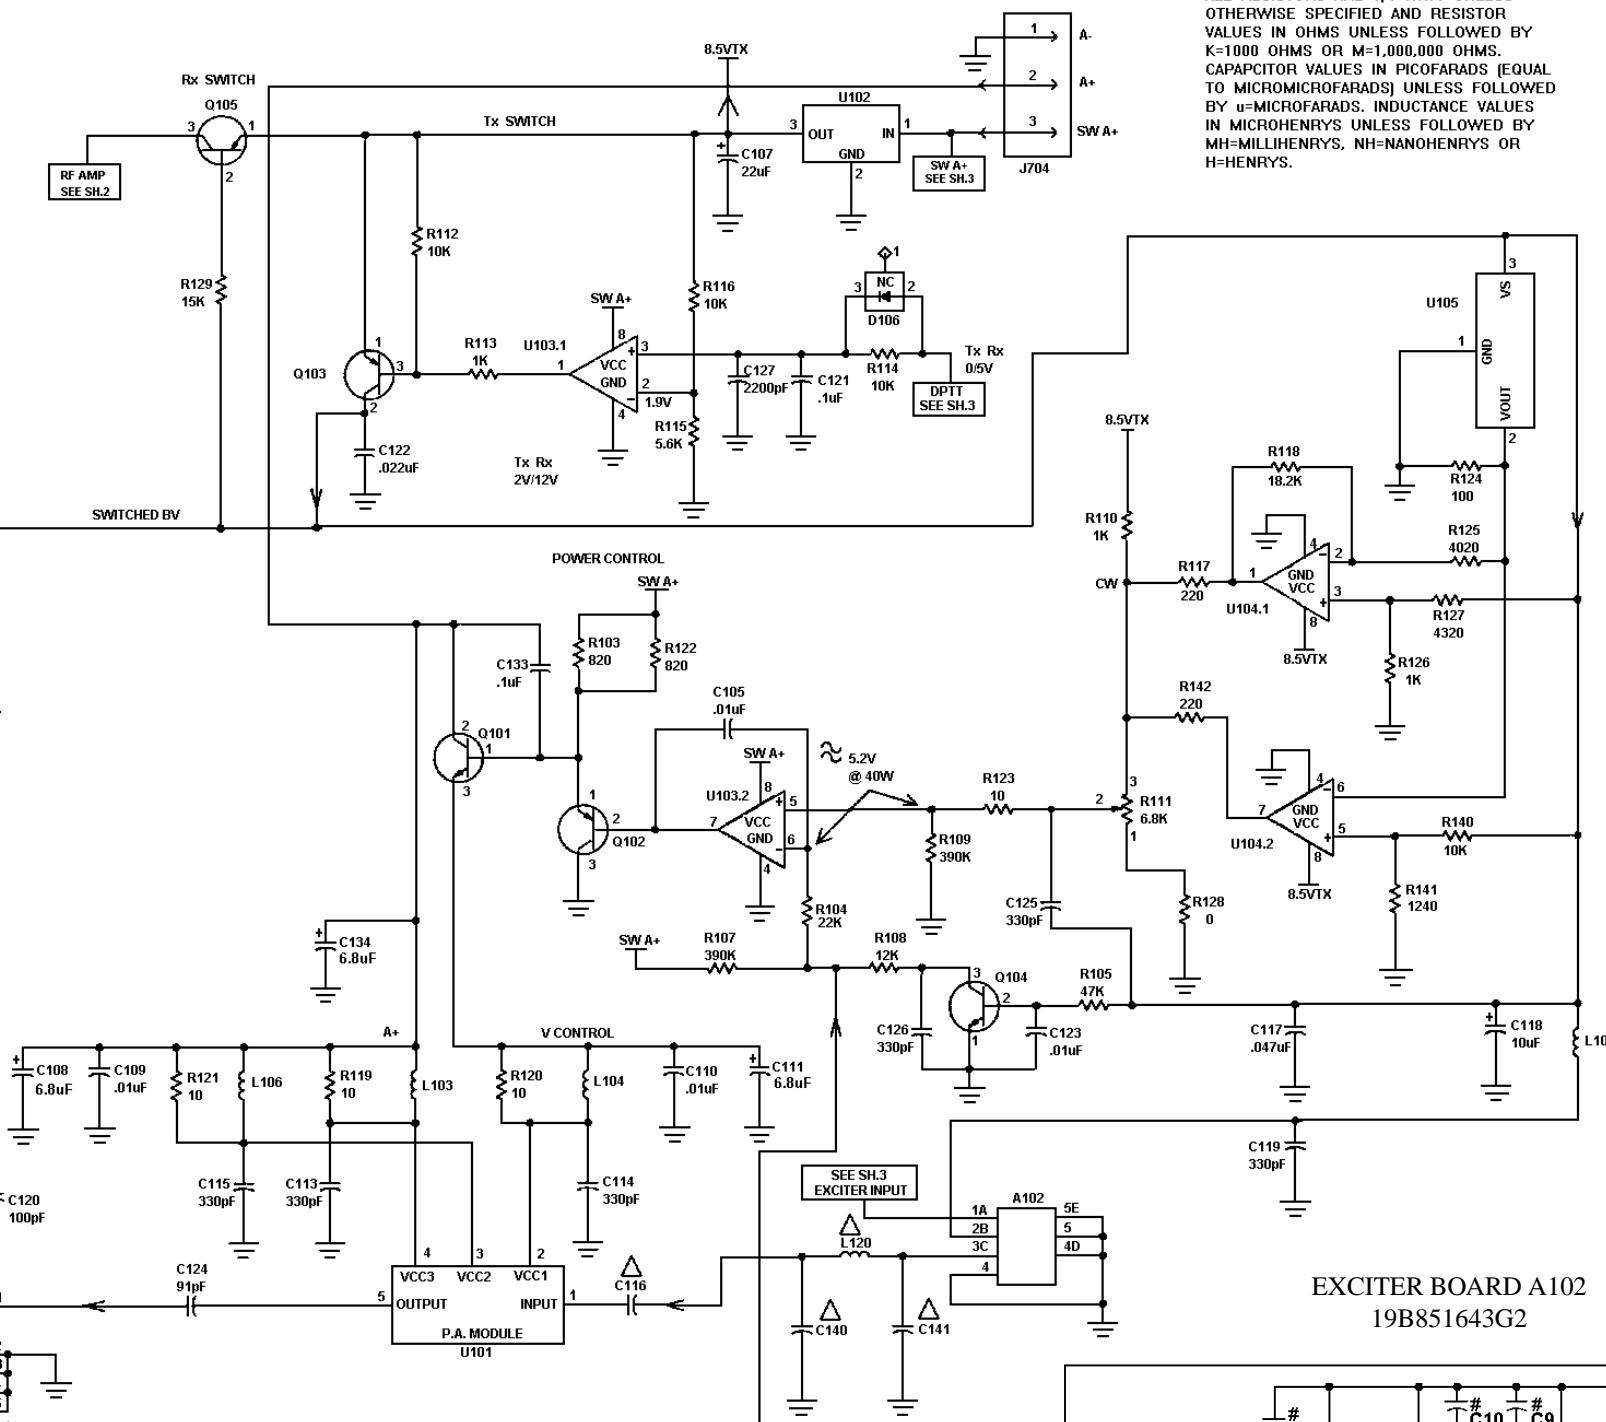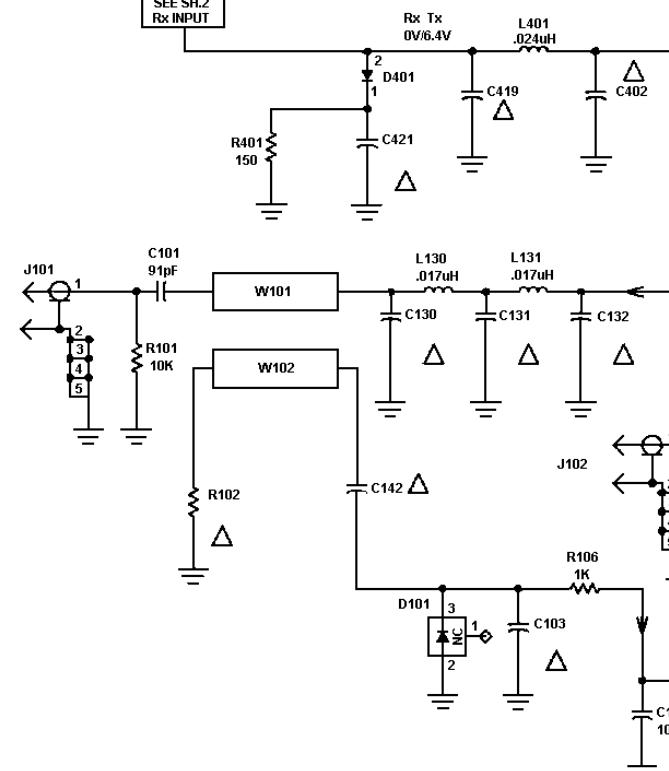


RF BOARD
188D5062G1-G3

(188D5060, Sh. 2, Rev. 9)

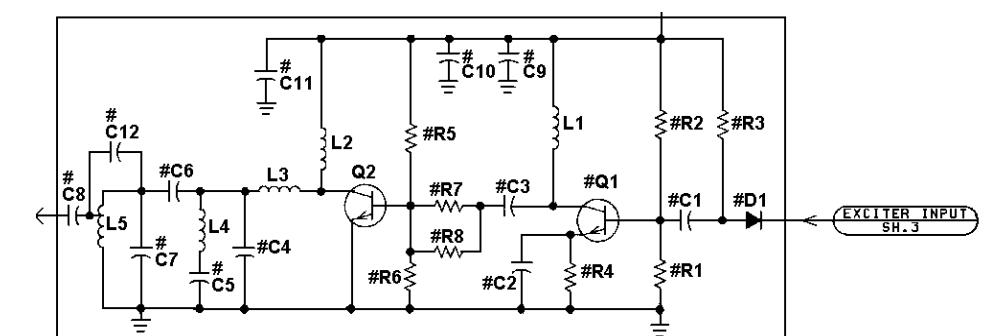


(19D902035, Sh. 1, Rev. 5)

ALL RESISTORS ARE 1/4 WATT UNLESS OTHERWISE SPECIFIED AND RESISTOR VALUES IN OHMS UNLESS FOLLOWED BY K=1000 OHMS OR M=1,000,000 OHMS.
CAPACITOR VALUES IN PICOFARADS [EQUAL TO MICROMICROFARADS] UNLESS FOLLOWED BY u=MICROFARADS. INDUCTANCE VALUES IN MICROHENRYS UNLESS FOLLOWED BY MH=ILLIHENRYS, NH=NANOHENRYS OR H=HENRYS.

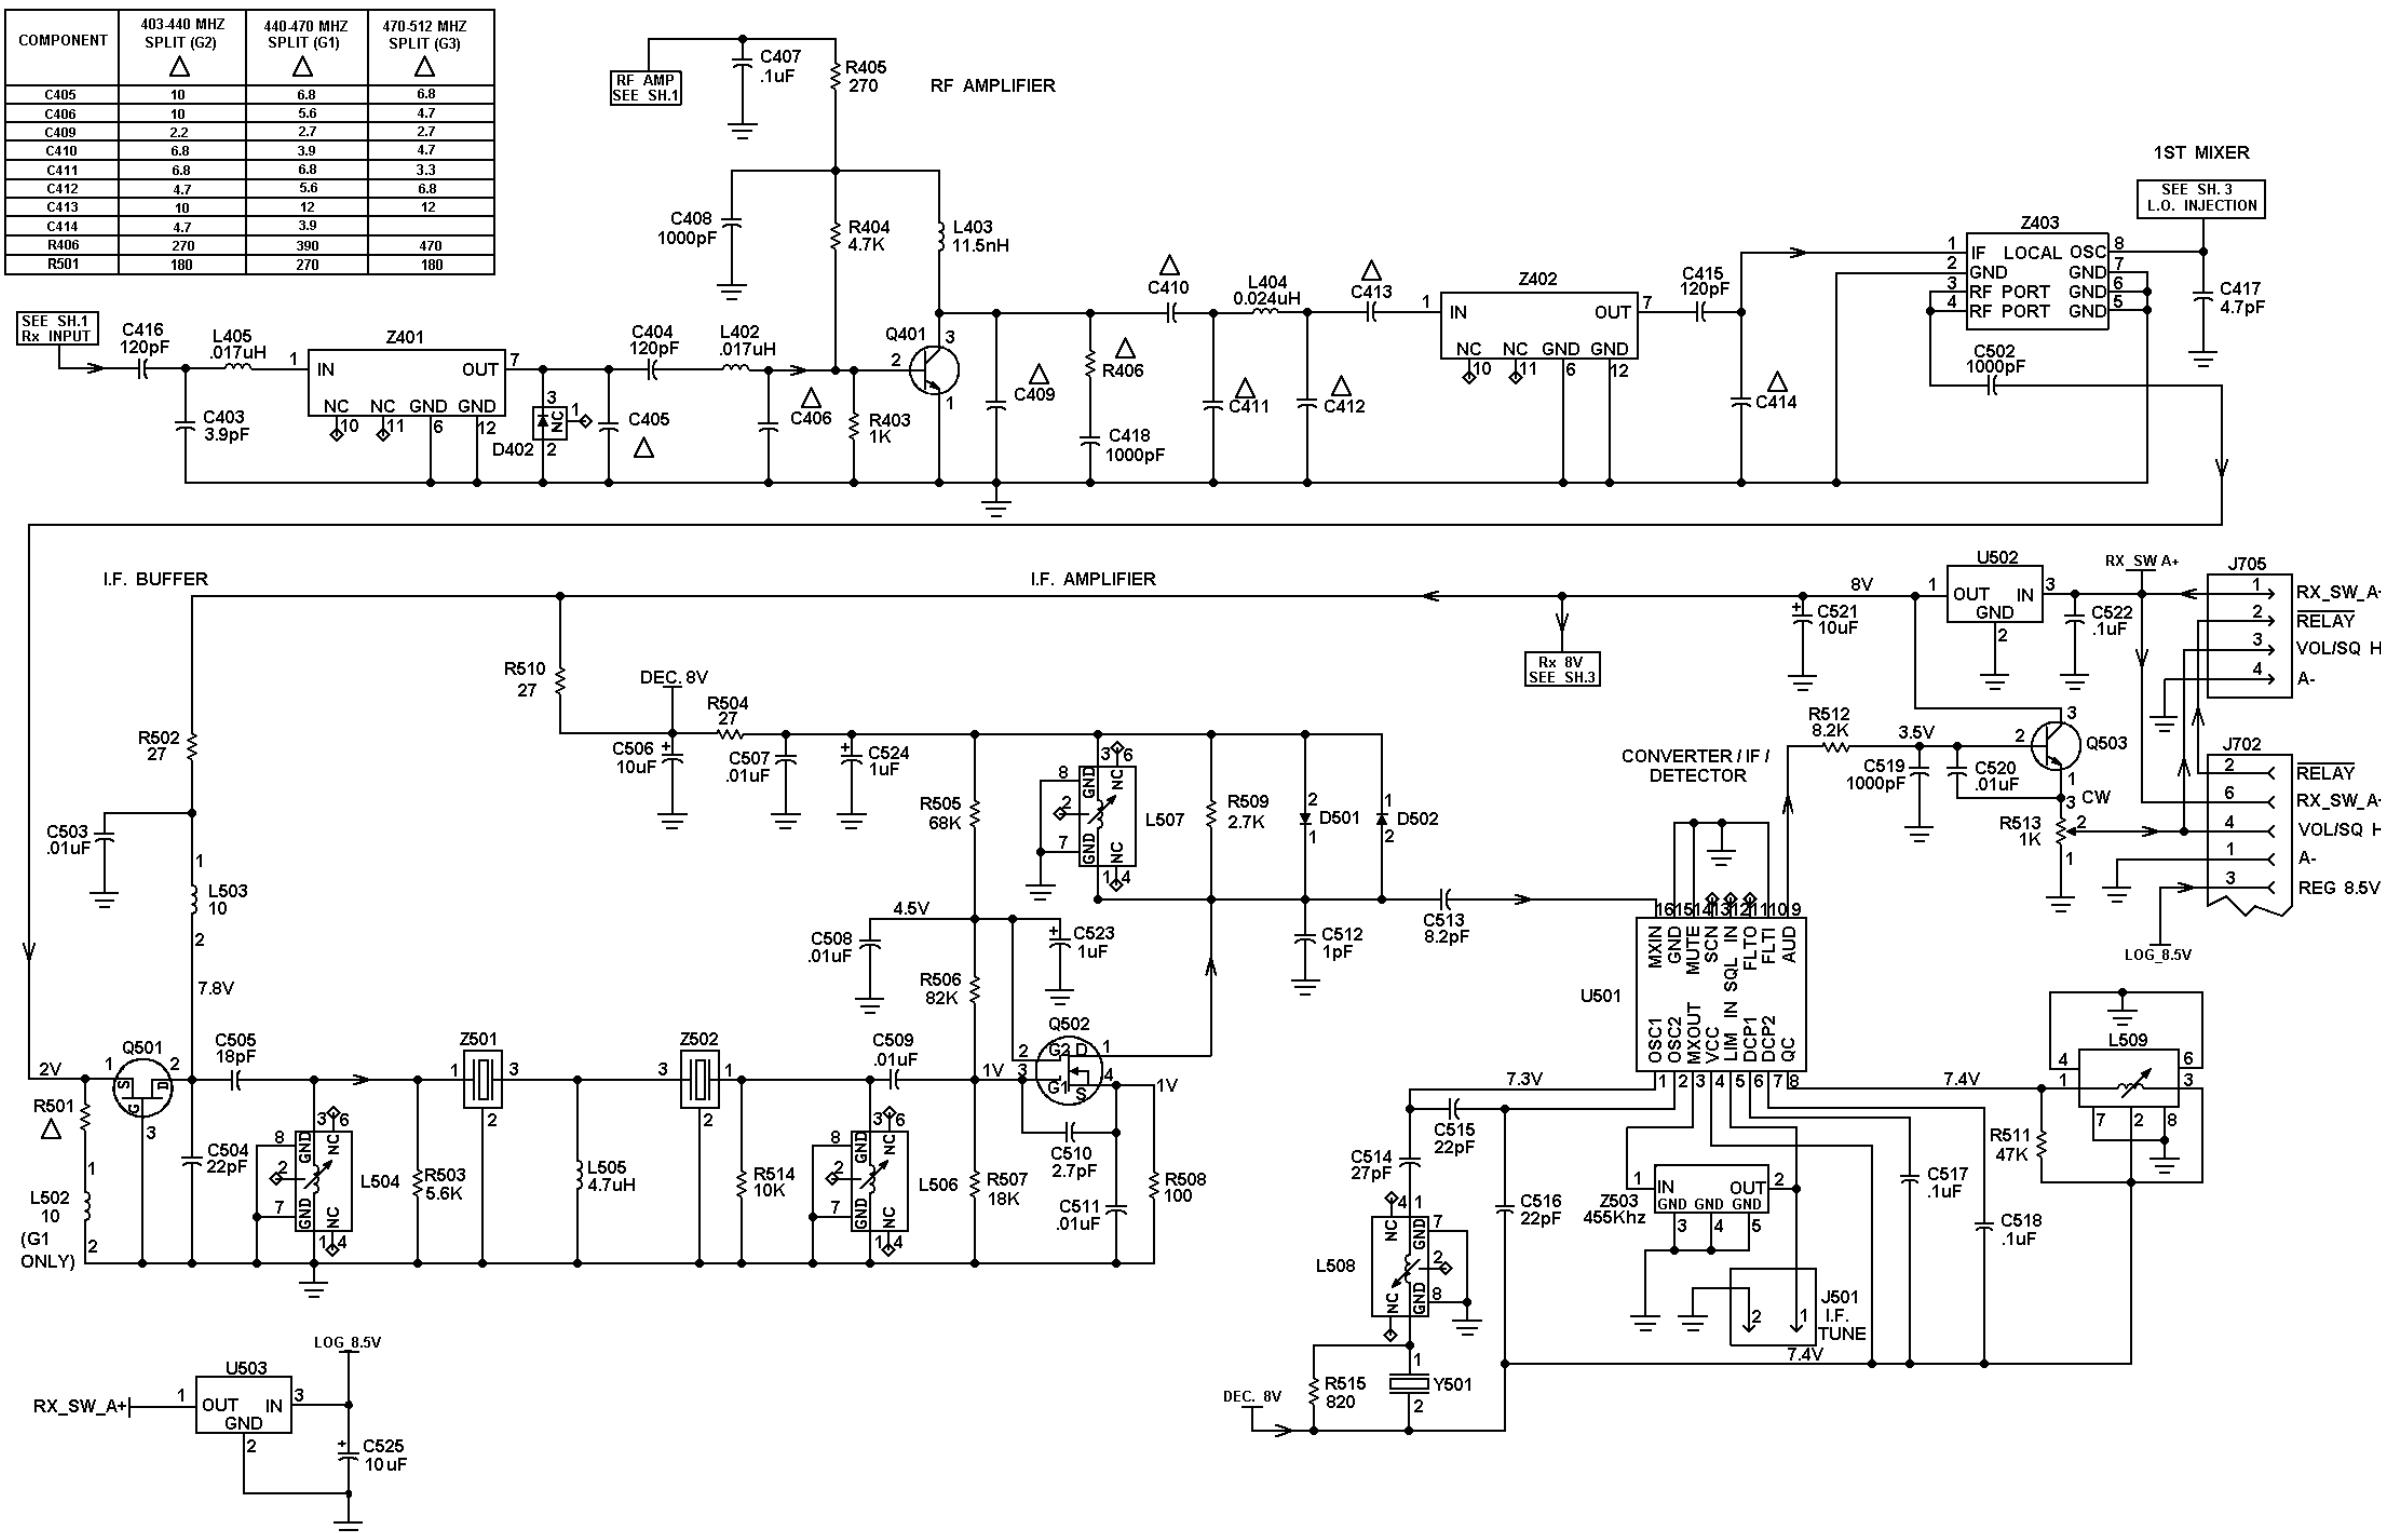


RF BOARD 188D5062G1-G3

(188D5060, Sh. 2, Rev. 9)

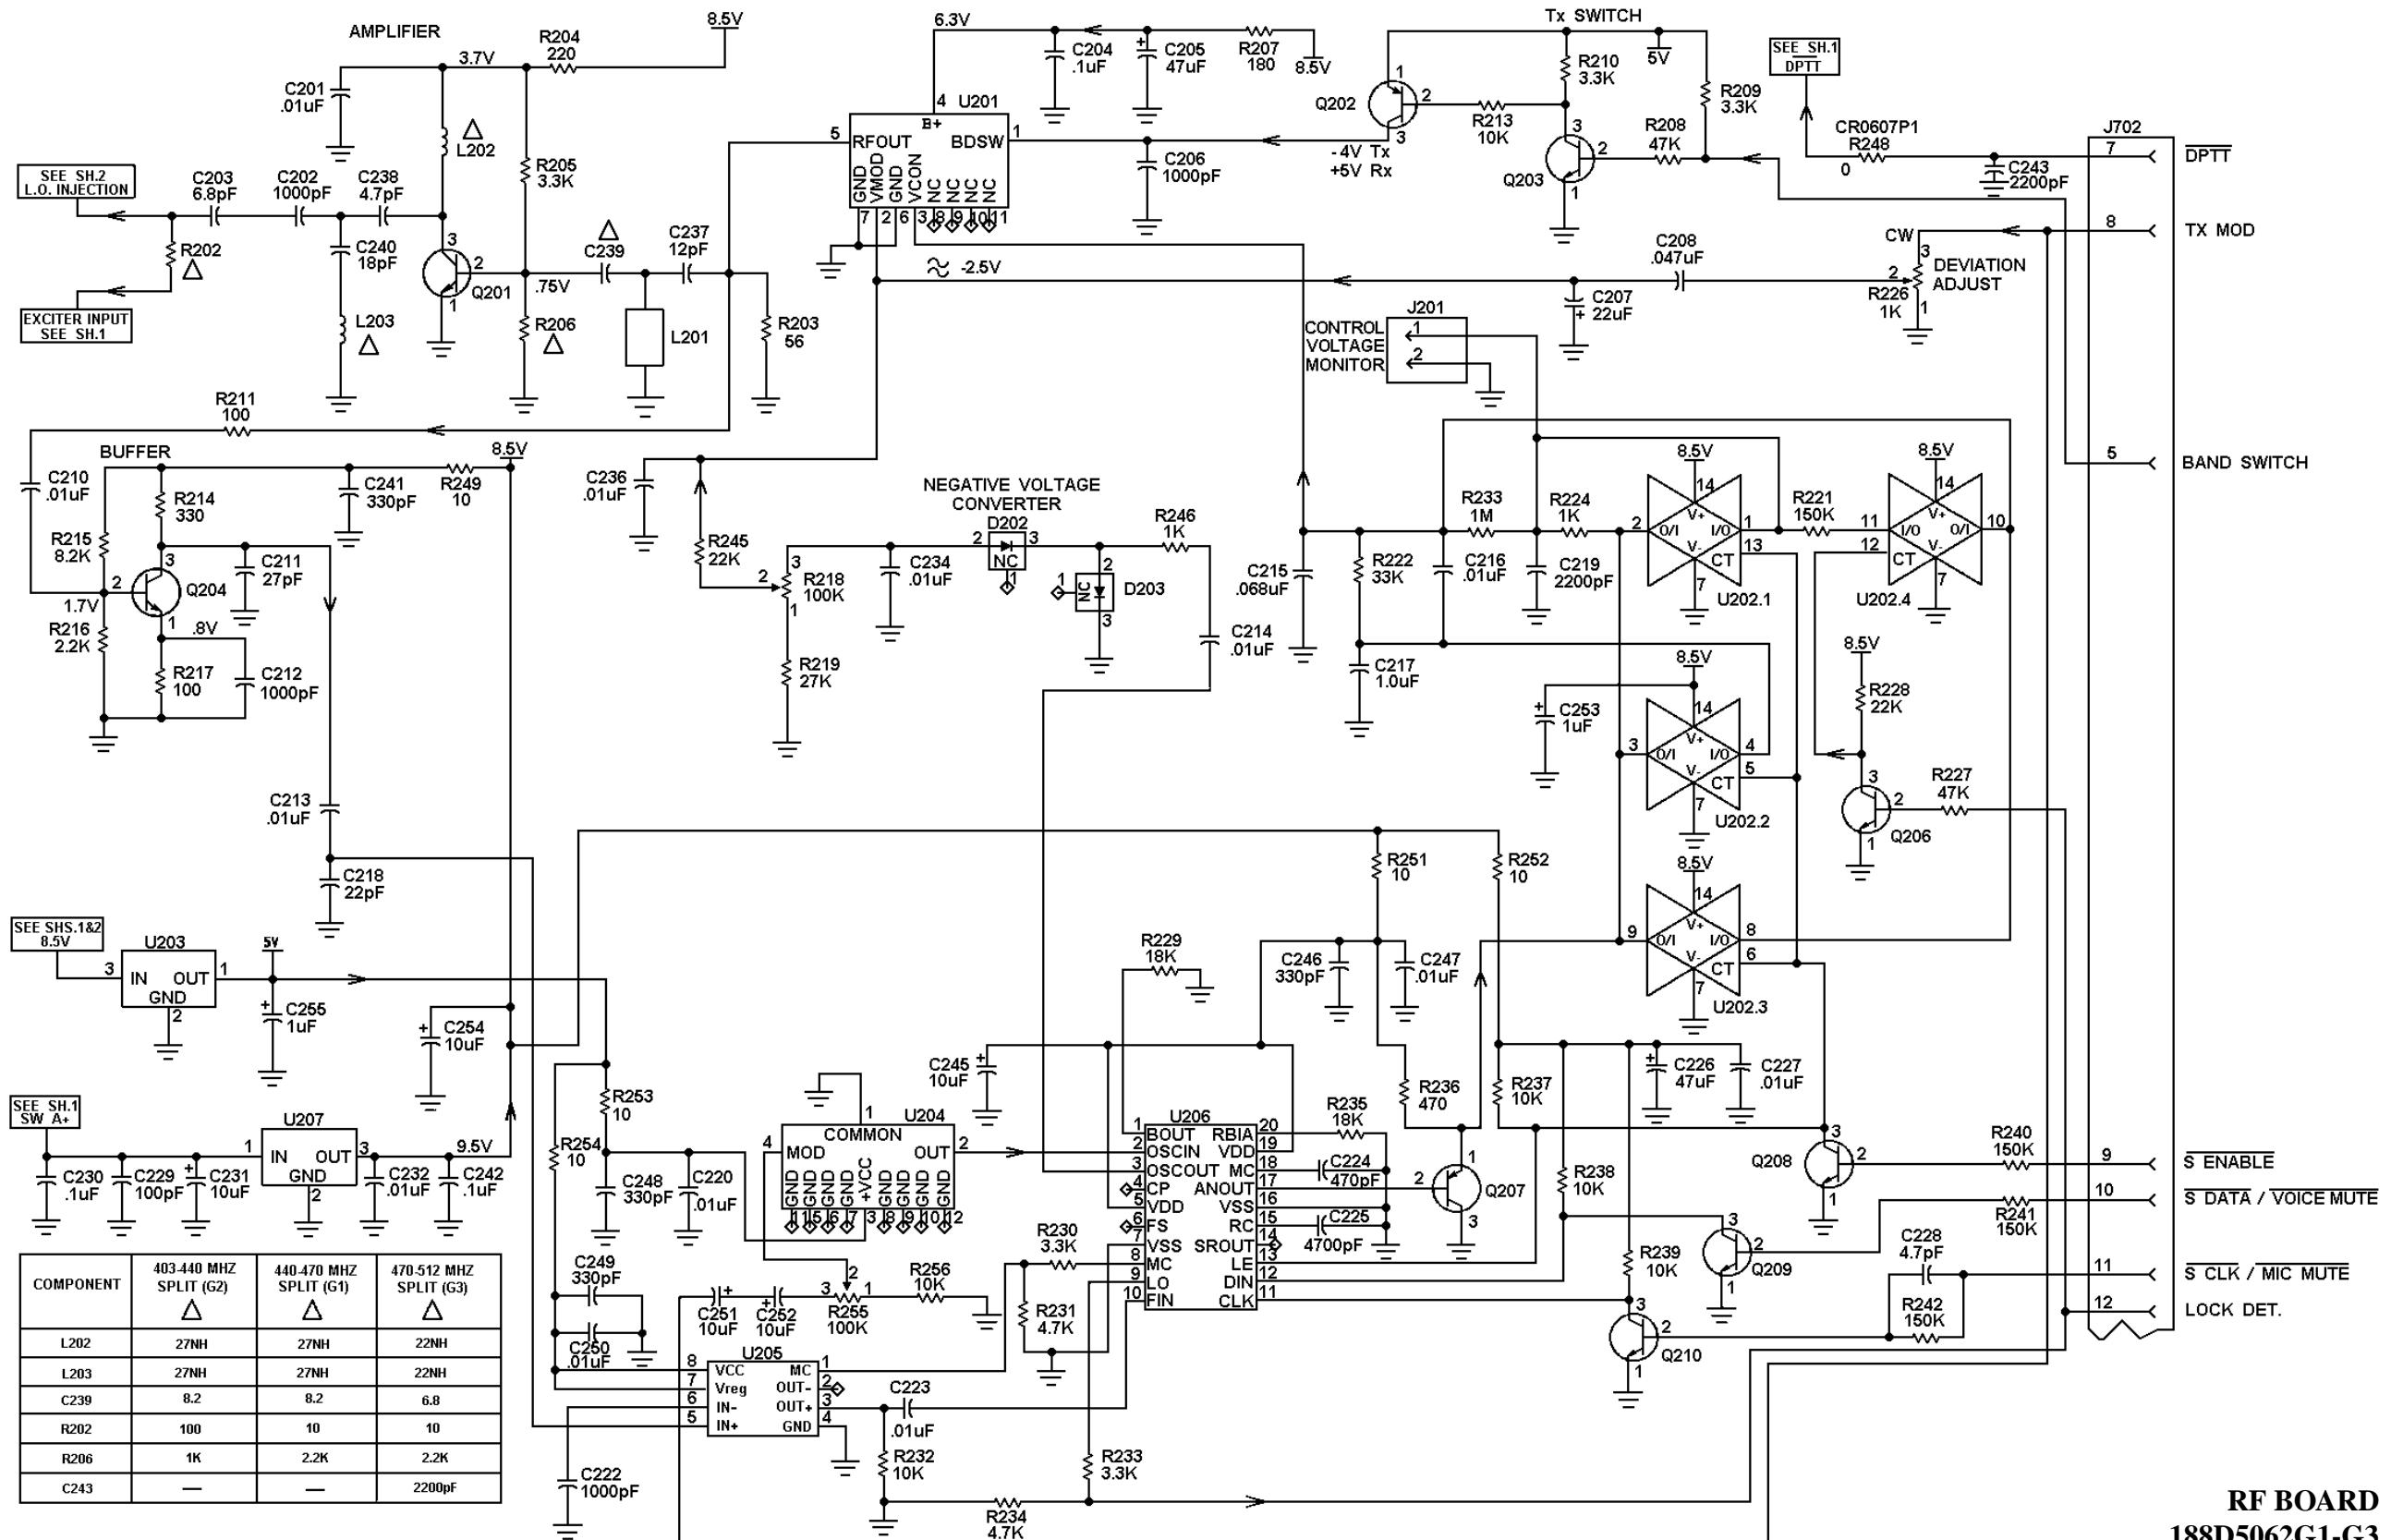


RF BOARD
188D5062G1-G3

(188D5060, Sh. 3, Rev. 9)

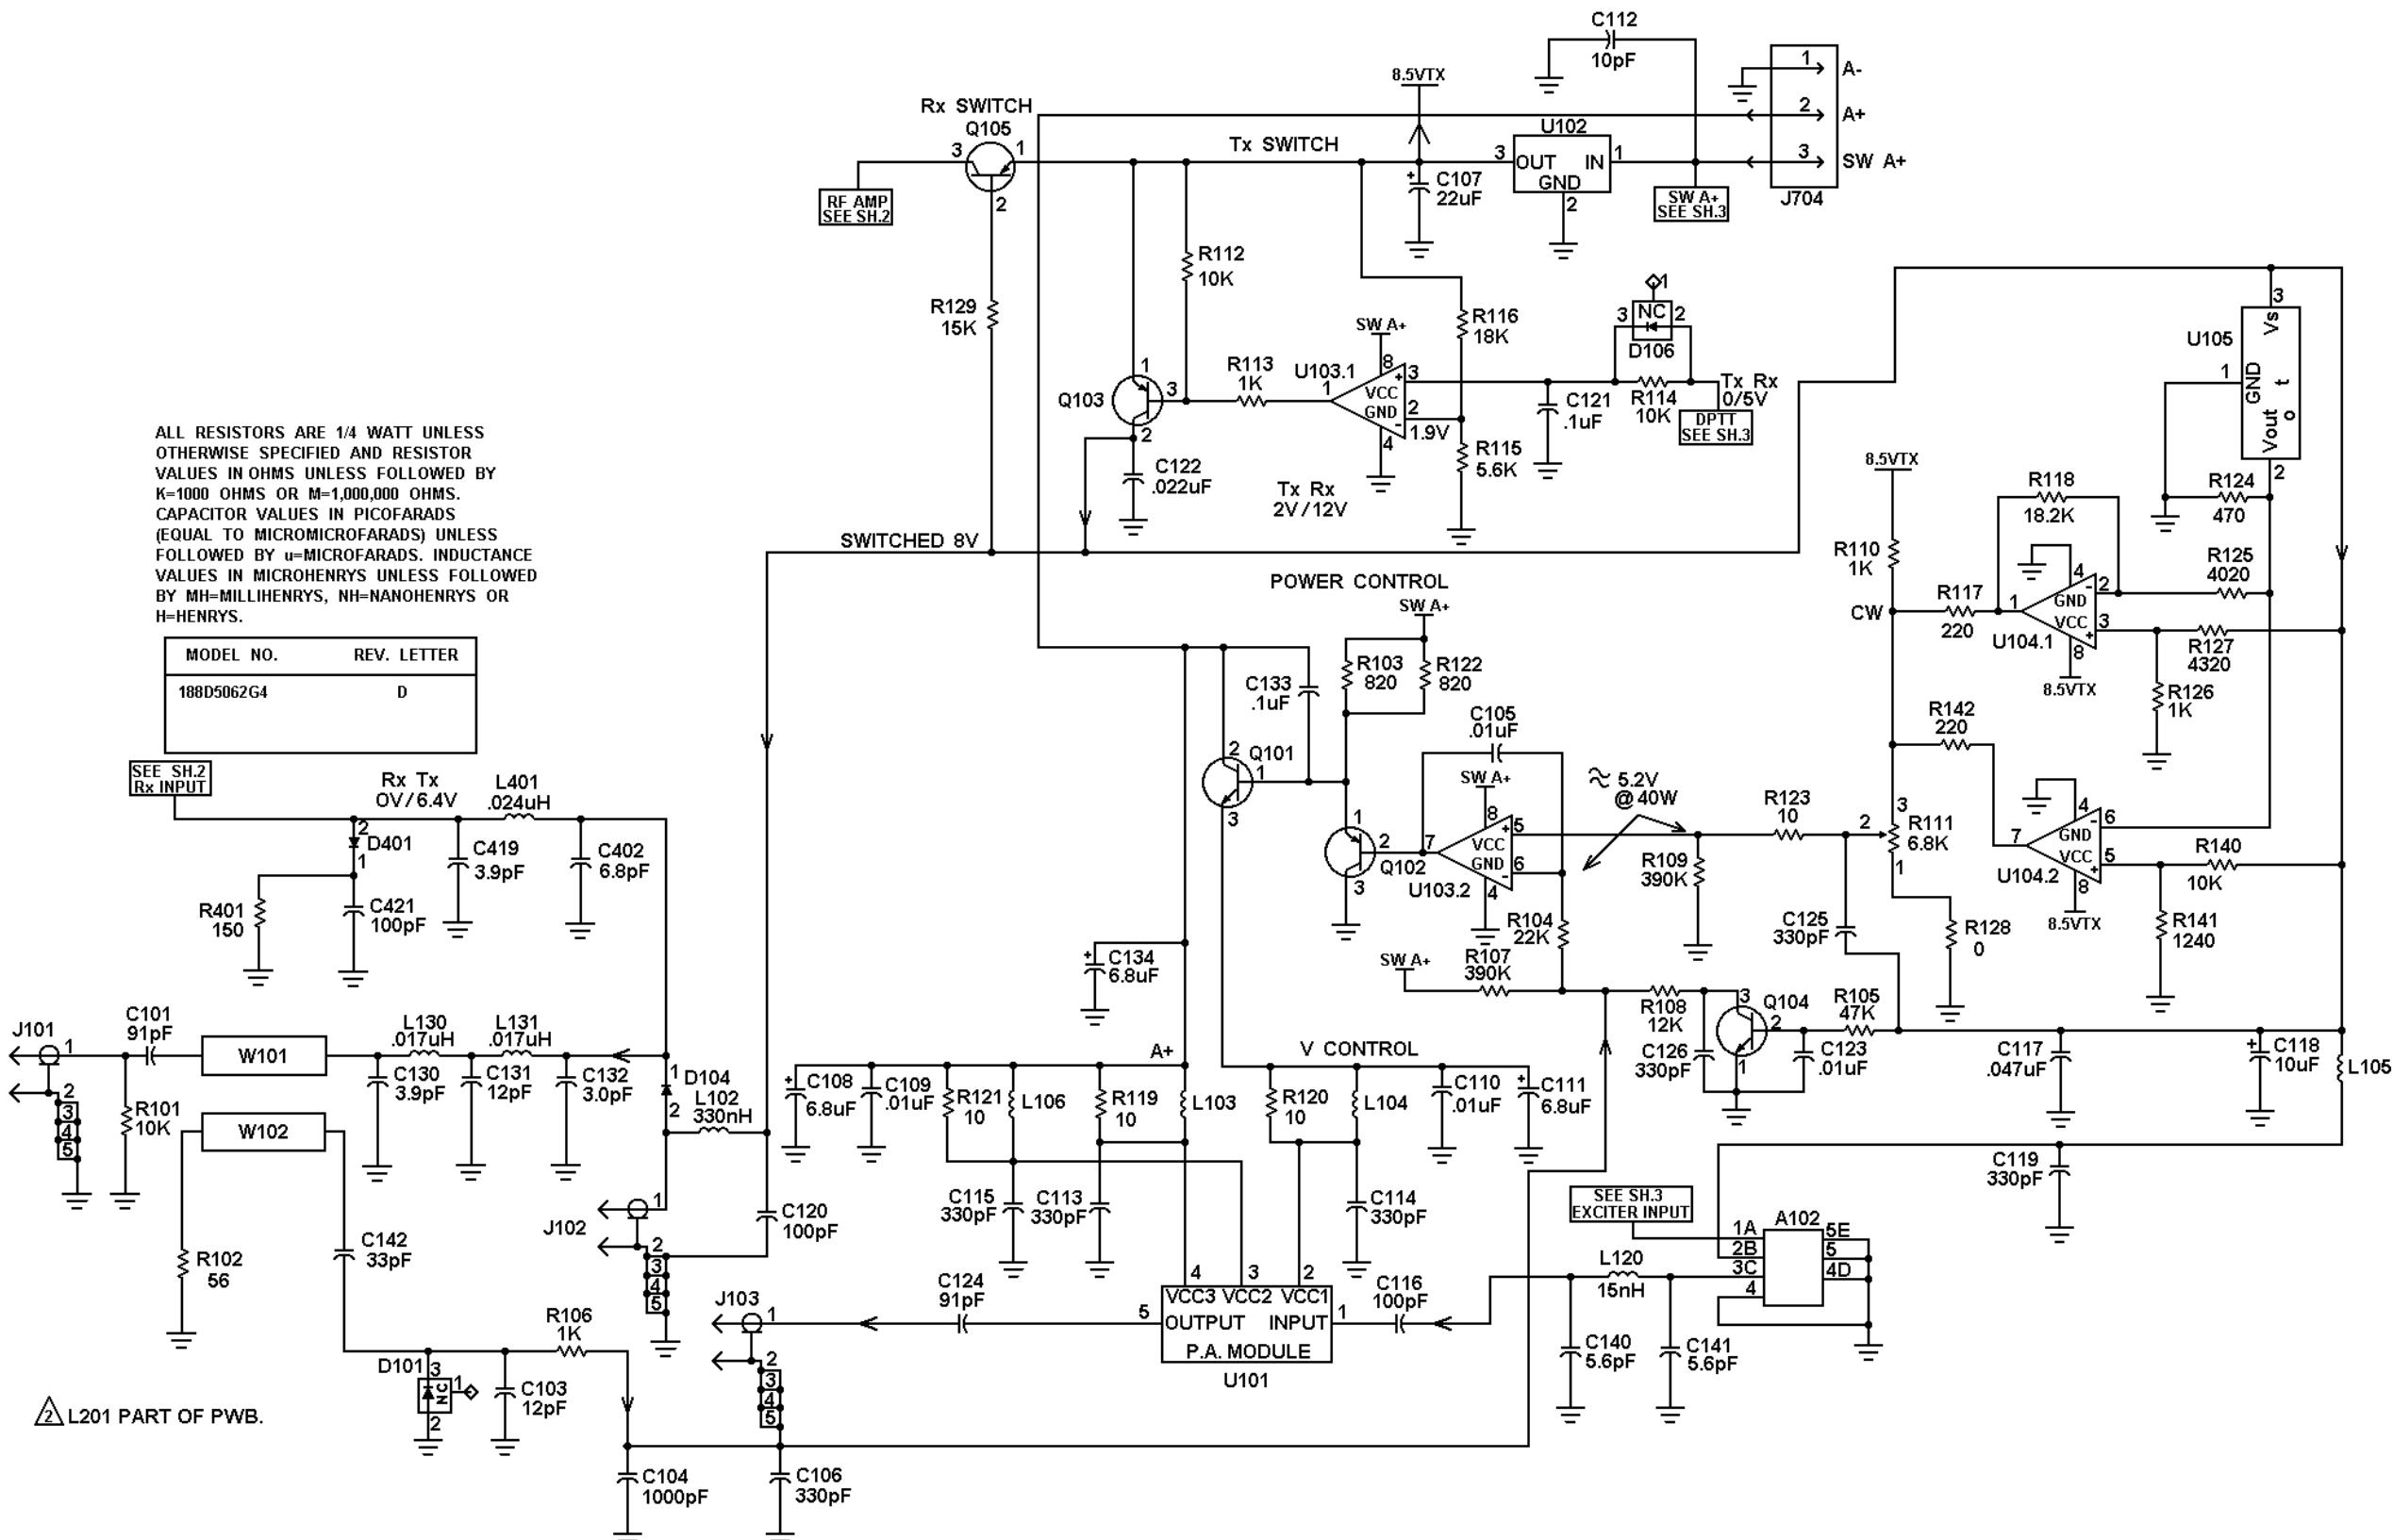


RF BOARD
188D5062G4

(188D6179, Sh. 1, Rev. 5)

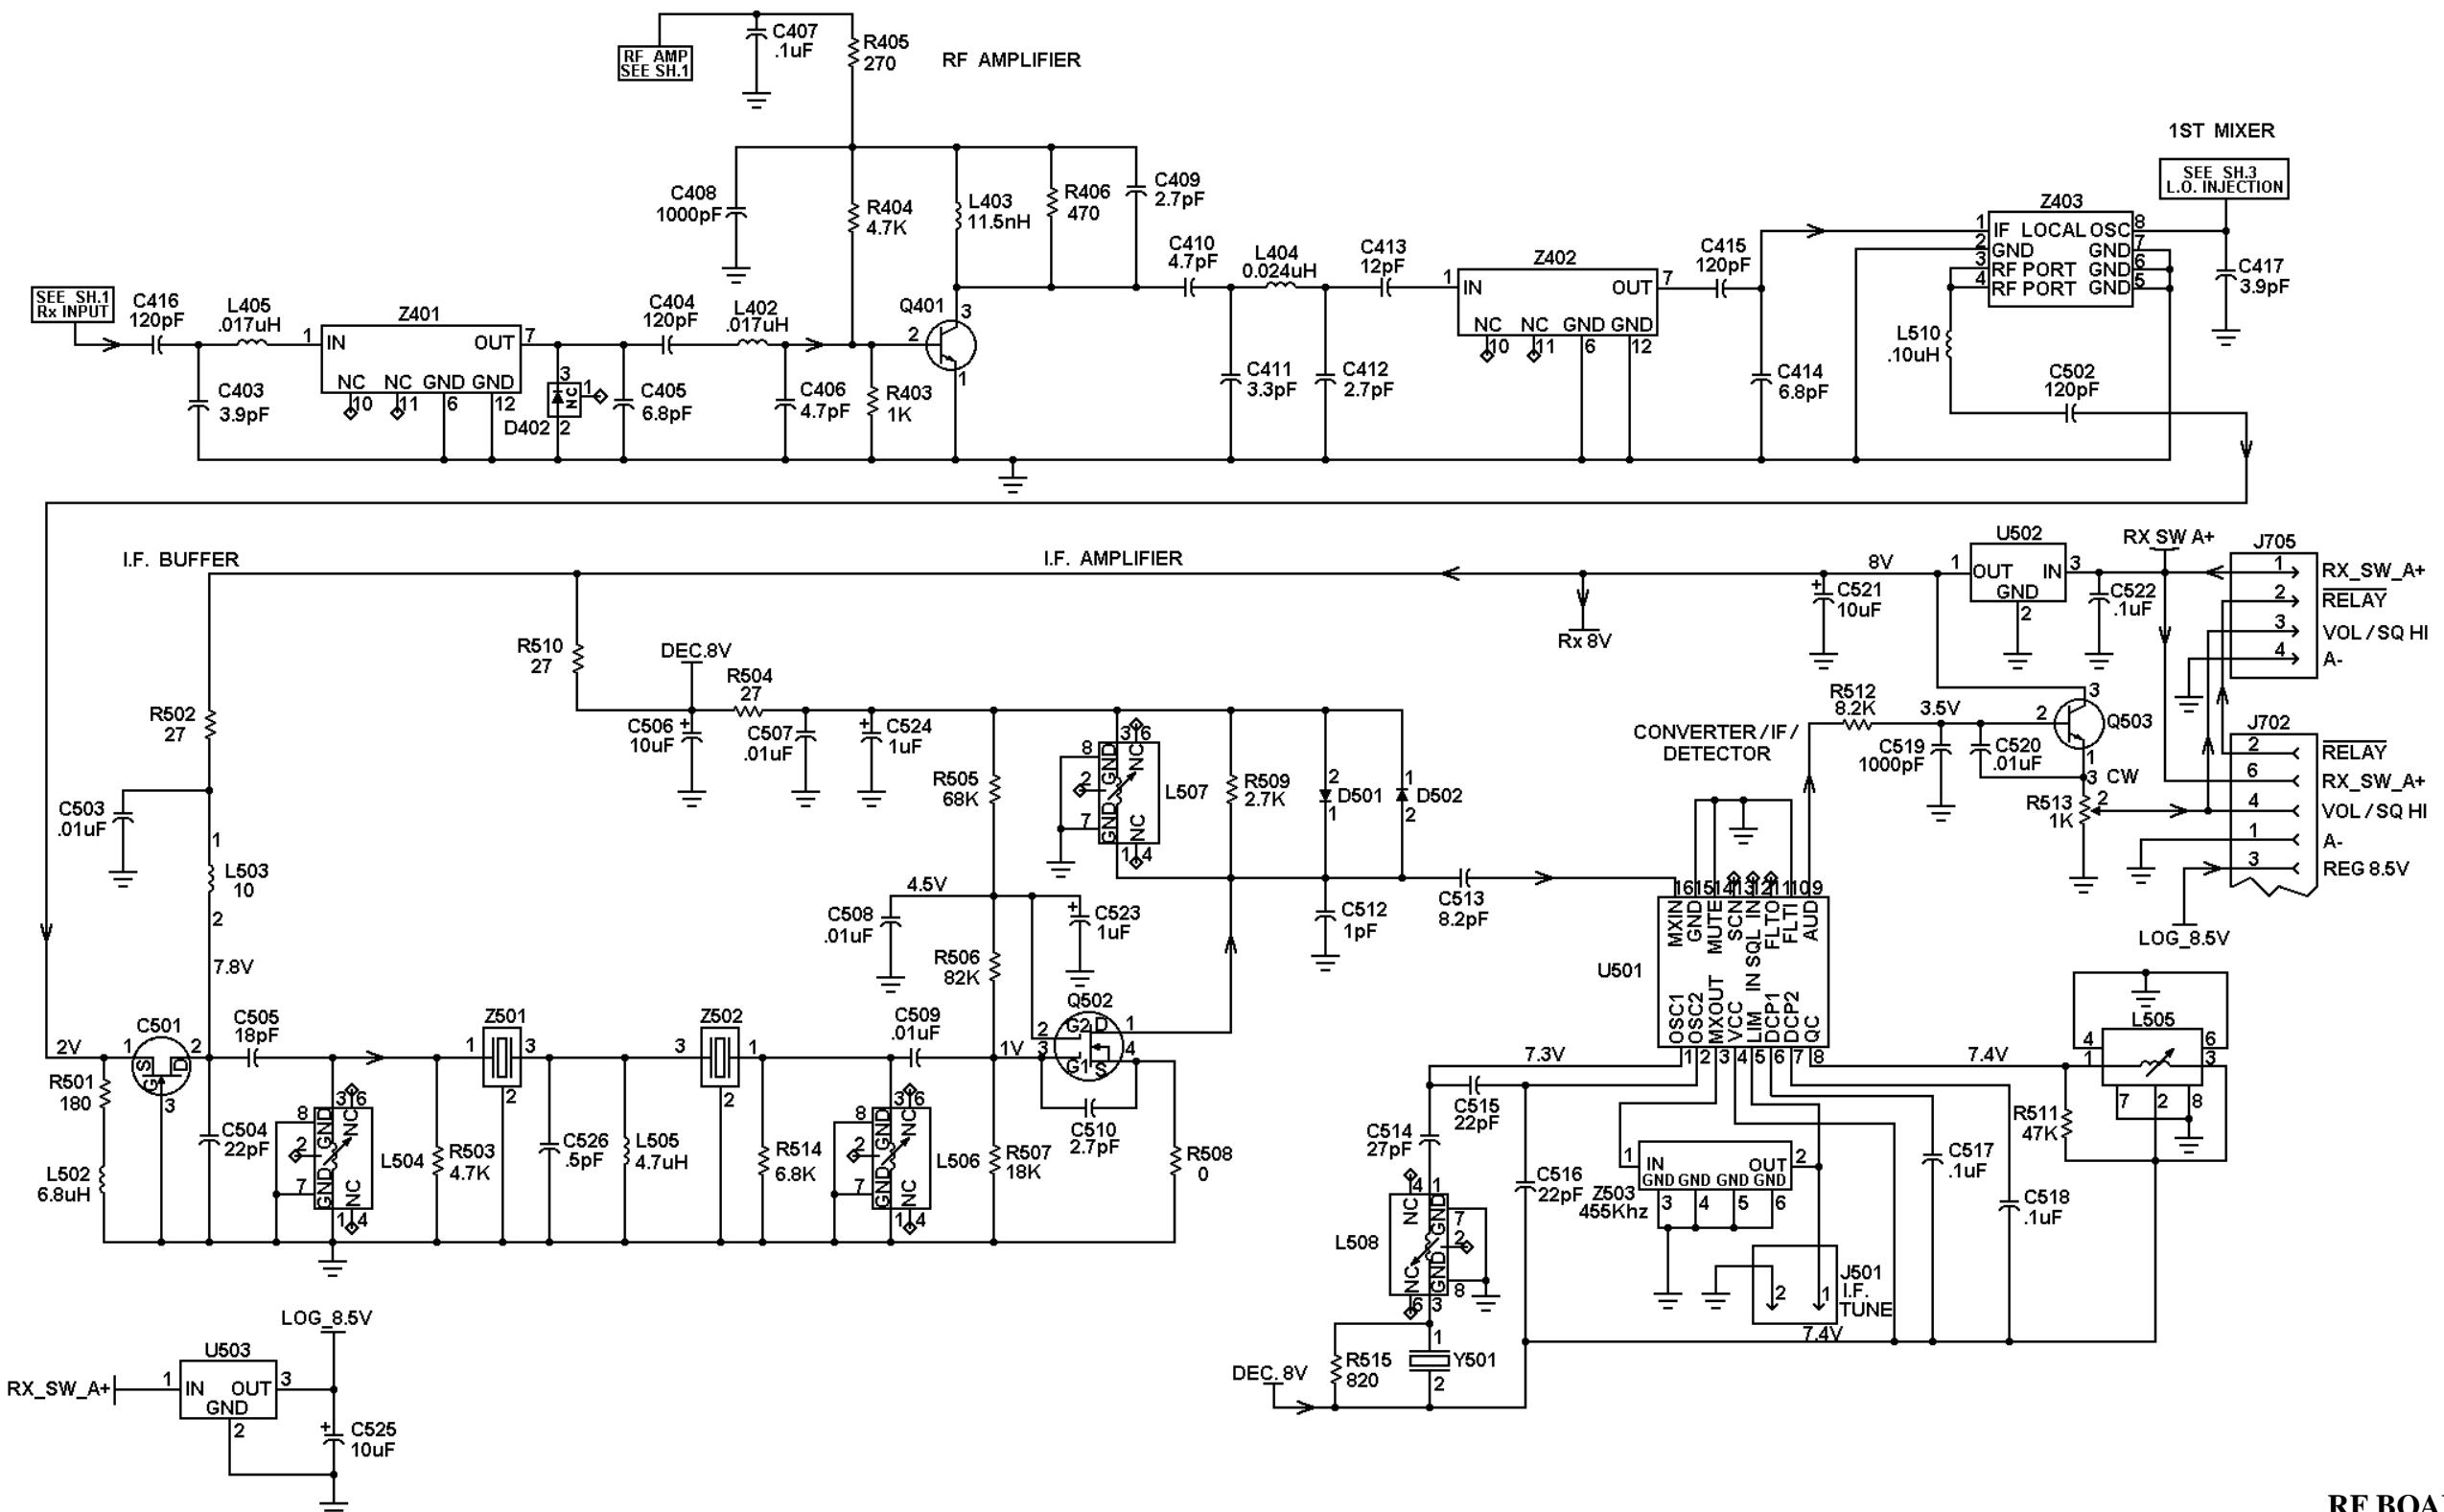

**RF BOARD
188D5062G4**

(188D6179, Sh. 2, Rev. 5)


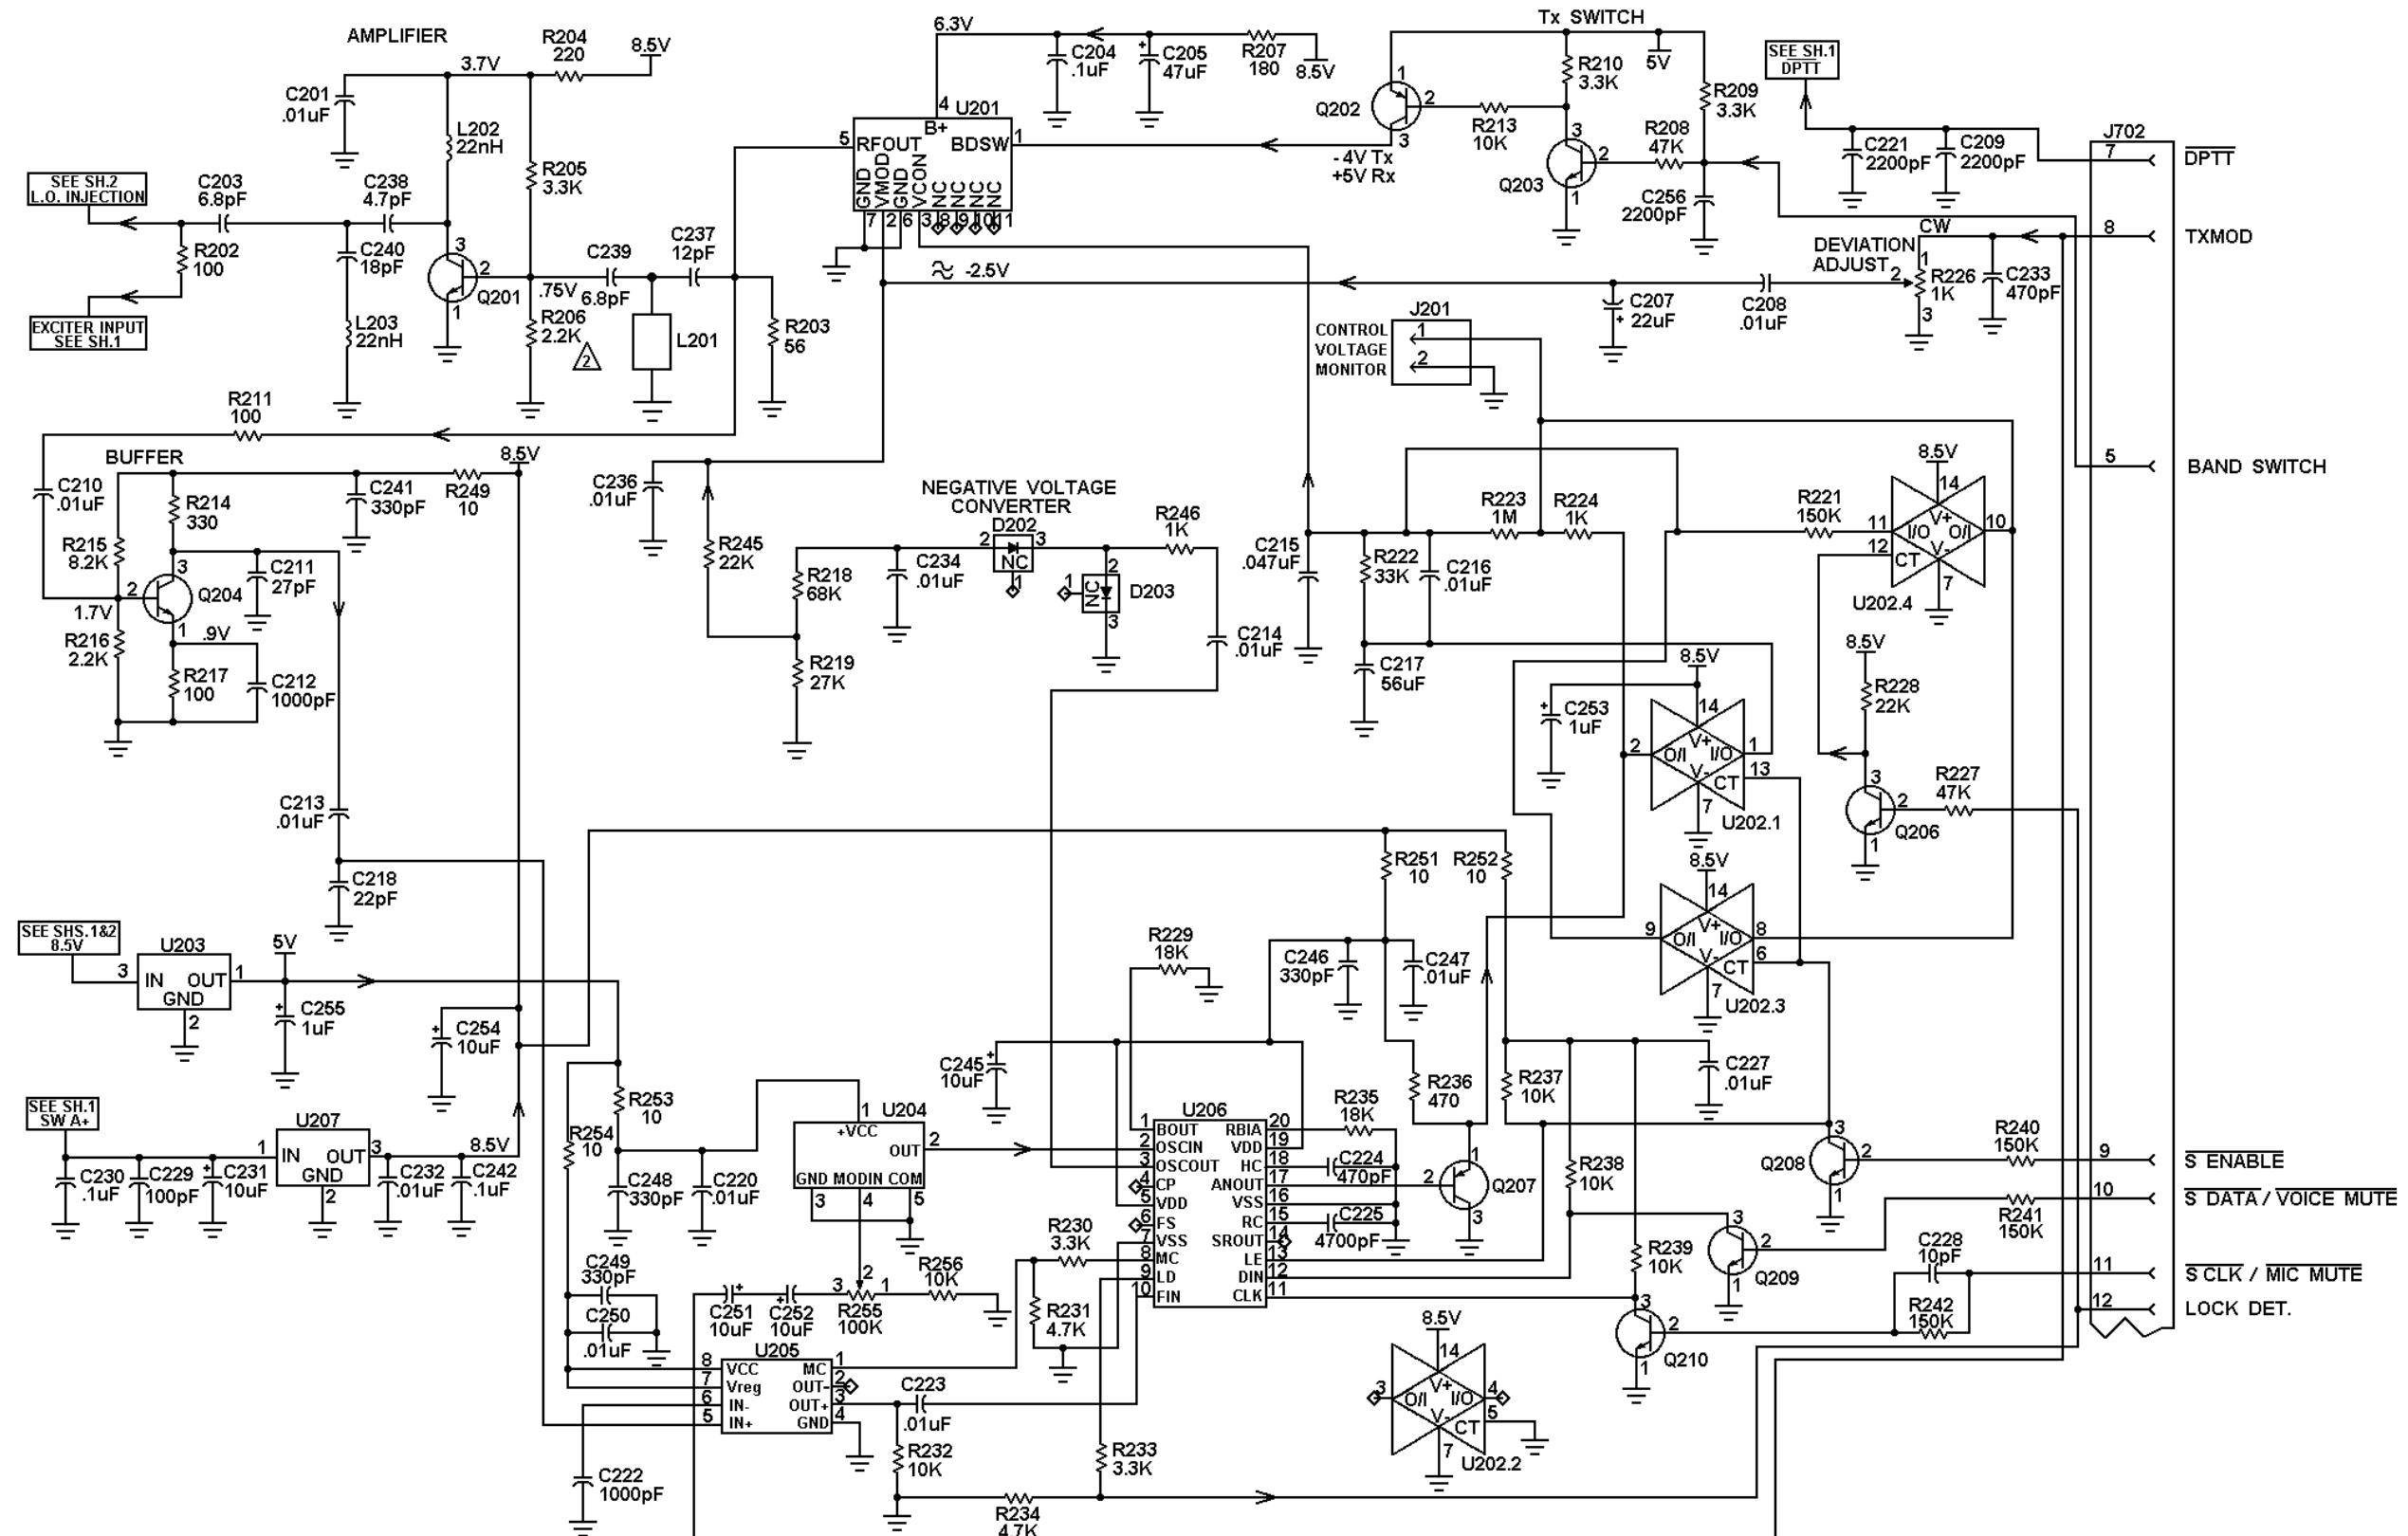


RF BOARD
188D5062G4

(188D6179, Sh. 3, Rev. 5)

VIEW FROM COMPONENT SIDE

VIEW FROM SOLDER SIDE

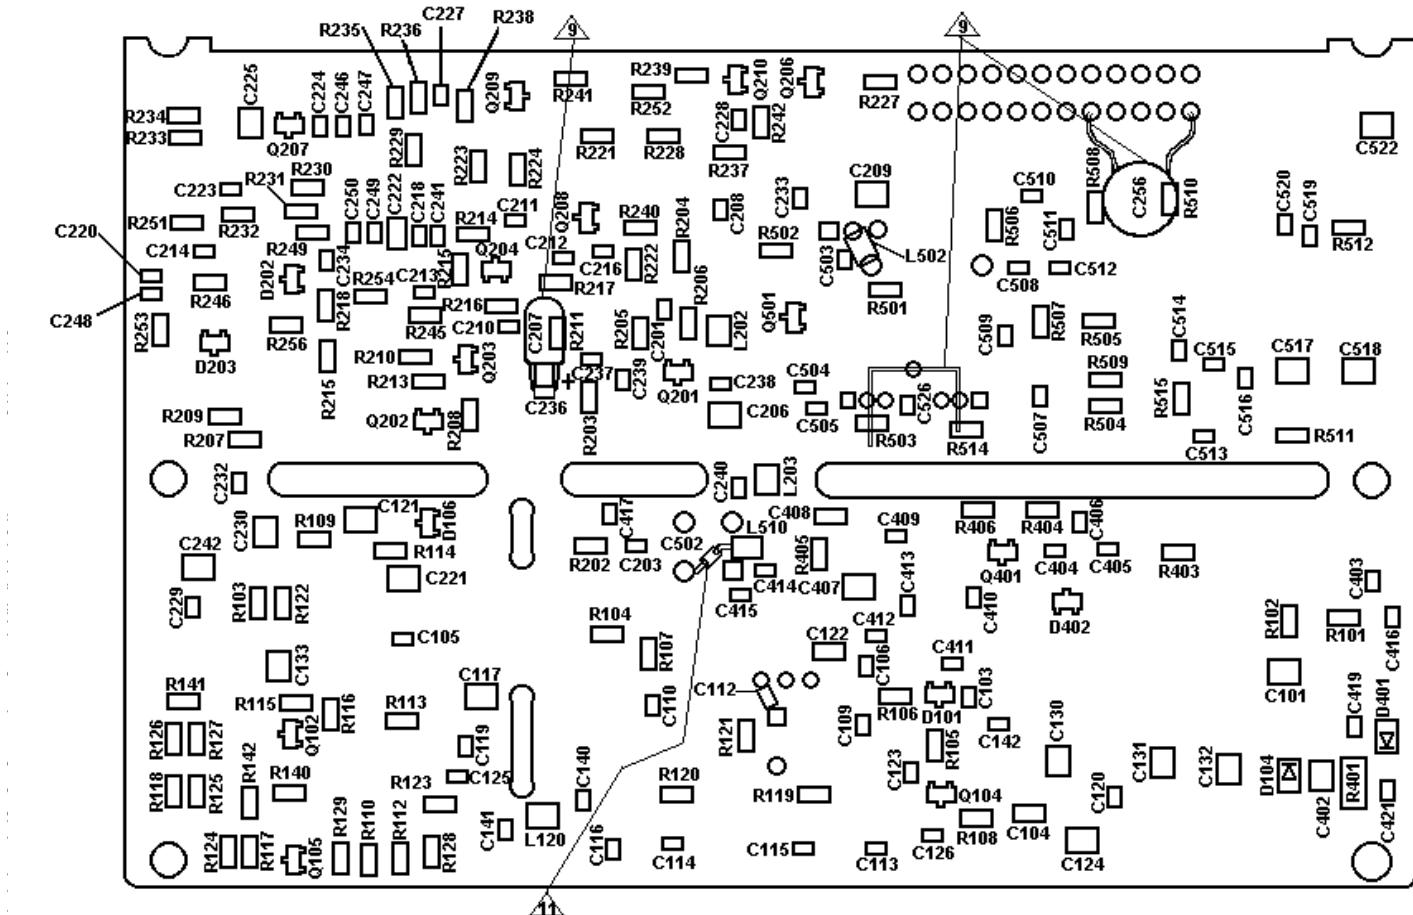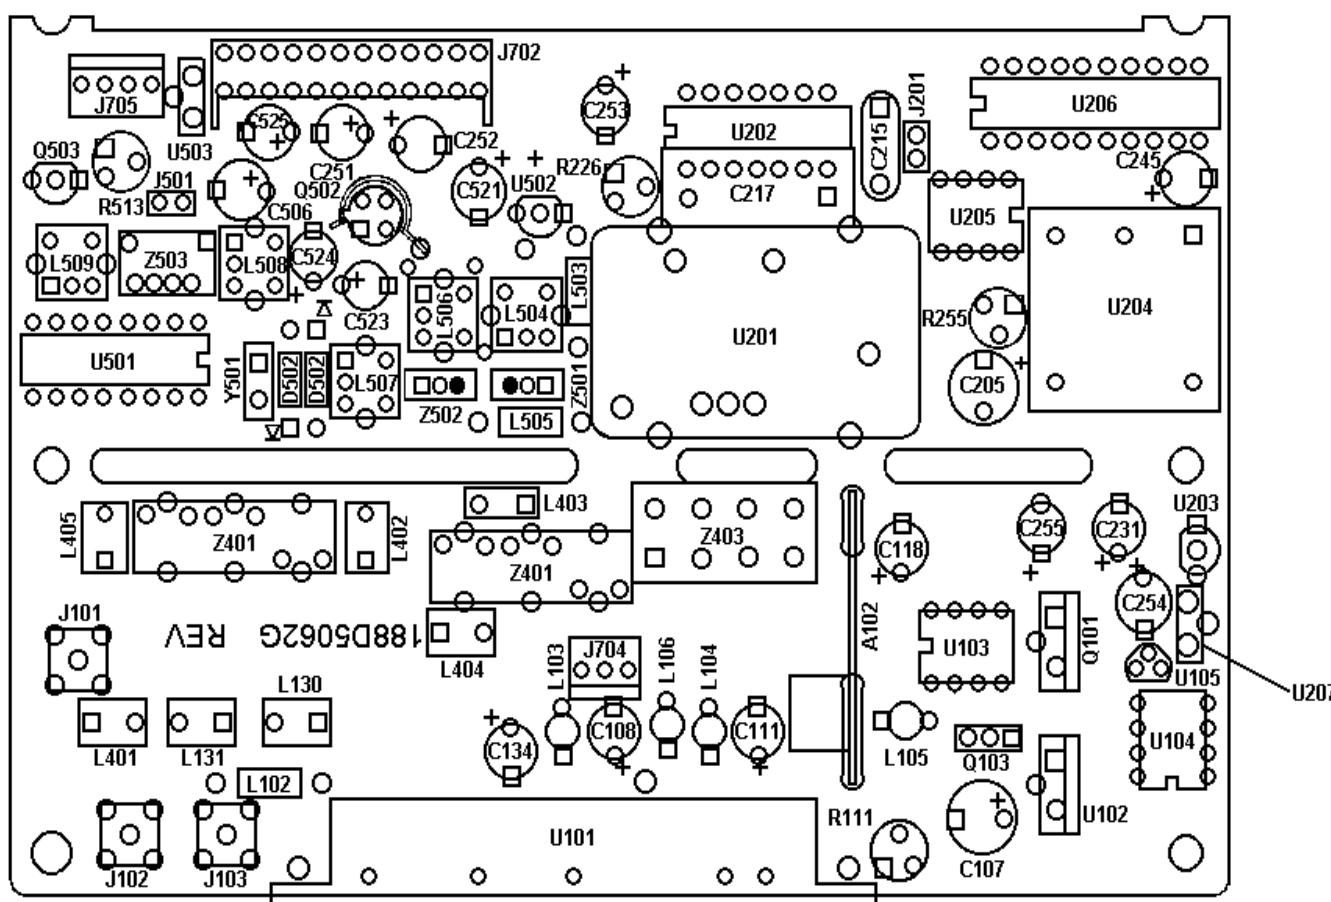


LEAD IDENTIFICATION
 FOR Q208, Q209, Q210
 AND Q503

FLAT


C B E


IN - LINE
TOP VIEW

NOTE: CASE SHAPE IS DETERMINING
 FACTOR FOR LEAD IDENTIFICATION

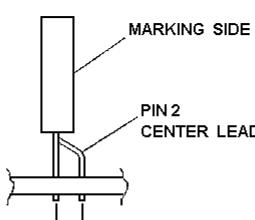

EGE PT. NO.
CENT. FREQ.

VIEW "A"



**LEAD IDENTIFICATION
FOR U203, U105, U502**


FLAT



The diagram illustrates the lead identification numbers for a component. Four numbers are positioned around a central circular hole: '1' at the top right, '2' at the bottom right, '3' at the bottom left, and '4' at the top left.

**IN - LINE
TOP VIEW**

**NOTE: CASE SHAPE IS DETERMINING
FACTOR FOR LEAD IDENTIFICATION**

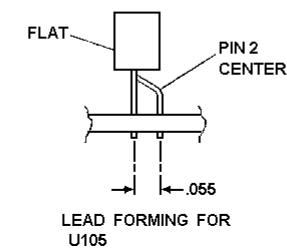

NOTES

5. THE FOLLOWING ITEMS ARE MOS DEVICES REQUIRING CARE PER 19A701294: Q502, U202, U206.
 6. **Z501 AND Z502 ARE A MATCHED PAIR OF CRYSTAL FILTERS WHICH MUST BE ORIENTED WITH "B" RESONATOR AS SHOWN. "B" RESONATOR IS IDENTIFIED BY DOT ON CAN. WHEN NO DOT IS PRESENT, VIEW THE PART FROM THE SIDE WHERE THE PART NUMBER AND CENTER FREQUENCY ARE VISIBLE AS IN VIEW "A" THE TOP LEAD WILL BE THE "A" RESONATOR, THE MIDDLE LEAD WILL BE GROUND AND THE BOTTOM LEAD WILL BE THE "B" RESONATOR.**
 9. **COMPONENTS C207, C256 AND ITEM 13 ARE HAND SOLDERED TO BOTTOM SIDE OF PWB AS SHOWN. KEEP LEADS AS SHORT AS POSSIBLE. SOLDER ITEM 13 TO CENTER PIN OF Z502.**
 11. **CONNECT C502 AND L510 AS SHOWN. THE PATTERN BETWEEN L510 AND Z403-3 MUST BE CUT AND SOLDER MASK REMOVED FROM NEW ENDS TO HAND SOLDER C502.**



CAUTION
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
SENSITIVE
DEVICES

**RF BOARD
188D5062G4**