

MAINTENANCE MANUAL

FOR

70.2 MHz RECEIVER IF MODULE

25 kHz CHANNEL SPACING

19D902783G5

TABLE OF CONTENTS

|                                          | Page        |
|------------------------------------------|-------------|
| DESCRIPTION . . . . .                    | Front Cover |
| GENERAL SPECIFICATIONS . . . . .         | 1           |
| BLOCK DIAGRAM . . . . .                  | 1           |
| CIRCUIT ANALYSIS . . . . .               | 1           |
| INPUT MATCHING NETWORK . . . . .         | 1           |
| CRYSTAL FILTERS, IF AMPLIFIERS . . . . . | 1           |
| OSCILLATOR/MIXER/DETECTOR . . . . .      | 1           |
| AUDIO AMPLIFIER . . . . .                | 1           |
| SQUELCH . . . . .                        | 2           |
| Buffer Amplifier . . . . .               | 2           |
| Bandpass Filter . . . . .                | 2           |
| Noise Detector . . . . .                 | 2           |
| DC Amplifier . . . . .                   | 2           |
| Schmitt Trigger . . . . .                | 2           |
| FAULT DETECTOR . . . . .                 | 2           |
| VOLTAGE REGULATOR . . . . .              | 2           |
| MAINTENANCE . . . . .                    | 2           |
| RECOMMENDED TEST EQUIPMENT . . . . .     | 2           |
| ALIGNMENT PROCEDURE . . . . .            | 2           |
| TROUBLESHOOTING . . . . .                | 3           |
| ASSEMBLY DIAGRAM . . . . .               | 3           |
| OUTLINE DIAGRAM . . . . .                | 4           |
| IC DATA . . . . .                        | 4           |
| SCHEMATIC DIAGRAM . . . . .              | 5           |
| PARTS LIST . . . . .                     | 7           |

DESCRIPTION

The MASTR III Receiver IF Module provides amplification and demodulation of the 70.2 MHz Intermediate Frequency signal. The IF Module also includes the receiver squelch circuitry. However, it does not include de-emphasis or squelch audio gating circuits. Figure 1 is a block diagram showing the functional operation of the IF Module.

The IF Module circuitry contains the following:

- A 50 ohm input impedance IF Amplifier
- A chain of two crystal filters and an integrated circuit IF amplifier
- An integrated circuit containing a crystal oscillator, mixer, limiter, and quadrature detector
- A variable gain AF amplifier
- A squelch circuit
- A fault detector circuit
- An integrated circuit voltage regulator

TABLE 1 - GENERAL SPECIFICATIONS

| ITEM                                           | SPECIFICATION                                  |
|------------------------------------------------|------------------------------------------------|
| I.F. frequency                                 | 70.2 MHz                                       |
| Input Impedance                                | 50 ohm                                         |
| 12 dB SINAD                                    | -124 dBm                                       |
| Adj. CH SEL (25 kHz)                           | -103 dB                                        |
| Image                                          | -100 dB                                        |
| 3rd order Intercept Pt                         | 14 dBm                                         |
| Variation of Sensitivity with Signal Frequency | 2 kHz                                          |
| 2nd I.F. frequency                             | 455 kHz                                        |
| 2nd L.O. frequency                             | 69.745 MHz                                     |
| AF output (J2 pin 31C)                         | 1 Vrms adjustable (with standard input signal) |
| AF output impedance                            | 1k ohm                                         |
| AF distortion                                  | 5%                                             |
| <u>AF response</u>                             |                                                |
| 10 Hz                                          | -3 dB                                          |
| 300 Hz                                         | ±1 dB                                          |
| 1000 Hz                                        | 0 dB reference                                 |
| 3 kHz                                          | ±1 dB                                          |
| Hum & Noise                                    | -55 dB                                         |
| RSSI output (J2 pin 20C)                       | 0.7 to 2.7 Vdc prop to log (sig level)         |
| RSSI time constant                             | 5 ms                                           |
| SQ Threshold Sensitivity                       | -119 dBm                                       |
| SQ Maximum Sensitivity                         | -102 dBm                                       |
| SQ Clipping                                    | 3 kHz                                          |
| SQ Attack                                      | 150 ms                                         |
| SQ Close                                       | 250 ms                                         |
| SQ output (J2 pin 26C)                         | 5V logic (low = squelched)                     |
| Fault output (J2 pin IIC)                      | 5V logic (low = fault)                         |
| DC Supply                                      | 1 Vrms (adjustable)                            |

## CIRCUIT ANALYSIS

### INPUT AMPLIFIER NETWORK

The input amplifier, consisting of Q2 and T1, provides a 50 ohm load for the receiver RF module.

Capacitor C1 provides AC coupling and a DC block on the input line (J1). This DC block protects the module in the event of a failure in a preceding module.

### CRYSTAL FILTERS, IF AMPLIFIERS

Y1, Y2, U1, and associated circuitry provide IF filtering and amplification at 70.2 MHz. Filters Y1 and Y2 are both 4- pole bandpass filters with a center frequency of 70.2 MHz and a bandwidth of ±6.5 kHz. Amplifier UI is an integrated-circuit amplifier. U1 provides 30 dB of gain. The amplifier and filters have terminal impedances of 50 ohms. In-circuit gain measurements can be made using a high impedance probe.

Inductors L3, L5 and associated resistors and capacitors provide power supply decoupling. R3 provides a path to the input of the Fault Detector circuit. This input enables the Fault Detector circuit to monitor the DC voltage of U1.

The RF level detector consists of transistor Q1 along with associated resistors and capacitors. This detector plays no role in the normal operation of the IF Module, but aids in unit testing and module troubleshooting.

### OSCILLATOR/MIXER/DETECTOR

Integrated circuit U3 provides several functions including 2nd mixer, if amplifier and limiter, and quadrature detector.

The 69.745 MHz crystal oscillator provides local oscillator injection to the mixer in U3. This mixer converts the 70.2 MHz IF signal to 455 kHz. C20 and C21 are oscillator feedback capacitors and have been chosen to provide the proper capacitance for crystal Y3. The proper oscillator output level is difficult to measure directly without affecting the oscillation.

A preferable measurement is at TP3 which should read about 10 mV pk. (Measured using a 10 megohm 11 pF oscilloscope probe.)

The mixer is internally connected to the crystal oscillator. Pins 1 and 20 of U3 are the mixer input and output respectively. Typical mixer conversion loss is about 2 dB. The output of the mixer drives the IF amplifier via the 2 pole ceramic bandpass filter FL1.

The IF amplifier output drives the limiter via the 6-pole ceramic filter FL2.


A received signal strength indicator (RSSI) is provided at U3 Pin 7. This indicator signal is generated within the limiter circuitry and provides an output current proportional to the logarithm of the input signal strength. This current develops a voltage across R18. The voltage varies from about 1 Vdc for noise input, to about 1.4 Vdc for a 12 dB SINAD signal, to a maximum of about 4.8 Vdc for a high signal level (70 dB stronger than that required for 12 dB SINAD).

The quadrature detector provides a demodulated audio frequency output. The input to the detector is internally connected to the limiter and is not externally available. The output of the detector is U3 pin 9. C28 provides low-pass filtering to remove 455 kHz feedthrough. Ceramic resonator Y4 provides the frequency selective component needed for FM demodulation. Y4 replaces the typical LC resonant circuit found in most quadrature detectors. In contrast to the typical LC network, Y4 requires no adjustment.

The DC supply to U3 is provided through voltage dropping resistor R11 to U3 pin 6. R12 provides a path to the input of the Fault Detection circuit. This enables the Fault Detector to monitor the DC voltage on U3.

### AUDIO AMPLIFIER

Operational amplifier U6.3 provides audio frequency amplification. Its gain is set by its associated resistors, including variable resistor VR1. VR1 allows for adjusting the AF output level to 1 Vrms with a standard input signal to the module (1 kHz AF, 3 kHz peak deviation). U6.2 is used as a voltage regulator to provide 4 Vdc for biasing the Operational amplifier.

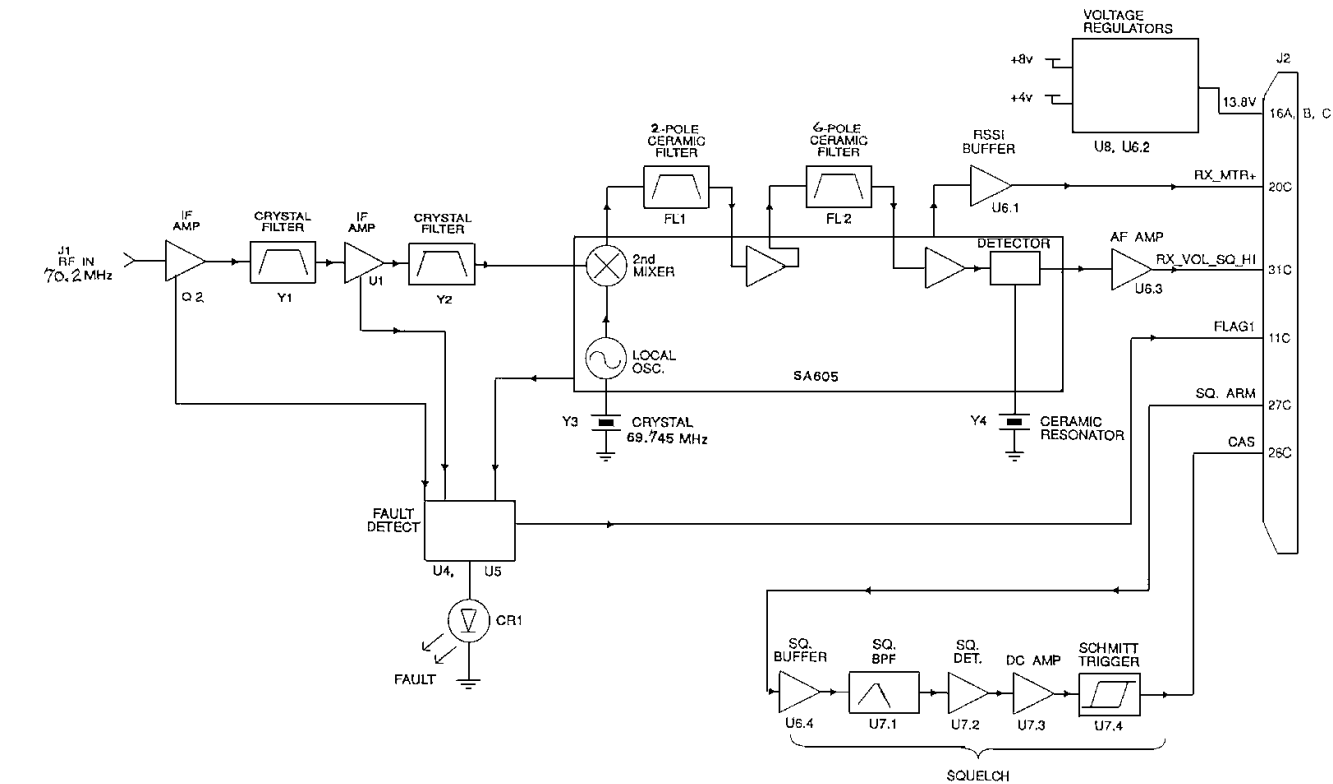

70.2 MHz IF MODULE - BLOCK DIAGRAM

## SQUELCH

### Buffer Amplifier

Integrated circuit U6.4 is configured as a unity gain buffer amplifier. It provides a high input impedance to minimize loading of the previous circuits.

### Bandpass Filter

The audio frequency bandpass filter consists of U7.1 and its associated circuitry. The purpose of this filter is to reject all voice frequencies and allow only demodulated noise to pass. The functioning of the squelch circuit depends upon the presence or absence of this noise. (When a signal is being received, i.e. the receiver is quiet, the squelch circuit senses the absence of noise and unsquelches the radio.)

### Noise Detector

U7.2 along with associated components act as a noise detector. The rectified output of U7.2 charges C11/C44 to a nearly constant DC voltage.

### DC Amplifier

U7.3 is configured as a basic amplifier with a gain of 3.

### Schmitt Trigger

U7.4 is configured as an amplifier with positive feedback. This arrangement provides hysteresis in the output versus input characteristic. This eliminates the possibility of the squelch circuit repeatedly cutting in and out when the input signal is near a threshold. R56 and R57 act as a voltage divider to provide a 5 volt logic level output. (Logic High = unsquelched)

## FAULT DETECTOR

U4 and U5 are voltage comparators. These are configured into four "window detectors" which sense the presence of voltages within specified ranges (windows).

The four window detector circuits are U4.1 & U4.2, U4.4 & U4.3, U5.1 & U5.2, and U5.4 & U5.3. These monitor DC operating voltages on U6.2, U1, Q2, and U3 respectively. R29 and R30 comprise a voltage divider to provide a 5 volt logic level output. A fault is indicated when the output drops to zero.

Diode D1 and transistor Q3 monitor the output of the 8V regulator. DI is a 8.2 volt breakdown diode. If the regulator

output voltage should rise above 8.9 V (8.2 + 0.7 base-emitter drop) Q1 will turn on and a fault will be indicated.

Transistors Q4 and Q5 are drivers for the front panel LED CRI. These are powered from the +13.8 Vdc line before the 8V regulator. Therefore, if the regulator opens, a fault will still be indicated.

## VOLTAGE REGULATOR

U8 is a monolithic integrated-circuit voltage regulator providing 8 Vdc. This powers all circuitry in the module with the exception of Q2, the front panel LED and its drivers.

## MAINTENANCE

### RECOMMENDED TEST EQUIPMENT

The following test equipment is required to test the IF Module.

1. FM Signal Generator; HP 8640B, HP 8657A, or equivalent
2. AF Generator or Function Generator
3. Audio Analyzer; HP 8903B, HP 339A, or equivalent
4. Oscilloscope
5. Frequency Counter; Racal-Dana 9919 or equivalent
6. DC Meter for troubleshooting
7. Power Supply; 13.8 Vdc @ 150 mA
8. Power Supply; 12 Vdc @20 mA

### ALIGNMENT PROCEDURE

1. Apply 13.8 Vdc and 12 Vdc supplies to module.
2. Verify 13.8 V DC current consumption is between 90 and 150 mA, and 12 Vdc current is between 12 and 18 mA.
3. Verify fault output is 0 to 0.5 Vdc and front panel LED is off.
4. Apply a standard input signal to the module input. (-60 dBm, 70.2 MHz signal modulated with 1 kHz AF, 3 kHz peak deviation)

5. Monitor TP5 with a high-impedance probe connected to the frequency counter. Adjust L10 for a reading of 455 kHz  $\pm$  100 Hz.

6. Set VRI for 1 Vrms  $\pm$ 3% at module output (pin 31C on 96 pin connector J2).
- The following four test points are provided on the PWB for additional test capability:

TP1: 60 mV pk @ 70.2 MHz with -30 dBm input signal

TP3: 10 mV pk @ 69.745 MHz independent of input signal

TP4: 20 mV pk @ 455 kHz with -60 dBm input signal


TP5: 750 mV pk @ 455 kHz with -60 dbm input signal

TROUBLESHOOTING

IF amplifier Q2 has a nominal 8 dB gain. U1 has a nominal gain of 30 dB. The mixer has about 2 dB loss with proper LO injection. The proper crystal oscillator level is 10 mV pk measured at TP3.






TROUBLE SHOOTING GUIDE

| SYMPTOM                           | CHECK<br>(CORRECT READING SHOWN)                                                                                                                                                                                                                                                                          | INCORRECT READING<br>INDICATES DEFECTIVE<br>COMPONENT                                                                                                                                                          |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Fault indicator on                | Check DC voltages<br>+8V at U8 Pin 1<br>+4v at U6 Pin 7<br>5.5V at U1 output pin<br>6V at U3 Pin 5                                                                                                                                                                                                        | If DC voltages not correct<br>U8 or associated components<br>U6 or associated components<br>U1 or associated components<br>U3 or associated components<br>If DC voltages correct<br>U4, U5, U6, DI, Q3, Q4, Q5 |
| No audio - no noise               | With no signal applied to module IF input<br>Check for AF noise @ C29 ; 200mV<br>Check for AF noise @ U6 Pin 14:1 V                                                                                                                                                                                       | U3 or associated components<br>U6 or associated components                                                                                                                                                     |
| Noise only - no demodulated audio | Check crystal oscillator: TP3 10 mVpk 69.745 MHz<br>Apply-30 dBm 70.2 MHz input, check TP1 60 mVpk<br>Apply-60 dBm 70.2 MHz input, check TP4 20 mVpk                                                                                                                                                      | U3, Y3 or associated components<br>Q2, Y1, U1 or associated components<br>U3, FL1 or associated components                                                                                                     |
| Poor 12 dB SINAD                  | Check crystal oscillator: TP3 10 mVpk 69.745 MHz<br>Apply-30 dBm 70.2 MHz input, check TP1 60 mVpk<br>Apply-60 dBm 70.2 MHz input, check TP4 20 mVpk                                                                                                                                                      | U3, Y3 or associated components<br>Q6, Y1, U1 or associated components<br>U3, FL1 or associated components                                                                                                     |
| No squelch function               | With squelch pot maximum, or with module AUDIO/SQUELCH/HI connected to SQUELCH/ARM input and with no signal to module IF input:<br>Check Presence of 1 Vpk noise at U6 Pin 14<br><br>Check presence of 1 Vpk noise U7 at Pin 1<br>Check DC voltage U7 at Pin 8: 7V<br>Check DC voltage U7 at Pin 14: 0.5V | U6 or associated components                                                                                                                                                                                    |
|                                   |                                                                                                                                                                                                                                                                                                           | U7 or associated components                                                                                                                                                                                    |

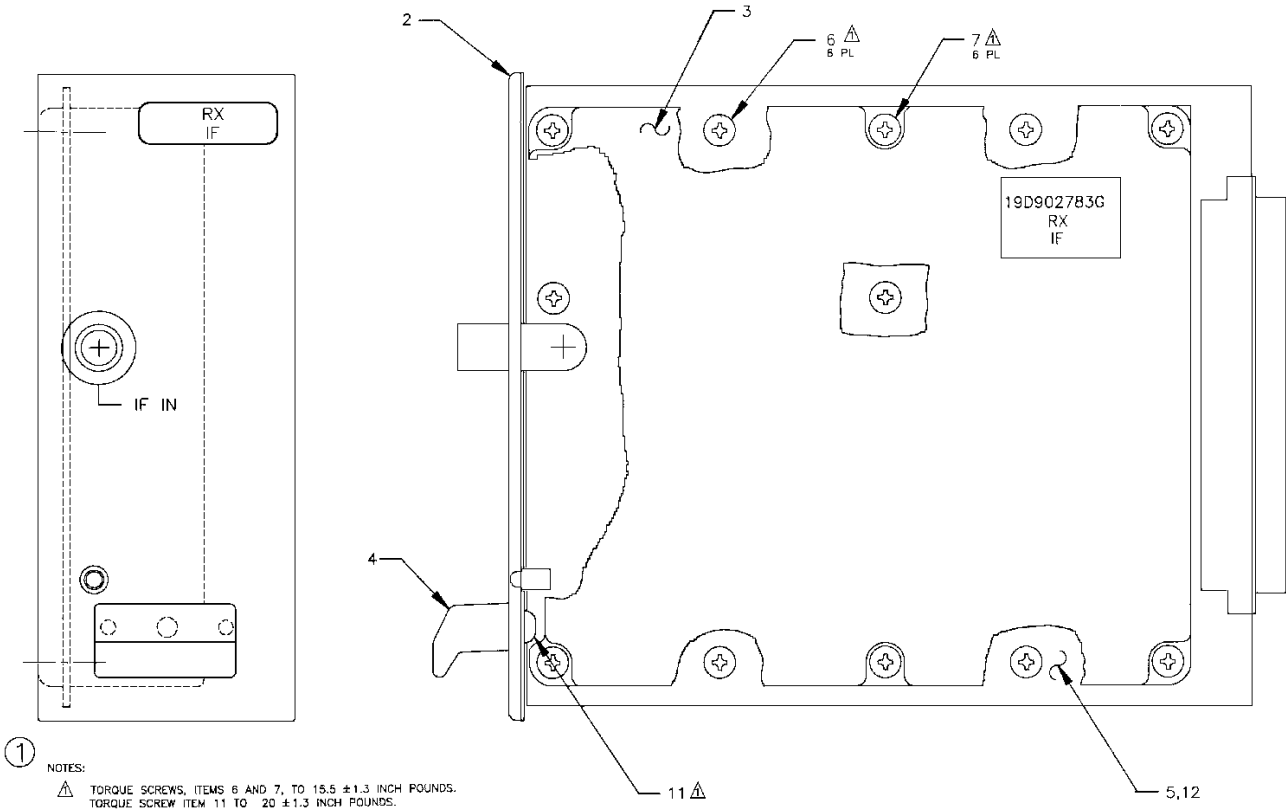


RECEIVER IF MODULE  
19D902783G5

(19D902783, Sh. 1, Rev. 2)


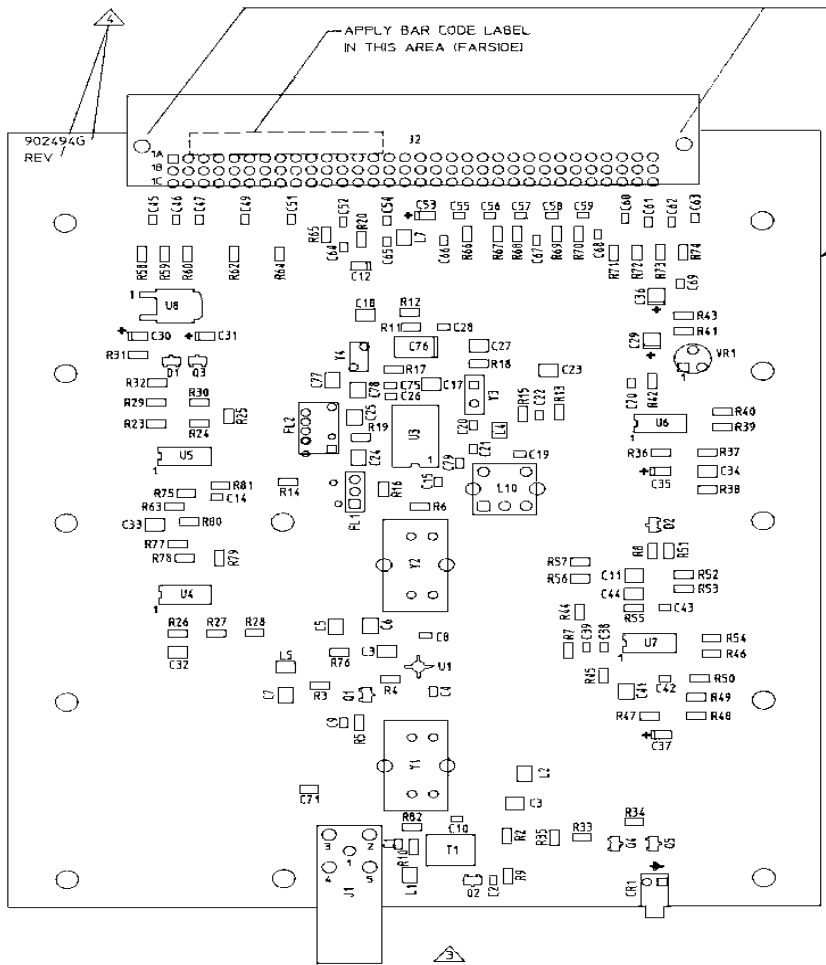


**CAUTION**  
OBSERVE PRECAUTIONS  
FOR HANDLING  
ELECTROSTATIC  
SENSITIVE  
DEVICES


U1  
344A3740P1  
Silicon Bipolar IC

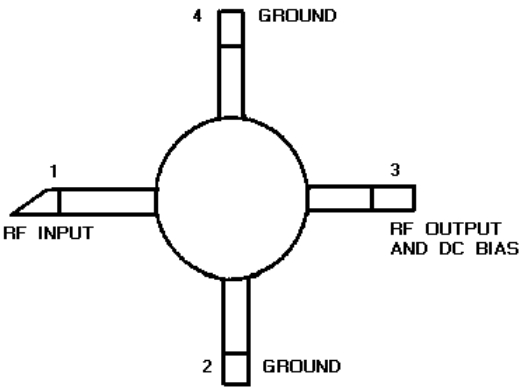


U4 & U5  
19A704125P1  
Quad Comparator

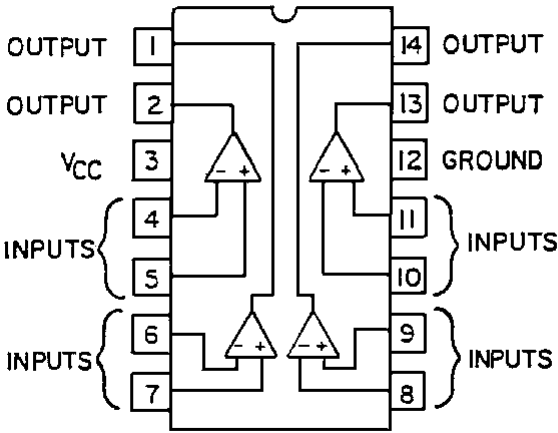


U3  
19A705535P3  
FM Receiver

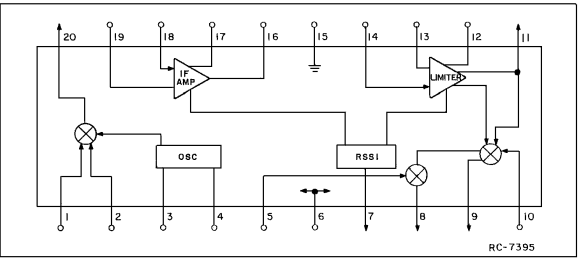

U6 & U7  
19A701789P5  
Quad Op-Amp

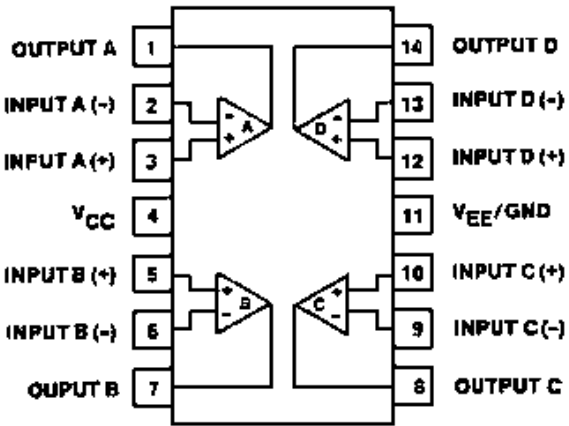


U8  
19A704971P10  
Voltage Regulator



RECEIVER IF MODULE  
19D902494G5

(19D902494, Sh. 2, Rev. 1)

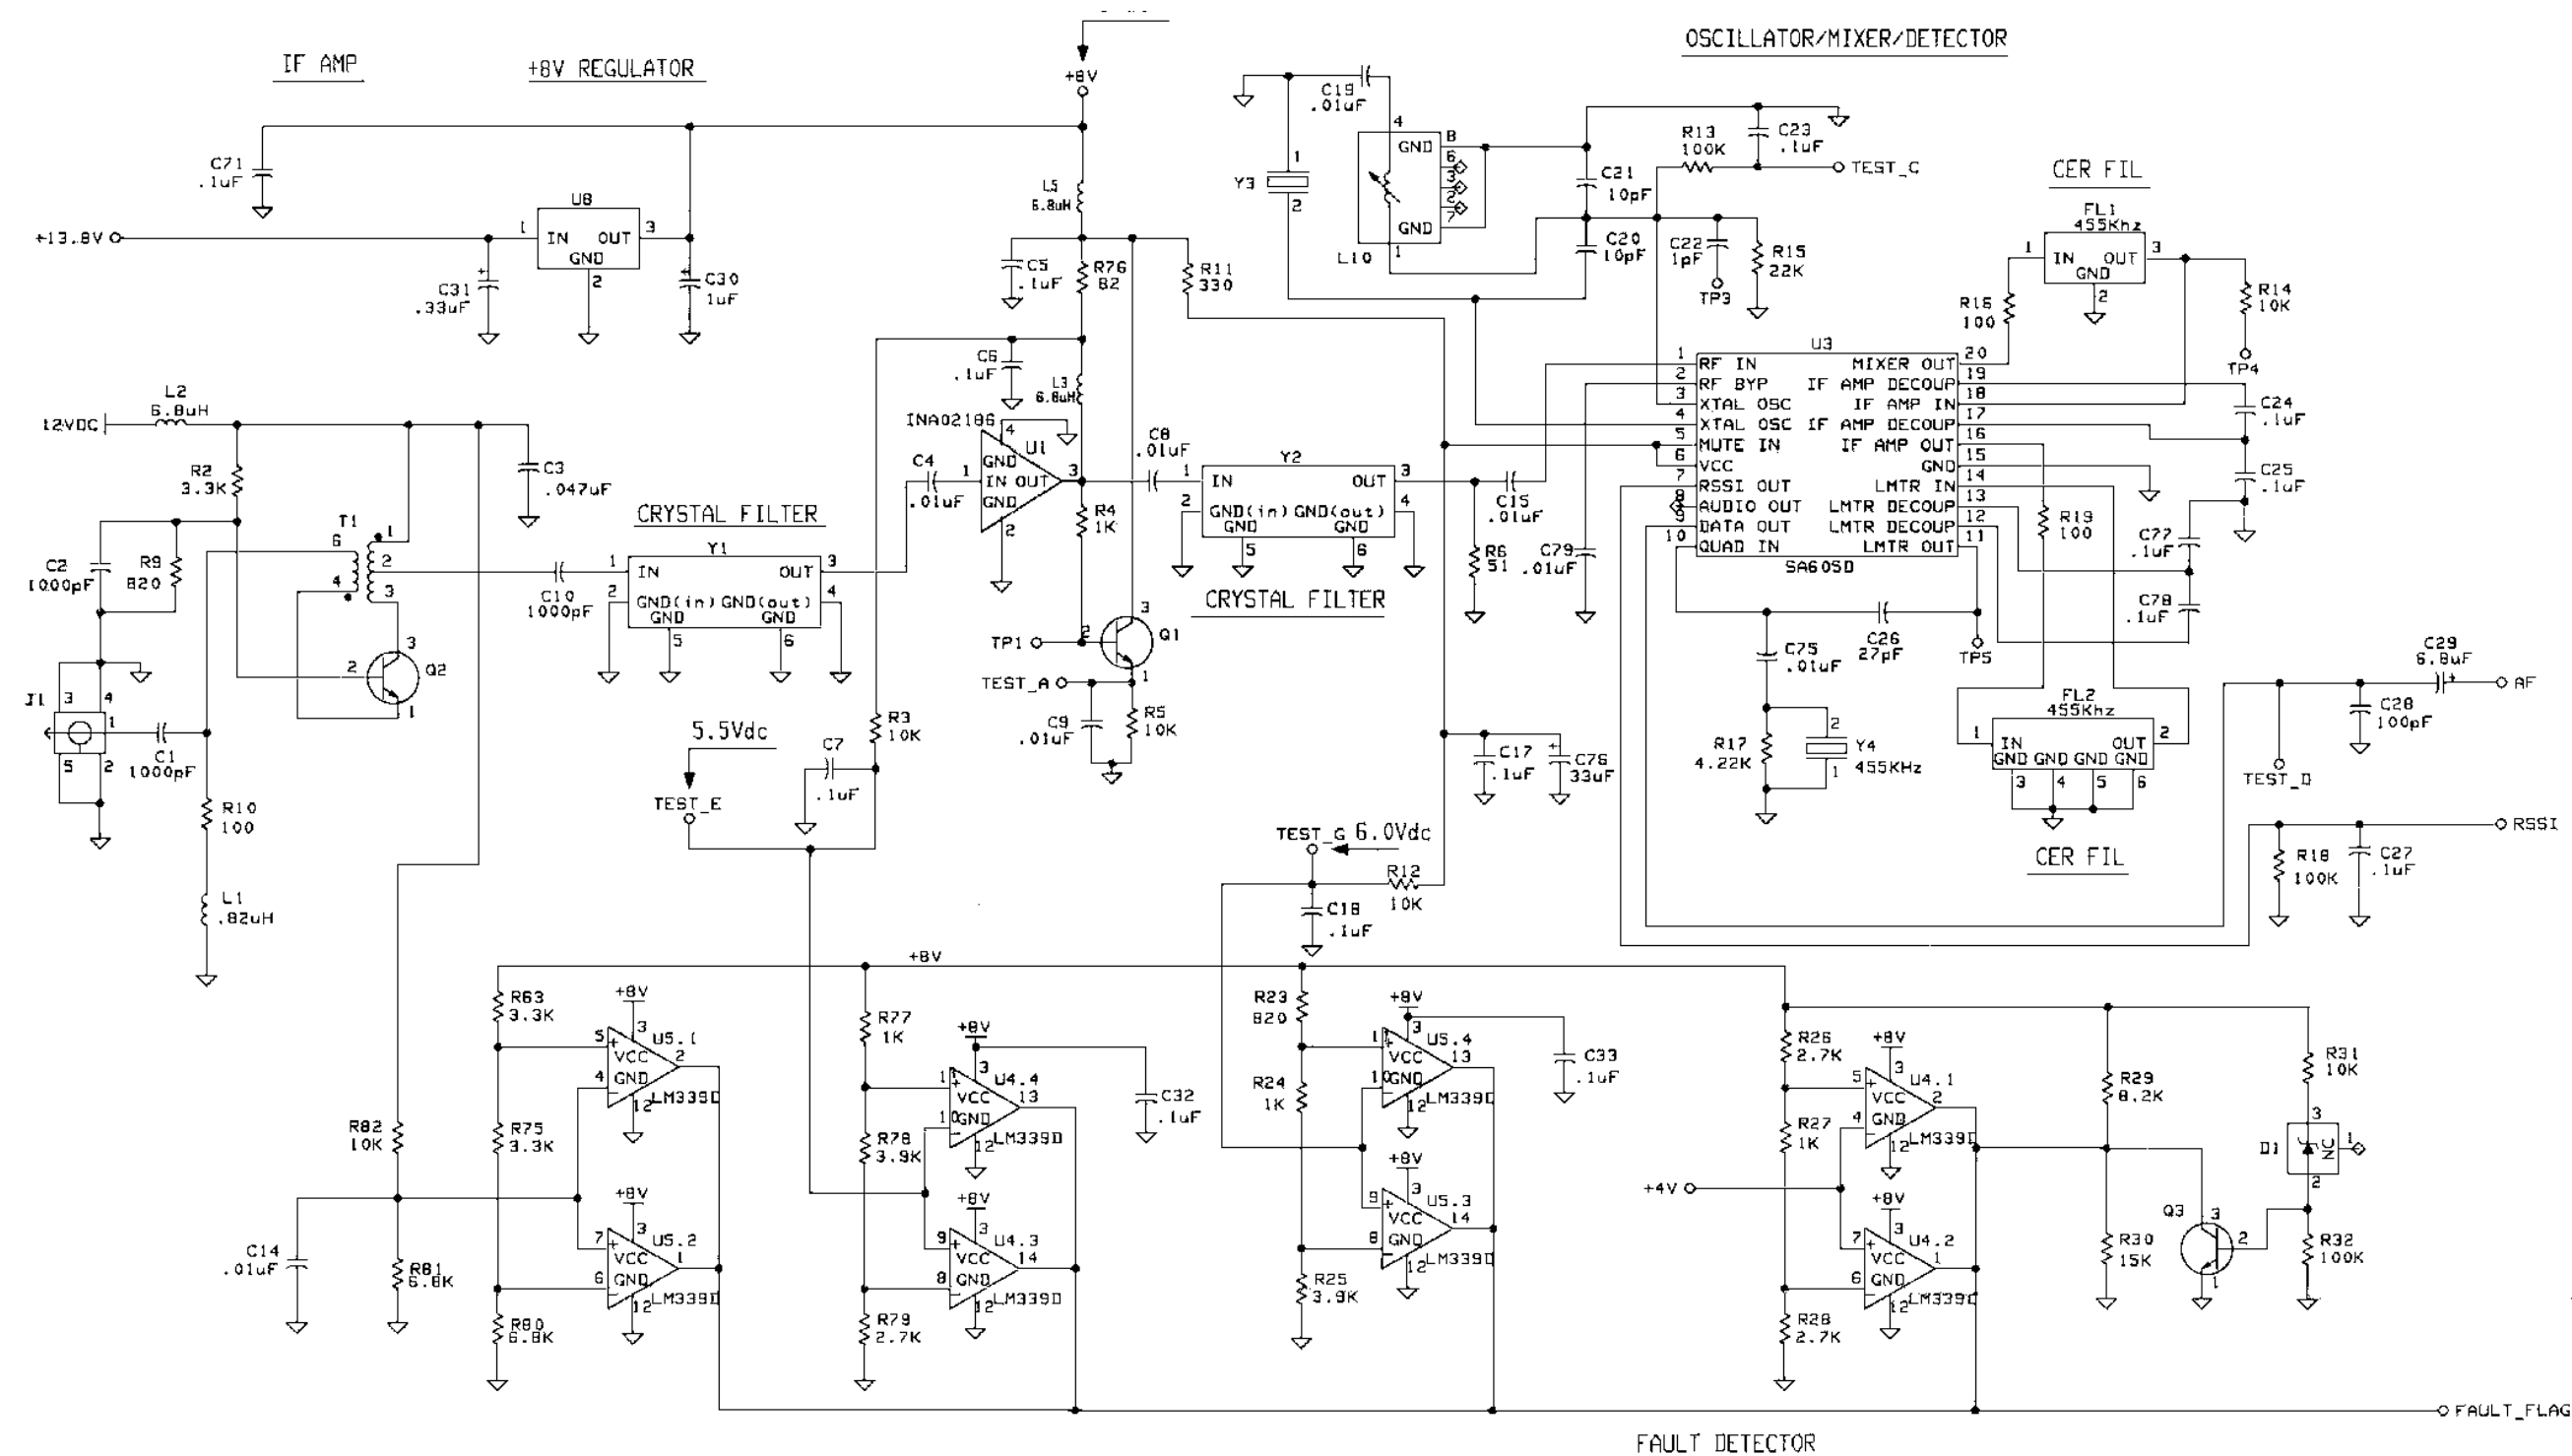


THIS SCHEMATIC DIAGRAM APPLIES TO  
MODEL NO. PL19D902494G5  
REV LETTER

All dc measurements +/-10%

RECEIVER IF MODULE  
19D902494G5

(19D904734, Sh. 1 Rev. 3))

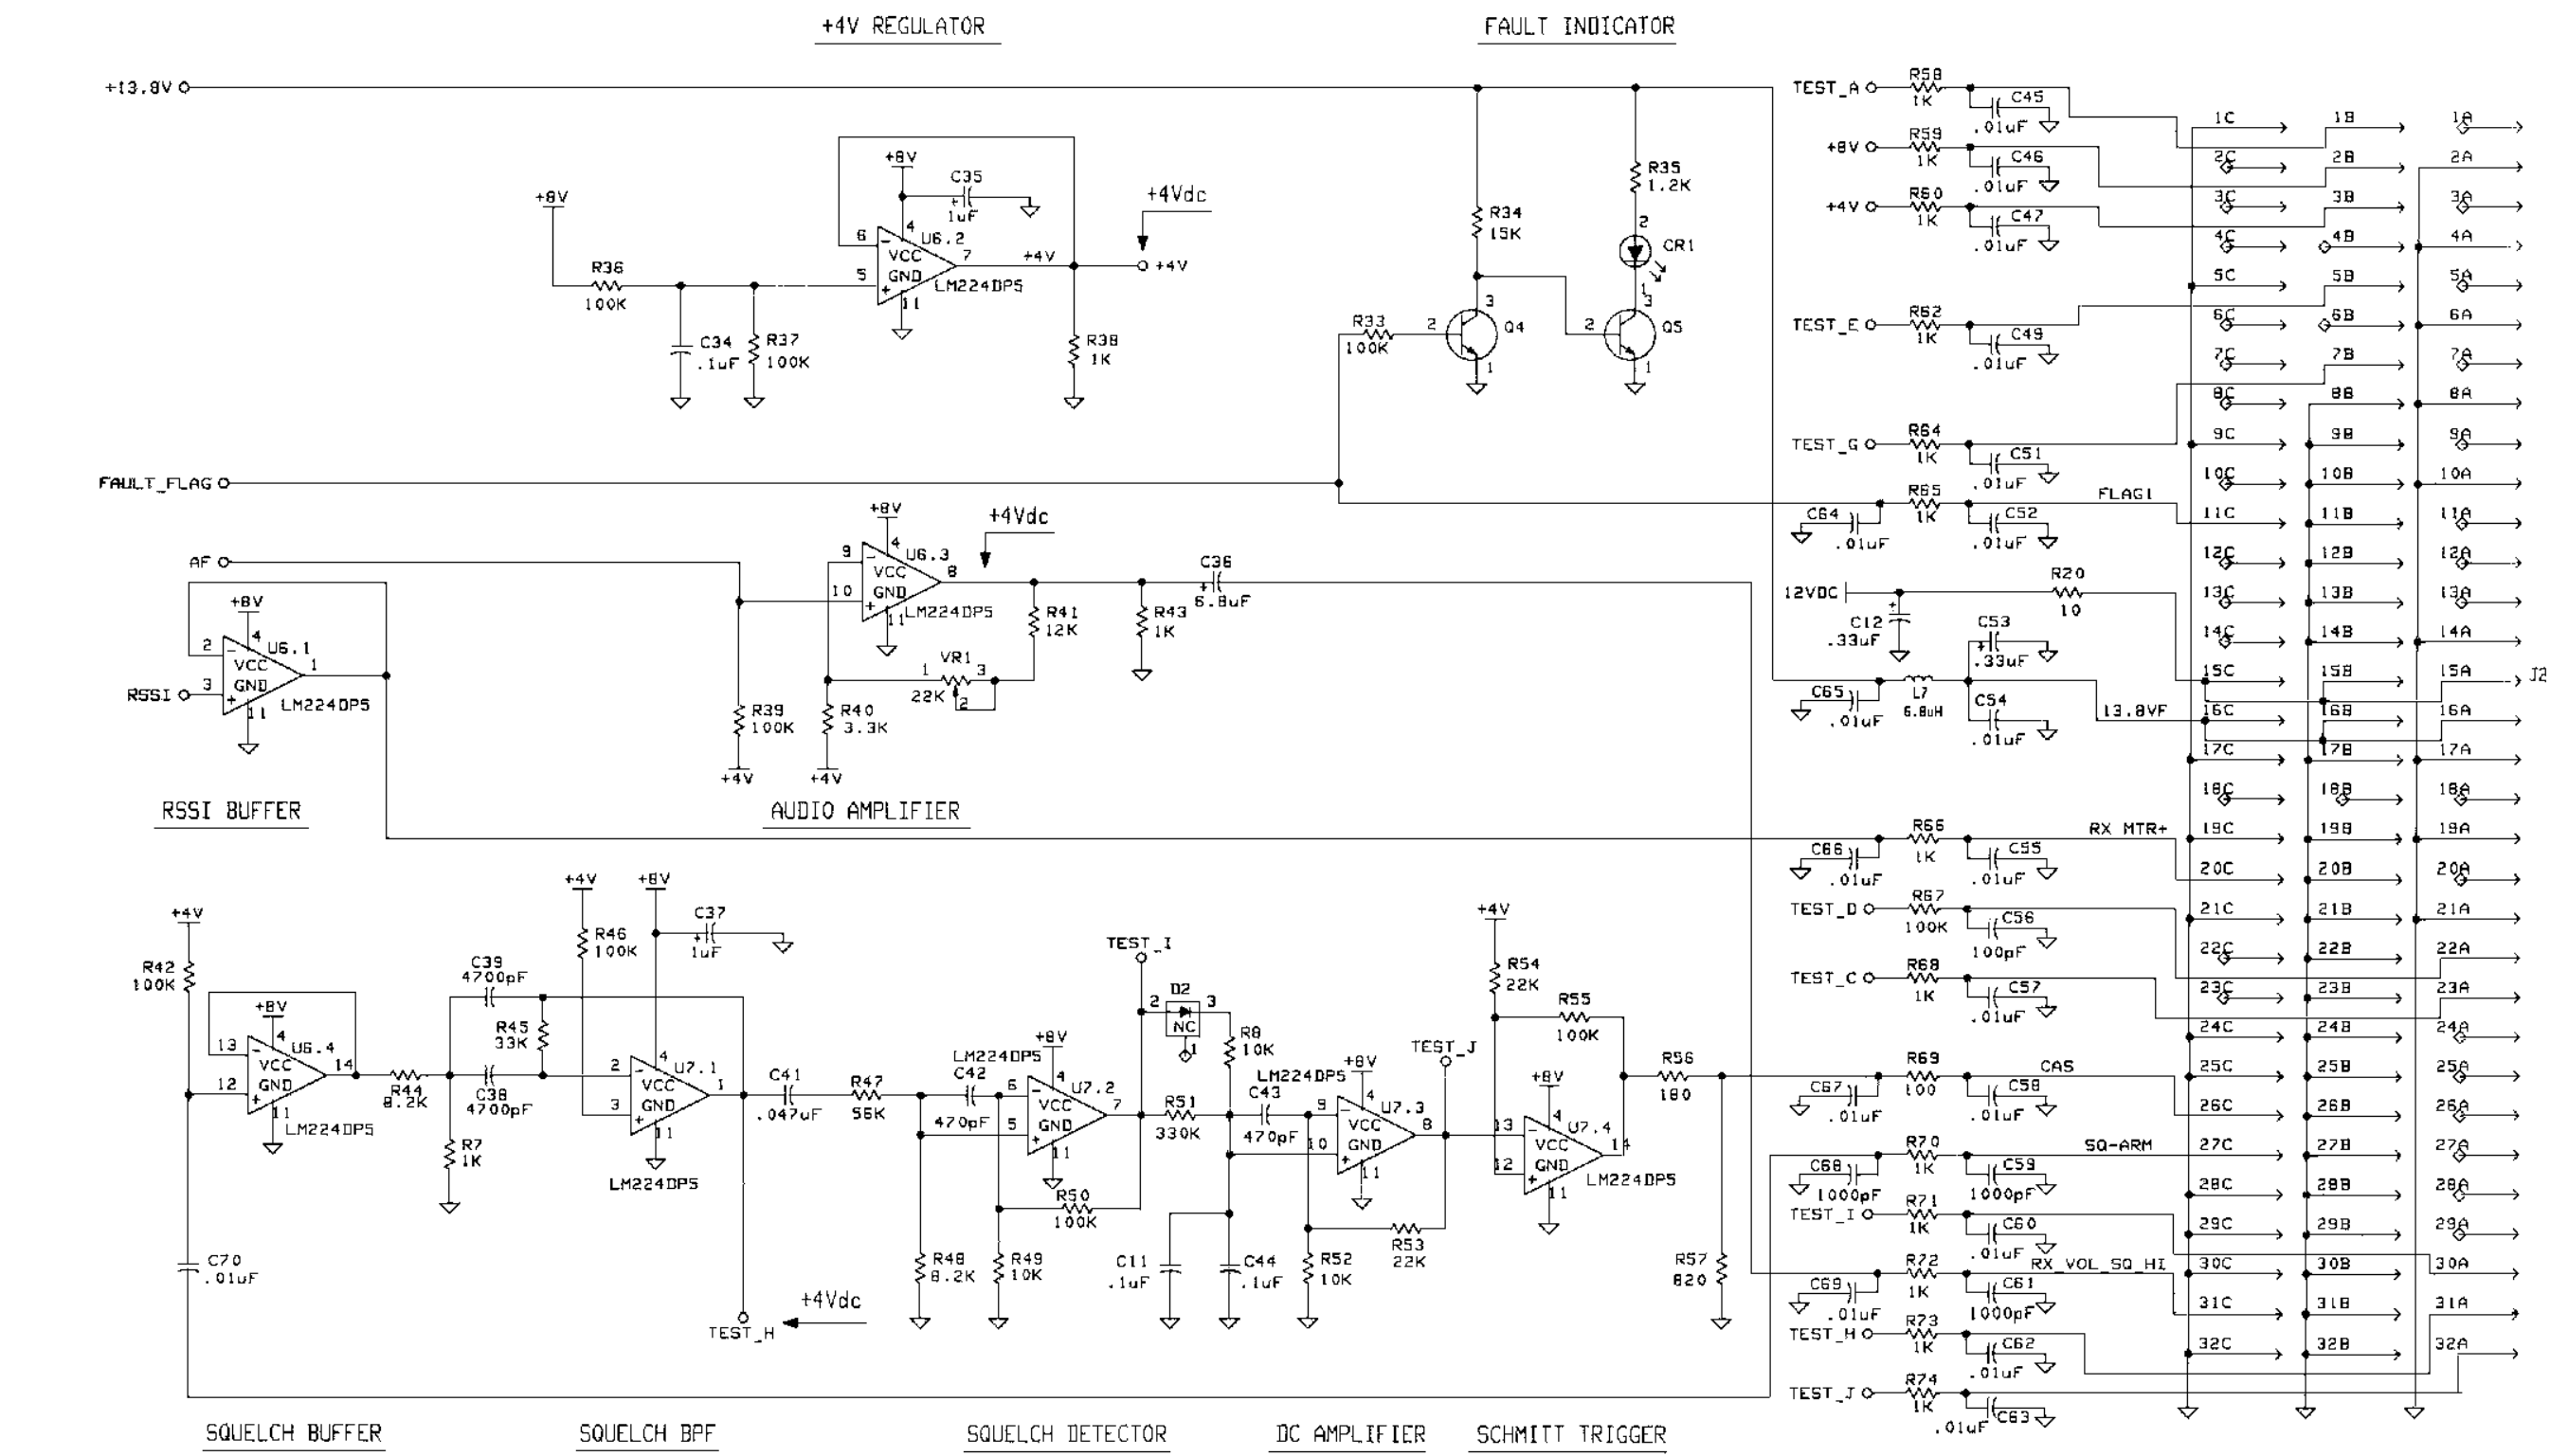

RECEIVER IF MODULE  
19D902494G5

(19D904734, Sh. 2, Rev. 4)

RECEIVER IF MODULE  
19D902783G5  
ISSUE 1

| SYMBOL                    | PART NUMBER   | DESCRIPTION                                                |
|---------------------------|---------------|------------------------------------------------------------|
| 19D902783G5               |               |                                                            |
| ----- MISCELLANEOUS ----- |               |                                                            |
| 2                         | 19D902508P1   | Chassis.                                                   |
| 3                         | 19D902509P1   | Cover.                                                     |
| 4                         | 19D902555P1   | Handle.                                                    |
| 6                         | 19A702381P506 | Screw, thread forming:<br>TORX, No. M3.5-.6 x 6.           |
| 7                         | 19A702381P513 | Screw, thread forming:<br>TORX, No. M3.5 - 0.6 X 13.       |
| 8                         | 19B235310P1   | Nameplate.                                                 |
| 11                        | 19A702381P508 | Screw, thd. form: No. 3.5-0.6 x 8.                         |
| 12                        | 19D902494G5   | 25 KHz IF Receiver Module.                                 |
| 19D902494G5               |               |                                                            |
| ----- CAPACITORS -----    |               |                                                            |
| C1<br>and<br>C2           | 19A702052P5   | Ceramic: 1000 pF ±10%, 50 VDCW.                            |
| C3                        | 19A702052P22  | Ceramic: 0.047 μF ±10%, 50 VDCW.                           |
| C4                        | 19A702052P14  | Ceramic: 0.01 μF ±10%, 50 VDCW.                            |
| C5<br>thru<br>C7          | 19A702052P26  | Ceramic: 0.1+ or μF ±10%, 50 VDCW.                         |
| C8<br>and<br>C9           | 19A702052P14  | Ceramic: 0.01 μF ±10%, 50 VDCW.                            |
| C10                       | 19A702052P5   | Ceramic: 1000 pF ±10%, 50 VDCW.                            |
| C11                       | 19A702052P26  | Ceramic: 0.1μF ±10%, 50 VDCW.                              |
| C12                       | 19A705205P12  | Tantalum: .33 μF, 16 VDCW; sim to<br>Sprague 293D.         |
| C14<br>and<br>C15         | 19A702052P14  | Ceramic: 0.01 μF ±10%, 50 VDCW.                            |
| C17<br>and<br>C18         | 19A702052P26  | Ceramic: 0.1μF ±10%, 50 VDCW.                              |
| C19                       | 19A702052P14  | Ceramic: 0.01 μF ±10%, 50 VDCW.                            |
| C20<br>and<br>C21         | 19A702236P25  | Ceramic: 10 pF ±5% pF, 50 VDCW,<br>temp coef 0 ±30 PPM/°C. |
| C22                       | 19A702061P1   | Ceramic: 1 pF ±0.5% pF, 50 VDCW.                           |
| C23<br>thru<br>C25        | 19A702052P26  | Ceramic: 0.1μF ±10%, 50 VDCW.                              |
| C26                       | 19A702061P33  | Ceramic: 27 pF ±5%, 50 VDCW, temp<br>coef 0 ±30 PPM/°C.    |
| C27                       | 19A702052P26  | Ceramic: 0.1μF ±10%, 50 VDCW.                              |
| C28                       | 19A702236P50  | Ceramic: 100 pF ±5%, 50 VDCW, temp<br>coef 0 ±30 PPM/°C.   |
| C29                       | 19A705205P5   | Tantalum: 6.8 μF, 10 VDCW; sim to<br>Sprague 293D.         |
| C30                       | 19A705205P2   | Tantalum: 1 μF, 16 VDCW; sim to<br>Sprague 293D.           |
| C31                       | 19A705205P12  | Tantalum: .33 μF, 16 VDCW; sim to<br>Sprague 293D.         |
| C32<br>thru<br>C34        | 19A702052P26  | Ceramic: 0.1μF ±10%, 50 VDCW.                              |
| C35                       | 19A705205P2   | Tantalum: 1 μF, 16 VDCW; sim to<br>Sprague 293D.           |
| C36                       | 19A705205P5   | Tantalum: 6.8 μF, 10 VDCW; sim to<br>Sprague 293D.         |

\*COMPONENTS ADDED, DELETED OR CHANGED BY PRODUCTION CHANGES

| SYMBOL                | PART NUMBER   | DESCRIPTION                                                                                        |
|-----------------------|---------------|----------------------------------------------------------------------------------------------------|
| C37                   | 19A705205P2   | Tantalum: 1 μF, 16 VDCW; sim to Sprague<br>293D.                                                   |
| C38<br>and<br>C39     | 19A702052P10  | Ceramic: 4700 pF ±10%, 50 VDCW.                                                                    |
| C41                   | 19A702052P22  | Ceramic: 0.047 μF ±10%, 50 VDCW.                                                                   |
| C42<br>and<br>C43     | 19A702061P77  | Ceramic: 470 pF ±5%, 50 VDCW, temp coef<br>0 ±30 PPM.                                              |
| C44                   | 19A702052P26  | Ceramic: 0.1μF ±10%, 50 VDCW.                                                                      |
| C45<br>thru<br>C47    | 19A702052P14  | Ceramic: 0.01 μF ±10%, 50 VDCW.                                                                    |
| C49                   | 19A702052P14  | Ceramic: 0.01 μF ±10%, 50 VDCW.                                                                    |
| C51<br>and<br>C52     | 19A702052P14  | Ceramic: 0.01μF±10%, 50 VDCW.                                                                      |
| C53                   | 19A705205P12  | Tantalum: .33 μF, 16 VDCW; sim to<br>Sprague 293D.                                                 |
| C54<br>and<br>C55     | 19A702052P14  | Ceramic: 0.01 μF ±10%, 50 VDCW.                                                                    |
| C56                   | 19A702236P50  | Ceramic: 100 pF ±5%, 50 VDCW, temp coef<br>0+ or -30 PPM/°C.                                       |
| C57<br>and<br>C58     | 19A702052P14  | Ceramic: 0.01 μF±10%, 50 VDCW.                                                                     |
| C59                   | 19A702052P5   | Ceramic: 1000 pF ±10%, 50 VDCW.                                                                    |
| C60                   | 19A702052P14  | Ceramic: 0.01 μF ±10%, 50 VDCW.                                                                    |
| C61                   | 19A702052P5   | Ceramic: 1000 pF ±10%, 50 VDCW.                                                                    |
| C62 thru<br>C67       | 19A702052P14  | Ceramic: 0.01 μF ±10%, 50 VDCW.                                                                    |
| C68                   | 19A702052P5   | Ceramic: 1000 pF ±10%, 50 VDCW.                                                                    |
| C69<br>and<br>C70     | 19A702052P14  | Ceramic: 0.01 μF ±10%, 50 VDCW.                                                                    |
| C71                   | 19A702052P33  | Ceramic: 0.1 μF ±10%, 50 VDCW.                                                                     |
| C75                   | 19A702052P14  | Ceramic: 0.01 μF ±10%, 50 VDCW.                                                                    |
| C76                   | 19A705205P15  | Tantalum: 33 μF, 16 VDCW; sim to Sprague<br>293D.                                                  |
| C77<br>and<br>C78     | 19A702052P26  | Ceramic: 0.1μF ±10%, 50 VDCW.                                                                      |
| C79                   | 19A702052P14  | Ceramic: 0.01 μF ±10%, 50 VDCW.                                                                    |
| ----- DIODES -----    |               |                                                                                                    |
| CR1                   | 19A703595P10  | Optoelectric: Red LED; sim to HP<br>HLMP-1301-010.                                                 |
| ----- DIODES -----    |               |                                                                                                    |
| D1                    | 19A700083P105 | Silicon: Zener; 8.2 Volt.                                                                          |
| D2                    | 19A700155P2   | Silicon: 100 mA, 35 PIV; sim to BAT 18.                                                            |
| ----- FILTERS -----   |               |                                                                                                    |
| FL1                   | 19B801021P6   | Bandpass Filter: 455 ± 0.5 kHz, 3 dB BW ±<br>0.5 kHz, 9 dB BW ± 7 kHz; sim to TOKO<br>SHCFM2-455D. |
| FL2                   | 19B801021P5   | Bandpass Filter: 455 ± 1.5 kHz, 3 dB BW ±6<br>kHz min; sim to Murata CF2M-455E10.                  |
| ----- JACKS -----     |               |                                                                                                    |
| J1                    | 19A115938P24  | Coaxial Connector.                                                                                 |
| J2                    | 19B801587P7   | Connector, DIN: 96 male contacts, right<br>anglemounting; sim to AMP 650887-1.                     |
| ----- INDUCTORS ----- |               |                                                                                                    |
| L1                    | 19A705470P24  | Coil: 6.8 μH.                                                                                      |
| L2<br>and<br>L3       | 19A705470P35  | Coil: 6.8 μH.                                                                                      |

| SYMBOL                  | PART NUMBER   | DESCRIPTION                                    |
|-------------------------|---------------|------------------------------------------------|
| L5                      | 19A705470P35  | Coil: 6.8 μH.                                  |
| L7                      | 19A705470P35  | Coil: 6.8 μH.                                  |
| L10                     | 19A703311P1   | Coil, RF: sim to TOKO American<br>KON-K6572BA. |
| ----- TRANSISTORS ----- |               |                                                |
| Q1<br>and<br>Q2         | 19A704708P2   | Silicon, NPN: sim to NEC 2SC3356.              |
| Q3<br>thru<br>Q5        | 19A700076P2   | Silicon, NPN: sim to MMBT3904, low profile.    |
| ----- RESISTORS -----   |               |                                                |
| R2                      | 19B800607P332 | Metal film: 3.3K ohms ±5%, 1/8 w.              |
| R3                      | 19B800607P103 | Metal film: 10K ohms ±5%, 1/8 w.               |
| R4                      | 19B800607P102 | Metal film: 1K ohms ±5%, 1/8 w.                |
| R5                      | 19B800607P103 | Metal film: 10K ohms ±5%, 1/8 w.               |
| R6                      | 19B800607P510 | Metal film: 51 ohms ±5%, 1/8 w.                |
| R7                      | 19B800607P102 | Metal film: 1K ohms ±5%, 1/8 w.                |
| R8                      | 19B800607P103 | Metal film: 10K ohms ±5%, 1/8 w.               |
| R9                      | 19B800607P821 | Metal film: 820 ohms ±5%, 1/8 w.               |
| R10                     | 19B800607P101 | Metal film: 100 ohms ±5%, 1/8 w.               |
| R11                     | 19B800607P331 | Metal film: 330 ohms ±5%, 1/8 w.               |
| R12                     | 19B800607P103 | Metal film: 10K ohms ±5%, 1/8 w.               |
| R13                     | 19B800607P104 | Metal film: 100K ohms ±5%, 1/8 w.              |
| R14                     | 19B800607P103 | Metal film: 10K ohms ±5%, 1/8 w.               |
| R15                     | 19B800607P223 | Metal film: 22K ohms ±5%, 1/8 w.               |
| R16                     | 19B800607P101 | Metal film: 100 ohms ±5%, 1/8 w.               |
| R17                     | 19A702931P261 | Metal film: 4220 ohms ±1%, 200 VDCW, 1/8 w.    |
| R18                     | 19A702931P401 | Metal film: 100K ohms ±1%, 200 VDCW, 1/8 w.    |
| R19                     | 19B800607P101 | Metal film: 100 ohms ±5%, 1/8 w.               |
| R20                     | 19B800607P100 | Metal film: 10 ohms ±5%, 1/8 w.                |
| R23                     | 19B800607P821 | Metal film: 820 ohms ±5%, 1/8 w.               |
| R24                     | 19B800607P102 | Metal film: 1K ohms ±5%, 1/8 w.                |
| R25                     | 19B800607P392 | Metal film: 3.9K ohms ±5%, 1/8 w.              |
| R26                     | 19B800607P272 | Metal film: 2.7K ohms ±5%, 1/8 w.              |
| R27                     | 19B800607P102 | Metal film: 1K ohms ±5%, 1/8 w.                |
| R28                     | 19B800607P272 | Metal film: 2.7K ohms ±5%, 1/8 w.              |
| R29                     | 19B800607P822 | Metal film: 8.2K ohms ±5%, 1/8 w.              |
| R30                     | 19B800607P153 | Metal film: 15K ohms ±5%, 1/8 w.               |
| R31                     | 19B800607P103 | Metal film: 10K ohms ±5%, 1/8 w.               |
| R32<br>and<br>R33       | 19B800607P104 | Metal film: 100K ohms ±5%, 1/8 w.              |
| R34                     | 19B800607P153 | Metal film: 15K ohms ±5%, 1/8 w.               |
| R35                     | 19B800607P122 | Metal film: 1.2K ohms ±5%, 1/8 w.              |
| R36<br>and<br>R37       | 19B800607P104 | Metal film: 100K ohms ±5%, 1/8 w.              |
| R38                     | 19B800607P102 | Metal film: 1K ohms ±5%, 1/8 w.                |
| R39                     | 19B800607P104 | Metal film: 100K ohms ±5%, 1/8 w.              |
| R40                     | 19B800607P332 | Metal film: 3.3K ohms ±5%, 1/8 w.              |
| *R41                    | 19B800607P123 | Metal film: 12Kohms ±5%, 1/8 w.                |
| R42                     | 19B800607P104 | Metal film: 100K ohms ±5%, 1/8 w.              |
| R43                     | 19B800607P102 | Metal film: 1K ohms ±5%, 1/8 w.                |
| R44                     | 19B800607P822 | Metal film: 8.2K ohms ±5%, 1/8 w.              |
| R45                     | 19B800607P333 | Metal film: 33K ohms ±5%, 1/8 w.               |
| R46                     | 19B800607P104 | Metal film: 100K ohms ±5%, 1/8 w.              |
| R47                     | 19B800607P563 | Metal film: 56K ohms ±5%, 1/8 w.               |
| R48                     | 19B800607P822 | Metal film: 8.2K ohms ±5%, 1/8 w.              |
| R49                     | 19B800607P103 | Metal film: 10K ohms ±5%, 1/8 w.               |
| R50                     | 19B800607P104 | Metal film: 100K ohms ±5%, 1/8 w.              |

| SYMBOL                          | PART NUMBER   | DESCRIPTION                                       |
|---------------------------------|---------------|---------------------------------------------------|
| R51                             | 19B800607P334 | Metal film: 330K ohms ±5%, 1/8 w.                 |
| R52                             | 19B800607P103 | Metal film: 10K ohms ±5%, 1/8 w.                  |
| R53<br>and<br>R54               | 19B800607P223 | Metal film: 22K ohms ±5%, 1/8 w.                  |
| R55                             | 19B800607P104 | Metal film: 100K ohms ±5%, 1/8 w.                 |
| R56                             | 19B800607P181 | Metal film: 180 ohms ±5%, 1/8 w.                  |
| R57                             | 19B800607P821 | Metal film: 820 ohms ±5%, 1/8 w.                  |
| R58<br>thru<br>R60              | 19B800607P102 | Metal film: 1K ohms ±5%, 1/8 w.                   |
| R62                             | 19B800607P102 | Metal film: 1K ohms ±5%, 1/8 w.                   |
| R63                             | 19B800607P332 | Metal film: 3.3K ohms ±5%, 1/8 w.                 |
| R64<br>thru<br>R66              | 19B800607P102 | Metal film: 1K ohms ±5%, 1/8 w.                   |
| R67                             | 19B800607P104 | Metal film: 100K ohms ±5%, 1/8 w.                 |
| R68                             | 19B800607P102 | Metal film: 1K ohms ±5%, 1/8 w.                   |
| R69                             | 19B800607P101 | Metal film: 100 ohms ±5%, 1/8 w.                  |
| R70<br>thru<br>R74              | 19B800607P102 | Metal film: 1K ohms ±5%, 1/8 w.                   |
| R75                             | 19B800607P332 | Metal film: 3.3K ohms ±5%, 1/8 w.                 |
| R76                             | 19B800607P820 | Metal film: 82 ohms ±5%, 1/8 w.                   |
| R77                             | 19B800607P102 | Metal film: 1K ohms ±5%, 1/8 w.                   |
| R78                             | 19B800607P392 | Metal film: 3.9K ohms ±5%, 1/8 w.                 |
| R79                             | 19B800607P272 | Metal film: 2.7K ohms ±5%, 1/8 w.                 |
| R80<br>and<br>R81               | 19B800607P682 | Metal film: 6.8K ohms ±5%, 1/8 w.                 |
| R82                             | 19B800607P103 | Metal film: 10K ohms ±5%, 1/8 w.                  |
| ----- TRANSFORMERS -----        |               |                                                   |
| T1                              | REGUA10003/1  | Transformer.                                      |
| ----- INTEGRATED CIRCUITS ----- |               |                                                   |
| U1                              | 344A3740P1    | Linear: Amp; sim to INA-02186.                    |
| U3                              | 19A705535P3   | Linear: RF/IF Signal Processor; sim to<br>SA605N. |
| U4<br>and<br>U5                 | 19A704125P1   | Linear: Quad Comparator; sim to LM339D.           |
| U6<br>and<br>U7                 | 19A701789P5   | Linear: Op Amp; sim to LM224D.                    |
| U8                              | 19A704971P10  | Linear: 8V; Voltage Regulator.                    |
| ----- VARIABLE RESISTOR -----   |               |                                                   |
| VR1                             | 19B800779P12  | Resistor, variable.                               |
| ----- CRYSTALS -----            |               |                                                   |
| Y1                              | 19A149974G9   | Filter, Crystal: 70.2 MHz.                        |
| Y2                              | 19A149974G10  | Filter, Crystal: 70.2 MHz.                        |
| Y3                              | 19B233066G20  | Crystal: 69.745 MHz.                              |
| Y4                              | 19A149976P1   | Discriminator: 455 kHz.                           |
| ----- MISCELLANEOUS -----       |               |                                                   |
| 6                               | 19D902494G6   | 25 KHz IF Receiver Module.                        |

PRODUCTION CHANGES

Changes in the equipment to improve performance or to simplify circuits are identified by a "Revision Letter", which is stamped after the model number of the unit. The revision stamped on the unit includes all previous revisions. Refer to the Parts List for the descriptions of parts affected by these revisions.

REV. A - RECEIVER IF MODULE 19D902494G5

To provide greater margin for adjusment of VR1. Changed R41 from 7.5k (19A702931P285) to 12k ohms (19B800607P123).