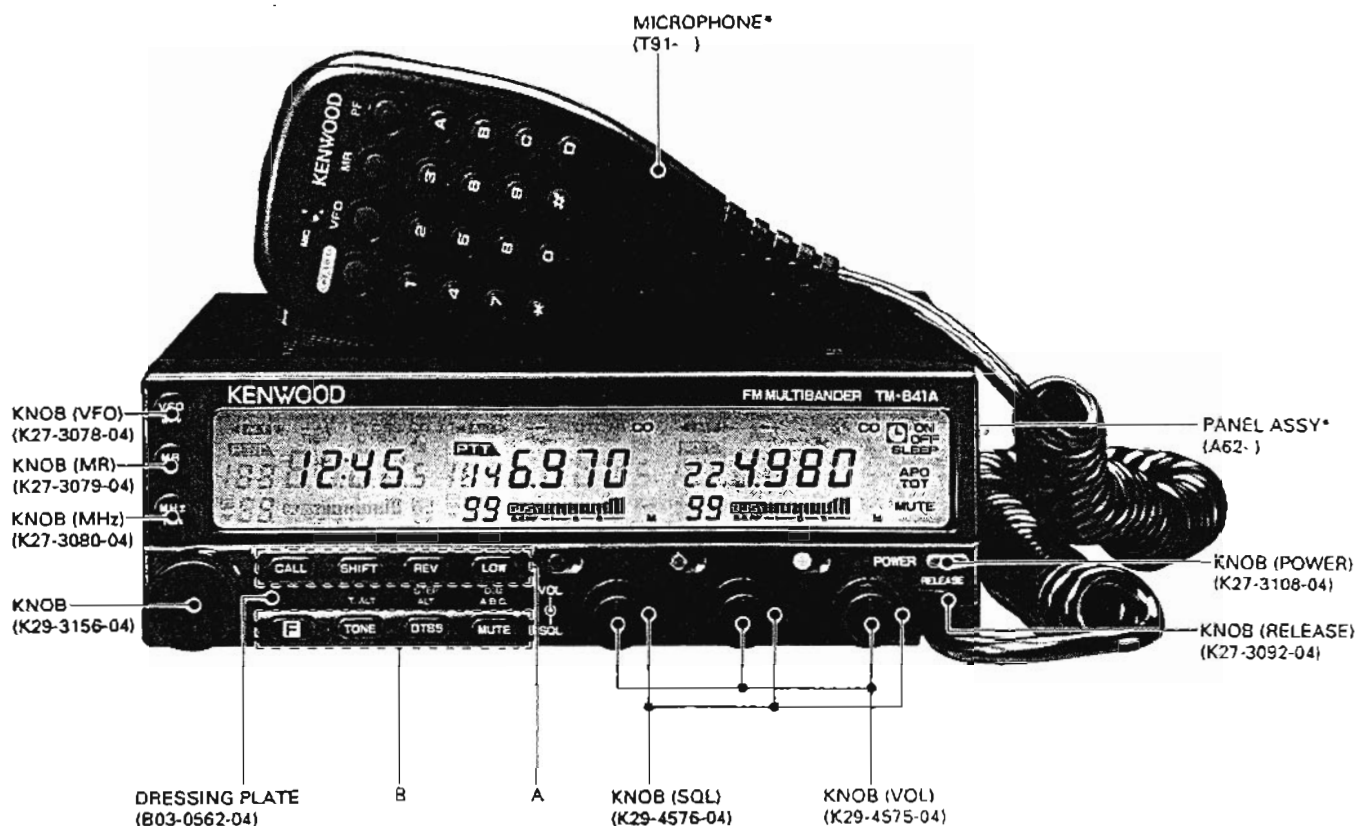


TM-641A

TM-741A/E

SERVICE MANUAL

KENWOOD

© 1991-9 PRINTED IN JAPAN
851-8139-00(A) 1599.

A	KNOB (CALL) K27-3110-04	KNOB (SHIFT) K27-3118-04	KNOB (REV) K27-3114-04	KNOB (LOW) K27-3116-04
B	KNOB (F) K27-3111-04	KNOB (TONE) K27-3113-04	KNOB (DTSS) K27-3115-04	KNOB (MUTE) K27-3117-04

* Refer to parts list on page 62
Photo is TM-641A

CONTENTS

OVER VIEW	2	144M TX-RX UNIT (X57-3580-12)	143
CIRCUIT DESCRIPTION	3	220M TX-RX UNIT (X57-3810-10)	147
DESCRIPTION OF COMPONENTS	41	430/440M TX-RX UNIT (X57-359X-XX)	151
SEMICONDUCTOR DATA	58	1200M TX-RX UNIT (X57-3600-11)	155
PARTS LIST	61	BLOCK DIAGRAM	159
EXPLODED VIEW	105	LEVEL DIAGRAM	167
PACKING	110	DTU-2 (DTMF UNIT)	171
ADJUSTMENT	113	TSU-7 (CTCSS UNIT)	173
PC BOARD VIEWS / SCHEMATIC DIAGRAM		MC-45 (MULTI FUNCTION MICROPHONE)	175
CONTROL UNIT (X53-331X-XX)	126	MC-45DM (MULTI FUNCTION MICROPHONE WITH AUTOPATCH)	176
DISPLAY UNIT (X54-312X-XX)	128	PK-4K/L (PANEL SEPARATE KIT K:4M, L:7M)	177
SCHEMATIC DIAGRAM	129	UT-28S/50S/1200 SPECIFICATION	178
28M TX-RX UNIT (X57-3790-01)	133	SPECIFICATION	BACK COVER
50M TX-RX UNIT (X57-3800-01)	139		

TM-641A/741A/741E

OVERVIEW

List of Destinations

Model	Destination	Destination code
TM-641A	North America	K
TM-741A	North America	K
TM-741A	Canada	P
TM-741E	Europe	E
TM-741A	Other countries	M
TM-741A	Other countries	M2

Units for Each Model and Destination


Parts No.	Unit name	TM-741A/E					TM-641A	Band Units				
								UT-28S	UT-50S	UT-220S	UT-440S	UT-1200
		K	P	E	M	M2		K	M	M	K	K
X53-3310-12	Control unit	I	I		I	I	I					
X53-3312-71	Control unit			I								
X54-3120-11	Display unit	I	I				I					
X54-3120-21	Display unit				I							
X54-3120-22	Display unit						I					
X54-3122-71	Display unit			I								
X57-3580-12	144 TX-RX unit	I	I	I	I	I	I					
X57-3590-12	440 TX-RX unit	I	I								I	
X57-3590-22	430 TX-RX unit				I	I						
X57-3592-72	430 TX-RX unit			I								
X57-3600-11	1200 TX-RX unit											I
X57-3790-01	28 TX-RX unit							I				
X57-3800-01	50 TX-RX unit								I			
X57-3810-10	220 TX-RX unit						I			I		

BAND UNITS

Any of the following optional band units may be installed in the TM-641A/741A/741E.

The same instructions apply for the Tri-Bander as for the Dual-bander.

	OPTIONAL BAND UNIT
TM-641A U.S.A. version	UT-28S UT-50S UT-440S UT-1200
TM-741A U.S.A. version	UT-28S UT-50S UT-220S UT-1200
TM-741A	UT-28S UT-50S UT-1200
TM-741E	UT-28S UT-50S UT-1200

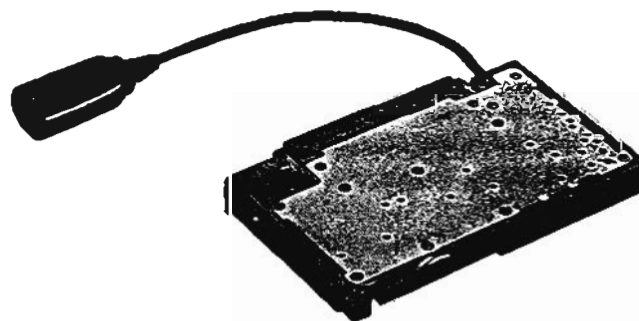

CIRCUIT DESCRIPTION

● Shift-register circuit

The ES, CK, and DT serial data from the control unit

are sent to C1 (BU4094BF) to perform the control operation outlined in the following table:

Pin No.	Name	Function	Pin No.	Name	Function
1	Strobe	Enable input	9	Qs	
2	Data	Serial data input	10	Q's	
3	Clock	Clock input	11	Q8	TX/RX selection. High when TX is set.
4	Q1	TX/RX selection. Low when TX is set	12	Q7	ATT switching. High when ATT is on
5	Q2	TX power selection. Low when middle and low. "H" when high.	13	Q6	High for AM; low for FM; High for narrow; low for wide
6	Q3	TX power selection. Low when high and low. "H" when middle.	14	Q5	High when off band
7	Q4	Low when off band	15	OE	8V
8	Vss	GND	16	VDD	8V

Table 3

● ATT circuit

If there is cross modulation, the ATT circuit operates

to attenuate the received signal before it enters Q2 (FET for high-frequency amplification).

28 TX-RX Unit Transmit Signal Channel

● Outline

In the transmission channel, the desired frequency is produced by direct oscillation, and is directly frequency modulated by means of a varicap diode.

● Modulator circuit

The audio signal from the control unit is input to microphone amplifier HIC IC3 (KCA04). IC4 consists of a preemphasis circuit, amplifier, limiter, and splatter circuit that eliminates unwanted high-frequency components. The voltage-controlled oscillator (VFO) signal is directly frequency modulated by means of a varicap diode in the frequency modulator circuit.

● Younger-stage circuit

The signal output from the VCO is input to drive circuit HIC IC16 (KCB16). The amplifier can obtain a stable drive output without adjustment because it has a large bandwidth. An APC circuit controls the collector voltage in the Younger final stage.

● Power amplifier circuit

The drive signal is amplified to the specified level by a discrete transistor. Q2 performs class B amplification, and the collector output voltage is controlled by an APC circuit. Q202 amplifies the power by class C operation, improving the efficiency of the final stage.

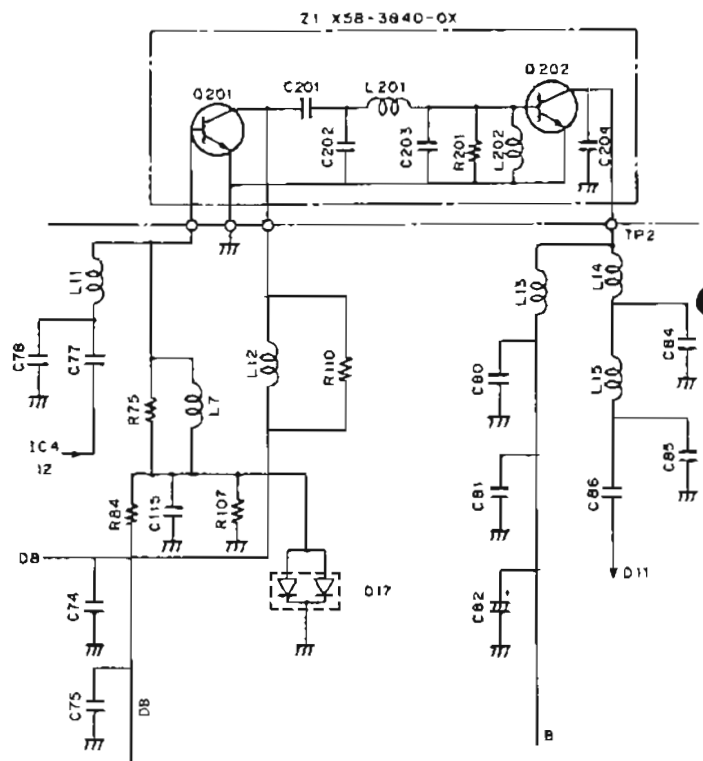


Fig. 2 Power amplifier circuit

CIRCUIT DESCRIPTION

● APC circuit

The automatic transmission output control circuit (APC) detects and partially amplifies the power amplifier output with a diode, and controls the output control voltage. The control voltage is output in inverse proportion to the output, so the control voltage output is always constant. To protect the radio against excessive temperature rise, the high-power unit has a thermal switch. The high-power unit is automatically set to a low power by the thermal switch if it exceeds the specified temperature.

● 8T (8 V during transmission) and unlock signal

The signal output from pin 4 of IC1 is high during reception, Q13 is turned on, and Q14 and Q11 are turned off. No voltage appears at the collector (8T) of Q11. Serial data is output from the control unit during transmission and input to shift register IC1. Pin 4 of IC1 is then made low. Therefore, Q13 is turned off, and Q14 and Q11 are turned on. An 8 V voltage is applied to the collector (8T) of Q11.

If the PLL circuit is unlocked during transmission, the LD pin goes low, Q24 is turned off, Q13 is turned on, Q14 is turned off, Q11 for 8T switching control is turned off, and the 8T line does not operate.

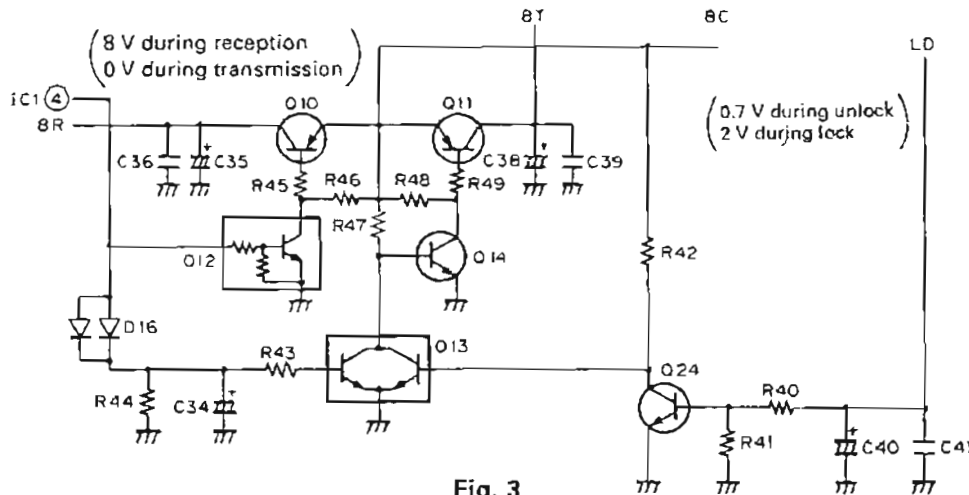


Fig. 3

28 TX-RX Unit PLL Synthesizer

The VCO and PLL circuits are housed in a solid shielding case as a hybrid integrated circuit. Comparison frequencies are produced by dividing a 9.285 MHz reference oscillation frequency by 1857 to correspond to the 5, 10, 15, 20, and 25 kHz channel steps.

For 28 MHz, the relationship between f_{VCO} (RX) and each frequency division ratio is given by

$$f_{VCO} = (28 + 8.83) = \{(n \times 64) + A\} \times f_{osc} / R$$

Where: f_{VCO} = VCO output frequency

n: Binary 10-bit programmable counter setting value

A: Binary 6-bit programmable counter setting value

f_{osc} : Reference oscillation frequency of 9.285 MHz

R: Binary 16-bit programmable counter setting value 1857

In this case, n is 155, and A is 6.

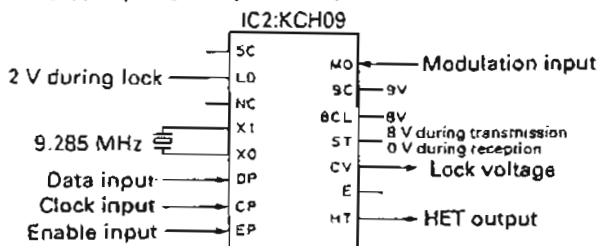


Fig. 4

$$\begin{aligned} \text{Therefore, } f_{VCO} &= \{(115 \times 64) + 6\} \times 9285 / 1857 \\ &= (7360 + 6) \times 5 \\ &= 36.83 \text{ MHz} \end{aligned}$$

The following table lists the pin functions of the PLL circuit:

Pin name	Function	Pin name	Function
5C	5V	MO	Modulation signal input
LD	Lock signal (2 V during locking)	9c	9v
NC	Unused	8CL	8 V (ripple filter)
X1 XO	9.285 MHz crystal oscillation	ST	8 V during transmission; 0 V during reception
		CV	Lock voltage output
DP	Data input	E	GND
CP	Clock input	HT	HET output
EP	Enable input		

Table 4 PLL circuit pin functions

CIRCUIT DESCRIPTION

UT-50

50 TX-RX Unit Frequency Configuration

The 50 MHz unit incorporates a variable frequency oscillator (VFO), based on a phase-locked-loop (PLL) synthesizer system, that allows a channel step of 5, 10, 15, 20, or 25 kHz to be selected. The frequency in the receive signal channel is mixed with a first local oscillation frequency of 60.595-64.590 MHz to produce a first in-

termediate frequency (IF) of 10.595 MHz. This frequency is then mixed with a second local oscillation frequency of 11.05 MHz to produce a second IF of 455 kHz. This is called a double-conversion system. The signal in the transmission channel is produced by direct oscillation, and is frequency-divided by a PLL circuit, amplified by a linear amplifier, then transmitted.

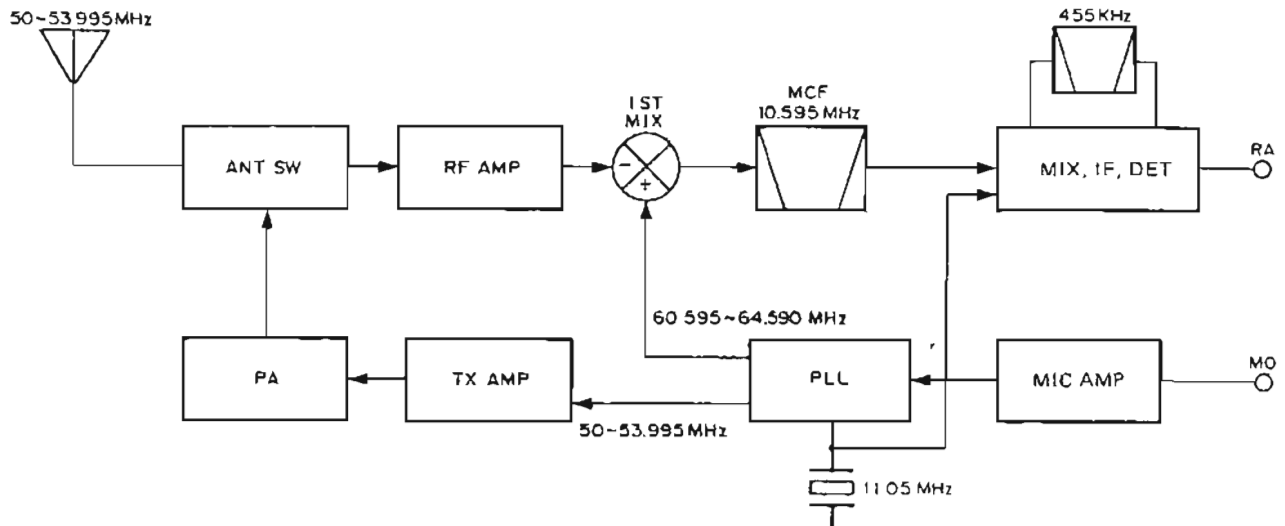


Fig. 5 Frequency Configuration

50 TX-RX Unit Receive Signal Channel

● Outline

The received signal by the antenna passes through a low-pass filter in the final transmission stage and then through a transmission/reception selection diode switch to the receiving front end. The signal then passes through an antenna matching coil and is amplified to high frequencies by a GaAs (gallium arsenide) field-effect transistor. The unwanted components of the signal are eliminated by a bandpass filter consisting of a three-stage variable capacitor. The resulting signal goes to the first mixer, is mixed with the first local signal from the PLL circuit, then converted to the first IF of 10.595 MHz.

Item	Rating
Center frequency	10.595 MHz
Pass bandwidth	±6.5 kHz or more at 3 dB
Attenuation bandwidth	±23 kHz or less at 40 dB ±40 kHz or less at 60 dB
Guaranteed attenuation	70 dB or more within $F_0 \pm 1$ MHz (Spurious: 40 dB or more)
Ripple	1 dB or less
Insertion loss	1.5 dB or less
Terminating impedance	2.9 k Ω /0pF

Table 5 MCF (L71-0421-05) (50TX-RX unit XF1)

The unwanted near-by signal components are then eliminated by a two-stage MCF.

The first IF signal is amplified and input to FM IF HIC IC6 (KCD04). This signal is then mixed with the second local oscillation frequency of 11.05 MHz to produce the second IF signal of 455 kHz. The unwanted near-by signal components are then eliminated by an FM ceramic filter. The resulting signal is input to IC6 again, amplified to the second IF signal, and detected to produce an audio signal.

Item	Rating
Nominal center frequency	455KHz
6 dB bandwidth	±6.0 kHz or more (from 455 kHz)
50 dB bandwidth	±12.5 kHz or less (from 455 kHz)
Ripple (within ±5 kHz of 3455 kHz)	3 dB or less
Insertion loss (at maximum output point)	6 dB or less
Guaranteed attenuation (within ±100 kHz of 455 kHz)	35 dB or more
Terminating impedance	2.0 k Ω

Table 6 Ceramic filter CFWM455F (L72-0372-05) (50TX-RX unit CF1)

CIRCUIT DESCRIPTION

● Signal-strength meter

The signal-strength meter output voltage of FM IF HIC IC6 (KCD04) is supplied to the control unit.

● Shift-register circuit

The ES, CK, and DT serial data from the control unit are sent to IC1 (BU4094BF) to perform the control operation outlined in the following table:

Pin No.	Name	Function	Pin No.	Name	Function
1	Strobe	Enable input	9	Qs	
2	Data	Serial data input	10	Q's	
3	Clock	Clock input	11	Q8	TX/RX selection High when TX is set.
4	Q1	TX/RX selection. Low when TX is set	12	Q7	ATT switching High when ATT is on
5	Q2	TX power selection. Low when middle and low. "H" when high.	13	Q6	High for AM; low for FM
6	Q3	TX power selection. Low when high and low. "H" when middle.	14	Q5	High when off band
7	Q4	Low when off band	15	OE	8V
8	Vss	GND	16	VDD	8V

Table 7

● ATT circuit

If there is cross modulation, the ATT circuit operates

to attenuate the received signal before it enters Q2 (FET for high-frequency amplification).

50 TX-RX Unit Transmit Signal Channel

● Outline

In the transmission channel, the desired frequency is produced by direct oscillation, and is directly frequency modulated by means of a varicap diode.

● Modulator circuit

The audio signal from the control unit is input to microphone amplifier HIC IC3 (KCA04). IC4 consists of a preemphasis circuit, amplifier, limiter, and splatter circuit that eliminates unwanted high-frequency components. The voltage-controlled oscillator (VFO) signal is directly frequency modulated by means of a varicap diode in the frequency modulator circuit.

● Younger-stage circuit

The signal output from the VCO is input to drive circuit HIC IC4 (KCB18). The amplifier can obtain a stable drive output without adjustment because it has a large bandwidth. An APC circuit controls the collector voltage in the Younger final stage.

● Power amplifier circuit

The drive signal is amplified to the specified level by a discrete transistor. Q201 performs class B amplification, and the collector output voltage is controlled by an APC circuit. Q202 amplifies the power by class C operation, improving the efficiency of the final stage.

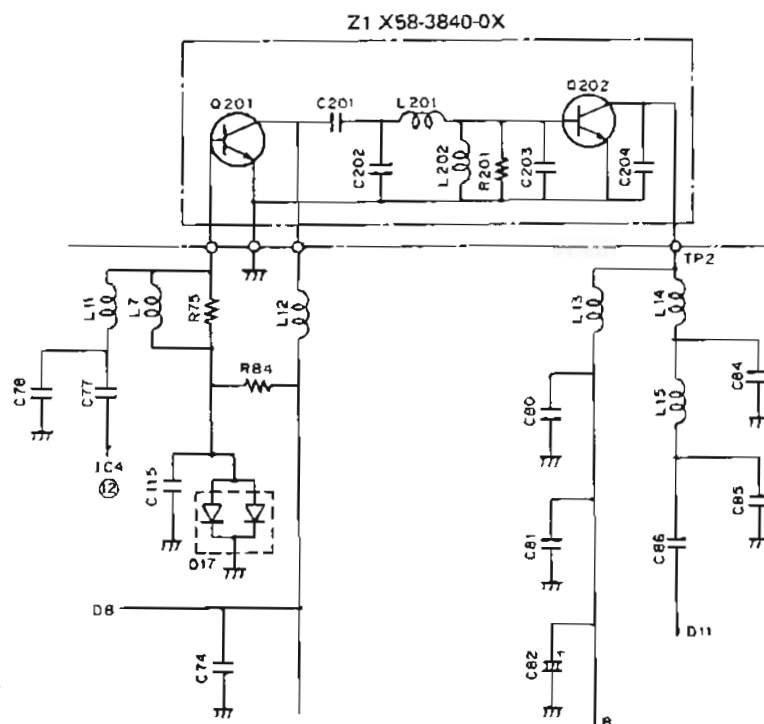


Fig. 6 Power amplifier circuit

CIRCUIT DESCRIPTION

● APC circuit

The automatic transmission output control circuit (APC) detects and partially amplifies the power amplifier output with a diode, and controls the output control voltage. The control voltage is output in inverse proportion to the output, so the control voltage output is always constant. To protect the radio against excessive temperature rise, the high-power unit has a thermal switch. The high-power unit is automatically set to a low

power by the thermal switch if it exceeds the specified temperature.

● LPF circuit

The low-pass filter sets the pole to the second and third harmonics, and cuts the frequency, by having the polar Chebyshev characteristics. To cut high frequencies, a filter with Chebyshev characteristics is used before the antenna.

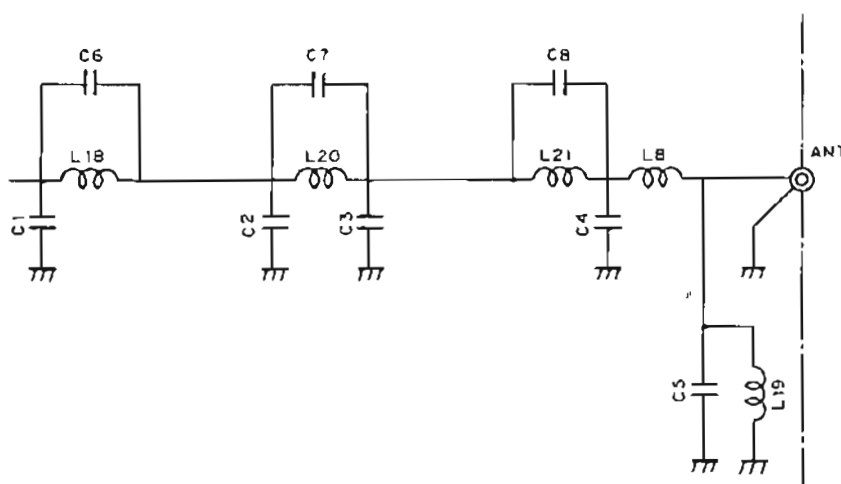


Fig. 7 LPF Circuit

● 8T (8 V during transmission) and unlock signal

The signal output from pin 4 of IC1 is high during reception, Q13 is turned on, and Q14 and Q11 are turned off. No voltage appears at the collector (8T) of Q11. Serial data is output from the control unit during transmission and input to shift register IC1. Pin 4 of IC1 is then made low. Therefore, Q13 is turned off, Q14 and

Q11 are turned on. An 8 V voltage is applied to the collector (8T) of Q11.

If the PLL circuit is unlocked during transmission, the LD pin goes low, Q24 is turned off, Q13 is turned on, Q14 is turned off, Q11 for 8T switching control is turned off, and the 8T line does not operate.

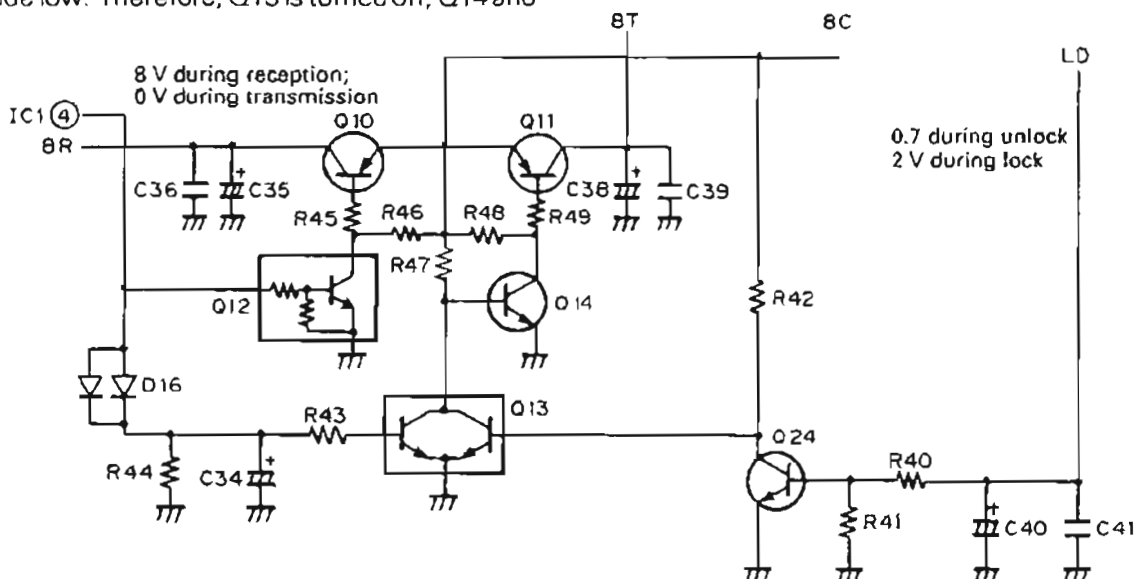


Fig. 8

CIRCUIT DESCRIPTION

50 TX-RX Unit PLL Synthesizer

The VCO and PLL circuits are housed in a solid shielding case as a hybrid integrated circuit. Comparison frequencies are produced by dividing a 11.05 MHz reference oscillation frequency by 2210 to correspond to the 5, 10, 15, 20, and 25 kHz channel steps.

For 50 MHz, the relationship between f_{vco} (RX) and each frequency division ratio is given by

$$f_{vco} = (50 + 10.595) = \{(n \times 64) + A\} \times f_{osc} / R$$

Where: f_{vco} = VCO output frequency

n: Binary 10-bit programmable counter setting value

A: Binary 6-bit programmable counter setting value

f_{osc} : Reference oscillation frequency of 11.05 MHz

R: Binary 16-bit programmable counter setting value

In this case, n is 189, and A is 23.

$$\text{Therefore, } f_{vco} = \{(189 \times 64) + 23\} \times 11050 / 2210$$

$$= (12096 + 23) \times 5$$

$$= 60.595 \text{ MHz}$$

The following table lists the pin functions of the PLL circuit:

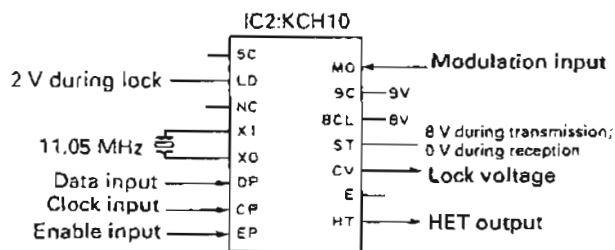


Fig. 9

Pin name	Function	Pin name	Function
5C	5V	MO	Modulation signal input
LD	Lock signal (2 V during locking)	9C	9V
NC	Unused	BCL	8 V (ripple filter)
X1 XO	11.05 MHz crystal oscillation	ST	8 V during transmission; 0 V during reception
	Data input	CV	Lock voltage output
DP	Clock input	E	GND
CP	Enable input	HT	HET output
EP			

Table 8 PLL circuit pin functions

CIRCUIT DESCRIPTION

TM-741/UT-144

144 TX-RX Unit Frequency Configuration

The 144 MHz unit incorporates a digital variable-frequency oscillator (VFO) that can freely select a channel step of 5, 10, 12.5, 15, 20, or 25 kHz with a Phase-Locked-Loop (PLL) synthesizer system.

The frequency in the receive signal channel is mixed with a first local oscillation frequency of 133.300-137.295 MHz to produce a first intermediate frequency of 10.7

MHz. This frequency is then mixed with a second local oscillation frequency of 10.245 MHz to produce a second intermediate frequency of 455 kHz. This is called a double-conversion system.

The signal in the transmission channel is directly oscillated and frequency-divided by a PLL circuit, amplified by a straight amplifier, then transmitted.

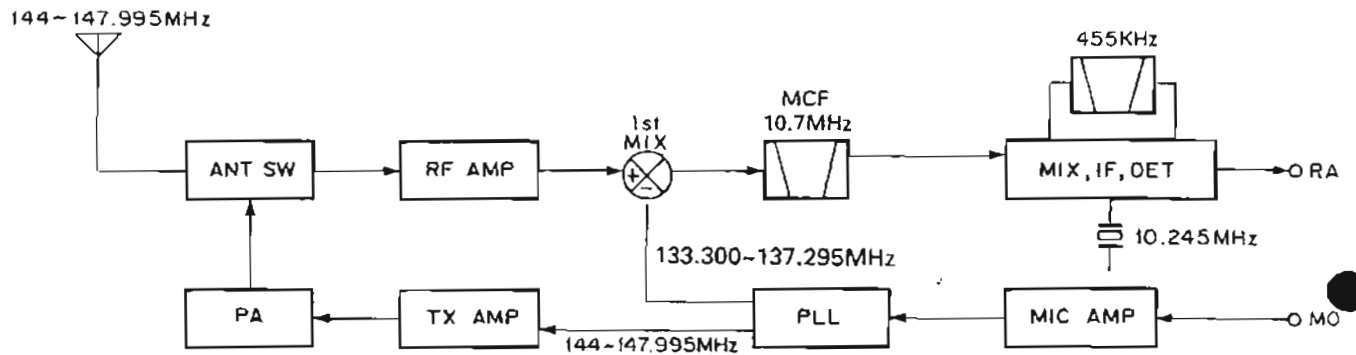


Fig. 10 Frequency configuration

144 TX-RX Unit Receive Signal Channel

• Outline

For the 144 MHz unit, the received signal from an antenna is passed through a low-pass filter in the final transmission stage and sent through a transmission/reception selection diode switch to the receiving front end. The signal is then passed through an antenna matching coil and amplified to high frequencies by a

GaAs (gallium arsenide) field-effect transistor. The unwanted components of the signal are eliminated by a bandpass filter consisting of a three-stage variable capacitor. The resultant signal is sent to the first mixer, mixed with the first local signal from a PLL circuit, then converted to a first intermediate frequency of 10.7 MHz. The unwanted near-by signal components are then eliminated by a two-stage MCF.

Item	Rating
Nominal center frequency (fo)	10.7MHz
Pass band width	±7.5kHz or less at 3dB
Attenuation band width	±25kHz or less at 40dB ±45kHz or less at 60dB
Ripple	1.0dB or less
Insertion loss	1.5dB or less
Guaranteed attenuation	70dB or more within ±1MHz (Spurious : 40dB or more at fo - fo + 500kHz) 80dB or more at fo - (900 - 920kHz)
Terminating impedance	3kΩ/0pF

Table 9 MCF (L71-0228-05) (114 TX-RX unit XF1)

Item	Rating
Nominal center frequency	455kHz ± 1kHz
6dB bandwidth	±6kHz or more (from 455kHz)
50dB bandwidth	±12.5kHz or less (from 455kHz)
Ripple (within ±4kHz of 455kHz)	3dB or less
Insertion loss	6dB or less
Guaranteed attenuation (within ±100kHz of 455kHz)	35dB or more
I/O matching impedance	2.0kΩ

Table 10 Ceramic filter CFWM455F (L72-0372-05)
(144 TX-RX unit CF1)

CIRCUIT DESCRIPTION

The first intermediate-frequency signal is amplified and input to FM IF HIC IC5 (KCD04). This signal is then mixed with a second local oscillation frequency of 10.245MHz to produce a second intermediate-frequency signal of 455 kHz. The unwanted near-by signal components are then eliminated by an FM ceramic filter. The resultant signal is input to IC5 again, amplified to a second intermediate-frequency signal, and detected to produce an audio signal.

• Signal-strength meter

The signal-strength meter output voltage of FM IF HIC IC5 (KCD04) is supplied to the control unit.

• Shift-register circuit

The ES, CK, and DT serial data from the control unit are sent to IC1 (BU4094BF) to perform the control operation outlined in the following table:

Pin NO.	Name	Function	Pin No.	Name	Function
1	Strobe	Enable input	9	Q _s	
2	Data	Serial data input	10	Q' _s	
3	Clock	Clock input	11	Q8	TX/RX selection. "H" when TX is set.
4	Q1	TX/RX selection. "L" when TX is set	12	Q7	439/144 MHz selection. "H" when 144MHz is set.
5	Q2	TX power selection. "L" when middle and low. "H" when high.	13	Q6	
6	Q3	TX power selection. "L" when high and low. "H" when middle.	14	Q5	
7	Q4		15	OE	8V
8	V _{ss}	GND	16	V _{DD}	8V

Table 11

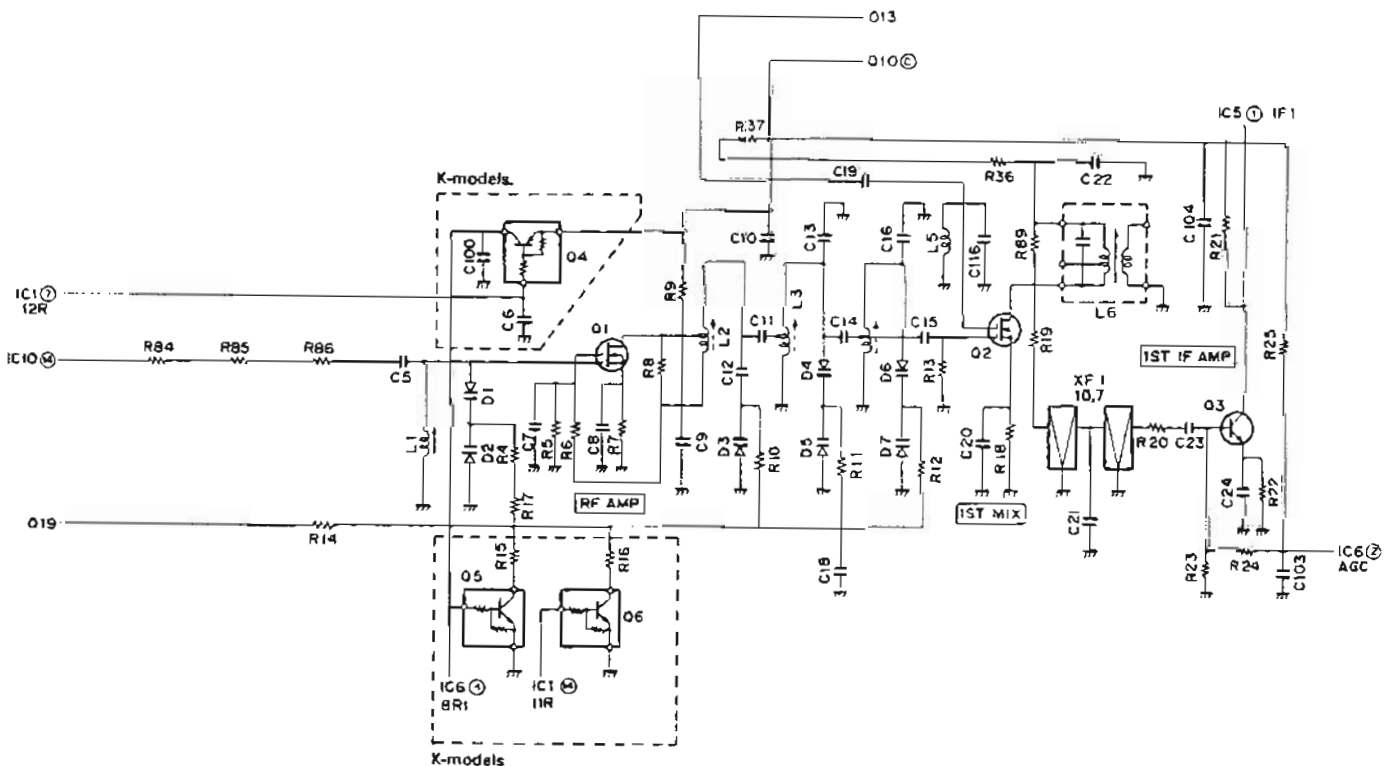


Fig. 11

CIRCUIT DESCRIPTION

144 TX-RX Unit Transmit Signal Channel

• Outline

In the transmission channel, the desired frequency is directly oscillated and directly frequency modulated by means of a varicap diode.

• Modulator circuit

The audio signal from the control unit is input to microphone amplifier HIC IC7 (KCA04). IC4 consists of a preemphasis circuit, amplifier, limiter, and splatter circuit that eliminate unwanted high-frequency components. The voltage-controlled oscillator (VCO) signal is directly frequency modulated by means of a varicap diode in the frequency modulator circuit.

• Younger-stage circuit

The signal output from the VCO is input to drive circuit HIC IC8 (KCB11). The amplifier can obtain a stable drive output without adjustment because it has a wide band. An APC circuit controls the collector voltage in the younger final stage.

• Power amplifier circuit

A drive signal is input to power module IC10 and amplified to the specified level.

• APC circuit

The automatic transmission output control circuit (APC) detects and partially amplifies the power module output with a diode and controls the output control voltage. The control voltage is output in inverse proportion to the output, so the control voltage output is always constant. To protect the set against excessive temperature rise, the high-power unit has a thermal switch. The high-power unit is automatically set to a low power by the thermal switch when it exceeds the specified temperature.

144 TX-RX Unit PLL Synthesizer

The VCO and PLL circuit are housed in a solid shielding case as a hybrid integrated circuit. Comparison frequencies of 6.25 kHz and 5 kHz are produced by dividing a 12.8 MHz reference oscillation frequency by 2048 and 2560 to correspond to 5, 10, 12.5, 15, 20, and 25 kHz channel steps.

For 144 MHz, the relationship between f_{VCO} (Rx) and each frequency division ratio is given by

$$f_{VCO} = (144 - 10.7) = \{(n \times 128) + A\} \times f_{osc} + R$$

Where: f_{VCO} = VCO output frequency

n : Binary 10-bit programmable counter setting value

A : Binary 7-bit programmable counter setting value

f_{osc} : Reference oscillation frequency of 12.8 MHz

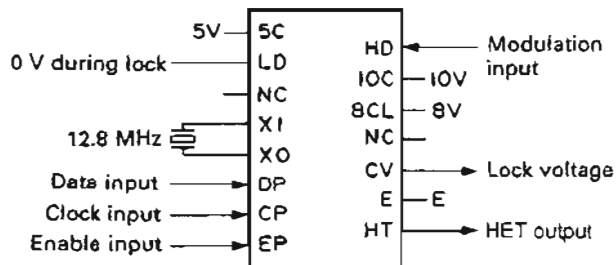


Fig. 12 IC11 KCH05

R: Binary 14-bit programmable counter setting value 2048

In this case, n is 208, and A is 36.

$$\begin{aligned} \text{Therefore, } f_{VCO} &= \{(208 \times 128) + 36\} \times 12800 / 2560 \\ &= \{26624 + 37\} \times 5 \\ &= 133300 \text{ kHz} = 133.300 \text{ MHz} \end{aligned}$$

The following table lists the pin functions of the PLL circuit:

Pin name	Function	Pin name	Function
5C	5V	MO	Modulation signal input
LD	Lock signal (on during lock)	10C	10V
NC	Unused	8CL	8V (ripple filter)
XI	12.8 MHz crystal oscillation	NC	Unused
XO		CV	Lock voltage output
DP	Data input	E	GND
CP	Clock input	HT	HET output
EP	Enable input		

Table 12

CIRCUIT DESCRIPTION

• 8T (8 V during transmission) and unlock signal

A 0.7 V voltage is applied to the base of Q13 during reception, Q13 is set on, Q14 is set off, and Q11 is set off. No voltage appears at the collector (8T) of Q11. Serial data is output from the control unit during transmission and input to shift register IC1. Pin 4 of IC1 is then set low. Therefore, Q13 is changed from on to off, Q14 from off to on, and Q11 from off to on. An 8 V

voltage is applied to the collector (8T) of Q11.

An unlock circuit is activated only during transmission. The LD signal output from the PLL circuit is ORed with the signal at pin 4 of IC1 using D11 as shown in the figure, so the LD signal is set high during unlock. Therefore, no voltage appears at the collector (8T) of Q11 and no transmission wave is output to the reception state.

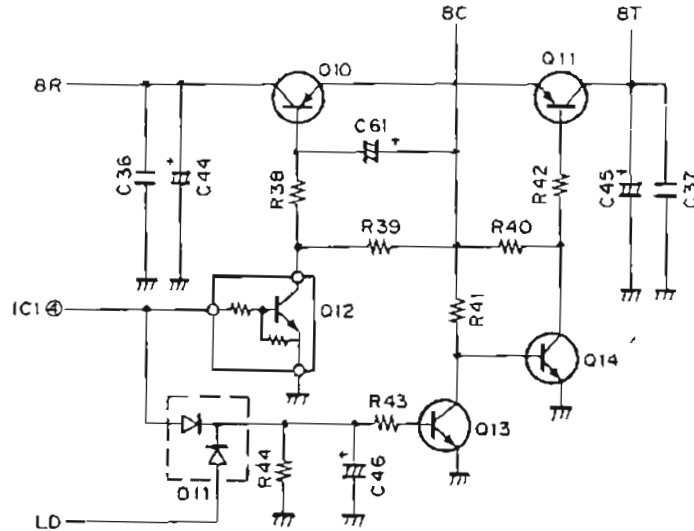


Fig. 13

UT-220S

220 TX-RX Unit Frequency Configuration

The 220 MHz unit incorporates a variable frequency oscillator (VFO), based on a phase-locked-loop (PLL) synthesizer system, that allows a channel step of 5, 10, 12.5, 15, 20, or 25 kHz to be selected. The frequency in the receive signal channel is mixed with a first local oscillation frequency of 189.175-194.17 MHz to produce

a first intermediate frequency (IF) of 30.825 MHz. This frequency is then mixed with a second local oscillation frequency of 30.37 MHz to produce a second IF of 455 kHz. This is called a double-conversion system. The signal in the transmission channel is produced by direct oscillation, and is frequency-divided by a PLL circuit, amplified by a linear amplifier, then transmitted.

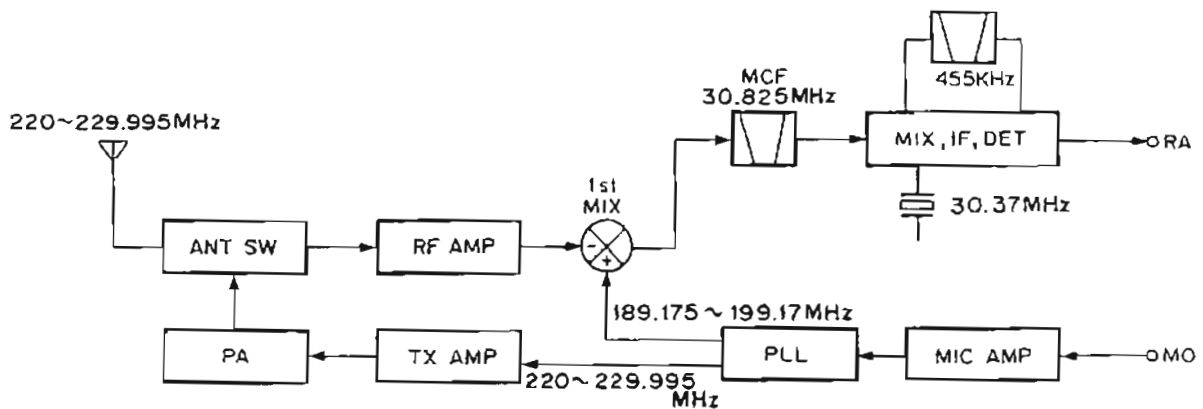


Fig. 14 Frequency configuration

CIRCUIT DESCRIPTION

220 TX-RX Unit Receive Signal Channel

● Outline

The received signal from the antenna passes through a low-pass filter in the final transmission stage and then through a transmission/reception selection diode switch to the receiving front end. The signal then passes through an antenna matching coil and is amplified to high frequencies by a GaAs (gallium arsenide) field-effect transistor. The unwanted components of the signal are eliminated by a bandpass filter consisting of a three-stage variable capacitor. The resulting signal goes to the first mixer (GaAs field-effect transistor), is mixed with the first local signal from the PLL circuit, then converted to a first IF of 30.825 MHz. The unwanted near-by signal components are then eliminated by a two-stage MCF.

The first IF signal is amplified and input to FM IF HIC IC5 (KCD04). This signal is then mixed with the second local oscillation frequency of 30.37 MHz to produce the second IF signal of 455 kHz. The unwanted near-by signal components are then eliminated by an FM ceramic filter. The resulting signal is input to IC5 again, amplified to the second IF signal, and detected to produce an audio signal.

Item	Rating
Center frequency (fo)	30.825 MHz
Pass bandwidth	± 7.5 kHz or more at 3 dB
Attenuation bandwidth	± 28 kHz or less at 40 dB
Guaranteed attenuation	60 dB or more within Fo ± 1 MHz (Spurious: 40 dB or more)
Ripple	1.5 dB or less
Insertion loss	3 dB or less
Terminating impedance	4.7 kΩ/0pF

Table 13 MCF (L71-0420-05) (220 TX-RX unit XF1)

Item	Rating
Nominal center frequency	455KHz
6 dB bandwidth	± 6 kHz or more (from 455 kHz)
50 dB bandwidth	± 12.5 kHz or less (from 455 kHz)
Ripple (within ± 5 kHz of 455 kHz)	3 dB or less
Insertion loss (at maximum output point)	6 dB or less
Guaranteed attenuation (within ± 100 kHz of 455 kHz)	35 dB or more
I/O matching impedance	2.0kΩ

Table 14 Ceramic filter CFWM455F (L72-0372-05)
(220TX-RX unit CF1)

● Signal-strength meter

The signal-strength meter output voltage of FM IF HIC IC5 (KCD04) is supplied to the control unit.

● Shift-register circuit

The ES, CK, and DT serial data from the control unit are sent to IC1 (BU4094BF) to perform the control operation outlined in the following table:

Pin No.	Name	Function
1	Strobe	Enable input
2	Data	Serial data input
3	Clock	Clock input
4	Q1	TX/RX selection. Low when TX is set.
5	Q2	TX power selection. Low when middle and low. High when high.
6	Q3	TX power selection. Low when high and low. High when middle.
7	Q4	
9	Q3	
10	Q3	
11	Q8	
12	Q7	
13	Q6	
14	Q5	
15	QE	8V

Table 15

CIRCUIT DESCRIPTION

220 TX-RX Unit Transmit Signal Channel

● Outline

In the transmission channel, the desired frequency is produced by direct oscillation, and is directly frequency modulated by means of a varicap diode.

● Modulator circuit

The audio signal from the control unit is input to microphone amplifier HIC IC7 (KCA04). IC4 consists of a preemphasis circuit, amplifier, limiter, and splatter circuit that eliminates unwanted high-frequency components. The voltage-controlled oscillator (VFO) signal is directly frequency modulated by means of a varicap diode in the frequency modulator circuit.

● Younger-stage circuit

The signal output from the VCO is input to drive circuit HIC IC8 (KCB15). The amplifier can obtain a stable drive output without adjustment because it has a large bandwidth. An APC circuit controls the collector voltage in the Younger final stage.

● Power amplifier circuit

The drive signal is input to power module IC10 and amplified to the specified level.

● APC circuit

The automatic transmission output control circuit (APC) detects and partially amplifies the power amplifier output with a diode and controls the output control voltage. The control voltage is output in inverse proportion to the output, so the control voltage output is always constant.

● 8T (8 V during transmission) and unlock signal

A 0.7 V voltage is applied to the base of Q13 during reception, Q13 is turned on, and Q14 and Q11 are turned off. No voltage appears at the collector (8T) of Q11. Serial data is output from the control unit during transmission and input to shift register IC1. Pin 4 of IC1 is then made low. Therefore, Q13 is turned off, and Q14 and Q11 are turned on. An 8 V voltage is applied to the collector (8T) of Q11.

The unlock circuit is activated only during transmission. The LD pin signal output from the PLL circuit is ORed with the signal at pin 4 of IC1 using D11, as shown in the figure, so the LD signal is made high during unlock. Therefore, no voltage appears at the collector (8T) of Q11, and no transmission signal is output during reception.

220 TX-RX Unit PLL Synthesizer

The VCO and PLL circuits are housed in a solid shielding case as a hybrid integrated circuit. Comparison frequencies are produced by dividing a 12.8 MHz reference oscillation frequency by 2248 and 2560 to correspond to the 5, 10, 12.5, 15, 20, and 25 kHz channel steps.

For 220 MHz, the relationship between f_{vco} (RX) and each frequency division ratio is given by

$$f_{vco} = (220 + 30.825) = \{(n \times 128) + A\} \times f_{osc} / R$$

Where: f_{vco} = VCO output frequency

n: Binary 10-bit programmable counter setting value

A: Binary 7-bit programmable counter setting value

f_{osc} : Reference oscillation frequency of 12.8 MHz

R: Binary 10-bit programmable counter setting value 2560

In this case, n is 295, and A is 75.

$$\text{Therefore, } f_{vco} = \{(295 \times 128) + 75\} \times 12800 / 2560$$

$$= (33760 + 75) \times 5$$

$$= 189.175 \text{ MHz}$$

The following table lists the pin functions of the PLL circuit:

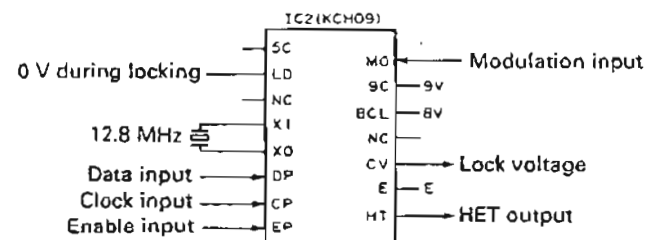


Fig. 15

Pin name	Function	Pin name	Function
SC	5V	MO	Modulation signal input
LD	Lock signal (0 V during locking)	9C	9V
NC	Unused	8CL	8 V (ripple filter)
XI	12.8 MHz crystal oscillation	NC	
XO		CV	Lock voltage output
DP	Data input	E	GND
CP	Clock input	HT	HET output
EP	Enable input		

Table 16 PLL circuit pin functions


CIRCUIT DESCRIPTION

430 TX-RX Unit Frequency Configuration

The 430 MHz unit incorporates a digital variable-frequency oscillator (VFO) that can freely select a channel step of 5, 10, 12.5, 15, 20, or 25 kHz with a PLL synthesizer system. The frequency in the receive signal channel is mixed with a first local oscillation frequency of 451.6-461.595 MHz (459.6-471.595 MHz for K-models) to produce a first intermediate frequency

of 21.6 MHz. The frequency is then mixed with a second local oscillation frequency of 21.145 MHz to produce a second intermediate frequency of 455 kHz. This is called a double-conversion system.

The signal in the transmission channel is directly oscillated and frequency-divided by a PLL circuit, amplified by a straight amplifier, then transmitted.

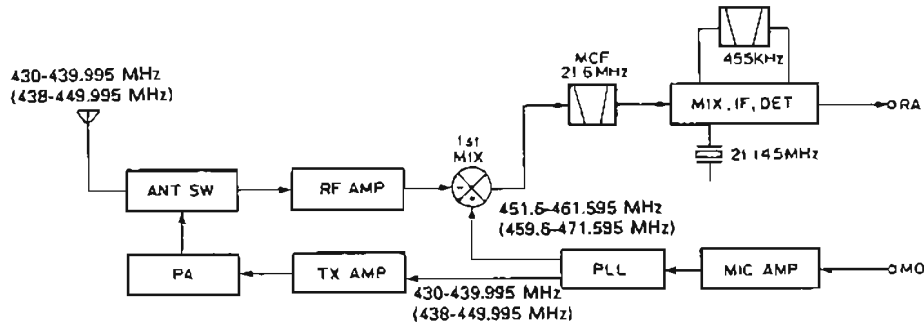

* The alphanumeric characters enclosed in parentheses are used for K-models.

Fig. 16 Frequency Configuration

430 TX-RX Unit Receive Signal Channel

• Outline

A 430 MHz band antenna input signal is passed through the antenna selection diode in the final stage and sent through a front-stage antenna matching coil to the high-frequency two-stage amplifier and helical block of a GaAs (gallium arsenide) FET and junction FET. The signal is then input to the first mixer. The first mixer input signal is mixed with the first local signal from the PLL circuit and converted to a first intermediate-frequency signal of 21.6 MHz. The unwanted near-by signal components are then eliminated by a two-stage MCF.

The first intermediate-frequency signal is amplified and input to FM IF HIC IC1 (KCD04). This signal is then mixed with a second local oscillation frequency of

21.145 kHz to produce a second intermediate frequency of 455 kHz. The unwanted near-by components of the intermediate-frequency signal are eliminated by an FM ceramic filter. The intermediate-frequency signal is input to IC1 again. The second intermediate-frequency signal is amplified and detected by IC1 to produce an audio signal.

• Signal-strength meter

The signal-strength meter output voltage of FM IF HIC IC1 (KCD04) is supplied to the control unit.

• Shift-register circuit

The ES, CK, and DT serial data from the control unit are sent to IC3 (BU40948F) to perform the control operation outlined in the following table:

Pin No.	Name	Function	Pin No.	Name	Function
1	Strobe	Enable input	9	Q _s	
2	Data	Serial data input	10	Q' _s	
3	Clock	Clock input	11	Q8	
4	Q1	TX/RX selection. "L" when TX is set	12	Q7	
5	Q2	TX power selection. "L" when middle and low. "H" when high.	13	Q6	
6	Q3	TX power selection. "L" when high and low. "H" when middle.	14	Q5	
7	Q4		15	OE	8V
8	V _{ss}	GND	16	V _{DD}	8V

Table 17

CIRCUIT DESCRIPTION

430 TX-RX Unit Transmit Signal Channel

• Outline

In the transmission channel, the desired frequency is directly oscillated and directly frequency modulated by means of a varicap diode.

• Modulator circuit

The audio signal from the control unit is input to microphone amplifier HIC IC2 (KCA04). IC4 consists of a preemphasis circuit, amplifier, limiter, and splatter circuit that eliminate unwanted high-frequency components. The VCO signal is directly frequency modulated by a varicap diode in the frequency modulator circuit.

• Younger-stage circuit

The signal output from the VCO is input to drive circuit HIC IC6 (KCB14). The amplifier can obtain a stable drive output without adjustment because it has a wide

band. An APC circuit controls the collector voltage in the younger final stage.

• Power amplifier circuit

A drive signal is input to power module IC7 and amplified to the specified level.

• APC circuit

The automatic transmission output control circuit (APC) detects and partially amplifies the power module output with a diode and controls the output control voltage. The control voltage is output in inverse proportion to the output, so the control voltage output is always constant. To protect the set against excessive temperature rise, the high-power unit has a thermal switch. The high-power unit is automatically set to a low power by the thermal switch when it exceeds the specified temperature.

430 TX-RX Unit PLL Synthesizer

The VCO and PLL circuit are housed in a solid shielding case as a hybrid integrated circuit. Comparison frequencies of 6.25 and 5 kHz are produced by dividing a 12.8 MHz reference oscillation frequency by 2048 and 2560 to correspond to 5, 10, 12.5, 15, 20, or 25 kHz channel steps.

For 430 MHz, the relationship between f_{VCO} (RX) and each frequency division ratio is given by

$$f_{VCO} = (430 + 21.6) = \{(n \times 128) + A\} \times f_{osc} \div R$$

Where: f_{VCO} = VCO output frequency

n: Binary 10-bit programmable counter setting value

A: Binary 7-bit programmable counter setting value

f_{osc} = Reference oscillation frequency of 12.8 MHz

R: Binary 14-bit programmable counter setting value
2560 (in 5, 10, 15, and 20 kHz steps)

2048 (in 12.5 and 25 kHz steps)

In 5, 10, 15, and 20 kHz steps, n is 705 and A is 80.

$$\begin{aligned} \text{Therefore, } f_{VCO} &= \{705 \times 128\} \times 12800 / 2560 \\ &= \{90240 + 80\} \times 5 \\ &= 451600 \\ &= 451.6 \text{ MHz} \end{aligned}$$

See the 144 MHz band unit (X57-3580-00) for the function of each pin of IC10 in the PLL circuit.

• 8T (8 V during transmission) and unlock signal

See the 144 TX/RX unit description on page 13. (The figure on the under indicates the 430 MHz unit.)

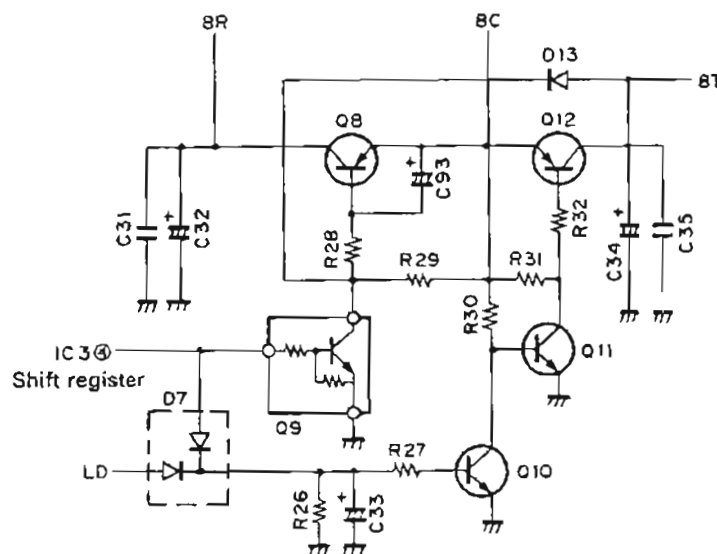


Fig. 17

CIRCUIT DESCRIPTION

1200 TX-RX Unit Frequency Configuration

The 1200 MHz unit incorporates a digital variable-frequency oscillator (VFO) that freely can select a channel step of 10, 12.5, 20, or 25 kHz with a PLL synthesizer system.

The frequency in the receive signal channel is mixed with a frequency of 1200.3 to 1240.20 MHz obtained when a first local oscillation frequency of 600.15 to 620.145 MHz is multiplied by 2 to produce a first

intermediate frequency of 59.7 MHz. This frequency is then mixed with a second local oscillation frequency of 59.245 MHz to produce a second intermediate frequency of 455 kHz. This is called a double-conversion system.

The signal in the transmission channel is oscillated and frequency-divided by a PLL circuit, then multiplies the frequency of 630 to 649.995 MHz by two to produce a frequency of 1260 to 1299.99 MHz. This signal is amplified by a straight amplifier, then transmitted.

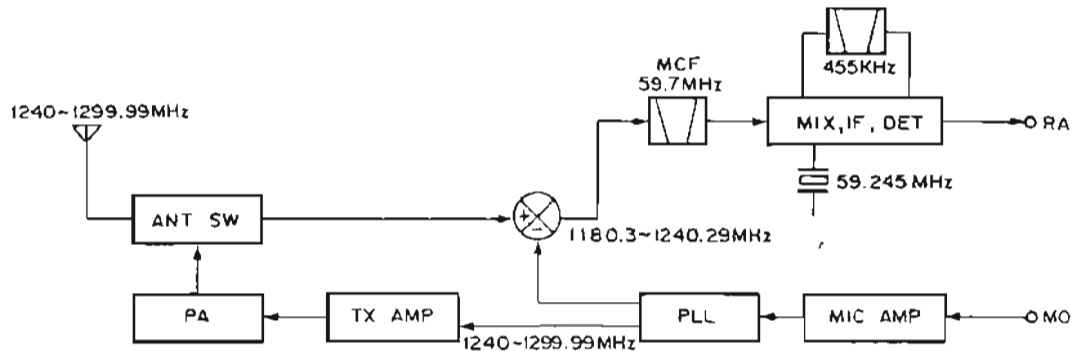


Fig. 18 Frequency Configuration

1200 TX-RX Unit Receive Signal Channel

• Outline

The received signal from an antenna is passed through a low-pass filter in the transmission final stage and sent through a transmission/reception selection diode switch to the receiving front end. The signal is then amplified to high frequencies by a microwave GaAs (gallium arsenide) FET and sent to a dielectric filter. The unwanted components of the signal are eliminated by a microwave transistor in another stage and the dielectric filter. The resultant signal is input to the first mixer. The front end block is matched by a microstrip line to ensure high sensitivity and high reliability. A GaAs FET is used in the first mixer to obtain a good two-signal characteristic. This signal is mixed with the first local signal from a PLL circuit by the first mixer and converted to a first intermediate frequency of 59.7 MHz. The unwanted near-by signal components are eliminated by a two-stage MCF. The

resultant signal is produced as a first intermediate-frequency signal.

The first intermediate-frequency signal is amplified and input to FM IF HIC IC2 (KCD04). This signal is then mixed with a second local oscillation frequency of 59.245 kHz to produce a second intermediate frequency of 455 kHz. The intermediate-frequency signal is passed through a ceramic filter to obtain a sharp characteristic. The signal is then input to an HIC again, amplified, then demodulated and output from the HIC.

• Signal-strength meter

The signal-strength meter output voltage of FM IF HIC IC2 (KCD04) is supplied to the control unit.

• Shift-register circuit

The FS, CK, and DT serial data from the control unit are sent to IC5 (BU4094BF) to perform the control operation outlined in the following table:

CIRCUIT DESCRIPTION

Pin No.	Name	Function	Pin No.	Name	Function
1	Strobe	Enable input	9	Q_s	
2	Data	Serial data input	10	Q'_s	
3	Clock	Clock input	11	Q_8	TX/RX selection. "L" when TX is set (Set low faster than Q_1).
4	Q_1	TX/RX selection. "L" when TX is set	12	Q_7	ALT. "H" when on.
5	Q_2	TX power selection. "L" when middle and low. "H" when high.	13	Q_6	
6	Q_3	TX power selection. "L" when high and low. "H" when middle.	14	Q_5	
7	Q_4		15	Q_E	8V
8	V_{ss}	GND	16	V_{DD}	8V

Table 18

1200 TX-RX Unit Transmit Signal Channel

- Outline

In the transmission channel, the desired frequency is oscillated by half and directly frequency modulated by means of a varicap diode.

- Modulator circuit

The audio signal from the control unit is input to microphone amplifier HIC IC4 (KCA04). IC4 consists of a preemphasis circuit, amplifier, limiter, and splatter circuit that eliminate unwanted high-frequency components. The VCO signal is directly frequency modulated by means of a varicap diode in the frequency modulator circuit.

- Younger-stage circuit

The signal output from the VCO is input to predrive circuit IC7 (KCB09). The amplifier can obtain a stable drive output without adjustment because it has a wide band.

- Power amplifier circuit

The signal amplified in the predrive stage is amplified again by drive circuit HIC IC8 (KCB10), then input to power module IC10 and amplified to the specified level.

- APC circuit

The automatic transmission output control circuit (APC) detects and partially amplifies the power module output with a diode and controls the output control voltage. The control voltage is output in inverse proportion to the output, so the control voltage output is always constant.

- Antenna selection circuit

Figure 19 shows the antenna selection circuit. The receiver circuit obtains a low insertion loss and isolation with a two-stage breaker circuit consisting of a $\lambda/4$ strip circuit.

The pin diode used as a switching device has a low junction capacitance. The high-frequency capacitance of the diode does not depend on the reverse bias voltage.

Figure 20 shows the equivalent circuit during transmission. A current flows through each diode using 8T. The impedance becomes very low. At that time, the receiver side uses a $\lambda/4$ strip circuit. Therefore, the impedance becomes very high when the receiver side is viewed from point (A). The voltage from a power module is transferred to the antenna.

Figure 21 shows the equivalent circuit during reception. The bias is switched off, so each diode is in a high-resistance state. The antenna and receiving circuit are connected by a strip line.

CIRCUIT DESCRIPTION

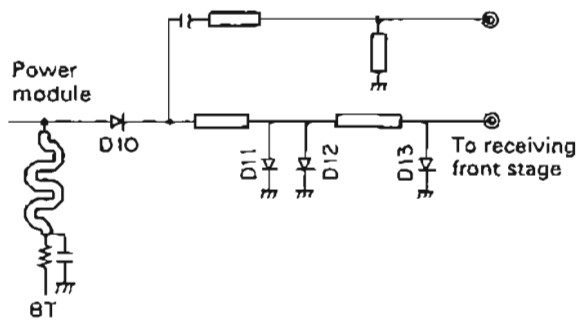


Fig. 19 Antenna Selection Circuit

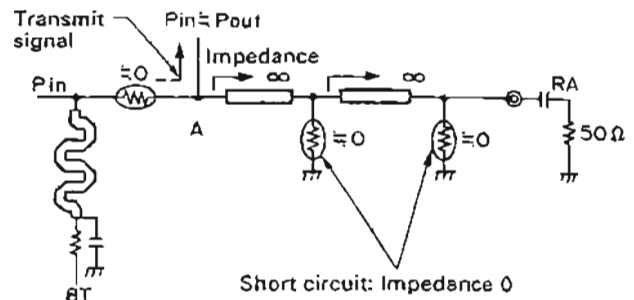


Fig. 20 Equivalent Circuit during Transmission

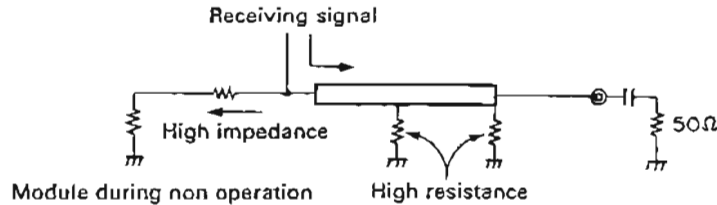


Fig. 21 Equivalent Circuit during Reception

1200 TX-RX Unit PLL Synthesizer

The VCO and PLL circuit are housed in 2 solid shielding case as a hybrid integrated circuit. This reduces the electrical and mechanical influence and ensures frequency stability.

The VCO and PLL circuit double the higher harmonics by oscillating and locking a 600 MHz frequency to produce a 1200 MHz band frequency. Comparison frequencies of 5 kHz and 6.25 kHz are produced by dividing a 12.8 MHz frequency of the TCXD by 2560 and 2048 to correspond to 10, 12.5, 20, and 25 kHz channel steps.

The relationship between $f_{vco}(RX)$ and each frequency division is given by

$$f_{vco}(RX) = (f_{RX} - 59.7) / 2 = \{(n \times 128) + A\} \times f_{osc} + R$$

Where: $f_{vco}(RX)$ = Previous output frequency that is multiplied by 2 during VCO reception

f_{RX} : Reception frequency

n : Binary 10-bit programmable counter setting value

A : Binary 7-bit programmable counter setting value

f_{osc} : Reference oscillation frequency of 12.8 MHz (TXCO)

R : Binary 14-bit programmable reference counter setting value


2048 (in 12.5 and 25 kHz steps)

2560 (in 10 and 20 kHz steps)

For 1260 MHz,

$$\begin{aligned} f_{vco}(RX) &= (1260 - 59.7) \\ &= \{(n \times 180) + A\} \times 12800 + 2560 \\ &= 600.15 \text{ MHz} \end{aligned}$$

In this case, n is 937 and A is 94.

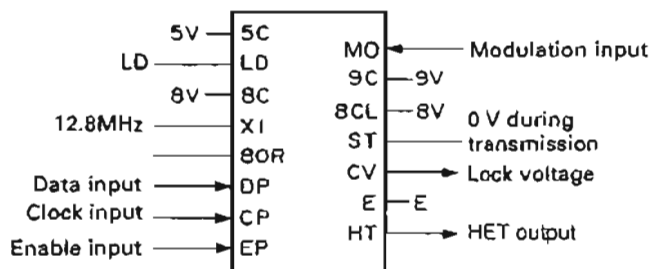

The same as for the 144 MHz unit except 8 V shown in the figure above.

Fig. 22 PLL pin description

Pin name	Function	Pin name	Function
5C	5V	MO	Modulation signal input
LD	Lock signal (on during lock)	9C	9V
NC	Unused	8CL	8V (ripple filter)
XI	12.8 MHz crystal oscillation	ST	0 V during transmission
80R		CV	Lock voltage
DP	Data input	E	GND
CP	Clock input	HT	HET output
EP	Enable input		

Table 19

CIRCUIT DESCRIPTION

• Unlock circuit

When a PLL circuit is unlocked during transmission, the LD pin of a IC11 set low and Q12 is set off. Q11 is then set on. The 8T line is not activated when 8T switching control circuit Q13 is set off.

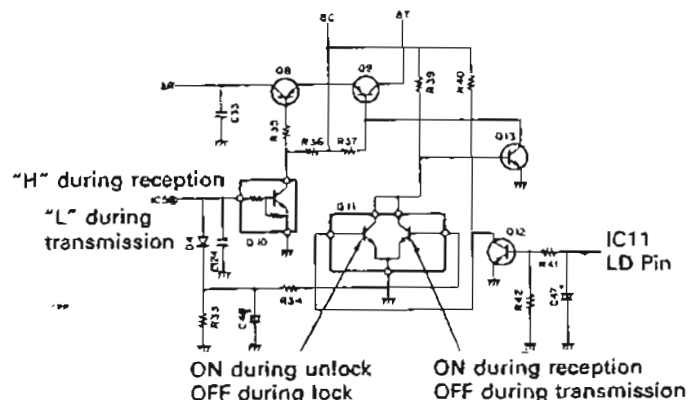


Fig. 23 Unlock Circuit

TM-641/741

Digital Control Block

• Outline

The digital control block is classified into a panel block and control unit block. The panel block consists of a key, rotary encoder input circuit, and display circuit. The control unit block consists of reset and backup circuits, a tone output circuit, and a microphone tone input circuit.

• Predrive circuit HIC (KCB09)

The VCO output is amplified by Q22, then input to pre-drive circuit HIC IC7. An average 22 to 23 dBm output is obtained by inputting 0 dBm through three-stage (2SC4093 and 2SC3357 x 2) amplification. An alumina board and hybrid integrated circuit are used to ensure stable circuit operation.

• Drive circuit HIC (KCB10)

The VCO output is amplified by KCB09, then input to drive circuit HIC. An average 29 dBm output is obtained by inputting 20 dBm through one-stage (2SC3814) amplification. An integrated radiation plate and alumina board are used to attain a stable output against heating.

• ALT

It is almost the same circuit construction as the TM-531A/E.

Refer to page 6 in the TM-531A/E service manual for more information.

• Panel and control unit data communication circuit

Figure 24 shows the panel and control unit data communication circuit. The S0 pin indicates serial data output and the S1 pin serial data input. An inverter is inserted for microcomputer port protection.

The data communication system is asynchronous, and the communication data rate is 19,200 bps. This data rate is about 16 times that of RC-20 and about 4 times those of other companies. The connection is checked every 0.5 second by a microcomputer on the control unit. Therefore, the power is switched off when the panel block is removed.

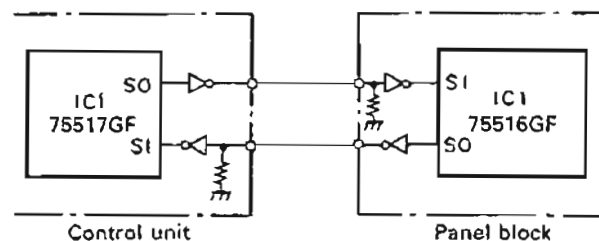


Fig. 24

CIRCUIT DESCRIPTION

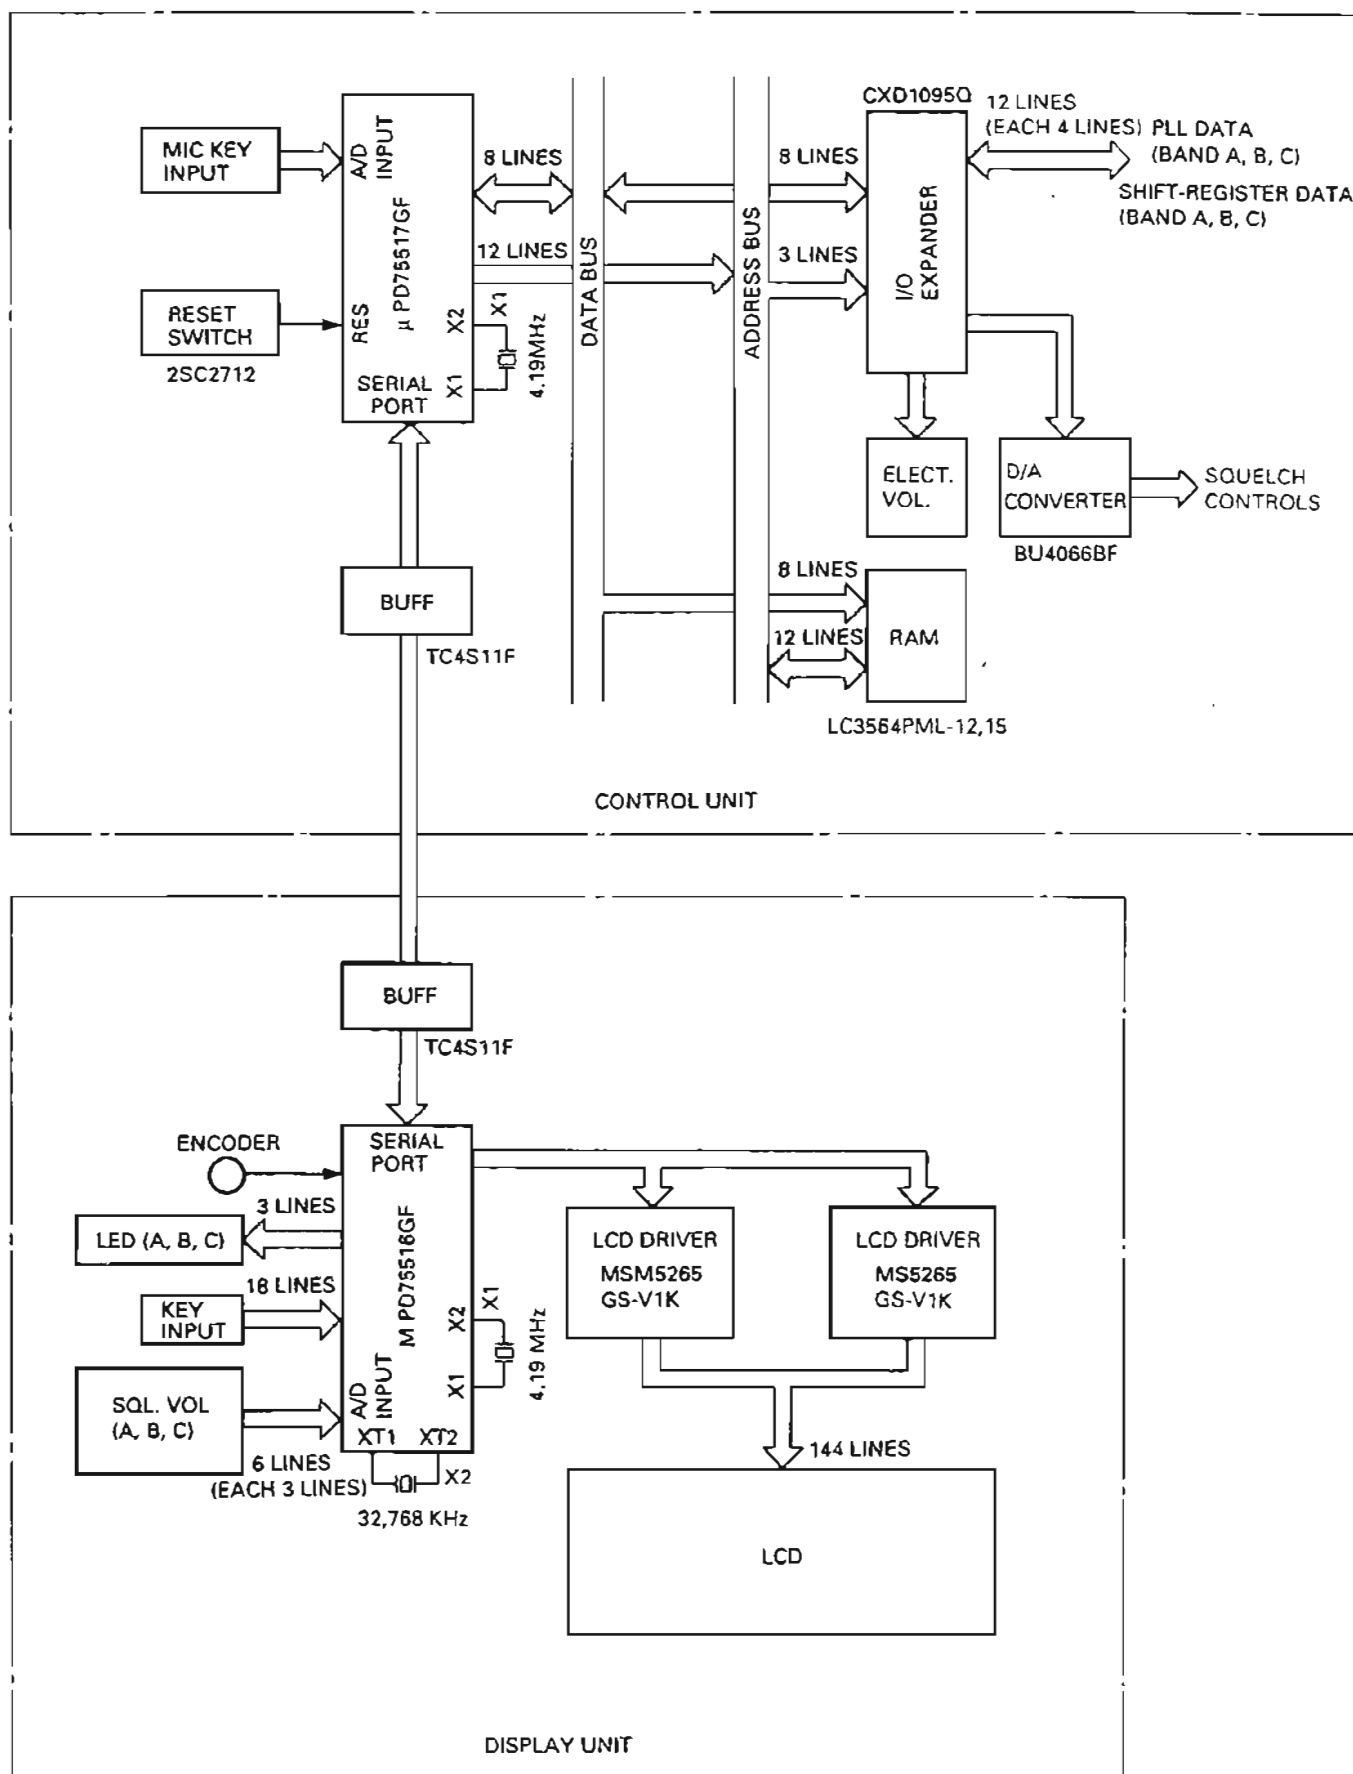


Fig. 25 TM-641A/741A/741E Control Block Diagram

CIRCUIT DESCRIPTION

Panel unit (display unit)

● Key rotary encoder input circuit

Each panel key signal is input from its own port. Pins 70 to 73, 60 to 63, 10 and 13 of the microprocessor are pulled up by software.

● Display circuit

The display circuit is in the panel unit, and is controlled by the microprocessor of the panel unit. It consists of two LCD drivers and their peripheral circuits.

The LCD is driven dynamically with 1/2 duty. Serial data is transferred from pins 102, 103, and 110 of the CPU (IC1: UPD75516GF) to the LCD driver. There are 141 segments.

● Dimmer circuit

The dimmer circuit changes the brightness of the lamp in four steps. Figure 1 shows the dimmer circuit. Q2 amplifies the error of the stabilized power supply using a 5 V reference voltage. Pins 132 and 133 of the microprocessor are open drain, and the output voltage can be controlled in four steps by grounding this port.

Pin 130 connected to the emitter of Q3 is also open drain. If it is open, Q3 is turned off, and no lamp voltage is output. If pin 130 is grounded, Q3 turns on and the lamp lights.

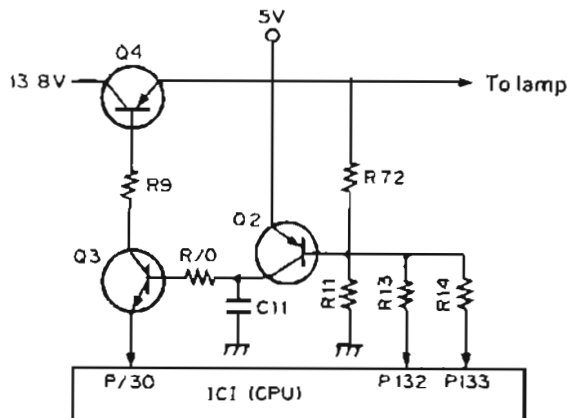


Fig. 26 Dimmer circuit

● Control band LED lighting circuit

The LED brightness is changed by switching the current to one of two ports for each LED. It is changed in two steps corresponding to lamp dimmers d1, d2, and d3, d4.

● Squelch volume input

The squelch volume for each band works by converting the voltage output by dividing 5 V applied to the variable resistor at the analog port of the microprocessor, and so reads the rotation angle. If the rotation angle changes, a command corresponding to the value is sent to the control unit.

● Reset backup circuit

When the power supply is connected, a low-level pulse of about 3 ms is output by the reset IC (IC7) and reset switch (Q1). This pulse power-on resets the CPU (IC1). When the power supply is disconnected, 13.8 V and line voltage drop are detected, the INT4 switch (Q6) turns off, and INT4 of the CPU (IC1) goes high. The microprocessor enters the backup mode, and if the backup switch (S2) is on, the clock count is performed (in 0.5-second intervals) by the BA1 power, and the 32.768 MHz crystal (X2) oscillates.

Control Unit Block

● Microphone key input circuit

Microphone UP/DQWN keys and function keys are connected to the analog input pins of a microcomputer. Each function is activated by the voltage generated when the keys are set on.

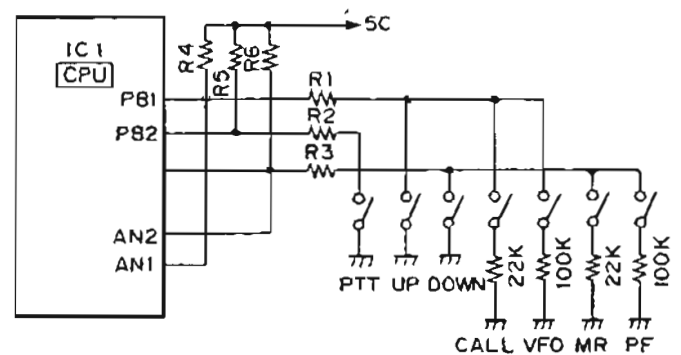


Fig. 27 Microphone key Input Circuit

CIRCUIT DESCRIPTION

● Shift-register circuit

The serial data from the microcomputer is passed through IC6 and IC7 (BU4094BF) to perform the following control operation.

Shift-Register Port Specification List (Common)

Control unit (X53-3310-XX)A/2:IC6.7

Shift-register A 4094

S. Reg Port	Pin No.	Port data	SA VE	Back up	Function	Pin name
Q1	4	PD_BZA			BAND A beep 0: Sounds 1: Does not sound	BZA
Q2	5	PD_BZA			BAND B beep 0: Sounds 1: Does not sound	BZB
Q3	6	PD_BZA			BAND C beep 0: Sounds 1: Does not sound	BZD
Q4	7	PD_MUTEA			BAND A MUTE 0: OFF 1: ON	MUTEA
Q5	14	PD_MUTEB			BAND B MUTE 0: OFF 1: ON	MUTEB
Q6	13	PD_MUTEA			BAND C MUTE 0: OFF 1: ON	MUTEA
Q7						
Q8					SRAM A12 0: Normal 1: Abnormal	BANK

Shift-register B 4094

S. Reg Port	Pin No.	Port data	SA VE	Back up	Function	Pin name
Q1	4	PD_CTC1			CTCSS operation unit selection *1	CTC1
Q2	5	PD_CTC2			CTCSS operation unit selection *1	CTC2
Q3	6	PD_RD1			Detection output connection unit selection *3	RD1
Q4	7	PD_RD2			Detection output connection unit selection *3	RD2
Q5	14	PD_DTS1			DTSS operation unit selection *2	DTS1
Q6	13	PD_DTS2			DTSS operation unit selection *2	DTS2
Q7	12					
Q8	11	PD_DTSEL			DTSS input selection 0: Detection output 1: MIC	DTSEL

*1, *2, *3

CTC2	CTC1	CTCSS operation unit
DTS2	DTS1	DTSS operation unit
RD2	RD1	Detection output connection unit
0	0	A
0	1	B
1	X	C

TM-641A/741A/741E

CIRCUIT DESCRIPTION

I/O Port Specification List

Control unit (X53-3310-XX) : IC1

μPD75517 I/O port list

μCOM Port	Port	I/O	Pull up	Back up	Description	Pin name
INT4 P00	P_VF	I			Power check 0: Operation 1: Backup	
SCK0 P01	P_RFMID	I	○		Lower-power unit TX power selection 0: Three stages (middle stage) 1: Two stages (no middle stage)	
S10/SB1 P02	P_SO	O	○		Panel microcomputer SI	
S10/SB1 P03	P_SI	I	○		Panel microcomputer SO	
INT0 P10		I		I		
INT1 P11	P_CTCSS	I		I	CTCSS detection 0: Tone coincides	SDO
INT2 P12	P_STD	I		I	DTMF detection (LC7385 standard) 0: No signal 1: Signal detected	DV
T10 P13	P_DTSCHK	I		I	DTSS connection check 0: No connection 1: Connection	VCK
PTO0 P20	P_BEEP	O		L	Beep sound output pin (effect sound) Set low when no beep sound is output	BZ
P21	P_DTOE	O		L	DTMF receiver LC7385 TOE	EN
PCL P22	P_DTCE	O		L	DTMF tone generator TP5088 CE	CE
BUZ P23	P_CLK	O		L	CTCSS unit/shift register/electronic volume clock	CK
P30	P_ET	O I		I	CTCSS unit enable connection check 0: Connection 1: No connection	ET
P31						
P32	P_FANDL0	I	Δ	I	FAN delay time setting input *1	
P33	P_FANDL1	I	Δ	I	FAN delay time setting input *1	
P40	P_DAT0	I/O	●	I	External RAM, i/o expander data, and DTMF data (D0/Q1)	
P41	P_DAT1	I/O	●	I	↑ (D1/Q2)	
P42	P_DAT2	I/O	●	I	↑ (D2/Q3)	
P43	P_DAT3	I/O	●	I	↑ (D3/Q4)	
P50	P_DAT4	I/O	●	I	External RAM and I/O expander data	

CIRCUIT DESCRIPTION

μPD75517 I/O List

μCOM Port	Port	I/O	Pull up	Back up	Description	Pin name
P51	P_DAT5	I/O	●	I	↑	
P52	P_DAT6	I	●	I	↑	
P53	P_DAT7	O	●	I	↑	
KR0 P60	P_SI	O		I	Subtone output bit 0	
KR1 P61	P_TONE	O		I	Subtone output bit 1	
KR2 P62	P_TONE	O		I	Subtone output bit 2	
KR3 P63	P_TONE	O		I	Subtone output bit 3	
KR4 P70	P_TONE	O		I	Subtone output bit 4	
KR5 P71	P_TONE	I		I	Subtone output bit 5	
KR6 P72	P_TONE	O		I	Subtone output bit 6	
KR7 P73	P_TONE	O		I	Subtone output bit 7	
PPO P80						
SCK P81	P_UP	I	●		Microphone up	
SO1 P82	P_PTT	I	●	I	Microphone PTT	
S11 P83	P_DOWN	I	●	I	Microphone down	
P90	P_A0	I		I	External RAM and I/O ex[am]der address (OPEADR)	
P91	P_A1	O		I	↑ (RAMADRL)	
P92	P_A2	O		I	↑	
P93	P_A3	O		I	External RAM address	
P100	P_A4	O		I	↑ (RAMADRH)	
P101	P_A5	O		I	↑	
P102	P_A6	O			↑	
P103	P_A7	O			↑	

TM-641A/741A/741E

CIRCUIT DESCRIPTION

μPD75517 I/O Port List

μCOM Port	Port	I/O	Pull up	Back up	Description	Pin name
P110	P_A8	O		I	↑	
P111	P_A9	O		I	↑	
P112	P_A10	O		I	↑	
P113	P_A11	O		L	↑	
P120	P_RAMOE	O	●	H	External RAM OE (L) L: Read	OE
P121	P_RAMRW	O	●	H	External RAM R/W L: Write H: Normal	R/W
P122	P_RAMCE2	O	●	L	External RAM CE2 L: Backup	CE2
P123	P_10CS	O	●	L	I/O Expander CS(L)	CS
P130	P_10RD	O	●	I	I/O Expander RD(L)	RD
P131	P_10WR	O	●	I	I/O Expander WR(L)	WR
P132	P_VOLEN1	O	●	I	Electronic volume enable 1 L: Buzzer R: Band C	EV1
P133	P_VOLEN2	O	●	I	Electronic volume enable 2 L: Band B R: Band A	EV2
P140	P_ES	O		I	Shift Register Enable	ES
P141	P_PSW	O		I	MicMUTE 0: MUTE OFF 1: MUTE ON	
P142	P_PSW	O		I	POWER switch 0: Power on 1: Power off	PSW
P143	P_DAT	O		I	CTCSS unit, shift register, and electronic volume data	DT
AN0	P_DNAN	I			DOWN, MR, PF key input	
AN1	P_UPAN	I			UP, CALL, and VFO key input	
AN2	P_SMA	I			Band unit A signal-strength meter input	
AN3	P_ALTA	I			Band unit A ALT input	
AN4 P150	P_SMB	I			Band unit B signal-strength meter input	
AN5 P151	P_ALTB	I			Band unit B ALT input	
AN6 P152	P_SMC	I			Band unit C signal-strength meter input	
AN7 P153	P_ALTC	I			Band unit C ALT input	

- Δ : Pulled up by software during check (note that P_ET is set high during check).
 ○ : Pulled up by software at all times.
 ● : Pulled up by hardware.

*1 FAN delay time setting input

FAN control	P_FANDL1	P_FANDL0
Always on during power-on sequence	0	0
On during transmission	0	1
On during transmission and for 1 minute after transmission	1	0
On during transmission and on for 2 minutes after transmission	1	1

CIRCUIT DESCRIPTION

I/O Expander Port Specification List

Control unit (X53-3310-XX) B/2 : IC 101

CXF1095Q I/O Port List

Port	I/O	Back up	Description	Pin name
PA0	I/O		BAND Unit C PLL Enable *3	EPC
PA1			BAND Unit c PLL/Shift Register Clock *3	CKC
PA2			BAND Unit C PLL/Shift Register Data *3	DTC
PA3			BAND Unit C Shift Register Enable	ESC
PA4	I		BAND Unit A busy input 0: Busy 1: Close	SCA
PA5			BAND Unit B busy input 0: Busy 1: Close	SCB
PA6			BAND Unit C busy input 0: Busy 1: Close	SCC
PA7				
PB0	O		BAND Unit C SQ Out bit0	SQC0
PB1			BAND Unit C SQ Out bit1	SQC1
PB2			BAND Unit C SQ Out bit2	SQC2
PB3			BAND Unit C SQ Out bit3	SQC3
PB4			BAND Unit B SQ Out bit0	SQB0
PB5			BAND Unit B SQ Out bit1	SQB1
PB6			BAND Unit B SQ Out bit2	SQB2
PB7			BAND Unit B SQ Out bit 3	SQB3
PC0	O		BAND Unit A SQ Out bit0	SQA0
PC1			BAND Unit A SQ Out bit1	SQA1
PC2			BAND Unit A SQ Out bit2	SQA2
PC3			BAND Unit A SQ Out bit3	SQA3
PC4	O		BAND Unit A SQ Out bit4	SQA4
PC5			BAND Unit A SQ Out bit5	SQA5
PC6			BAND Unit B SQ Out bit4	SQB4
PC7			BAND Unit B SQ Out bit5	SQB5
PD0	I/O		BAND Unit A PLL Enable *1	EPA
PD1			BAND Unit A PLL/Shift Register Clock *1	CKA
PD2			BAND Unit A PLL/Shift Register Data *1	DTA
PD3			BAND Unit A Shift Register Enable	ESA
PD4			BAND Unit B PLL Enable *2	EPB
PD5			BAND Unit B PLL/Shift Register Clock *2	CKB
PD6			BAND Unit B PLL/Shift Register Data *2	DTB
PD7			BAND Unit B Shift Register Enable	ESB
PE0	I/O		FAN ON/OFF 0: OFF 1: ON	FANSW
PE1			PSW other than SC	OSW2
PE2			BAND Unit C SQ Out bit4	SQC4
PE3			BAND Unit C SQ Out bit5	SQC5

TM-641A/741A/741E

CIRCUIT DESCRIPTION

*1, *2, *3 Type of band unit

BAND Unit	DTx	CKx	EPx	Unit No.	No. of data items after conversion
No unit	0	0	0	0	0
28 MHz BAND	1	0	0	4	1
50 MHz BAND	1	1	0	6	2
144 MHz BAND	0	1	1	3	3
220MHz BAND	0	1	0	2	4
430MHz BAND	1	0	1	5	5
1200MHz BAND	0	0	1	1	6

Note:

An x indicates A, B, or C. The number of data items after conversion indicates the data used in a program.

CIRCUIT DESCRIPTION

I/O Expander Port Specification List

DISPLAY UNIT (X54-3120-00) : IC1

 μ PD75516 (IC1) I/O Port List

μ COM Port	Port name	I/O	Pull up	Back up	Description	Circuit Pin name
INT4 P00	P_INT4	I		I	Power check 0: Operation 1: Backup	
SCK0 P01	P_01	I	O	I		
SO0/SB0 P02	P_SO	O	O	I	Serial data out	
SI0/SB1 P03	P_S1	I	O	I	Serial data in	
INT0 P10	P_ENCCLK	I		I	Encoder (CLK)	
INT1 P11	P_INT1	I		I	Connect to serial data in.	
INT2 P12	P_PSKEY	I		I	Power switch 0: NORMAL 1: PUSH	
T10 P13	P_ENCDDT	I		I	Encoder (DAT)	
PTO0 P20	P_TYPE0	I	O	I	Destination data B0	
P21	P_TYPE1	I	O	I	Destination data B1	
PCL P22	P_TYPE2	I	O	I	Destination data B2	
BUZ P23	P_TYPE3	I	O	I	Destination data B3	
P30	P_LEDOC1	O		I	Operation band LED Orange C 0: ON (Bright) 1: OFF/ON (dark)	
P31	P_LEDGC2	O		I	Operation band LED Orange C 0: ON (Bright)/ON (dark) 1: OFF	
P32	P_LEDGC1	O		I	Operation band LED Green C 0: ON (Bright) 1: OFF/ON (dark)	
P33	P_LEDGC2	O		I	Operation band LED Green C 0: ON (Bright)/ON (dark) 1: OFF	

CIRCUIT DESCRIPTION

μPD75516 (IC1) I/O Port List

μCOM Port	Port name	I/O	Pull up	Back up	Description	Circuit Pin name
P40	P_LEDOB1	O		I	Operation band LED Orange B 0: ON (Bright) 1: OFF/ON (dark)	
P41	P_LEDOB2	O		I	Operation band LED Orange B 0: ON (Bright)/ON (dark) 1: OFF	
P42	P_LEDGB1	O		I	Operation band LED Green B 0: ON (Bright) 1: OFF/ON (dark)	
P43	P_LEDGB2	O		I	Operation band LED Green B 0: ON (Bright)/ON (dark) 1: OFF	
P50	P_LED0A1	O		I	Operation band LED Orange A 0: ON (Bright) 1: OFF/ON (dark)	
P51	P_LED0A2	O		I	Operation band LED Orange A 0: ON (Bright)/ON (dark) 1: OFF	
P52	P_LEDGA1	O		I	Operation band LED Green A 0: ON (Bright) 1: OFF/ON (dark)	
P53	P_LEDGA2	O		I	Operation band LED Green A 0: ON (Bright)/ON (dark) 1: OFF	
KR0 P60	P_VFO	O	○	I	VFO key 0: PUSH 1: NORMAL	
KR1 P61	P_MR	O	○	I	MR key 0: PUSH 1: NORMAL	
KR2 P62	P_MHZ	O	○	I	MHz key 0: PUSH 1: NORMAL	
KR3 P63	P_CALL	O	○	I	CALL key 0: PUSH 1: NORMAL	
KR4 P70	P_BELL	O	○	I	BELL (SHIFT) key 0: PUSH 1: NORMAL	
KR5 P71	P_TONE	O	○	I	TONE key 0: PUSH 1: NORMAL	
KR6 P72	P_REV	O	○	I	REV key 0: PUSH 1: NORMAL	

CIRCUIT DESCRIPTION

 μ PD75516 (IC1) I/O Port List

μ COM Port	Port name	I/O	Pull up	Back up	Description	Circuit Pin name
KR7 P73	P_DTSS	O		I	DTSS key 0: PUSH 1: NORMAL	
PPO P80	P_LOW	I		I	LOW key 0: PUSH 1: NORMAL	
SCK1 P81	P_MUTE	I		I	MUTE key 0: PUSH 1: NORMAL	
SO1 P82	P_CSA	I		I	CONT SEL A key 0: PUSH 1: NORMAL	
SI1 P83	P_CSB	I		I	CONT SEL B key 0: PUSH 1: NORMAL	
P90	P_IF430	I		I	IF selection (430MHz) 0: 1: NORMAL	
P91	P_IF50	I		I	IF selection (50MHz) 0: NORMAL 1:	
P92	P_IF28	I		I	IF selection (28MHz) 0: NORMAL 1:	
P93	P_CKBL	I		I	Time display dot flash selection 0: Flash 1: Do not flash	
P100	P_BLANK	O		I	LCD driver (MSM5265) BLANK	
P101	P_TEST	O		I	LCD driver (MSM5265) TEST	
P102	P_LCODT	O		I	LCD driver (MSM5265) DT	
P103	P_LCDDL	O		I	LCD driver (MSM5265) CK	
P110	P_LCDLD	O		I	LCD driver (MSM5265) LD	
P111	P_111	O		I		
P112	P_112	O		I		
P113	P_FDISP	O		I	"F" display LED 0: ON 1: OFF	
P120	P_FKEY	O		I	F key 0: PUSH 1: NORMAL	
P121	P_DATE	O		I	Month/day display format selection 0: Month, day 1: Day, month	

TM-641A/741A/741E

CIRCUIT DESCRIPTION

μPD75516 (IC1) I/O-Port List

μCOM Port	Port name	I/O	Pull up	Back up	Description	Circuit Pin name
P122	P_VOLT	O	●	I	Voltage display 0: Display voltage 1: Do not display voltage	
P123	P_ILUMI	O	●	I	Dimmer 0: Reduce brightness by one step 1: Normal brightness	
P130	P_LPSW	O		I	Illumination switch 0: ON 1: OFF	
P131	P_PSW	O		I	Power switch 0: ON 1: OFF	
P132	P_DIM1	O		I	Illumination bulb (2.7k) 0: ON (D1), ON (D2) 1: ON (D3), OFF	
P133	P_DIM2	O		I	Illumination bulb (12k) 0: ON (D1), ON (D3) 1: ON (D2), OFF	
P140	P_CSC	I	●	I	CONTSEL C 0: PUSH 1: NORMAL	
P141	P_BSA	I	●	I	BAND SEL A 0: PUSH 1: NORMAL	
P142	P_BSB	I	●	I	BAND SEL B 0: PUSH 1: NORMAL	
P143	P_BSC	I	●	I	BAND SEL C 0: PUSH 1: NORMAL	
AN0		AD			Band A squelch input	
AN1		AD			Band B squelch input	
AN2		AD			Band C squelch input	
AN3		AD			Band A volume input	
AN4 P150		AD			Band B volume input	
AN5 P151		AD			Band C volume input	
AN6 P152		AD			SB/4 input (for voltage display)	
AN7 P153		AD				

- : Always pulled up by software.
● : Always pulled up by hardware.

CIRCUIT DESCRIPTION

LCD Driver (MSM 5265) list

DISPLAY UNIT (X54-3120-00): IC2, IC3

MSM 5265 (IC2) list

IC Pin No.	IC Pin Name	LCD SEG.		LCD Term. No.
		COM0	COM1	
51	S1			144
52	S2			143
53	S3			142
54	S4	ACC	MUTE	141
55	S5	A.B.C.	TOT	140
56	S6	APO	A.	139
57	S7	LOCK	SLEEP	138
58	S8	OFF	ON	137
59	S9		TIMER	136
60	S10	ⓄM	ⓄONAIR	135
61	S11	ⓄL	ⓄS7	134
62	S12	ⓄS6	ⓄS5	133
63	S13	ⓄBELL	ⓄCO	132
64	S14	Ⓞ05K	Ⓞ1Kc	131
65	S15	Ⓞ1Kg	Ⓞ1Kb	130
66	S16	Ⓞ1Ka	Ⓞ1Kf	129
67	S17	Ⓞ1Kd	Ⓞ1Ke	128
68	S18	ⓄS3	ⓄS4	127
69	S19	ⓄD'SS	ⓄS2	126
70	S20	ⓄC CSS	ⓄT	125
71	S21	Ⓞ10kdp	Ⓞ10Kc	124
72	S22	Ⓞ10Kg	Ⓞ10Kb	123
73	S23	Ⓞ10Ka	Ⓞ10Kf	122
74	S24	Ⓞ10Kd	Ⓞ10Ke	121
75	S25	ⓄCLKdp1	ⓄCLKdp2	120
76	S26	Ⓞ100Kdp	Ⓞ100Kc	119
77	S27	Ⓞ100Kg	Ⓞ100Kb	118
78	S28	Ⓞ100Ka	Ⓞ100Kf	117
79	S29	Ⓞ100Kd	Ⓞ100Ke	116
80	S30	ⓄS1	ⓄBUSY	115
81	S31	ⓄREV	Ⓞ+	114
82	S32	ⓄL-	ⓄR-	113
83	S33	Ⓞ1Mdp	Ⓞ1Mc	112
84	S34	Ⓞ1Mg	Ⓞ1Mb	111
85	S35	Ⓞ1Ma	Ⓞ1Mf	110
86	S36	Ⓞ1Md	Ⓞ1Me	109
87	S37	ⓄF	Ⓞ10Mc	108
88	S38	Ⓞ10Mg	Ⓞ10Mb	107
89	S39	Ⓞ10Ma	Ⓞ10Mf	106
90	S40	Ⓞ10Md	Ⓞ10Me	105
91	S41	Ⓞ>	ⓄALT	104

IC Pin No.	IC Pin Name	LCD SEG.		LCD Term. No.
		COM0	COM1	
92	S42	Ⓞ<	ⓄPTT	103
93	S43	Ⓞ1Gbc	Ⓞ100Mc	102
94	S44	Ⓞ100Mg	Ⓞ100Mb	101
95	S45	Ⓞ100Ma	Ⓞ100Mf	100
96	S46	Ⓞ100Md	Ⓞ100Me	99
97	S47	Ⓞ☆	ⓄMRHc	98
98	S48	ⓄMRHg	ⓄMRHb	97
99	S49	ⓄMRHa	ⓄMRHf	96
100	S50	ⓄMRHd	ⓄMRHe	95
1	S51	ⓄS&RF	ⓄMRLc	94
2	S52	ⓄLRLg	ⓄMRLb	93
3	S53	ⓄMRLa	ⓄMRLf	92
4	S54	ⓄMRLd	ⓄMRLe	91
5	S55	ⓄM	ⓄONAIR	90
6	S56	ⓄL	ⓄS7	89
7	S57	ⓄS6	ⓄS5	88
8	S58	ⓄBELL	ⓄCO	87
9	S59	Ⓞ05K	Ⓞ1Kc	86
10	S60	Ⓞ1Kg	Ⓞ1Kb	85
11	S61	Ⓞ1Ka	Ⓞ1Kf	84
12	S62	Ⓞ1Kd	Ⓞ1Ke	83
13	S63	ⓄS3	ⓄS4	82
14	S64	ⓄDTSS	ⓄS2	81
15	S65	ⓄC CSS	ⓄT	80
16	S66	Ⓞ10Kdp	Ⓞ10Kc	79
17	S67	Ⓞ10Kg	Ⓞ10Kb	78
18	S68	Ⓞ10Ka	Ⓞ10Kf	77
19	S69	Ⓞ10Kd	Ⓞ10Ke	76
20	S70	ⓄCLKdp1	ⓄCLKdp2	75
21	S71	Ⓞ100Kdp	Ⓞ100Kc	74
22	S72	Ⓞ100Kg	Ⓞ100Kb	73
23	S73	Ⓞ100Ka	Ⓞ100Kf	72
24	S74	Ⓞ100Kd	Ⓞ100K	71
25	S75	ⓄS1	ⓄBUSY	70
26	S76	ⓄREV	Ⓞ+	69
27	S77	ⓄL-	ⓄR-	68
28	S78	Ⓞ1Mdp	Ⓞ1Mc	67
29	S79	Ⓞ1Mg	Ⓞ1Mb	66
30	S80	Ⓞ1Ma	Ⓞ1Mf	65
48	COM-A			
49	COM-B			

TM-641A/741A/741E

CIRCUIT DESCRIPTION

MSM 5265 (IC3) list

IC Pin No.	IC Pin Name	LCD SEG.		LCD Term. No.
		COM0	COM1	
51	S1	ⓑ1Md	ⓑ1Me	64
52	S2	ⓑF	ⓑ10Mc	63
53	S3	ⓑ10Mg	ⓑ10Mb	62
54	S4	ⓑ10Ma	ⓑ10Mf	61
55	S5	ⓑ10Md	ⓑ10Me	60
56	S6	ⓑ>	ⓑALT	59
57	S7	ⓑ<	ⓑPTT	58
58	S8	ⓑ1Gbc	ⓑ100Mc	47
59	S9	ⓑ100Mg	ⓑ100Mb	56
60	S10	ⓑ100Ma	ⓑ100Mf	55
61	S11	ⓑ100Md	ⓑ100Me	54
62	S12	ⓑ☆	ⓑMRHc	53
63	S13	ⓑMRHg	ⓑMRHb	52
64	S14	ⓑMRHa	ⓑMRHf	51
65	S15	ⓑMRHd	ⓑMRHe	50
66	S16	ⓑS&RF	ⓑMRLc	49
67	S17	ⓑMRLg	ⓑMRLb	48
68	S18	ⓑMRLa	ⓑMRLf	47
69	S19	ⓑMRLd	ⓑMRLe	46
70	S20	ⒶM	ⒶONAIR	45
71	S21	ⒶL	ⒶS7	44
72	S22	ⒶS6	ⒶS5	43
73	S23	ⒶBELL	ⒶCO	42
74	S24	Ⓐ05K	Ⓐ1Kc	41
75	S25	Ⓐ1Kg	Ⓐ1Kb	40
76	S26	Ⓐ1Ka	Ⓐ1Kf	39
77	S27	Ⓐ1Kd	Ⓐ1Ke	38
78	S28	ⒶS3	ⒶS4	37
79	S29	ⒶDTSS	ⒶS2	36
80	S30	ⒶC CSS	ⒶT	35
81	S31	Ⓐ10Kdp	Ⓐ10Kc	34
82	S32	Ⓐ10Kg	Ⓐ10Kb	33
83	S33	Ⓐ10Ka	Ⓐ10Kf	32
84	S34	Ⓐ10Kd	Ⓐ10Ke	31
85	S35	ⒶCLKdp1	ⒶCLKdp2	30
86	S36	Ⓐ100Kdp	Ⓐ100Kc	29
87	S37	Ⓐ100Kg	Ⓐ100Kb	28
88	S38	Ⓐ100Ka	Ⓐ100Kf	27
89	S39	Ⓐ100Kd	Ⓐ100Ke	26
90	S40	ⒶS1	ⒶBUSY	25
91	S41	ⒶREV	Ⓐ+	24

IC Pin No.	IC Pin Name	LCD SEG.		LCD Term. No.
		COM0	COM1	
92	S42	ⒶL-	ⒶR-	23
93	S43	Ⓐ1Mdp	Ⓐ1Mc	22
94	S44	Ⓐ1Mg	Ⓐ1Mb	21
95	S45	Ⓐ1Ma	Ⓐ1Mf	20
96	S46	Ⓐ1Md	Ⓐ1Me	19
97	S47	ⒶF	Ⓐ10Mc	18
98	S48	Ⓐ10Mg	Ⓐ10Mb	17
99	S49	Ⓐ10Ma	Ⓐ10Mf	16
100	S50	Ⓐ10Md	Ⓐ10Me	15
1	S51	Ⓐ>	ⒶALT	14
2	S52	Ⓐ<	ⒶPTT	13
3	S53	Ⓐ1Gbc	Ⓐ100Mc	12
4	S54	Ⓐ100Mg	Ⓐ100Mb	11
5	S55	Ⓐ100Ma	Ⓐ100Mf	10
6	S56	Ⓐ100Md	Ⓐ100Me	9
7	S57	Ⓐ☆	ⒶMRHc	8
8	S58	ⒶMRHg	ⒶMRHb	7
9	S59	ⒶMRHa	ⒶMRHf	6
10	S60	ⒶMRHd	ⒶMRHe	5
11	S61	ⒶS&RF	ⒶMRLc	4
12	S62	ⒶMRLg	ⒶMRLb	3
13	S63	ⒶMRLa	ⒶMRLf	2
14	S64	ⒶMRLd	ⒶMRLe	1
15	S65			
16	S66			
17	S67			
18	S68			
19	S69			
20	S70			
21	S71			
22	S72			
23	S73			
24	S74			
25	S75			
26	S76			
27	S77			
28	S78			
29	S79			
30	S80			
48	COM-A			
49	COM-B			

CIRCUIT DESCRIPTION

• Tone output circuit

The tone output signal is input from the P60 through P63 and P70 through P73 ports of the microcomputer to ladder resistor R8 and converted from digital to analog. The 38 waves in 67.0 to 250.3 MHz are then produced. Figure 28 shows the internal configuration of R8.

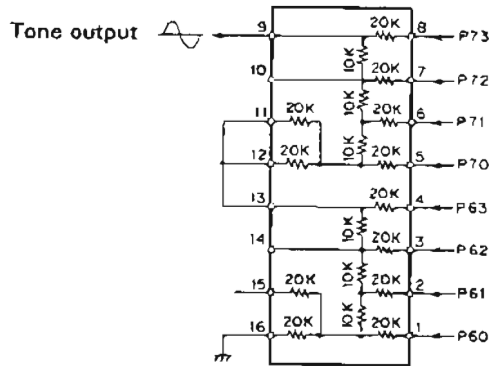


Fig. 28 Internal Configuration of Ladder Resistor (KRR-C001)

• CTCSS unit input and output (TSU-7 (option))

The data input to the CTCSS unit is output from P30, P23, and P143. P30 is also used for connection check. Data is input to P30 when the power is switched on. The data is output from P30 after a connection check is completed. The CTCSS unit is not set on when no connection is performed.

Figure 30 shows the data transfer format, and figure 31 shows the data configuration. A low signal is input to the P11 pin of the microcomputer when the tone detected from the CTCSS unit coincides. The squelch is then opened.

One CTCSS unit can correspond to three bands by switching detection signal RD output from a band unit.

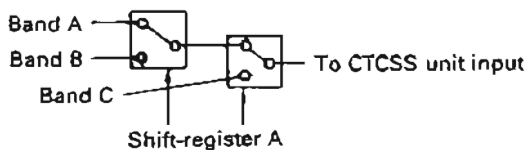


Fig. 29

As the figure above shows, the analog switch is selected with two-bit data.




Fig. 30 CTCSS Data Transfer Format

Tone frequency selection data of CTCSS FX365

	D0	D1	D2	D3	D4	D5
Example 88.5 Hz (DTMF unit)	L	H	H	H	L	L

Fig. 31 CTCSS Data Configuration

• DTMF unit input and output (DTU-2 (option))

Data input to the DTMF unit is output from P21, P22, and P40 through P43 of the microcomputer. An encoder is activated when P40 through P43 output data and when P2 is high.

Similar to the CTCSS unit, when a decoder selects a detection signal and detects the input signal, a high signal is input to P12, P21 is set high, and data is input to P40 through P43. The microcomputer then judges whether the data coincides with a DTSS code.

• PLL data output

The PLL data is passed through I/O expander IC10 (CXD1095Q) from the microcomputer and output to each band unit with EP, CK, and DT signals and three serial data items.

A PLL IC (M56760FP) is used in common with the 144 and 430 TX/RX units. Figure 32 shows the data configuration. Figure 33 and 34 shows the PLL data transfer format.


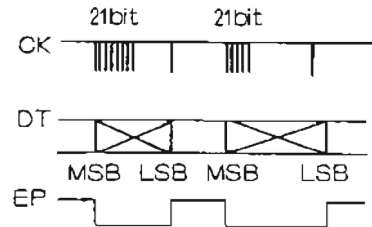


Fig. 32 PLL Data Configuration

CIRCUIT DESCRIPTION

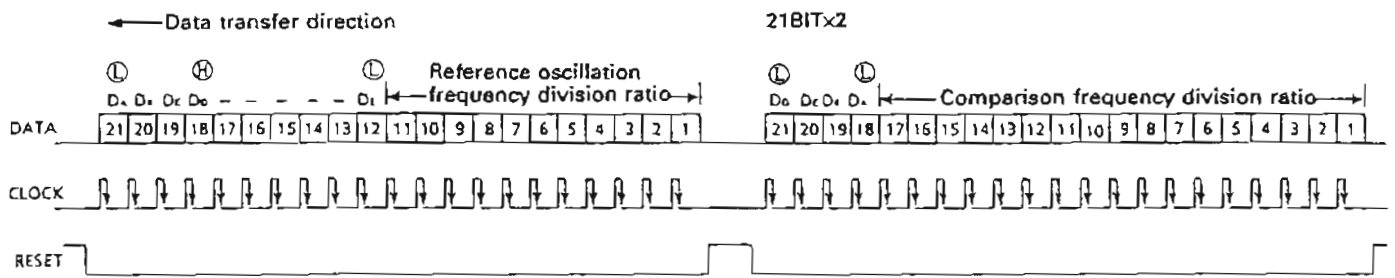

$$f_{REF} = 12800 \div (8 \times \text{Reference oscillation frequency division ratio})$$

Reference oscillation frequency division ratio = $16000 / f_{REF}$ (kHz)

5 kHz P = 320
6.25 kHz P = 256

Reference oscillation frequency division ratio

1 2 3 4 5 6 7 8 9 10 11
0 0 0 0 0 0 1 0 1 0 0 (320)
0 0 0 0 0 0 0 0 1 0 0 (256)

17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1
0 0 0 0 0 0 0 0 1 0 1 0 0 0 0 0 0 01 40 5 kHz
0 0 0 0 0 0 0 0 1 0 0 0 0 0 0 0 0 0 01 00 5.25 kHz

Special bit function

Bit	Name	H	L
D _A	Data latch selection	Reference	Comparison
D _B	SW2	H: OFF	L: ON
D _C	SW1	H: OFF	L: ON
D _D	POWER switch	OFF	ON
D _E	Test	Test	Normal

PLL data-to-bit relationship

ADD	BIT			
	0	1	2	3
1BH	1	2	3	4
1CH	5	6	7	8
1DH	9	10	11	12
1EH	13	14	15	16
1FH	17	-	-	-

Fig. 33 M56760 PLL DATA

1F	1E	1D	1C	1B	1A
-	6	10	14	18	1
-	7	11	15	19	2
-	8	12	16	20	3
5	9	13	17	21	4

Data	State
D _E	POWER switch
L	ON
H	OFF

Data	PLL
D _E	POWER switch
L	ON
H	OFF

1F	1E	1D	1C	1B	1A
-	2 ¹⁶	2 ¹¹	2 ⁷	2 ³	D _D
-	2 ¹⁴	2 ¹⁰	2 ⁶	2 ²	D _C
-	2 ¹³	2 ⁹	2 ⁵	2 ¹	D _B
2 ¹⁶	2 ¹²	2 ⁸	2 ⁴	2 ⁰	D _A

For frequency division ratio setting

1F	1E	1D	1C	1B	1A
-	x	D _E	2 ⁷	2 ³	D _D
-	x	2 ¹⁰	2 ⁶	2 ²	D _C
-	x	2 ⁹	2 ⁵	2 ¹	D _B
x	x	2 ⁸	2 ⁴	2 ⁰	D _A

For comparison frequency

Data		Output port	
D _H	D _C	SW2	SW1
L	L	ON	ON
H	L	OFF	ON
L	H	ON	OFF
H	H	OFF	OFF

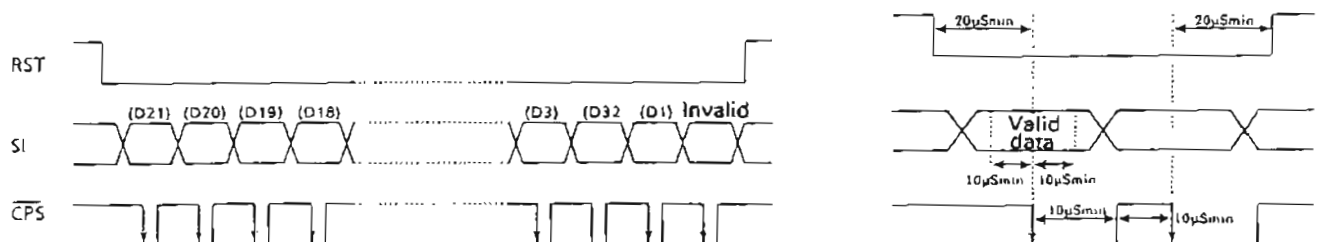


Fig. 34 M56760 PLL DATA OUTPUT

CIRCUIT DESCRIPTION

The PLL and reference frequency-division ratio data input to the 1200 TX/RX unit are output from P21 (CK), P22 (DT), and P23 (EP1) of the CPU. The reference frequency-division ratio data (R) is output only when the power is switched on and when 10 and 12.5 kHz reference frequencies are changed.

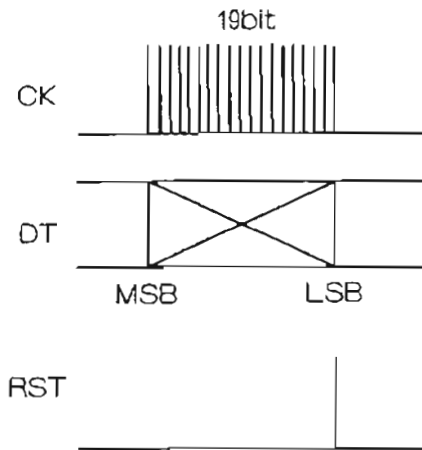


Fig. 35 PLL Frequency-Division Ratio Data Transfer Format

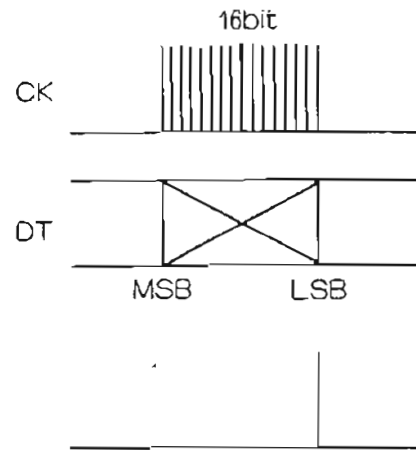


Fig. 36 Reference Frequency-Division Ratio Data Transfer Format

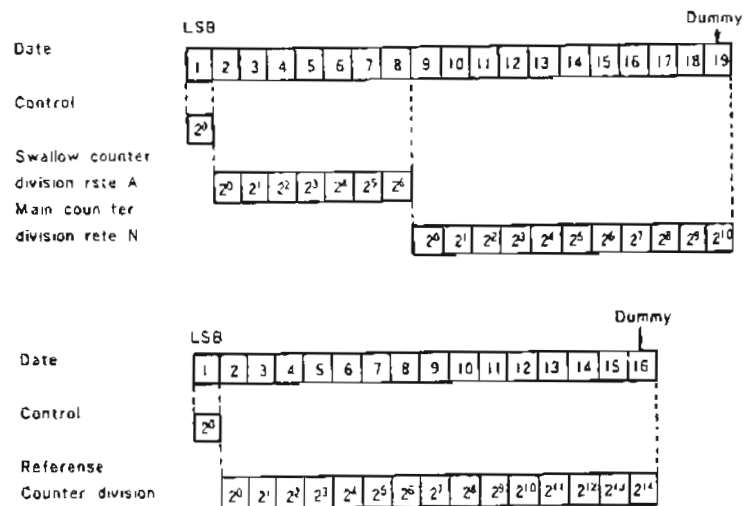


Fig. 37 Data Configuration

CIRCUIT DESCRIPTION

AF Signal Channel

• Outline

Detection signal RA from each band unit is passed through an electronic volume control and output to the power amplifier and speaker through a mute circuit, buzzer circuit, and speaker selection circuit.

Each band has an independent AF signal that can be output from the speaker in accordance with the speaker jack insertion position.

• Volume control circuit

The angle data of each band volume control on the panel is analog-to-digital converted by a microcomputer on the panel and converted to 5-bit data. The data from the panel block is sent to the microcomputer of the control unit, then converted. Serial data is then output from P132, P133, P23, and P143. Each band has an independent volume control. See the device function for the channel-to-band unit relationship.

• Buzzer circuit

A pulse is output from P20 of IC1 to sound a buzzer when keys are pressed. The pulse is mixed with the DTMF unit output signal as a monitor pulse during DTSS operation.

After that, the pulse is passed through the electronic volume control and mixed with the AF signal in a mute circuit corresponding to each band before it is mixed with the AF signal line in each band.

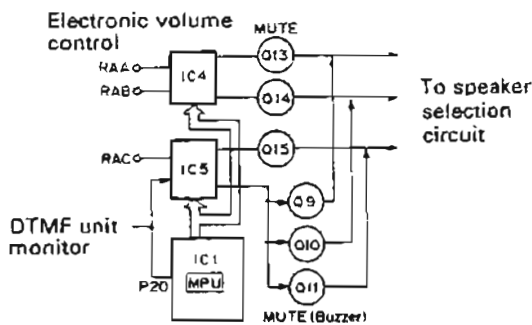


Fig. 38 Volume and Buzzer Circuits

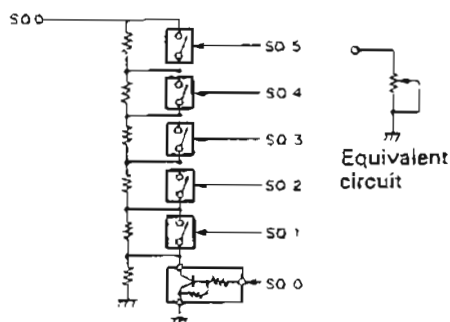


Fig. 40 Squelch D/A Converter Circuit

• Speaker selection circuit

Each band unit has three speaker jacks (on rear panel), and the control unit has one speaker jack (on side panel). When a speaker is connected to a speaker jack on the band unit, the corresponding band AF signal is output.

The speaker jack on the control unit outputs a remaining mixed AF signal. The mixed signal is output from an internal speaker when a speaker is not connected to this speaker jack. Figure 39 shows the speaker selection circuit.

A signal is input to adder IC103 when no speaker is connected. The signal level does not fluctuate even if one to three signals are input to the adder.

For example, band B can mix bands A and C with one speaker and output the mixed signal from another speaker by connecting the band B jack and control unit jack.

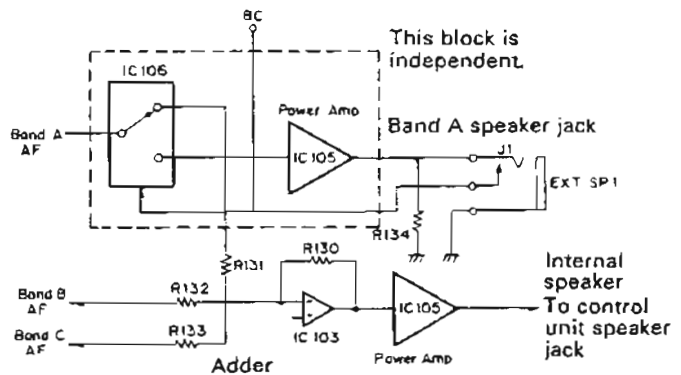


Fig. 39 Speaker Selection Circuit

• Squelch circuit

The angle data of each band squelch volume control on the panel is analog-to-digital converted and converted to 6-bit data.

The data from the panel block is sent to the microcomputer of the control unit and passed through I/O expander IC101 from the microcomputer. The data is then digital-to-analog converted by the analog switch shown in Figure 40. Each band in the circuit shown in Figure 40 is independent.

TM641A/741A/741E

CIRCUIT DESCRIPTION

Connector Connecting the Band Unit and Control Unit

• Outline

The pin assignments of the connector that connects the control unit and band unit are common in three

bands. The band unit is also used to check which band unit is connected.

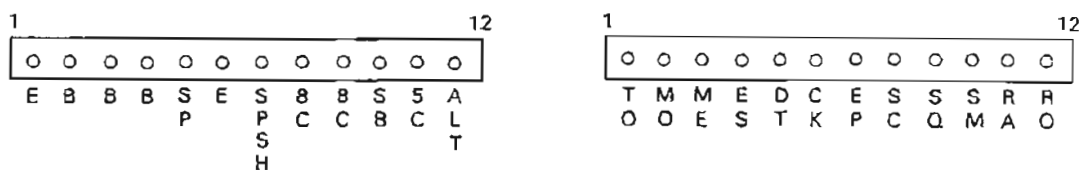


Fig. 41 Connector Connecting the Band Unit and Control Unit

Pin No.	Name	Function	Pin No.	Name	Function
1	E	GND	1	TO	67.0 to 250.3 Hz subtone output
2	B	13.8 V input	2	MO	Audio signal from microphone (including DTMF)
3	B		3	ME	Microphone ground
4	B		4	ES	Shift-register enable output
5	SP	AF signal is output when speaker jack is connected.	5	CK	Shift-register PLL clock
6	E	GND	6	DT	Shift-register PLL data
7	SPSW	Speaker jack connection and detection. "H" during connection.	7	EP	PLL enable
8	8C	8 V is output during the power-on sequence.	8	SC	"L" when squelch input is busy.
9	8C		9	SQ	50 k ohms when squelch D/A output is tight.
10	SB	13.8 V is output during the power-on sequence.	10	SM	Signal-strength meter voltage input
11	SC	5 V is output during the power-on sequence.	11	RA	Detection input (squelch circuit)
12	ACT	ALT voltage input	12	RD	Detection input (no squelch circuit)

Table 20 Pin functions (as viewed from the control unit)

• Band retrieval

Each band is retrieved through the EP, CK, and DT pins. Data is input for retrieval when the power is switched on and when the memory is cleared. Data is then output again.

The control unit is pulled down as shown in Figure 42. Therefore, the DT, CK, and EP pins are set low when no band unit is connected. Pins set high as listed in Table 21 are pulled up when any band unit is connected. The type of connected band unit is then judged.

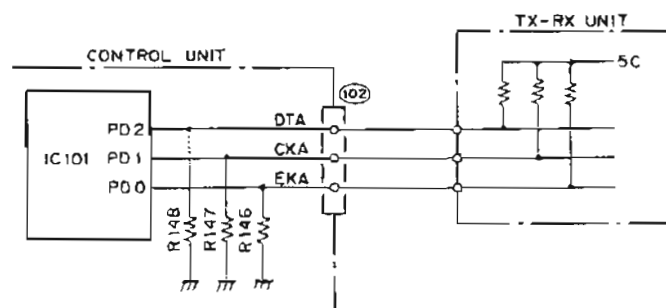





Fig. 42 Retrieval System

BAND Unit	DT	CK	EP
No Unit	L	L	L
28	H	L	L
50	H	H	L
144	L	H	H
430	H	L	H
1200	L	L	H

Table 21 Band Retrieval

DESCRIPTION OF COMPONENTS

Control Unit (X53-331X-XX) 0-12 : TM-641A(K), 741A(K, P, M, M2), 741E(E)



Reference No.	Function	Description
IC1	Microcomputer	See the circuit description.
IC2	SRAM memory backup	
IC3	6V AVR	Three-terminal regulator 
IC4, IC5	Electronic volume control	IC4 R-CH band A volume control IC4 L-CH band B volume control IC5 R-CH band C volume control IC5 L-CH BZ common volume control (Used in common) ③ L-CH input ⑥ L-CH output ⑪ R-CH output ⑭ R-CH input
IC6, IC7	Shift register	See the circuit description.
IC8, IC9	Analog switch	CTCSS, DTSS, or microphone RD band selection (See the circuit description.)
IC10	Low-frequency amplification and adder	Microphone amplifier and DTMF modulation adder
IC11, IC12	Serial data inverter buffer	
IC101	I/O expander	See the circuit description.
IC102	8V AVR	Three-terminal regulator 
IC103	Adder	Used for internal speaker and level compensation.
IC104, IC105	Low-frequency amplification	① Input (IC104: Band B, IC105: Common) ⑥ Output (IC104: Band B, IC105: Common) ⑦ 13.8 V ④ ⑩ ⑫ Ground ⑧ Output (IC104: Band C, IC105: Band A) ⑨ Input (IC104: Band C, IC105: Band A)
IC106	Speaker selection analog switch	④ Band C AF input ⑭ Band A AF input ⑮ Band B AF input ② Band B internal SP output ⑤ Band C internal SP output ⑩ Band A internal SP output ① Band B external SP output ③ Band C external SP output ⑧ Band A external SP output ⑪ Band A selection input ⑨ Band B selection input ⑨ Band C selection input ⑨ to ⑪ Internal SP when "L"
IC107-IC110	Analog switch	Used for squelch. (See the circuit description.)

DESCRIPTION OF COMPONENTS

Reference No.	Function	Description
Q1	Low-frequency amplification	Microphone amplifier
Q2	Buffer amplification	Used for microphone RD.
Q3	Microphone line muting	Microphone muting when power is ON (DTMF signal transmission).
Q4	RESET switch	RESET switch for IC1
Q5	BACKUP switch	ON when power is supplied
Q6, Q7, Q8	Low-frequency amplification	Q6 Band A Q7 Band B Q8 Band C
Q9, Q10, Q11	Beep sound muting	Q9 Band A Q10 Band B Q11 Band C A beep sounds from the corresponding band when OFF.
Q13, Q14, Q15	AF muting	Q13 Band A Q14 Band B Q15 Band C Muted when power is on (squench ON, CTCSS, DTSS, etc.)
Q16	5 V POWER switch	5 V is output when power is ON.
Q17	Low-frequency amplification	Used for DTMF signal monitor.
Q101, Q102	SB POWER switch	Q101 and Q102 are set ON when power is ON. Q101 and Q102 are set OFF when power is OFF.
Q103	Fan motor switch	Rotates when power is ON. Does not rotate when power is OFF.
Q104, Q105	Squelch switch	Same as for IC107 through IC110. (See the circuit description.)
Q106, Q108	MUTE switch	Power amplifier muting Q106 is instantaneously set ON when power is switched ON. Q108 is instantaneously set ON when power is switched OFF.
Q107	RESET switch	RESET switch for IC101
D1	Antireverse current lithium cell selection	Lithium cell is OFF when power is supplied.
D2	Voltage compensation	
D3	Backup detection	
D4	Antireverse current	
D5	Reset detection	
D6, D101 – D103	Antireverse current	

DESCRIPTION OF COMPONENTS

Display Unit (X54-312X-XX) 0-11: 641A(K, P), 0-21:741A(M) 0-22:741A(M2), 2-71:741E(E)

Component	Use/Function	Operation/Condition/Compatibility
IC1	Microprocessor	See Circuit Diagram
IC2, IC3	LCD driver	See Circuit Diagram
IC4	6V AVR	Three Circuit regulator 
IC5, IC6	Serial data inverter Buffer	 (Top view)
IC7	Reset IC	See Circuit Diagram
Q1	Reset switch	
Q2	Lamp AVR	
Q3	Lamp AVR switch	
Q4	Lamp AVR	See Circuit Diagram
Q5	5-V power switch	
Q6	INT4 SW	ON: 13.8 V; OFF: 0V
Q7	LED POWER SW	ON when power ON; OFF when power OFF
Q8	Function LED switch	ON when function used



DESCRIPTION OF COMPONENTS

28TX-RX unit (X57-3790-01) UT-28S(M)

Component	Use/Function	Operation/Condition/Compatibility
IC1	Shift register	See Circuit Description.
IC2	VCO, PLL	
IC3	Low-frequency amplifier, limiter	Microphone amplifier
IC4	28-MHz band transmission Drive	Operation during transmission 28 - 29.695 MHz ① Input ④ Output
IC5	APC	
IC6	Second local oscillator, mixer IF amplifier, detector Low-frequency amplifier Noise detector Squelch switch	① First IF input 8.83 MHz ③ Second local oscillator input 9.285 MHz ⑨ Squelch output, busy signal, 0 V while busy ⑩ Noise detection voltage output (DC) ⑪ Signal-strength meter output ⑫ Detection output ⑭ RD output ⑮ AF OUT
IC7	9V AVR	
IC8	Out-of-band reception Mixer, RF amplifier	① HET input 2 IF output ③ 8 V (8 V outside band; 0 V within band) ⑤ RF output ⑥ 8 V (8 V within band, 0 V outside band) ⑧ RF input
Q1	High-frequency amplifier	Operation during reception, 28-MHz band
Q2	First mixer	Operation during reception
Q3	First IF amplifier	Operation during reception 8.83 MHz
Q4	ATT switch	ON when ATT is ON
Q5	First mixer selection switch	OFF during out-of-band reception

TM-641A/741A/741E

DESCRIPTION OF COMPONENTS

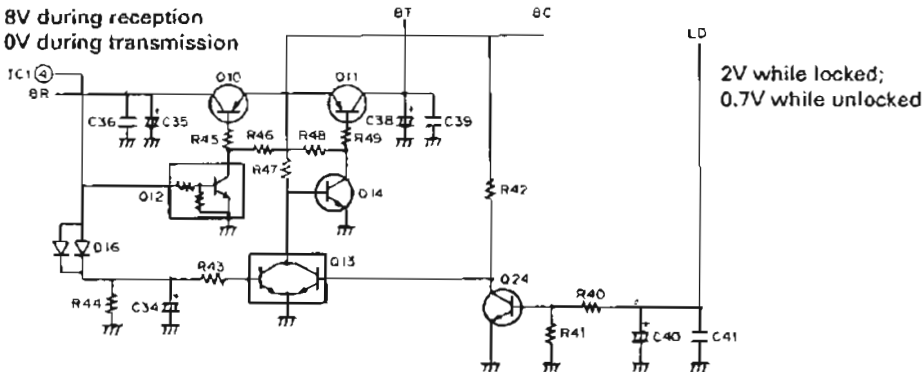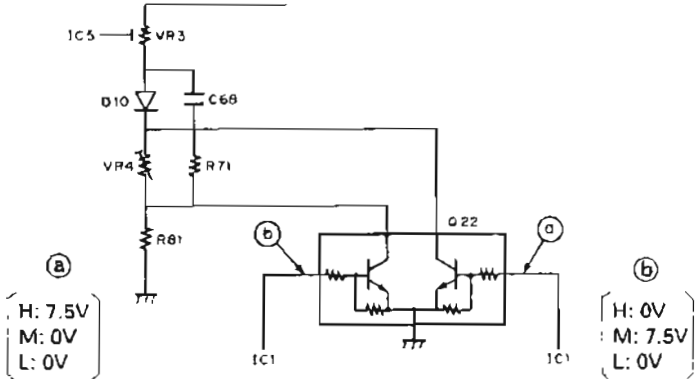Component	Use/Function	Operation/Condition/Compatibility
Q6-7	In-band/out-of-band power switch	Q6 OFF, Q7 ON: In-band reception; Q6 ON, Q7 OFF: Out-of-band reception
Q8	Second local oscillator buffer	Operation during reception 9.285 MHz
Q9	Squelch hysteresis switch	ON while busy
Q10~Q14 Q24	Transmit/receive power switch	 Q10, Q12, Q13 OFF, Q11, Q14, Q24 ON: During transmission Q10, Q12, Q13, Q24 ON, Q11, Q14 OFF: During reception
Q15-17	Inverter	
Q18	Modulation system mute	ON during reception
Q19	CV line buffer	
Q20	HET output amplifier	28-29.695 MHz: During transmission;
Q21	2VCO 8V ripple filter	36.83-38.525 MHz: During reception
Q22	Middle (not for 10 W), LOW Power switch	
Q23	APC control	Operation during transmission
Q25-Q26	AM/FM selection switch	Q25 and Q26 OFF: During FM reception Q25 and Q26 ON: During AM reception

DESCRIPTION OF COMPONENTS

Component	Use/Function	Operation/Condition/Compatibility
Q27	Transmission band selection switch	ON: Narrow OFF: Wide
Q1~2	ATT selection switch	D1 OFF and D2 ON: When ATT ON D1 ON and D2 OFF: When ATT OFF
Q3~Q6	Varicap tuner	
D7	HET selection switch	
D8	Reverse-flow prevention	
D9	HET selection switch	
D10	Temperature compensation	APC
D11, D12	Antenna transmit/receive switch	ON: Transmit; OFF: Receive
D13, D14	Power detection	APC
D15	Reverse-power connection prevention	
D16	Reverse-flow prevention	
D17	Temperature compensation	



TM-641A/741A/741E

DESCRIPTION OF COMPONENTS

50 TX-RX Unit (X57-3800-01) UT-50S(M)

Component	Use/Function	Operation/Condition/Compatibility
IC1	Shift register	See Circuit Description.
IC2	VCO, PLL	
IC3	Low-frequency amplifier, limiter	Microphone amplifier
IC4	50 MHz band transmission Drive	Operation during transmission 50 - 53.995 MHz ① Input ⑫ Output
IC5	APC	
IC6	Second local oscillator, mixer IF amplifier, detector Low-frequency amplifier Noise detector Squelch switch	① First IF input 10.595 MHz ③ Second local oscillator input 11.05 MHz ⑨ Squelch output, busy signal, 0 V while busy ⑩ Noise detection voltage output (DC) ⑪ Signal-strength meter output ⑫ Detection output ⑭ RD output ⑯ AF OUT
IC7	9V AVR	
IC8	Out-of-band reception	① HET input 2 IF output ③ 8 V (8 V outside band; 0 V within band)
	Mixer, RF amplifier	⑤ RF output ⑧ 8 V (8 V within band; 0 V outside band) ⑥ RF input
Q1	High-frequency amplifier	Operation during reception, 50 MHz band
Q2	First mixer	Operation during reception
Q3	First IF amplifier	Operation during reception 10.595 MHz
Q4	ATT switch	ON when ATT is ON
Q5	First mixer selection switch	OFF during out-of-band reception

DESCRIPTION OF COMPONENTS

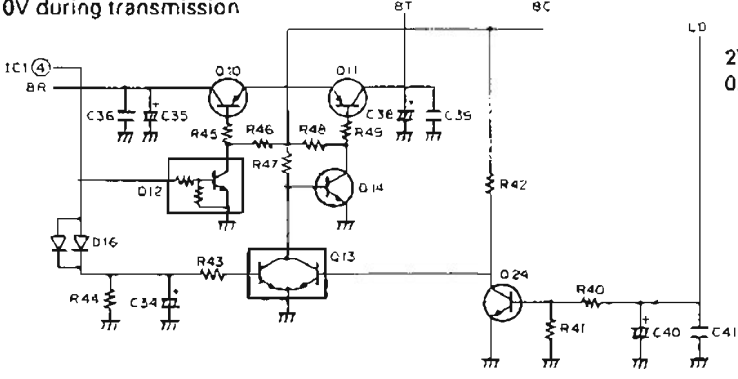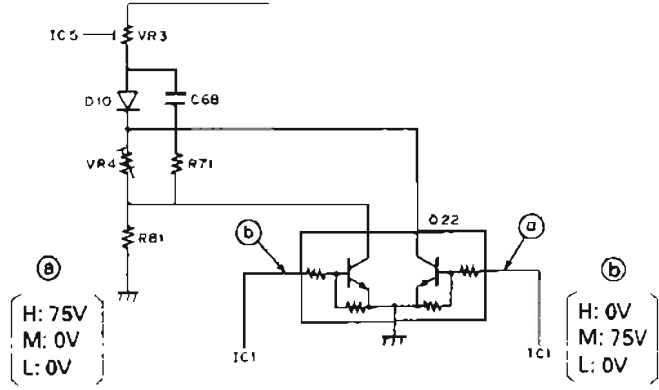Component	Use/Function	Operation/Condition/Compatibility
Q6~7	In-band/out-of-band power switch	Q6 OFF, Q7 ON: In-band reception; Q6 ON, Q7 OFF: Out-of-band reception
Q8	Second local oscillator buffer	Operation during reception 11.05 MHz
Q9	Squelch hysteresis switch	ON while busy
Q10-Q14 Q24	Transmit/receive power switch 8V during reception; 0V during transmission  2V while locked; 0.7V while unlocked Q10, Q12, Q13 OFF, Q11, Q14, Q24 ON During transmission Q10, Q12, Q13, Q24 ON, Q11, Q14 OFF: During reception	
Q15-17	Inverter	
Q18	Modulation system mute	ON during reception
Q19	CV line buffer	
Q20	HET output amplifier	50 - 53.995 MHz: During transmission, 60.595 - 64.590 MHz: During reception
Q21	2VCO 8-V ripple filter	
Q22	Middle (not for 10 W). LOW Power switch	 H: 75V M: 0V L: 0V
Q23	APC control	Operation during transmission
Q25~Q26	AM/FM selection switch	Q25 and Q26 OFF: During FM reception Q25 and Q26 ON: During AM reception



DESCRIPTION OF COMPONENTS

Component	Use/Function	Operation/Condition/Compatibility
D1-D2	ATT selection switch	D1 OFF and D2 ON: When ATT ON D1 ON and D2 OFF: When ATT OFF
D3-D6	Varicap tuner	
D7	HET selection switch	
D8	Reverse-flow prevention	
D9	HET selection switch	
D10	Temperature compensation	
D11, D12	Antenna transmit/receive switch	APC
D13, D14	Power detection	ON: Transmit; OFF: Receive
D15	Reverse-power connection prevention	APC
D16	Reverse-flow prevention	
D17	Temperature compensation	

TM-641A/741A/741E



CIRCUIT DESCRIPTION

144TX-RX Unit (X57-3580-12) TM-641A, 741A, 741E

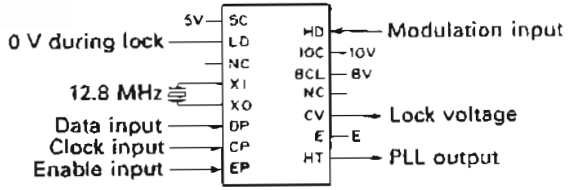Reference No.	Function	Description
IC1	Shift register	See the circuit description.
IC2	10V AVR	
IC5	Second local oscillation, mixer, IF amplification, detection, low-frequency amplification, noise amplification, noise detection, and squelch switching	① 10.7 MHz first IF input ③, ④ 10.245 MHz second local oscillation ⑨ 0 V when scan control and busy signals are busy. ⑩ Noise detection voltage output (DC) ⑪ Signal-strength meter output ⑫ Detection output ⑭ RD output ⑮ AF output
IC7	Low-frequency amplification and limiter	Microphone amplifier
IC8	144 MHz band transmission driver	Operation during transmission. 144 to 148 MHz band ⑬ Input ① Output
IC9	APC	
IC10	Power module	
IC11	VCO.PLL	
Q1	High-frequency amplification	Operation during reception. 144 MHz band
Q2	First mixer	Operation during reception
Q3	First IF amplification	Operation during reception. 10.7 MHz



TM-641A/741A/741E

CIRCUIT DESCRIPTION

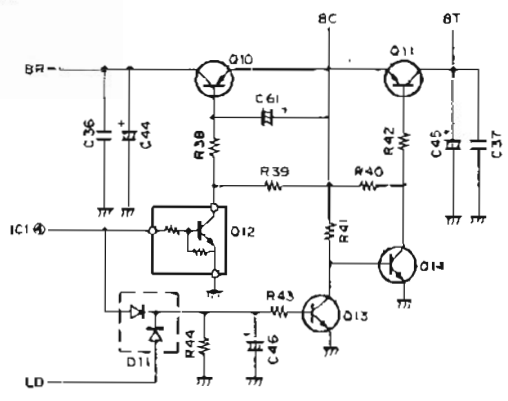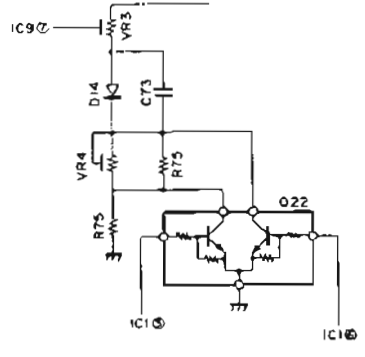Reference No.	Function	Description
Q10 ~ Q14	Transmission and reception power selection	 (0 V during lock) (Q10, Q12, and Q13 are set "OFF" during transmission. Q11 and Q14 are set "ON" during transmission.) (Q10, Q12, and Q13 are set "ON" during reception. Q11 and Q14 are set "OFF" during reception.)
Q15, Q16, Q17	Inverter	
Q18	Modulation muting	ON during reception
Q19	CV line buffer	144 MHz band
Q20	PLL output amplification	
Q21	PLL 8 V ripple filter	
Q22	Middle/low POWER switch	 Middle and low POWER switches are set ON when high.
Q23	APC control	Operation during transmission
Q24	Squelch hysteresis switch	OFF when busy
D1 - D7	Varicap diode tuning	
D11	Antireverse current	
D12	Antireverse current	
D13	PLL output switch	
D14	Temperature compensation	APC
D15, D16	Antenna transmission and reception selection	ON during transmission. OFF during reception.
D17, D18	Power detection	APC
D19	Power reverse connection protection	

DESCRIPTION OF COMPONENTS

220 TX-RX Unit (X57-3810-10):TM-641A(K), UT-220S(K)

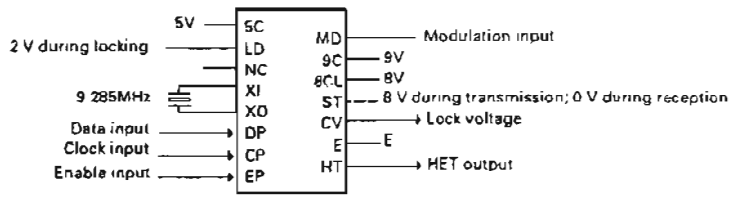Component	Use/Function	Operation/Condition/Compatibility
IC1	Shift register	See Circuit Description.
IC2	9V AVR	
IC5	Second local oscillator, mixer IF amplifier, detector Low-frequency amplifier Noise detector Squelch switch	① First IF input 30.825 MHz ③ ④ Second local oscillator 30.37 MHz ⑨ Squelch output, busy signal, 0 V while busy ⑩ Noise detection voltage output (DC) ⑪ Signal-strength meter output ⑭ RD output ⑮ AF OUT
IC7	Low-frequency amplifier, limiter	Microphone amplifier
IC8	220-MHz band transmission Drive	Operation during transmission 220 - 224.995 MHz ① Input ⑮ Output
IC9	APC	
IC10	Power module	
IC11	VCO, PLL	
Q1	High-frequency amplifier	Operation during reception, 220 MHz band
Q2	First mixer	Operation during reception
Q3	First IF amplifier	Operation during reception 30.825 MHz



DESCRIPTION OF COMPONENTS

Component	Use/Function	Operation/Condition/Compatibility
Q10-Q14	Transmit/receive power switch	8V during reception: 0V during transmission (0 V during lock) Q10, Q12, Q13 OFF, Q11, Q14 ON. During transmission Q10, Q12, Q13, ON, Q11, Q14 OFF: During reception
Q15-Q17	Inverter	
Q18	Modulation system mute	ON during reception
Q19	CV line buffer	
Q20	HET output amplifier	220 - 224.995 MHz: During transmission: 189.175 - 194.17 MHz: During reception
Q21	VCO 8V ripple filter	
Q22	Middle/low power switch	H:0V M:7.5V L:0V H:7.5V M:0V L:0V
Q23	APC control	Operation during transmission
Q24	Squelch hysteresis switch	ON while busy
D3, 5, 7, 20	Varicap tuner	
D11, 12	Reverse-flow prevention	
D13	HET selection switch	
D14	Temperature compensation	APC
D15, 16	Antenna transmit/receive switch	ON: Transmit; OFF: Receive
D17, 18	Power detection	
D19	Reverse-power connection prevention	

TM-641A/741A/741E



DESCRIPTION OF COMPONENTS

430TX-RX Unit (X57-359X-XX)0-12:TM-741A(K, P), UT-440S(K), 0-22 : TM-741A(M, M2) 2-72 : TM-741E (E)

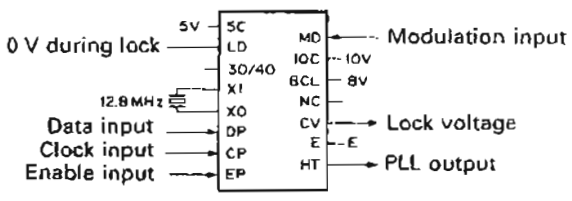Reference No.	Function	Description
IC1	Second local oscillation, mixer, IF amplification, detection, low-frequency amplification, noise amplification, noise detection, and squelch switching	① 21.6 MHz first IF input ③, ④ 21.145 MHz second local oscillation ⑤ 0 V when scan control and busy signals are busy. ⑥ Noise detection voltage output (DC) ⑦ Signal-strength meter output ⑧ RD output ⑨ AF output ⑫ Detection output
IC2	Low-frequency amplification and limiter	Microphone amplifier
IC3	Shift register	See the circuit description.
IC4	10V AVR	
IC5	APC	
IC6	430 MHz band transmission driver	① Output ⑮ Input
IC7	Power module	
IC10	VCO, PLL	
Q1, Q2	High-frequency amplification	Operation during reception
Q3	First mixer	Operation during reception
Q5	First IF amplification	Operation during reception. 21.6 MHz

TM-641A/741A/741E




DESCRIPTION OF COMPONENTS

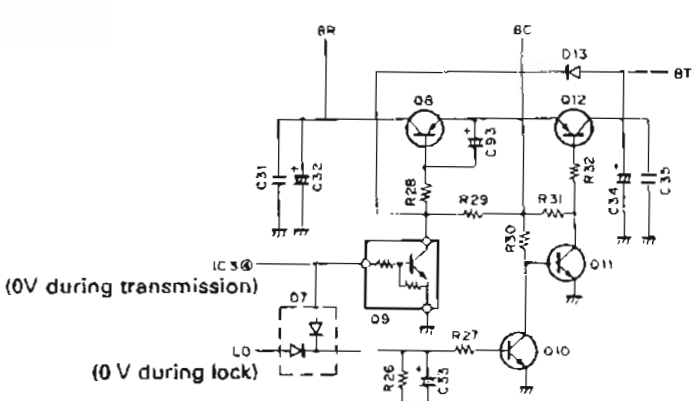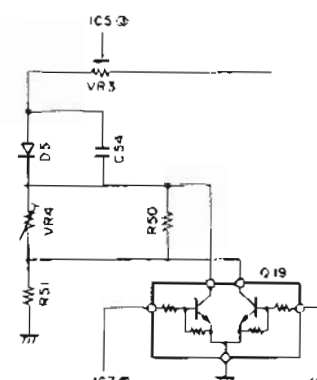Reference No.	Function	Description
Q8-Q12	Transmission/reception power selection	 (0V during transmission) (0 V during lock) (Q8, Q9, and Q10 are set "OFF" during transmission. Q11 and Q12 are set "ON" during transmission. Q8, Q9, and Q10 are set "ON" during reception. Q11 and Q12 are set "OFF" during reception.)
Q13, Q14, Q15	Inverter	
Q16	Modulation muting	ON during reception
Q17	PLL 8 V ripple filter	
Q18	PLL output amplification	
Q19	Middle/low POWER switch	 Middle and low POWER switches are ON when high.
Q20	APC control	Operation during transmission
Q21	Squelch hysteresis switch	OFF when busy
D1	Antenna switch	OFF during reception
D4	PLL output switch	
D5	Temperature compensation	APC
D6, D7	Antireverse current	
D8, D9	Antenna transmission/reception selection	ON during transmission
D10, D11	Power detection	APC
D12	Power reverse connection protection	
D13	Antireverse current	BT pulse rise is faster during transmission and reception.
D14	IF level limiter	

TM-641A/741A/741E


DESCRIPTION OF COMPONENTS

1200TX-RX Unit (X57-3600-11) : UT-1200(M)

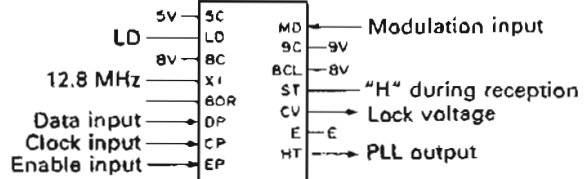Reference No.	Function	Description
IC2	Second local oscillation, mixer, IF amplification, detection, low-frequency amplification, noise amplification, noise detection, and squelch switching	① 59.7 MHz first IF input ③, ④ 59.245 MHz second local oscillation ⑤ 0 V when scan control and busy signals are busy. ⑩ Noise detection voltage output (DC) ⑪ Signal-strength meter output ⑫ Detection output ⑭ RD output ⑮ AF output
IC3	ALT	② 8 V ③ "H" during ALT ⑥ Detection input (DC)
IC4	Low-frequency amplification and limiter	Microphone amplifier
IC5	Shift register	See the circuit description.
IC6	9V AVR	
IC7	Predrive	⑩ Input ① Output
IC8	Drive	① Output ⑧ Input
IC9	APC	
IC10	Power module	
IC11	VCO.PLL	
IC12	5V AVR	Three-terminal regulator 
Q1, Q2	High-frequency amplification	Operation during reception
Q3	First mixer	Operation during reception
Q6	Receiving PLL output amplification	Operation during reception
Q7	First IF amplification	Operation during reception. 59.7 MHz

TM-641A/741A/741E

DESCRIPTION OF COMPONENTS

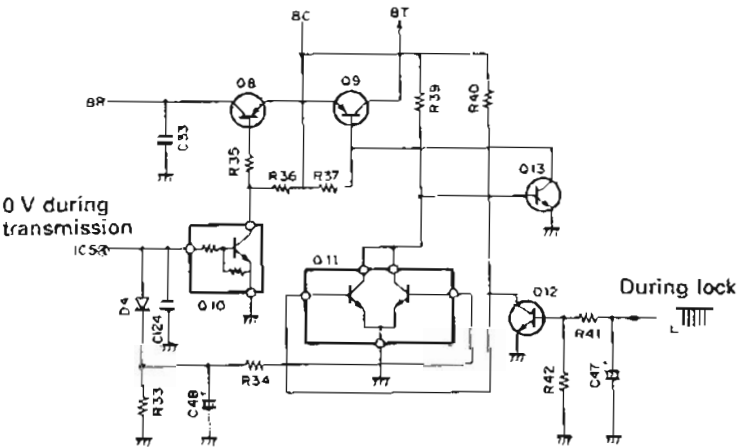Reference No.	Function	Description
Q8 ~ Q13	Transmission/reception power selection	 Q8, Q10, and Q11 (b) are set "OFF" during transmission. Q9, Q12, and Q13 are set "ON" during transmission. Q8, Q10, Q11 (b), and Q12 are set "ON" during reception. Q9, Q11 (a), and Q13 are set "OFF" during reception.
Q15, Q16, Q17	Inverter	
Q18	Modulation muting	ON during reception
Q19, Q20	8T voltage selection	OFF when low
Q21	PLL output amplification	
Q22	Transmitting PLL output amplification	Operation during transmission
Q23	8 V ripple filter	
Q24	APC control	Operation during transmission
Q25	Lower-power switch	ON when high
Q26	Squelch hysteresis switch	OFF when busy
Q28	Q1 POWER switch	ON during transmission
D3	IF level limiter	
D4, D17	Antireverse current	
D5, D15	Constant voltage circuit	
D6	Temperature compensation	APC
D7	Temperature compensation	Drive
D8	Overvoltage prevention	
D9	Power detection	APC
D10 ~ D13	Antenna switch	ON during transmission
D14	Power reverse connection protection	


SEMICONDUCTOR DATA

Power Transistor 2SC3240(28 TX-RX Unit)

● Electrical characteristics

Item	Conditions	Maximum value
V _{CB0}		50V
V _{EB0}		5V
V _{CE0}	R _{BE} = ∞	20V
I _C		25A
P _c	T _c = 25°C	270W
T _j		+175°C
T _{stg}		-55 ~ +175°C
T _a	25 ± 3°C	

● External view

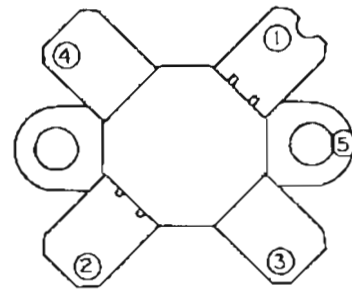


- ① Collector
- ② Base
- ③ Emitter
- ④ Emitter
- ⑤ Flange (Emitter)

Power Transistor MRF492 (50 TX-RX Unit)

● Electrical characteristics

Item	Conditions	Maximum value
V _{CB0}		36V
V _{EB0}		4.0V
V _{CE0}		18V
I _C		20A
P _D	T _c = 25°C	250W
T _{stg}		-65 ~ +150°C

● External view




- ① Emitter
- ② Base
- ③ Emitter
- ④ Collector

TM-641A/741A/741E


SEMICONDUCTOR DATA

Power module S-AV17 (144 TX-RX UNIT)

● Equivalent circuit diagram

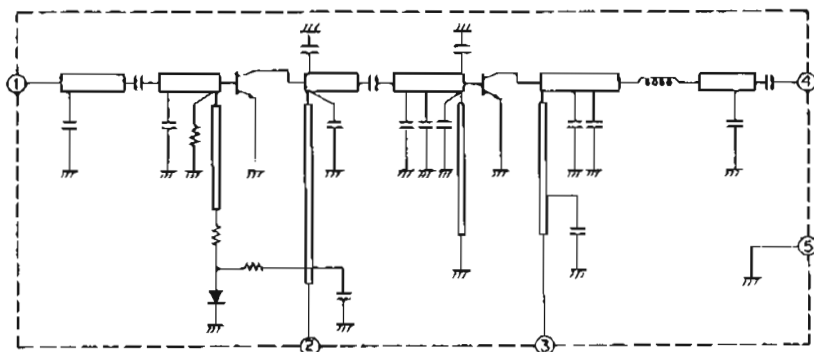

● External view

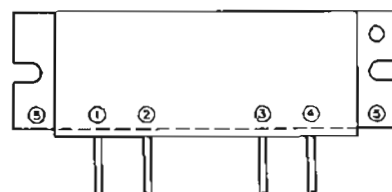


- ① Input terminal
- ② First power supply terminal
- ③ End power supply terminal
- ④ Output terminal
- ⑤ Fin (earth)

● Electrical characteristics


Item	Symbol	Tc (°C)	Conditions	Standard value			Unit
				Minimum	Standard	Maximum	
Frequency	f			144		148	MHz
Output power	Po	25	Vcc = 12.5V, Pin = 400mW, Zg = Zl = 50Ω			65	W
Combined efficiency	ηT	25	Same as above	45			%
Harmonics	HRM	25	Same as above		-30	-25	dB

Power module M57774 (220 TX-RX UNIT)

● Equivalent circuit diagram

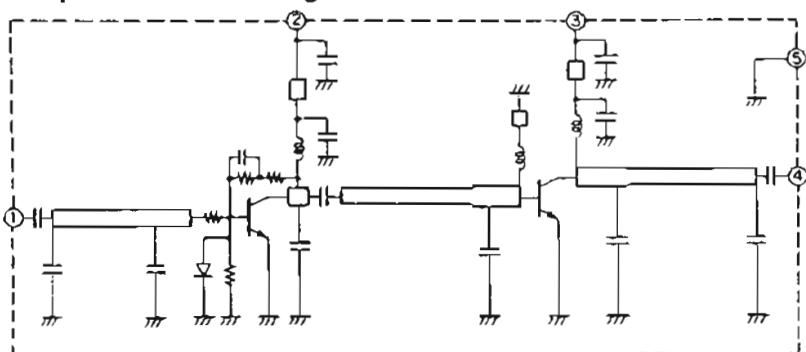

● External view

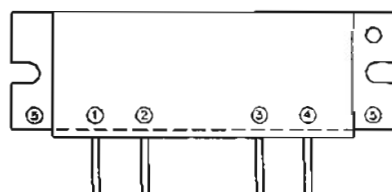

- ① Input terminal
- ② First power supply terminal
- ③ End power supply terminal
- ④ Output terminal
- ⑤ Fin (earth)


● Electrical characteristics

Item	Symbol	Tc (°C)	Conditions	Standard value			Unit
				Minimum	Standard	Maximum	
Frequency	f			220		225	MHz
Output power	Po	25	Vcc = 12.5V, Pin = 0.3W, Zg = Zl = 50Ω	30	33	40	W
Combined efficiency	ηT	25	Same as above	43	48		%
Secondary spurious strength		25	Same as above			-30	dB
Tertiary spurious strength		25	Same as above			-35	dB


SEMICONDUCTOR DATA

Power module M57788M(430 TX-RX UNIT)

● Equivalent circuit diagram

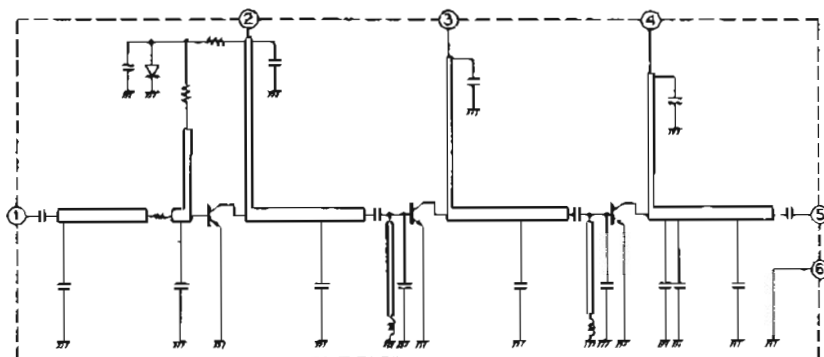

● External view

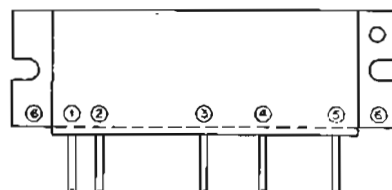


- ① Input terminal
- ② First power supply terminal
- ③ Driver power supply terminal
- ④ End power supply terminal
- ⑤ Output terminal
- ⑥ Fin (earth)

● Electrical characteristics


Item	Symbol	Tc (°C)	Conditions	Standard value			Unit
				Minimum	Standard	Maximum	
Frequency	f			430		450	MHz
Output power	Po	25	Vcc = 12.5V, Pin = 400mW, Zg = Zi = 50Ω	40	45		W
Combined efficiency	ηT	25	Same as above	40	45		%
Secondary spurious strength		25	Same as above			-30	dB
Tertiary spurious strength		25	Same as above			-30	dB

Power module M67711 (1200 TX-RX UNIT)

● Equivalent circuit diagram

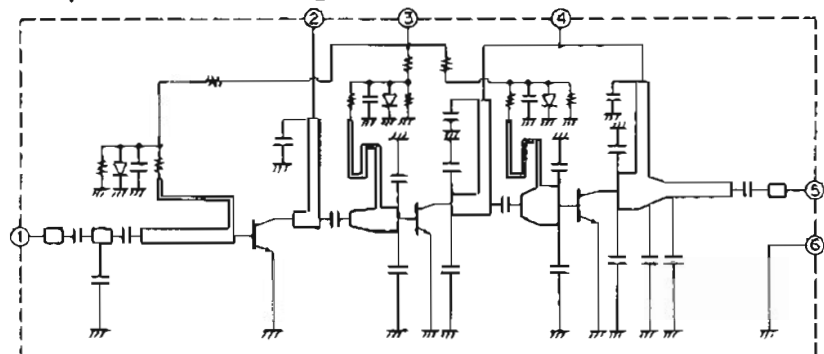

● External view

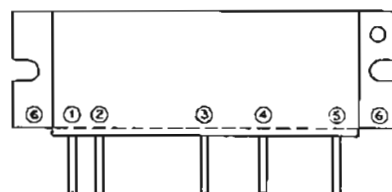

- ① Input terminal
- ② First power supply terminal
- ③ Driver power supply terminal
- ④ End power supply terminal
- ⑤ Output terminal
- ⑥ Fin (earth)



● Electrical characteristics

Item	Symbol	Tc (°C)		Standard value			Unit
				Minimum	Standard	Maximum	
Frequency	f			1.24		1.3	GHz
Output power	Po	25	Vcc = 12.5 V, Vbb = 10 V Pin = 1 W, Zg = Zi = 50Ω	16	17		W
Combined efficiency	ηT	25	Same as above	30	35		%
Secondary spurious strength		25	Same as above			-45	dB

PARTS LIST

CAPACITORS

CC 45 TH 1H 220 J
1 2 3 4 5 6



• Capacitor value

1 0 3 = 0.01 μ F

- 1 = Type ceramic, electrolytic, etc. 4 = Voltage rating
2 = Shape round, square, etc. 5 = Value
3 = Temp. coefficient 6 = Tolerance

• Temperature Coefficient

1st Word	C	L	P	R	S	T	U
Color*	Black	Red	Orange	Yellow	Green	Blue	Violet
ppm/°C	0	-80	-150	-220	-330	-470	-750

2nd Word	G	H	J	K	L
ppm/°C	± 30	± 60	± 120	± 250	± 500

Example CC45TH = -470 = 60 ppm/°C

• Tolerance

Code	C	D	G	J	K	M	X	Z	P	No code
(%)	± 0.25	± 0.5	± 2	± 5	± 10	± 20	+40 -20	+80 -20	+100 -0	More than Less than 10 μ F -10 ~ +50 47 μ F -10 ~ +75

Code	B	C	D	F	G
(pF)	± 0.1	± 0.25	± 0.5	± 1	± 2

Less than 10 pF

• Rating voltage

2nd word	A	B	C	D	E	F	G	H	J	K	V
1st word	0	1.0	1.25	1.6	2.0	2.5	3.15	4.0	5.0	6.3	8.0
1	10	12.5	16	20	25	31.5	40	50	63	80	35
2	100	125	160	200	250	315	400	500	630	800	—
3	1000	1250	1600	2000	2500	3150	4000	5000	6300	8000	—

• Chip capacitors

(EX) CC 13 F 5 L 1 H 0 0 0 J
1 2 3 4 5 6 7
(Chip) (CH, RH, UJ, SL)
(EX) CC 13 F 5 L 1 H 0 0 0 J
1 2 3 4 5 6 7
(Chip) (B, F)

Refer to the table above

Dimension

Dimension code	L	W	T
Empty	5.6 $\pm$ 0.5	5.0 $\pm$ 0.5	Less than 2.0
E	3.2 $\pm$ 0.2	1.6 $\pm$ 0.2	Less than 1.25
F	2.0 $\pm$ 0.3	1.25 $\pm$ 0.2	Less than 1.25

Dimension

Dimension code	L	W	T	Wattage
E	3.2 $\pm$ 0.2	1.6 $\pm$ 0.2	0.57	2B
F	2.0 $\pm$ 0.3	1.25 $\pm$ 0.2	0.45	2A

Rating wattage

Code	Wattage	Code	Wattage	Code	Wattage
2A	1/10W	2E	1/4W	3A	1W
2B	1/8W	2H	1/2W	3D	2W
2C	1/6W				

Dimension



RESISTORS

• Chip resistor (Carbon)

(EX) R 0 7 3 2 8 2 0 0 0 J
1 2 3 4 5 6 7
(Chip) (B, F)

• Carbon resistor (Normal type)

R 0 7 3 2 8 2 0 0 0 J
1 2 3 4 5 6 7

- 1 = Type ceramic, electrolytic, etc.
2 = Shape round, square, etc.
3 = Dimension
4 = Temp. coefficient
5 = Voltage rating
6 = Value
7 = Tolerance

PARTS LIST

- New Parts

Parts without Parts No. are not supplied.

Parts indicated by asterisk (*) are not supplied.

Parts with Parts No. are not supplied.

TM-641A

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名/規格	Desti- nation 仕向	Re- marks 備考
TM-641A						
1	1D, 3P, 2J, 1G	*	A01-2006-03 A01-2048-03 A62-0128-03 A82-0001-12	METALLIC CABINET(UPSIDE) METALLIC CABINET(BOTTOM) PANEL ASSY BACK PANEL		
2	3J		B03-0562-04	DRESSING PLATE		
3	4L		B11-1002-04	FILTER		
4	2N		B41-0679-04	CAUTION LABEL		
5	2F		B41-0686-04	CAUTION LABEL(ADJUST)		
6	3A, 4A		B42-2455-04	LABEL		
7	3A, 4A		B42-2343-04	LABEL(S/NB)		
8	4A		B42-3394-14	LABEL(FC)		
9	3A, 4A	*	B42-3498-04	LABEL(SP, ANT)		
10	3Q		B44-2163-04	UPC CODE LABEL(ITEM CARTON)		
11	3Q		B44-2165-04	UPC CODE LABEL(OUTER CARTON)		
12	1Q		B46-0410-30	WARRANTY CARD		
13	2P		B58-1001-00	CAUTION CARD		
14	1Q		B59-0241-00	SUB-INSTRUCTION MANUAL		
15	1P	*	B62-0082-10	INSTRUCTION MANUAL		
16	3A, 4A	*	B72-0286-04	MODEL NAME PLATE(TM-641A)		
17	2J		D10-0607-04	LEVER		
18	1K		D32-3415-04	STOPPER		
19	2E		E23-0676-04	TERMINAL		
20	1C, 2A		E30-3005-05	CONNECTING WIRE(COMMON-PANEL)		
21			E30-3006-05	CURL CORD		
22	2P		E30-3034-05	DC POWER CORD(ACSY)		
23	2D		E37-0006-05	CONNECTING WIRE(SPEAKER)		
24	3G		E37-0007-05	FLAT CABLE(COMMON)		
25	2H		F01-0977-13	HEAT SINK(COMMON AVR)		
26	2I		F01-0978-04	HEAT SINK		
27			F05-2036-05	FUSE(20A)		
28	3N		F07-1203-13	COVER(FAN)		
29	1B		F07-1204-04	COVER(PANEL)		
30	3P		F51-0017-05	FUSE(15A, ACSY)		
31	2J		G01-0854-04	COMPRESSION SPRING		
32	3J		G02-0805-05	COIL SPRING		
33	1G		G02-0716-04	FLAT SPRING(SPEAKER)		
34	3J		G09-0405-05	SPRING(KNOB)		
35	2H		G10-0635-04	NON-WOVEN FABRIC(19X19)		
36	2E		G10-0663-04	NON-WOVEN FABRIC(100X85)		
37	2D, 4F		G10-0654-04	NON-WOVEN FABRIC(30X10)		
38	2B, 2C		G10-0700-04	NON-WOVEN FABRIC(60X10)		
39	2X		G10-0708-04	NON-WOVEN FABRIC(BACK PANEL)		
40	2C		G10-0709-04	NON-WOVEN FABRIC		
41	1L		G11-0651-04	SHEET		
42	2B		G11-0653-04	SHEET		
43	3G		G11-0558-04	SHEET(10X5)		
44	2L		G11-0664-03	SHEET		
45	1C		G12-0921-04	CUSHION(BACK PANEL)		
46	2M		G13-0967-04	CUSHION(VERTICAL 3 KEY)		
47	2N		G13-0968-04	CUSHION(8 KEY)		
48	3K		G13-0969-04	CUSHION(3 KEY)		

L:Scannew

K:USA

P:Canada

Y:Far East (Hawaii)

T:England

E:Europe

Y:AFES(Europe)

X:Asia

M:Other Areas

A indicates safety critical components

PARTS LIST

New Parts

Parts without a Parts No. and not supplied.

Parts with a Parts No. and not supplied are Parts No. and not supplied.

A: New Parts No. with a new part.

TM-641A

Ref. No.	Address	New Parts	Parts No.	Description	Desti- Re- nation marks
参照番号	位 置	新	部 品 番 号	部 品 名 / 規 格	仕 向 備考
59	4C		G13-1302-04	CUSHION	
60	2D, 3F		G53-0508-04	NON-WEVEN FABRIC(30X10)	
61	1E		G53-0511-04	NON-WEVEN FABRIC(30MMX)	
62	3F		H10-2696-02	POLYSTYRENE FORMED FIXTURE	
63	1F		H11-3830-04	PACKING FIXTURE	
67	0P		H25-0029-04	PROTECTION BAG(MIC PEEK SCREEN)	
68	2P		H25-0079-04	PROTECTION BAG(200X200)	
69	0P		H25-0723-04	PROTECTION BAG(230X400)	
70	3D	*	H52-0198-04	ITEM CARTON BOX	
-		*	H62-0168-04	OUTER CARTON BOX	
72	2K		J19-1477-04	LED HOLDER	
73	2K		J19-1496-04	HOLDER(VFO, MR, MHZ)	
74	2P		J20-0319-24	MIC PEEK(ACSY)	
75	4N		J21-4308-14	MOUNTING HARDWARE(FAN)	
76	2J		J21-4309-14	MOUNTING HARDWARE(LEVER)	
78	2F		J21-4352-03	MOUNTING HARDWARE	
79	2D		J29-0454-03	WIRING BOARD	
80	2F		J42-0452-05	BUSHING	
81	4C		J42-0470-03	MIC CORD BUSHING	
82	1M		K27-3078-04	KNOB(BUTTON) VFO	
83	1M		K27-3079-04	KNOB(BUTTON) MR	
84	1M		K27-3080-04	KNOB(BUTTON) MHZ	
85	2K		K27-3092-04	KNOB(BUTTON) RELEASE	
86	3L		K27-3108-04	KNOB(BUTTON) POWER	
87	3K		K27-3109-04	KNOB(BUTTON) CONT-SEL	
88	10		K27-3110-04	KNOB(BUTTON) CALL	
89	10		K27-3111-04	KNOB(BUTTON) F	
91	10		K27-3113-04	KNOB(BUTTON) TONE	
92	10		K27-3114-04	KNOB(BUTTON) REV	
93	10		K27-3115-04	KNOB(BUTTON) DTSS	
94	10		K27-3116-04	KNOB(BUTTON) LSW	
95	10		K27-3117-04	KNOB(BUTTON) MUTE	
96	10		K27-3118-04	KNOB(BUTTON) SHIFT	
97	3L		K29-3156-04	KNOB	
98	3J		K29-4575-04	KNOB VOL	
99	3L		K29-4576-04	KNOB SQL	
-			L15-0310-25	LOW-FREQUENCY CHOKE COIL	
A	2E		N09-2084-05	SCREW(*)	
B	3E		N30-3030-46	PAN HEAD MACHINE SCREW(UNIT)	
C	1E, 2F		N33-2606-45	OVAL HEAD MACHINE SCREW(CABE)	
D	3N		N33-2614-45	OVAL HEAD MACHINE SCREW(FAN)	
E	1L		N38-2050-45	SCREW(RELEASE)	
G	0P		N46-3010-46	PAN HEAD TAPPING SCREW(MIC HSD)	
H	1K		N80-2006-45	PAN HEAD TAPTITE SCREW(PANEL)	
I	1D, 2S		N86-2606-45	SCREW	
J	1H, 4H		N87-2606-45	BRAZIER HEAD TAPTITE SCREW	
K	2H		N87-2608-45	BRAZIER HEAD TAPTITE SCREW	
L	2D, 3E		N88-2606-46	PLAT HEAD TAPTITE SCREW(UNIT)	
M	3P		N99-0331-05	SCREW SET(ACSY)	
-			RD14083A220	REGISTER 22 J 14	
SP1	2D		T07-0268-05	SPEAKER	
SPAN	4N		T42-0310-05	FAN MOTOR	

L:Scandinavia

K:USA

P:Canada

Y:R.F.E. East, Hawaii

T:England

E:Europe

Y:W.F.E.S.(Europe)

X:Australia

M:Other Areas

△ indicates safety critical components.

PARTS LIST

New Parts

Parts without Part No. are not supplied

Les pièces sans numéro figurent dans le Parts Number sont des fournies

Teil ohne Parts No. werden nicht geliefert

TM-841A

TM-741A/E

Ref. No.	Address New Parts	Parts No.	Description	Desti- Re- nation marks
参考番号	位置新	部品番号	部品名 / 規格	仕向備考
102	1P	791-0397-05	MICROPHONE	
105	2P	W01-0414-04	SPANNER(ACSY)	
107	2J, 30	X53-3510-12	CONTROL UNIT	
108	2L	X54-3120-11	DISPLAY UNIT	
113	2P	X57-3550-12	TX-RX UNIT(144M 50W)	
115	3P	X59-3810-10	TX-RX UNIT(220M 25W)	
120	3K	490-0160-05	PROTECTION SHEET(FRONT GLASS)	
TM-741A/E				
1	10	A01-2006-03	METALLIC CABINET(UPSIDE)	
2	3P	A01-2048-03	METALLIC CABINET(BOTTOM)	
3	2J	A62-0086-03	PANEL ASSY(TM-741A)	KPM2
3	2J	A62-0087-03	PANEL ASSY(TM-741E)	E
4	1J	A82-0001-12	BACK PANEL	
5	3P	B03-0562-04	DRESSING PLATE	
7	4L	B11-1002-04	FILTER	
9	2S	B41-0679-04	CAUTION LABEL	
10	2F	B41-0686-04	CAUTION LABEL	
11	3A, 4A	B42-2453-04	LABEL	
12	3A, 4A	B42-3343-04	LABEL(S/NG)	
12	4A	B42-3394-04	LABEL(POC)	KP
14	3A, 4A	B42-3484-04	LABEL(SP, ANT)	KP
14	3A, 4A	B42-3485-04	LABEL(SP, ANT)	KPM2
15	3Q	B44-2163-04	UPC CODE LABEL(ITEM CARTON)	
-	-	B44-2165-04	UPC CODE LABEL(OUTER CARTON)	
17	10	S46-0410-00	WARRANTY CARD	K
17	1Q	B46-0419-00	WARRANTY CARD	E
17	1Q	S46-0422-00	WARRANTY CARD	K
18	2P	B58-1001-00	CAUTION CARD	
21	1Q	S59-0441-00	SUB-INSTRUCTION MANUAL	
22	1P	B62-0082-00	INSTRUCTION MANUAL	K
22	3S, 3S	S62-0083-00	INSTRUCTION MANUAL	KPM2
22	3S	B62-0084-00	INSTRUCTION MANUAL	E
23	3A, 4A	S72-0166-04	MODEL NAME PLATE(TM-741A)	KP
23	3A, 4A	B72-0167-04	MODEL NAME PLATE(TM-741A)	KM2
23	3A, 4A	B72-0168-04	MODEL NAME PLATE(TM-741E)	E
24	2J	D10-0607-04	LEVER	
25	1K	D32-0418-04	STOPPER	
26	2E	S23-0676-04	TERMINAL	
27	10, 2A	B30-3005-05	CONNECTING WIRE(COMMON-PANEL)	
-	-	B30-3006-08	CURL CORD	
30	2P	B30-3034-05	9C CORD	
31	2C	B37-0006-05	CONNECTING WIRE(SPEAKER)	
32	30	S37-0007-05	PLAT CABLE(COMMON)	
33	2P	F01-0977-13	HEAT SINK(COMMON AVR)	
34	2L	F01-0978-04	HEAT SINK	
-	-	F05-2036-05	FUSE(20A)	
36	3K	F07-1203-13	COVER(FAN)	
37	1B	F07-1204-04	COVER(PANEL)	
38	2P	F81-0617-05	FUSE(1EA, ACSY)	
39	2C	G01-0914-04	COMPRESSION SPRING	

L:Scandinavia

K:USA

P:Canada

YH:Far East (Hawaii)

T:England

E:Europe

Y:AFR(Europe)

X:Australia

M:Other Areas

△ indicates safety critical components

PARTS LIST

4 New Parts

Parts without Parts Number are not supplied

Level 10 is not in enclosure due to Parts Number 1005 no. 1005

Other Parts No. written in this part after

TM-741A/E

Ref. No. 参照番号	Address New Parts 位置	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
40	2J	G02-0505-05	LEAF SPRING		
41	1C	G02-0716-04	FLAT SPRING(SPEAKER)		
42	1J	G09-0405-05	SPRING(KNOB)		
43	2H	G10-0655-04	NON-WOVEN FABRIC(19X19)		
44	2E	G10-0663-04	NON-WOVEN FABRIC(100X80)		
46	2D, 4F	G10-0684-04	NON-WOVEN FABRIC(130X10)		
-		G10-0694-04	NON-WOVEN FABRIC		
49	2B, 2C	G10-0710-04	NON-WOVEN FABRIC(60X10)		
49	23	G10-0708-04	NON-WOVEN FABRIC(BACK PANEL)		
50	25	G10-0709-04	NON-WOVEN FABRIC		
51	1L	G11-0651-04	SHEET		
52	2B	G11-0653-04	SHEET		
53	3A	G11-0658-04	SHEET(10X5)		
54	2L	G11-0664-02	SHEET		
55	13	G13-0921-04	CUSHION(BACK PANEL)		
56	2M	G13-0967-04	CUSHION(3 KEY)		
57	2K	G13-0968-04	CUSHION(6 KEY)		
58	23	G13-0969-04	CUSHION(3 KEY)		
59	3C	G13-1202-04	CUSHION		
60	2D, 3F	G03-0508-04	NON-WOVEN FABRIC(30X10)		
61	1H	G53-0511-04	NON-WOVEN FABRIC(COMMON)		
62	3P, 2S	H10-2696-02	POLYSTYRENE PERMED FIXTURE		
63	1P	H11-0830-04	PACKING FIXTURE		
64	3R	H11-0856-14	POLYSTYRENE PLATE		K
65	20	H11-0857-14	POLYSTYRENE PLATE		B
66	1S	H13-0561-04	PROTECTION BOARD		E
67	29	H25-0029-04	PROTECTION BAG		PMME
68	29	H25-0079-04	PROTECTION BAG(260X200)		XP
69	29	H25-0723-04	PROTECTION BAG(230X400)		
70	3Q	H52-0103-04	ITEM CARTON BOX(TM-741A, 440M)		KP
70	3Q	H52-0104-04	ITEM CARTON BOX(TM-741A, 430M)		PM2
70	3Q	H52-0105-04	ITEM CARTON BOX(TM-741E)		B
-		H62-0093-04	OUTER CARTON BOX(TM-741A)		SPRME
-		H62-0094-04	OUTER CARTON BOX(TM-741E)		E
72	2K	J19-1477-04	LED HOLDER		
73	2K	J19-1496-04	HOLDER(VFO, MR, MHZ)		
74	2P	J20-0319-21	MIC BOOK(ACSY)		XP
75	4N	J21-4304-14	MOUNTING HARDWARE(FAN)		
76	27	J21-4309-14	MOUNTING HARDWARE(LEVER)		
78	2P	J21-4352-03	MOUNTING HARDWARE		
79	2Q	J29-0454-03	WIRING BOARD		
80	2P	J42-0452-05	BUSHING		
81	4C	J42-0490-03	MTC CORD BUSHING		
82	1M	K27-3070-04	KNOB(BUTTON) VFO		
83	1M	K27-3079-04	KNOB(BUTTON) MR		
84	1M	K27-3080-04	KNOB(BUTTON) MHZ		
85	4K	K27-3092-04	KNOB(BUTTON) RELEASE		
86	3L	K27-3108-04	KNOB(BUTTON) POWER		
87	3K	K27-3109-04	KNOB(BUTTON)		
88	10	K27-3110-04	KNOB(BUTTON) CALL		
89	10	K27-3111-04	KNOB(BUTTON) F		
90	10	K27-3112-04	KNOB(BUTTON) BELL		
91	10	K27-3113-04	KNOB(BUTTON) TONE		

LA/América

K/USA

P/Oceania

Y/PX(Far East, Hawaii)

T/England

E/Europe

Y/AFES(Europe)

X/Australia

M/Other Areas

 indicates safety critical components

PARTS LIST

A New Taping

Items without Parts No. are not supplied.

See Appendix I for more information on Parts No. and SMD (Surface Mounting).

For more information on Parts No. and SMD (Surface Mounting), see Appendix I.

TM-741A/E

UT-28S

Ref. No.	Address/Ref. Parts	Parts No.	Description	Desti- Re- nation marks
参照番号	位 置 番 号	部 品 番 号	部 品 名 / 規 格	仕 向 備考
92	10	K27-3114-04	KNOB(BUTTON) REV	
93	10	K27-3115-04	KNOB(BUTTON) OTSS	
94	10	K27-3116-04	KNOB(BUTTON) LOW	
95	10	K27-3117-04	KNOB(BUTTON) MUTE	
96	10	K27-3118-04	KNOB(BUTTON) SHIFT	
97	3J	K29-3156-04	KNOB	
98	3J	K29-4575-04	KNOB VOL	
99	3J	K29-4576-04	KNOB SQL	
-		L15-0310-25	LOW-FREQUENCY CHOKE COIL	
A	2E	A09-2084-05	SCREW	
B	5B	N50-3030-46	PAN HEAD MACHINE SCREW(UNIT	
C	16, 2F	N33-2606-45	OVAL HEAD MACHINE SCREW(CABE	
D	3N	N33-2614-45	OVAL HEAD MACHINE SCREW(PAN	
E	1L	N30-2250-45	SCREW(RELEASE)	
G	2P	N46-3010-46	PAN HEAD TAPPING SCREW(MIC H30	
H	1K	N80-3006-45	PAN HEAD TAPTITE SCREW(PANEL)	
T	10, 2E	N86-2606-45	SCREW	
J	1F, 4H	N87-2606-46	BRAZIER HEAD TAPTITE SCREW	
K	2H	N87-2608-46	BRAZIER HEAD TAPTITE SCREW	
L	2D, 3E	N86-2606-46	FLAT HEAD TAPTITE SCREW(UNIT)	
M	3P	N99-0331-05	SCREW SET(ACSY)	
-		RD140B3A020J	REGISTER 22 J 1W	
SP1	2D	T07-0248-05	SPEAKER	
MFAN	4N	T42-0310-05	FAN MOTOR	
102	1P	T91-0395-05	MICROPHONE	MM2
102	1P	T91-0397-05	MICROPHONE	K2
102	1P	T91-0398-05	MICROPHONE	B
105	2P	W01-0414-04	SPANNER(ACSY)	
107	2I, 3G	X53-3310-12	CONTROL UNIT	KPM2
107	2I, 3G	X53-3312-71	CONTROL UNIT	E
108	2W	X54-3120-11	DISPLAY UNIT	K2
108	2W	X54-3120-21	DISPLAY UNIT	M
108	2W	X54-3120-22	DISPLAY UNIT	M2
108	2W	X54-3122-71	DISPLAY UNIT	S
113	2F	X57-3580-12	TX-RX UNIT(144M 50W)	
115	3F	X57-3590-12	TX-RX UNIT(440M 35W)	KP
115	3F	X57-3590-22	TX-RX UNIT(430M 35W)	MM2
115	3P	X57-3592-72	TX-RX UNIT(430M 35W)	S
UT-28S				
300	1U	B41-0686-04	CAUTION LABEL(ADJUST)	
303	1T	B42-2437-04	LABEL(S/NO,UNIT)	
305	1T	B42-2454-04	LABEL(S/NO,ITEM CARTON BOX)	
309	2U	B42-3468-04	LABEL(FREQUENCY)	
311	1T	B62-0009-10	INSTRUCTION MANUAL	
313	2U	S23-0657-04	TERMINAL	
315	1U	G11-0665-04	SHBET(PAN CABLE)	
317	2T, 1U	H10-0726-03	POLYSTYRENE FOAMED FIXTURE	
320	1T	F13-0855-04	PROTECTION BOARD	
322	2U	H25-0029-04	PROTECTION BAG(60X110)	
324	1T, 1U	H25-0760-04	PROTECTION BAG(200X350)	
326	2T	H52-0150-04	ITEM CARTON BOX	

L:Scandinavia

K:USA

M:Canada

V:PX(Far East, Hawaii)

T:England

E:Europe

Y:AF&ES(Europe)

X:Australia

N:Other Areas

△ indicates safety critical components.

PARTS LIST

New Parts

Parts without Parts Number are common

No. and description of parts are the same as Parts No. in the parts list

Two-line Parts No. is shown in the following

UT-28S

UT-50S

UT-220S

UT-440S

Ref. No.	Address New Parts	Parts No.	Description	Desti- nation	Re- marks
参照番号	位置	部品番号	部品名/規格	仕	向備考
328	BT	* B62-0110-04	OUTER PACKING CASE		
330	1U	J69-0325-05	O RING		
335	1U	N99-0355-05	SCREW SET		
340	1U, 2T	* X57-3790-01	TX-RX UNIT(28MHz 50W)		
UT-50S					
300	1T	B41-0685-04	CAUTION LABEL(ADJUST)		
303	1T	B42-2437-04	LABEL(S/N, UNIT)		
305	1T	B42-2454-04	LABEL(S/N, ITEM CARTON BOX)		
309	2U	B42-3488-04	LABEL(FREQUENCY)		
311	1T	B62-0089-10	INSTRUCTION MANUAL		
312	2U	E23-0657-04	TERMINAL		
315	1U	G11-0665-04	SHEET(FAN CABLE)		
317	1U, 2T	H10-2724-03	POLYSTYRENE FOAMED FIXTURE		
320	1T	H13-0855-04	PROTECTION BOARD		
322	2U	H25-0029-04	PROTECTION BAG(60X10)		
324	1T, 1U	* H25-0760-04	PROTECTION BAG(200X350)		
326	2T	* H52-0133-04	ITEM CARTON BOX		
328	BT	* B62-0110-04	OUTER CARTON BOX		
330	1U	J69-0325-05	O RING		
335	1U	N99-0355-05	SCREW SET		
340	1U, 2T	* X57-3800-01	TX-RX UNIT(50M 50W)		
UT-220S					
300	1T	B41-0685-04	CAUTION LABEL(ADJUST)		
303	1T	B42-2437-04	LABEL(S/N, UNIT)		
305	3T	B42-2454-04	LABEL(S/N, ITEM CARTON BOX)		
309	2U	B42-3488-04	LABEL(FREQUENCY)		
311	1T	B62-0089-10	INSTRUCTION MANUAL		
312	2U	E23-0657-04	TERMINAL		
315	1U	G11-0665-04	SHEET(FAN CABLE)		
317	1U, 2T	H10-2724-03	POLYSTYRENE FOAMED FIXTURE		
320	1T	H13-0855-04	PROTECTION BOARD		
322	2U	H25-0029-04	PROTECTION BAG(60X110)		
324	1T, 1U	* H25-0760-04	PROTECTION BAG(200X350)		
326	2T	* H52-0133-04	ITEM CARTON BOX		
328	BT	* B62-0110-04	OUTER PACKING CASE		
330	1U	J69-0325-05	O RING		
335	1U	N99-0355-05	SCREW SET		
340	1U, 2T	* X57-3810-10	TX-RX UNIT(220MHz 25W)		
UT-440S					
300	1U	B41-0685-04	CAUTION LABEL(ADJUST)		
303	1T	B42-2437-04	LABEL(S/N, UNIT)		
305	1T	B42-2454-04	LABEL(S/N, ITEM CARTON BOX)		
309	2U	B42-3488-04	LABEL(FREQUENCY)		
311	1T	B62-0089-10	INSTRUCTION MANUAL		

L:Scandinavia

K:USA

P:Canada

Y:PX/For East Hawaii

T:England

E:Europe

Y:AF/CS(Europe)

X:Australia

M:Other Areas

△ indicates safety critical components

PARTS LIST

* New Parts

Parts without Parts No. are not shipped.

Parts without Parts No. are not shipped.

Parts with Parts No. are not shipped.

UT44DS

UT-1200

CONTROL UNIT (X53-331X-XX)

Ref. No. 参照番号	Address 位置	New Parts	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
313	2U		B23-0657-04	TERMINAL		
315	1U		G11-0665-04	SHEET (FAN CABLE)		
317	1U, 2T		H10-2726-03	POLYSTYRENE FOAMED FIXTURE		
320	1T		H13-0855-04	PROTECTION BOARD		
322	2U		H25-0029-04	PROTECTION BAG (60X110)		
324	1T, 1U		H25-0760-04	PROTECTION BAG (200X550)		
326	2T	*	H52-0157-04	ITEM CARTON BOX		
328	3T	*	H52-0169-04	OUTER PACKING CASE		
330	1U		J69-0325-05	O RING		
335	1U		N99-0355-05	SCREW SET		
340	1U, 2T		X57-3590-12	TX-PRUNIT (440MHZ 35W)		
UT-1200						
300	1U	*	B41-0686-04	CAUTION LABEL (ADJUST)		
303	1T		B42-2437-04	LABEL (S/N)		
305	1T		B42-2454-04	LABEL (S/N) ITEM CARTON BOX		
309	2T	*	B42-2468-04	LABEL (FREQUENCY)		
311	1T	*	S62-0067-10	INSTRUCTION MANUAL		
313	2U		B23-0657-04	TERMINAL		
315	1U	*	G11-0665-04	SHEET (FAN CABLE)		
317	1U, 2T	*	H10-2726-03	POLYSTYRENE FOAMED FIXTURE		
320	1T	*	H13-0855-04	PROTECTION BOARD		
322	2U		H25-0029-04	PROTECTION BAG (60X110)		
324	1T, 1U		H25-0760-04	PROTECTION BAG (200X550)		
326	2T	*	H52-0112-04	ITEM CARTON BOX		
328	3T	*	H52-0101-04	OUTER CARTON BOX		
330	1U		J69-0325-05	O RING		
335	1U	*	N99-0355-05	SCREW SET		
340	1U, 2T		X57-3600-11	TX-RX UNIT (1200MHZ 10W)		
CONTROL UNIT (X53-331X-XX) 0-12:K, P, M, M2 2-71:E						
C1 -A			CK73FB10102K	CHIP C	1000PF	K
C5			CK73FB10104K	CHIP C	0.10UF	K
C6			CK73FB10105Z	CHIP C	1.0UF	Z
C7			CK73FB10123K	CHIP C	0.002UF	K
C8			CK73FB10102K	CHIP C	1000PF	K
C9			CK73FB10104K	CHIP C	0.10UF	K
C10			CK73FB10102K	CHIP C	1000PF	K
C11			CK73FB10105Z	CHIP C	1.0UF	Z
C12			CK73FB10102K	CHIP C	1000PF	K
C13			CK73FB10123K	CHIP C	0.002UF	K
C14			CK73FB10104K	CHIP C	1000PF	K
C15			CK73FB10102K	CHIP C	39PF	Z
C16			CK73FB10103J	CHIP C	33PF	J
C17 -19			G62-0005-05	ELECTRO	2.2UF	6.3W
C20 -28			CK73FB10104K	CHIP C	0.10UF	K
C29			CK73FB10105Z	CHIP C	1.0UF	Z
C30			CK73FB10104K	CHIP C	0.10UF	K
C31			G62-0007-05	CHIP C	4.7UF	6.3W

L:Grandavia

K:USA

P:Canada

V:PR (Far East, Hava)

T:England

E:Europe

Y:AFES (Europe)

X:Australia

M:Other Areas

△ indicates safety critical components

PARTS LIST

- New Parts

(Parts without Parts No. are not supplied)

- An asterisk (*) indicates that the Parts No. is common to all models.

- The Parts No. within () indicates optional part.

CONTROL UNIT (X53-331X-X5)

Ref. No. 参照番号	Address 位置	New Parts	Parts No. 部品番号	Description 部品名 / 規格	Designation 位置	Remarks 備考
C32 -35			CK73FB1H102K	CHIP C 1000PF K		
C33 -37			CK73FSL1H101J	CHIP C 100PF J		
C36 -40			CK73FB1H102K	CHIP C 1000PF K		
C41			CE04EW1A101M	ELECTRO 100UF 10WV		
C42			CK73FB1C105Z	CHIP C 1.0UF Z		
C43			CK73FB1H102K	CHIP C 1000PF K		
C44			CK73FB1E103K	CHIP C 0.001UF K		
C45 -46			CK73FB1H102K	CHIP C 1000PF K		
C47 -49			CK73FB1E104K	CHIP C 0.10UF K		
C50			CK73FB1C105Z	CHIP C 1.0UF Z		
C51			CK73FSL1H101J	CHIP C 100PF J		
C101-103			CK73FB1E102K	CHIP C 1000PF K		
C104			CE04EW1C470M	ELECTRO 47UF 16WV		
C105			CK73FB1H102K	CHIP C 1000PF K		
C106			CE04EW1A470M	ELECTRO 47UF 10WV		
C107-108			CK73FB1E123K	CHIP C 0.0012UF K		
C109			C92-0507-05	CHIP TAN 4.7UF 0.2WV		
C110			CK73FB1H682K	CHIP C 6800PF K		
C111			CK73FB1C105Z	CHIP C 1.0UF Z		
C112-113			CK73FB1E104K	CHIP C 0.10UF K		
C116			CE04EW1A471M	ELECTRO 470UF 10WV		
C117-120			CE04EW1A470M	ELECTRO 47UF 10WV		
C121			CE04EW1C101M	ELECTRO 100UF 16WV		
C122-125			CE04EW1A470M	ELECTRO 47UF 10WV		
C126			CE04EW1C101M	ELECTRO 100UF 16WV		
C127-129			CK73FB1E104K	CHIP C 0.10UF K		
C130-131			CK73FB1H102K	CHIP C 1000PF K		
C132		*	C90-2167-05	ELECTRO 100UF 16WV		
C133-135			CE04EW1A471M	ELECTRO 470UF 10WV		
C136			CK73FB1H102K	CHIP C 1000PF K		
C137			CK73FB1E123K	CHIP C 0.0012UF K		
C138			CE04EW1C470M	ELECTRO 47UF 16WV		
C139			CK73FB1E223K	CHIP C 0.0022UF K		
C140-141			CK73FB1E103K	CHIP C 0.01UF K		
C142-143			CK73FB1H102K	CHIP C 1000PF K		
C144			CK73FSL1H101J	CHIP C 100PF J		
C145-146			CK73FB1C105Z	CHIP C 1.0UF Z		
CN1 -2			E40-3417-05	PIN CONNECTOR (1P)		
CN3			E40-3246-05	PIN CONNECTOR (2P)		
CN4			E40-3248-05	PIN CONNECTOR (4P, PANEL)		
CN5			E40-3188-05	PIN CONNECTOR (1P, DTSS)		
CN6			E40-5183-05	PIN CONNECTOR (6P, DTSS)		
CN7			E40-5343-05	PIN CONNECTOR (9P, DTSS)		
CN8			E40-5224-05	PIN CONNECTOR (16P)		
CN101-106			E40-5452-05	PIN CONNECTOR (12P)		
CN107-108			E40-8400-05	PIN CONNECTOR (13P)		
CN109			E40-5224-05	PIN CONNECTOR (16P)		
J1			E11-0425-05	PHONE JACK (E, 50)		
J2		*	E08-0876-05	RECTANGULAR RECEPTACLE (8P)		
W1		*	E33-1871-15	FINISHED WIRE SET		
W2 -3		*	E33-1943-05	FINISHED WIRE SET		
W201		*	E37-0187-15	CONNECTING WIRE (PAN)		
X1			L07-1333-05	CRYSTAL RESONATOR (4.19MHZ)		

L:Scandinavia

K:USA

P:Canada

Y:PX (Far East, Hawaii)

T:England

E:Europe

Y:AAFFS (Far East)

X:Australia

M:Other Areas

An indicates safety critical components

PARTS LIST

— New Parts

Parts without Parts No. are not supplied.

Les pièces non mentionnées dans le Parts No. ne sont pas fournies.

Teil ohne Parts No. werden nicht geliefert.

CONTROL UNIT (X53-331X-XX)

Ref. No. 参照番号	Address 位置	New Parts 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
R1	-5	RK73FB2A102J	CHIP R 1.0K J 1/10W		
R4	-6	RK73FB2A147J	CHIP R 47K J 1/10W		
R7		RK73FB2A102J	CHIP R 1.0K J 1/10W		
PR		R92-0211-05	MULTI-00MP		
R9		RK73FB2A102J	CHIP R 1.0K J 1/10W		
R10		RK73FB2A154J	CHIP R 150K J 1/10W		
R11		RK73FB2A333J	CHIP R 33K J 1/10W		
R12		RK73FB2A102J	CHIP R 1.0K J 1/10W		
R13		RK73FB2A102J	CHIP R 1.0K J 1/10W		
R13		RK73FB2A392J	CHIP R 3.9K J 1/10W		KPM2
R14		RK73FB2A332J	CHIP R 3.3K J 1/10W		KPM2
R14		RK73FB2A682J	CHIP R 6.8K J 1/10W		E
R15		RK73FB2A183J	CHIP R 18K J 1/10W		
R16		RK73FB2A104J	CHIP R 100K J 1/10W		
R17		RK73FB2A182J	CHIP R 1.8K J 1/10W		
R18		RK73FB2A221J	CHIP R 220 J 1/10W		
R19		RK73FB2A563J	CHIP R 56K J 1/10W		
R20	-21	RK73FB2A473J	CHIP R 47K J 1/10W		
R22		RK73FB2A472J	CHIP R 4.7K J 1/10W		
R23	-23	RK73FB2A153J	CHIP R 15K J 1/10W		
R29		RK73FB2A684J	CHIP R 680K J 1/10W		
R30		RK73FB2A272J	CHIP R 2.7K J 1/10W		
R31		RK73FB2A102J	CHIP R 1.0K J 1/10W		
R32		RK73FB2A684J	CHIP R 680K J 1/10W		
R33		RK73FB2A272J	CHIP R 2.7K J 1/10W		
R34		RK73FB2A102J	CHIP R 1.0K J 1/10W		
R35		RK73FB2A684J	CHIP R 680K J 1/10W		
R36		RK73FB2A272J	CHIP R 2.7K J 1/10W		
R37		RK73FB2A102J	CHIP R 1.0K J 1/10W		
R38	-40	RK73FB2A104J	CHIP R 100K J 1/10W		
R41		RK73FB2A103J	CHIP R 10K J 1/10W		
R42		RK73FB2A105J	CHIP R 1.0K J 1/10W		
R43		RK73FB2A123J	CHIP R 12K J 1/10W		
R44	-47	RK73FB2A103J	CHIP R 10K J 1/10W		
R48		RK73FB2A683J	CHIP R 68K J 1/10W		
R49		RK73FB2A473J	CHIP R 47K J 1/10W		
R50		RK73FB2A474J	CHIP R 470K J 1/10W		
R51		RK73FB2A124J	CHIP R 120K J 1/10W		
R52		RK73FB2A472J	CHIP R 4.7K J 1/10W		
R53		RK73FB2A224J	CHIP R 220K J 1/10W		
R54		RK73FB2A184J	CHIP R 180K J 1/10W		
R55		RK73FB2A474J	CHIP R 470K J 1/10W		
R56		R92-0670-05	CHIP R 0.0MP		
R57		RK73FB2A223J	CHIP R 22K J 1/10W		
R58		R92-0670-05	CHIP R 0.0MP		
R59		RK73FB2A472J	CHIP R 4.7K J 1/10W		
R60		R92-1291-05	CHIP R 0.1W		
R61	-63	RK73FB2A474J	CHIP R 470K J 1/10W		
R64	-67	RK73FB2A473J	CHIP R 47K J 1/10W		
R66		RK73FB2A472J	CHIP R 4.7K J 1/10W		
R69		RK73FB2A103J	CHIP R 10K J 1/10W		
R70		RK73FB2A473J	CHIP R 47K J 1/10W		
R71		RK73FB2A472J	CHIP R 4.7K J 1/10W		
R72		RK73FB2A822J	CHIP R 8.2K J 1/10W		
R73		RK73FB2A.533	CHIP R 15K J 1/10W		

LEscandavia

KUSA

PCanada

70

Y:RX(Far East, Hawaii)

T:England

EEurope

Y:AAFE(S:Europe)

X:Australia

MOther Areas

⚠ indicates safety critical components

PARTS LIST

X NEW Parts

Parts with this Parts No. are not available.

Les articles avec cette désignation de Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

CONTROL UNIT (X53-331X-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 位置	Re- mark 備考
R74			RK73FB2A473J	CHIP R 47K	J	1/10W
R75, 76			RK73FB2A102J	CHIP R 1.0K	J	1/10W
R77			RK73FB2A103J	CHIP R 1.0K	J	1/10W
R78			RK73FB2A471J	CHIP R 470	J	1/10W
R79			RK73FB2A272J	CHIP R 2.7K	J	1/10W
R101			RK73FB2A273J	CHIP R 27K	J	1/10W
R102			RK73FB2A123J	CHIP R 12K	J	1/10W
R103			RK73FB2A562J	CHIP R 5.6K	J	1/10W
R104			RK73FB2A272J	CHIP R 2.7K	J	1/10W
R105			RK73FB2A122J	CHIP R 1.2K	J	1/10W
R106			RK73FB2A561J	CHIP R 560	J	1/10W
R107			RK73FB2A273J	CHIP R 27K	J	1/10W
R108			RK73FB2A123J	CHIP R 12K	J	1/10W
R109			RK73FB2A562J	CHIP R 5.6K	J	1/10W
R110			RK73FB2A272J	CHIP R 2.7K	J	1/10W
R111			RK73FB2A122J	CHIP R 1.2K	J	1/10W
R112			RK73FB2A561J	CHIP R 560	J	1/10W
R113			RK73FB2A273J	CHIP R 27K	J	1/10W
R114			RK73FB2A123J	CHIP R 12K	J	1/10W
R115			RK73FB2A562J	CHIP R 5.6K	J	1/10W
R116			RK73FB2A272J	CHIP R 2.7K	J	1/10W
R117			RK73FB2A122J	CHIP R 1.2K	J	1/10W
R118			RK73FB2A561J	CHIP R 560	J	1/10W
R119			RK73FB2A473J	CHIP R 4.7K	J	1/10W
R120			RK73FB2A103J	CHIP R 10K	J	1/10W
R121			R92-1215-G5	CHIP R 470	J	1/2W
R122-124			RK73FB2A103J	CHIP R 10K	J	1/10W
R125-126			RK73FB2A104J	CHIP R 100K	J	1/10W
R130			RK73FB2A183J	CHIP R 18K	J	1/10W
R131			RK73FB25183J	CHIP R 18K	J	1/10W
R132, 133			RK73FB2A183J	CHIP R 18K	J	1/10W
R134			RK73FB2A473J	CHIP R 4.7K	J	1/10W
R135			RK73FB2A473J	CHIP R 47K	J	1/10W
R136, 137			RK73FB2A101J	CHIP R 100	J	1/10W
R138, 139			RK73FB2A473J	CHIP R 47K	J	1/10W
R140, 141			RK73FB2A101J	CHIP R 100	J	1/10W
R142			RK73FB2A473J	CHIP R 47K	J	1/10W
R143-145			RK73FB2A473J	CHIP R 4.7K	J	1/10W
R146			RK73FB2A474J	CHIP R 470K	J	1/10W
R147, 148			RK73FB2A183J	CHIP R 18K	J	1/10W
R149			RK73FB2A332J	CHIP R 3.3K	J	1/10W
R150			RK73FB2A474J	CHIP R 470K	J	1/10W
R151, 152			RK73FB2A183J	CHIP R 18K	J	1/10W
R153			RK73FB2A332J	CHIP R 3.3K	J	1/10W
R154			RK73FB2A183J	CHIP R 18K	J	1/10W
R155			RK73FB2A183J	CHIP R 18K	J	1/10W
R156			RK73FB2A474J	CHIP R 470K	J	1/10W
R157			RK73FB2A332J	CHIP R 3.3K	J	1/10W
R158			RK73FB2A473J	CHIP R 47K	J	1/10W
R159			RK73FB2A473J	CHIP R 47K	J	1/10W
R160			R92-0695-05	CHIP R 22	J	1/2W
R161			RK73FB2A472J	CHIP R 4.7K	J	1/10W
R162-169			RK73FB2A473J	CHIP R 47K	J	1/10W
R170			RK73FB2A563J	CHIP R 56K	J	1/10W
R171			RK73FB2A103J	CHIP R 10K	J	1/10W

L:Spain and

K:USA

P:Canada

Y:PX(Taiwan, Hawaii)

T:England

E:Europe

Y:AF&S(Europe)

X:Australia

M:Other Areas

⚠ indicates safety critical components

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les pièces non numérotées dans le Parts No. ne sont pas fournies.

Isle ohne Parts No. werden nicht geliefert.

CONTROL UNIT (X53-331X-XX)

DISPLAY UNIT (X54-312X-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名/規格	Desti- nation 仕向	Re- marks 備考
R172 R173, 174 R175-177 R178			RK73F32A473J RK73F32A472J RK73F32A102J R92-0670-35	CHIP R 47K 1/10W CHIP R 4.7K 1/10W CHIP R 1.0K 1/10W CHIP R 0.0HM		
D1 D2 D3 D4 D5			1SS184 1SS01 C2C26.8(K) 1F801 C2C23.0(Z)	DIODE DIODE DIODE DIODE DIODE		
D6 D101-103 IC1 IC2 IC3		*	1F801 1SS224 75517GP-014-569 LC3564PML-12,16 TA76L06P	DIODE DIODE IC(CPU) IC(64K RAM/MEMORY BACK UP) IC(5V AVR)		
IC4, 5 IC6, 7 IC8, 9 IC10 IC11, 12			TC9154AP BU40948P BU4053BF NJM4558E TC4511F	IC(2CH ELECTRONIC VOLUME) IC(SHIFT REGISTER) IC(ANALOG SWITCH) IC(AF AMP ADDER) IC(2 INPUT NAND GATE)		
IC101 IC102 IC103 IC104, 105 IC106			CKD1095Q MC78T06CT NJM4558E LA4446 BU4053BF	IC(1/2 EXPANDER) IC(5V AVR) IC(ADDER) IC(AF PA) IC(ANALOG SW)		
IC107-110 Q1 Q2 Q3 Q4 -6			BG40663P 2SC3324(G) 2SC2712(Y) DTC114EK 2SC2712(Y)	IC(ANALOG SWITCH X4) TRANSISTOR TRANSISTOR DIGITAL TRANSISTOR TRANSISTOR		
Q9 -11 Q12 Q13 -15 Q16 Q17			DTC114EK 2SC1757K 2SD1757(N) 2SA1519 2SC2712(Y)	DIGITAL TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR		
Q101 Q102 Q103 Q104, 105 Q106			2SC2712(Y) 2SA1641(S, T) DTC143EK DTC114EK DTC144EK	TRANSISTOR TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR		
Q107 Q108			2SC2712(Y) DTA144EK	TRANSISTOR DIGITAL TRANSISTOR		
BA1	3R		W09-0573-05	LITHIUM BATTERY		
DISPLAY UNIT (X54-312X-XX) 0-11:K, P 0-21:M 0-22:M2 2-7:E						
PL1 -6		*	B11-0487-05 B11-0500-15 B11-0026-04 B38-0337-05 B30-0886-13	FILTER(LCD) FILTER(KNOB) FILTER(LCD) LCD LAMP		
C1 C2 C3 C4, 5 C7		*	C92-0038-05 CK73F31H102K C92-0048-05 CK73F31H102K CK73F31B225K	ELECTRO 22UF 16KV CHIP C 1000PF K ELECTRO 100UF 6.3KV CHIP C 1000PF K CHIP C 0.022UF K		

L:Scandinavia

K:USA

P:Canada

V:PK(Far East, Hawaii)

T:England

E:Europe

W:AFES(Europe)

X:Australia

M:Other Areas

 indicates safety critical components.

PARTS LIST

X: New Order

Parts without Parts No. are not supplied.

* Examples in parenthesis show the Parts No. is supplied for the

same kind Parts No. without parenthesis

DISPLAY UNIT (X54-312X-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名/規格	Desti- nation 仕向	Re- marks 備考
C8			CK73FB1H102K	CHIP C 1000PF K		
C9	10		CK73FSL1H101J	CHIP C 100PF J		
C11			CK73FB1E223K	CHIP C 0.022UF K		
C12			CK73FB1H102K	CHIP C 1000PF K		
C13			CK73FB1E103K	CHIP C 0.01UF K		
C14	15		CK73FCH1H50J	CHIP C 33PF J		
C16	17		CK73FCH1H150J	CHIP C 15PF J		
C18			CK73FB1H102K	CHIP C 1000PF K		
C19			CK73FB1C105Z	CHIP C 1.0UF Z		
C20			CK73FB1H102K	CHIP C 1000PF K		
C21			CK73FB1E103K	CHIP C 0.01UF K		
C22			CK73FB1H102K	CHIP C 1000PF K		
C23			CK73FB1E103K	CHIP C 0.01UF K		
C101-104			CK73FB1B103K	CHIP C 0.001UF K		
C201-204			CK73FB1E103K	CHIP C 0.01UF K		
C301-304			CK73FB1E103K	CHIP C 0.01UF K		
CX1			E29-0500-14 E37-0264-05 E40-0262-00	CONNECTOR FLAT CABLE PIN CONNECTOR (4P)		
			F20-1088-04	INSULATING BOARD(LITHIUM BATT)		
			J21-4359-25 J39-0439-05	MOUNTING HARDWARE(LED) LAMP HOLDER		
X1			L77-1397-05	CRYSTAL RESONATOR(4.19MHZ)		
X2			L77-1254-05	CRYSTAL RESONATOR(32.768KHZ)		
			N14-0552-05 N80-2006-45	NUT(VOLUME) PAN HEAD TAPCITE SCREW		
R1		X	P92-1279-05	FIXED RESISTOR		
R2			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R3			RK73FB2A473J	CHIP R 47K J 1/10W		
R4			RK73FB2A563J	CHIP R 56K J 1/10W		
R5			RK73FB2A105J	CHIP R 1.0M J 1/10W		
R6			RK73FB2A103J	CHIP R 10K J 1/10W		
R7			RK73FB2A331J	CHIP R 330 J 1/10W		
R8			R92-1211-05	SOLID R 5.6K J 1/2W		
R9			RK73FB2A222J	CHIP R 2.2K J 1/10W		
R10			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R11			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R12			RK73FB2A222J	CHIP R 2.2K J 1/10W		
R13			RK73FB2A272J	CHIP R 2.7K J 1/10W		
R14			RK73FB2A123J	CHIP R 12K J 1/10W		
R15	17		RK73FB2A100J	CHIP R 10 J 1/10W		
R18			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R19			RK73FB2A103J	CHIP R 10K J 1/10W		
R20			RK73FB2A473J	CHIP R 47K J 1/10W		
R21			RK73FB2A330J	CHIP R 330K J 1/10W		
R22			RK73FB2A221J	CHIP R 220 J 1/10W		
R23			RK73FB2A391J	CHIP R 390 J 1/10W		
R24			RK73FB2A221J	CHIP R 220 J 1/10W		
R25			RK73FB2A331J	CHIP R 330 J 1/10W		
R26			RK73FB2A221J	CHIP R 220 J 1/10W		
R27			RK73FB2A391J	CHIP R 390 J 1/10W		

L:Scandinavia

K:USA

P:Canada

Y:FX(Far East, Hawaii)

E:England

E:Europe

Y:AAFTS(Europe)

X:Australia

M:Other Areas

⚠ indicates safety critical components

PARTS LIST

* New Parts

Parts without Parts No. are not supplied

Parts without Parts No. are not supplied

Parts without Parts No. are not supplied

DISPLAY UNIT (X54-312X-XX)

Ref. No.	Address	Parts No.	Description	Position	Remarks
参照番号	位置	部品番号	部品名 / 規格	仕向	備考
R28		RK73FB2A221J	CHIP R 220 J 1/10W		
R29		RK73FB2A331J	CHIP R 330 J 1/10W		
R30		RK73FB2A221J	CHIP R 220 J 1/10W		
R31		RK73FB2A331J	CHIP R 330 J 1/10W		
R32		RK73FB2A221J	CHIP R 220 J 1/10W		
R33		RK73FB2A331J	CHIP R 330 J 1/10W		
R34	35	RK73FB2A100J	CHIP R 10 J 1/10W		
R36		RK73FB2A100J	CHIP R 100M J 1/10W		
R37		RK73FB2A104J	CHIP R 100K J 1/10W		
R38	59	RK73FB2A222J	CHIP R 2.2K J 1/10W		
R40		RK73FB2A223J	CHIP R 22K J 1/10W		
R41	42	RK73FB2A100J	CHIP R 10 J 1/10W		
R43	51	RK73FB2A473J	CHIP R 47K J 1/10W		
R52		RK73FB2A103J	CHIP R 10K J 1/10W		
R53		RK73FB2A333J	CHIP R 33K J 1/10W		
R54		R92-0670-05	CHIP R 0 OHM		KPMR
R55		R92-0670-05	CHIP R 0 OHM		KPMR
R56		R92-0670-05	CHIP R 0 OHM		KPMR
R57		R92-0670-05	CHIP R 0 OHM		KPMR
R58		RK73FB2A102J	CHIP R 1.0K J 1/10W		
R59	61	RK73FB2A473J	CHIP R 47K J 1/10W		
R62		RK73FB2A473J	CHIP R 47K J 1/10W		
R63	65	RK73FB2A473J	CHIP R 47K J 1/10W		
R66	71	RK73FB2A151J	CHIP R 150 J 1/10W		
R72		RK73FB2A473J	CHIP R 47K J 1/10W		
VR101		R23-9407-05	POTENTIOMETER		
VR201		R23-9407-05	POTENTIOMETER		
VR301		R23-9407-05	POTENTIOMETER		
S1		* S70-0408-05	TACT SWITCH		
S2		* S62-0412-05	SLIDE SWITCH		
S3	12	* S70-0408-05	TACT SWITCH		
S13	15	* S70-0409-05	TACT SWITCH		
S16		* S70-0408-05	TACT SWITCH		
S17	2X	W02-0386-05	ENCODER		
C1	2	1SS184	DIODE		
C3		02C27.5(X,Y)	DIODE		
C4	9	B3C-2108-05	LED(RED)		
C10		LF801	DIODE		
C11		* 7551605-270-3B5	IC(CPU)		
IC2	3	* MSM5265GS-V1X	IC(LCD DRIVER)		
IC4		TA79L06F	IC(6V AVR)		
IC5	6	IC4S11F	IC(INVERTER)		
IC7		S-8054AL3-LN	IC(RESET)		
Q1		2SC2712(Y)	TRANSISTOR		
Q2		2SA1162(Y)	TRANSISTOR		
Q3		2SC2712(Y)	TRANSISTOR		
Q4		2SA1162(Y)	TRANSISTOR		
Q5		2SA1162(Y)	TRANSISTOR		
Q6		2SC2712(Y)	TRANSISTOR		
Q7		2SD1624(S, P)	TRANSISTOR		
Q8		DTA1145K	DIGITAL TRANSISTOR		
BA1		W04-0394-05	LITHIUM BATTERY		

L:Scandinavia

K:USA

P:Canada

Y:Pacific East, Hawaii

T:England

E:Europe

Y:AFRICA(Europe)

X:Australia

M:Other Areas

⚠ indicates safety critical components

PARTS LIST

Notes:

Parts without Parts No. are not supplied.

Parts not mentioned are not supplied.

Teil ohne Parts No. werden nicht geliefert.

144M TX-RX UNIT (X57-3580-12)

Ref. No. 参照番号	Address 位置	Parts No. 部品番号	Description 部品名/規格	Desti- nation 仕向	Re- marks 備考
144M TX-RX UNIT (X57-3580-12)					
		A10-1316-01	CHASSIS		
		B42-2437-04	LABEL(S/N9)		
C5		CC73PCH1H040C	CHIP C 45F C		
C6		CK73FB1H102K	CHIP C 1000PF K		
C7	-9	CK73FB1H102K	CHIP C 1000PF K		
C10		CK73FB1E103K	CHIP C 0.01UF K		
C11		CC73FCH1H0R5C	CHIP C 0.5PF C		
C12		CC73FCH1H151J	CHIP C 15PF J		
C13		CC73FCH1H0J0C	CHIP C 3PF C		
C14		CC73PCH1H0R5C	CHIP C 0.5PF C		
C15		CC73FCH1H150J	CHIP C 15PF J		
C16		CC73PCH1H020C	CHIP C 2.0PF C		
C18		CK73FB1H102K	CHIP C 1000PF K		
C19		CC73FCH1H060C	CHIP C 6PF C		
C20		CK73FB1H102K	CHIP C 1000PF K		
C21		CC73FCH1H050C	CHIP C 5PF C		
C22		CK73FB1E103K	CHIP C 0.01UF K		
C23		CK73FB1H102K	CHIP C 1000PF K		
C24		CK73FB1E103K	CHIP C 0.01UF K		
C26		CK73FB1H102K	CHIP C 1000PF K		
C29		CK73FB1E103K	CHIP C 0.01UF K		
C30		CC73PCH1H39CJ	CHIP C 39PF J		
C31		CC73PCH1H101J	CHIP C 100PF J		
C32		CK73FB1H102K	CHIP C 1000PF K		
C33		CK73FB1E104K	CHIP C 0.10UF K		
C34	,35	CK73FB1C105Z	CHIP C 1.0UF Z		
C36	,37	CK73FB1E103K	CHIP C 0.01UF K		
C39		CC73PCH1H010C	CHIP C 1.0PF C		
C44	,45	CE04NW1C470M	ELECTRO 47UF 16WV		
C46		C92-0504-05	CHIP TAN 0.58UF 20WV		
C47		CE04NW1C470M	ELECTRO 47UF 16WV		
C48		C92-0003-05	CHIP TAN 0.47UF 25WV		
C49		CE04NW1E100M	ELECTRO 10UF 25WV		
C50		CE04NW1C470M	ELECTRO 47UF 16WV		
C51	,52	CK73FB1E103K	CHIP C 0.01UF K		
C53	,54	CK73FB1H102K	CHIP C 1000PF K		
C55		CK73FB1C105Z	CHIP C 1.0UF Z		
C56		CC73PUJ1H150J	CHIP C 15PF J		
C57		CK73FB1H102K	CHIP C 1000PF K		
C58		CC73PUJ1H220J	CHIP C 22PF J		
C59	,60	CK73FB1H102K	CHIP C 1000PF K		
C61		CE04NW1C470M	ELECTRO 47UF 16WV		
C62		CK73FB1H102K	CHIP C 1000PF K		
C63		CK73FB1E103K	CHIP C 0.01UF K		
C64		CE04NW1E100M	ELECTRO 10UF 25WV		
C65		CE04NW1A330M	ELECTRO 33UF 10WV		
C66		CK73FB1E103K	CHIP C 0.01UF K		
C67		CK73FB1H102K	CHIP C 1000PF K		
C68		CC73PCH1H100C	CHIP C 10PF C		
C69		CC73FCH1H100C	CHIP C 10PF C		
C70		CK73FB1E103K	CHIP C 0.01UF K		
C71	-73	CK73FB1H102K	CHIP C 1000PF K		

L:Scandinavia

K:USA

P:Canada

Y:PX(Far East, Hawaii)

T:England

E:Europe

V:AFES(Europe)

X:Australia

M:Other Areas

A indicates safety critical components

PARTS LIST

X: New Parts

Parts without Part No. are not supplied

Les pièces énumérées sans le Part No. ne sont pas fournies

Teil ohne Parts No. werden nicht geliefert

144M TX-RX UNIT (X57 3600-12)

Ref. No. 参照番号	Address 位置	New Parts 番	Parts No. 部品番号	Description 部品名 / 規格	Desti- Re- nation marks 仕向備考
C74			CK73FB1H223K	CHIP C 0.022UF	K
C75			CE04NW1C101M	ELECTRO 100UF	25WV
C76			CK73FB1H0105Z	CHIP C 1.0UF	C
C77, 78			CK73FB1H102K	CHIP C 1000PF	K
C79			CK73FB1H0105Z	CHIP C 1.0UF	C
C80			CC73FCH1H050C	CHIP C 50PF	C
C81			CC45SL2H120J	CERAMIC 12PF	J
C82			CK73FB1H102K	CHIP C 1000PF	K
C83			CK45B2H122K	CERAMIC 1000PF	K
C84			CM73F2H130J	CHIP C 30PF	J
C85			CC73FCH1H220J	CHIP C 22PF	J
C86			CC73FCH1H050C	CHIP C 0.5PF	C
C87			CC73FCH1H020C	CHIP C 2.0PF	C
C88			CC45SL2H560J	CERAMIC 56PF	J
C89			CC45SL2H470J	CERAMIC 47PF	J
C90 -92			CK73FB1H102K	CHIP C 1000PF	K
C93			CC73FCH1H050C	CHIP C 0.5PF	C
C94			CM73F2H300J	CHIP C 30PF	J
C95			CC73FCH1H020C	CHIP C 2.0PF	C
C96			CK73FB1H103K	CHIP C 0.01UF	K
C98			CK73FB1H102K	CHIP C 1000PF	K
C99			CE04NW1C100M	ELECTRO 10UF	25WV
C100			CK73FB1H102K	CHIP C 1000PF	K
C101			CE04NW1E100M	ELECTRO 10UF	25WV
C103			CK73FB1H102K	CHIP C 1000PF	K
C104			CK73FB1E103K	CHIP C 0.01UF	K
C105			CK73FB1H223K	CHIP C 0.022UF	K
C110			CC73FCH1H030C	CHIP C 30PF	C
C111			CK73FB1E103K	CHIP C 0.01UF	K
C112			CE04NW1A221K	ELECTRO 220UF	10WV
C113			CC73FCH1H100C	CHIP C 10PF	C
C114, 115			CC73FSL1H101J	CHIP C 100PF	J
C116			CC73FCH1H080C	CHIP C 8PF	C
C119			CE04NW1E100M	ELECTRO 10UF	25WV
C120-127			CC73FSL1H101J	CHIP C 100PF	J
C128, 129			CK73FB1H102K	CHIP C 1000PF	K
C130			CE04SW1C102K	ELECTRO 1000UF	16WV
TC1			C05-0345-05	TRIMMING CAP 10PF	
			E22-0672-04	TERMINAL BOARD(-)	
			E22-0673-04	TERMINAL BOARD(+)	
			E30-2145-05	ANT. CABLE	
			E30-3007-05	DC POWER CORD	
			E40-5461-05	PIN CONNECTOR	
CH1, 2					
J1			E11-0442-05	PHONE JACK	
J3			E23-0619-05	TERMINAL	
			F05-1531-05	FUSE	
			F10-1446-04	SHIELDING PLATE	
			F10-2010-03	SHIELDING COVER	
			F10-2012-04	SHIELDING CASE(VCC-PLL)	
			F20-1006-04	INSULATION SHEET(AFC)	
			F51-5017-05	FUSE(15A)	
			G02-0600-14	FLAT SPRING(THERMAL SW)	
			G02-0706-04	FLAT SPRING	

L:Scandinavia

K:USA

P:Canada

V:PX(Far East, Hawaii)

T:England

EE:Europe

Y:AFES(Europe)

X:Australia

M:Other Areas

△ indicates safety critical components.

PARTS LIST

4. View PARTS

- Parts which do not have a Part No. are shown in bold.

- Do not order from this list when ordering a Part No. in bold (see 1. Remarks).

- The other Parts are shown in bold when not in use.

144MTX-RX UNIT (X57-3580-12)

Ref. No.	Address	New Parts	Parts No.	Description	Destination	Remarks
参照番号	位置	新部品	部品番号	部品名/規格	仕向	備考
			G02-0715-04	LEAF SPRING(ARC TR)		
			G02-0716-04	FLAT SPRING(VCO)		
			G06-0420-05	SPRING(AC COIL)		
			G11-0664-04	CUSHION(VCO)		
			G11-0665-04	CUSHION(CN1, CN2)		
			G11-0660-04	CUSHION(VCS)		
			G11-0661-04	INSULATION SHEET(ARC TR)		
			G13-0841-04	FORMED PLATE(ITAL)		
			G13-1325-04	FORMED PLATE(VCS)		
			G13-1337-04	CUSHION(VCO)		
			G13-1349-04	CUSHION(VCS)		
			G53-0508-04	NON-WOVEN FABRIC		
			J30-0564-05	SPACER		
C01			L79-1013-05	FILTER		
C01			L72-0372-05	CERAMIC FILTER(CFWM455F)		
L1	-4		L34-4251-05	COIL		
L5			L40-1582-19	SMALL FIXED INDUCTOR(0.15UH)		
L6			L34-4251-05	COIL(1ST IF)		
L8			L34-1185-05	COIL(2.5T)		
L10			L40-3352-19	SMALL FIXED INDUCTOR(0.33UH)		
L11			L34-1239-05	COIL(10.5T)		
L12			L34-0895-05	COIL(6T)		
L13			L34-0742-05	COIL(6T)		
L14			L34-0908-05	COIL(9.5T)		
L15	-17		L34-0499-05	COIL(4.5T)		
L19			L40-3272-40	SMALL FIXED INDUCTOR(82NH)		
L20			L40-1001-19	SMALL FIXED INDUCTOR(10UH)		
X1			L77-1405-05	CRYSTAL RESONATOR(12.8MHZ)		
X2			L77-1473-05	CRYSTAL RESONATOR(10.245MHZ)		
X51			L71-0228-05	CRYSTAL FILTER(10.7MHZ)		
			N09-2077-05	SCREW(MODULE)		
			N87-2606-45	BRAZIER HEAD TAPTITE SCREW(ANT		
			N88-2606-44	FLAT HEAD TAPTITE SCREW		
R4			RK73FB2A103J	CHIP R 10K J 1/10W		
R5			RK73FB2A532J	CHIP R 33K J 1/10W		
R6			RK73FB2A274J	CHIP R 270K J 1/10W		
R7			RK73FB2A101J	CHIP R 10K J 1/10W		
R8			RK73FB2A103J	CHIP R 10K J 1/10W		
R9			RK73FB2A101J	CHIP R 10K J 1/10W		
R10	-12		RK73FB2A103J	CHIP R 10K J 1/10W		
R13			RK73FB2A473J	CHIP R 47K J 1/10W		
R14			RK73FB2A104J	CHIP R 100K J 1/10W		
R15			RK73FB2A683J	CHIP R 68K J 1/10W		
R16			RK73FB2A823J	CHIP R 82K J 1/10W		
R17			R92-2670-05	CHIP R 0.5HM		
R18			RK73FB2A470J	CHIP R 47K J 1/10W		
R19			RK73FB2A102J	CHIP R 10K J 1/10W		
R20			RK73FB2A152J	CHIP R 15K J 1/10W		
R21			RK73FB2A471J	CHIP R 47K J 1/10W		
R22			RK73FB2A101J	CHIP R 10K J 1/10W		
R23			RK73FB2A103J	CHIP R 10K J 1/10W		
R24			RK73FB2A473J	CHIP R 47K J 1/10W		
R25			RK73FB2A103J	CHIP R 10K J 1/10W		

L:Latin America

K:USA

P:Canada

Y:Yokohama (Hiroshima, Hawaii)

T:England

E:Europe

Y:AAFEs(Europe)

X:Australia

M:Other Areas

△ indicates safety critical components.

PARTS LIST

Notes:

Parts without a Parts No. are not supplied.

For details of the parts and the parts No. see the parts list.

See also Parts No. when you order parts.

144M TX-RX UNIT (X57-3580-12)

Ref. No.	Address	New Parts	Parts No.	Description	Destination	Remarks
参照番号	位置	新部品	部品番号	部品名/規格	仕向	備考
R30			R92-0670-05	CHIP R	0.98M	
R31			RK73FB2A394J	CHIP R	390K	J 1/10W
R32	54		R92-0670-05	CHIP R	0.98M	
R33			RK73FB2A222J	CHIP R	2.2K	J 1/10W
R34			RK73FB2A101J	CHIP R	100	J 1/10W
R37			R92-0670-05	CHIP R	0.98M	
R38			RK73FB2A182J	CHIP R	1.8K	J 1/10W
R39	41		RK73FB2A103J	CHIP R	10K	J 1/10W
R42			RK73FB2A182J	CHIP R	1.8K	J 1/10W
R43			RK73FB2A223J	CHIP R	22K	J 1/10W
R44			RK73FB2A273J	CHIP R	27K	J 1/10W
R45			RK73FB2A473J	CHIP R	47K	J 1/10W
R46			RK73FB2A472J	CHIP R	4.7K	J 1/10W
R47			R92-0670-05	CHIP R	0.98M	
R49			RK73FB2A223J	CHIP R	22K	J 1/10W
R50			RK73FB2A124J	CHIP R	120K	J 1/10W
R52	54		RK73FB2A473J	CHIP R	47K	J 1/10W
R55			RK73FB2A471J	CHIP R	470	J 1/10W
R56			RK73FB2A104J	CHIP R	100K	J 1/10W
R57			RK73FB2A105J	CHIP R	1.0M	J 1/10W
R58			RK73FB2A473J	CHIP R	47K	J 1/10W
R59			R92-0670-05	CHIP R	0.98M	
R60			RK73FB2A103J	CHIP R	10K	J 1/10W
R61			RK73FB2A471J	CHIP R	470	J 1/10W
R62			R92-0670-05	CHIP R	0.98M	
R63	64		RK73FB2A222J	CHIP R	2.2K	J 1/10W
R65	66		R92-0670-05	CHIP R	0.98M	
R67			RK73FB2A122J	CHIP R	1.2K	J 1/10W
R68			RK73FB2A220J	CHIP R	22	J 1/10W
R69			RK73FB2A470J	CHIP R	47	J 1/10W
R71			R92-0670-05	CHIP R	0.98M	
R72			RK73FB2A104J	CHIP R	100K	J 1/10W
R74			R92-0670-05	CHIP R	0.98M	
R75			RK73FB2A103J	CHIP R	10K	J 1/10W
R76			R92-0670-05	CHIP R	0.98M	
R78			R92-1213-05	CARBON	100	J 1/2W
R79	80		RK73FB2A223J	CHIP R	22K	J 1/10W
R81			RK73FB2A471J	CHIP R	470	J 1/10W
R82			R92-0685-05	CHIP R	22	J 1/2W
R83			R92-0670-05	CHIP R	0.98M	
R84	86		R92-0670-05	CHIP R	0.98M	
R89			RK73FB2A332J	CHIP R	3.3K	J 1/10W
R90			RK73FB2A221J	CHIP R	220	J 1/10W
R91			RK73FB2A473J	CHIP R	47K	J 1/10W
R92			R92-0679-05	CHIP R	0.98M	
R93			RK73FB2A104J	CHIP R	100K	J 1/10W
R98	99		RK73FB2A103J	CHIP R	10K	J 1/10W
R101			RK73FB2A102J	CHIP R	1K	J 1/10W
VR1			R12-6429-05	TRIM POT.	100K	
VR2			R12-6427-05	TRIM POT.	47K	
VR3			R12-6423-05	TRIM POT.	10K	
VR4			R12-6423-05	TRIM POT.	10K	
TS1			S79-0401-05	THERMAL SWITCH(95°C)		

L:Scandinavia

K:USA

P:Canada

Y:PR(Far East, Hawaii)

T:England

E:Europe

Y:AF&E(Europe)

X:Australia

M:Other Areas

 indicates safety critical components.

PARTS LIST

New Parts

Call out Part No. are not supplied

See Unit for more information about the Parts No. New Parts are available

Use the Parts No. as shown in the following

144M TX-RX UNIT (X57-3580-12)

430/440M TX-RX UNIT (X57-359X-XX)

Ref. No.	Address	New Parts	Parts No.	Description	Description	Remarks
参照番号	位置	新部品	部品番号	部品名/規格	仕向/備考	
D1			1SV164	DIODE		
D2			1SV166	DIODE		
D3	4		1SV164	DIODE		
D5			1SV166	DIODE		
D6			1SV164	DIODE		
D7			1SV166	DIODE		
D11			1SS184	DIODE		
D12			1SS184	DIODE		
D13			DAN235(K)	DIODE		
D14			1SS184	DIODE		
D18			M1407	DIODE		
D16			M1509	DIODE		
D17	15		1SS224	DIODE		
D19			DSA3A1	DIODE		
D61			BU4094BF	IC		
IC2			LA5C10M	IC (LOW SATURATION V. REGULATOR)		
IC5			KC004	IC (FM IF)		
IC6			KC005	IC (AM IF)		
IC7			KCAC4	IC (MTG AMP)		
IC8			KC911	IC (DRIVE)		
IC9			KC004	IC (APC)		
IC10			S-AV17	IC (POWER MODULE FOR 144MHZ)		
IC11			KC005	IC (144 PLL-VC0)		
Q1			2SK184(S)	FET		
Q2			2SK184(V12)	FET		
Q3			2SC2714(Y)	TRANSISTOR		
Q4			DTA114YK	DIGITAL TRANSISTOR		
Q5	6		DT0123JK	DIGITAL TRANSISTOR		
Q7			DT0144BK	DIGITAL TRANSISTOR		
Q10			2SA1362(Y)	TRANSISTOR		
Q11			2SB1119S	TRANSISTOR		
Q12			DT0144WK	DIGITAL TRANSISTOR		
Q13	14		2SC2712(Y)	TRANSISTOR		
Q15	17		DT0144BK	DIGITAL TRANSISTOR		
Q18			2SD1757K	TRANSISTOR		
Q19			2SK208(Y)	FET		
Q20			2SC2714(Y)	TRANSISTOR		
Q21			2SC2712(Y)	TRANSISTOR		
Q22			PM01	TRANSISTOR		
Q23			2SD1902S	TRANSISTOR		
Q24			2SC106(GR)	FET		
430/440M TX-RX UNIT (X57-359X-XX) 0-12:K, P 0-22:M M2 2-72:E						
			A10-1316-01	CHASSIS		
			B42-1437-04	LABEL (S/V NO)		
C1			CC73FCH1H0300	CHIP C	3PF	C
C2	4		CK73FB1F102K	CHIP C	1000PF	X
C5			CC73FCH1H1300	CHIP C	1.58PF	C
C6			CC73FCH1H590T	CHIP C	39PF	J
C7			CK73FB1F102K	CHIP C	1000PF	X
C8			CK73FB1H102K	CHIP C	1000PF	X
C9			CC73FCH1H0300	CHIP C	3.0PF	C
C9			CC73FCH1H0100	CHIP C	1.0PF	C
C10			CC73FCH1H390J	CHIP C	39PF	C

L:Scandinavia

K:USA

P:Canada

Y:PX(Fri East Hawaii)

T:England

E:Europe

Y:AAHE(S)(Europe)

X:Australia

M:Other Areas

△ indicates safety critical components.

PARTS LIST

- New Parts

Parts without Part No. are not supplied

Parts not mentioned are optional Parts No. are not supplied

Table only Parts No. without direct quotation

430/440M TX-RX UNIT (X57-359X-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
C11			CK73FB1H102K	CHIP C	1000PF	K
C12			CK73FB1H102K	CHIP C	1000PF	K
C13 , 14			CK73FB1H102K	CHIP C	1000PF	K
C15			CK73FCH1H050C	CHIP C	5PF	C
C16 , 17			CK73FB1H102K	CHIP C	1000PF	K
C18			CK73FCH1H060D	CHIP C	6PF	D
C19 , 20			CK73FB1H102K	CHIP C	1000PF	K
C21			CK73FCH1H560J	CHIP C	56PF	J
C21 , 22			CK73FCH1H330J	CHIP C	33PF	J
C22			CK73FCH1H180J	CHIP C	18PF	J
C23			CK73FB1H102K	CHIP C	1000PF	K
C24			CE04NW1C470Y	ELECTRO	47UF	16WV
C25			CK73FB1H102K	CHIP C	1000PF	K
C26			CK73FF1C105Z	CHIP C	1.0UF	Z
C27			C92-0003-05	CHIP TAN	0.47UF	25WV
C28 , 29			CK73FF1C105Z	CHIP C	1.0UF	Z
C30			CK73FB1H102K	CHIP C	1000PF	K
C31			CK73FB1H102K	CHIP C	1000PF	K
C32			CE04NW1C470Y	ELECTRO	47UF	16WV
C33			C92-0004-05	CHIP TAN	0.68UF	25WV
C34			CE04NW1C470Y	ELECTRO	47UF	16WV
C35			CK73FB1H102K	CHIP C	1000PF	K
C36			CE04NW1C470Y	ELECTRO	47UF	16WV
C37			CK73FB1H102K	CHIP C	1000PF	K
C38			CK73FB1H822K	CHIP C	8200PF	K
C39			CK73FB1H102K	CHIP C	1000PF	K
C40			CK73FF1C105Z	CHIP C	1.0UF	Z
C41 , 42			CK73FCU1H180J	CHIP C	18PF	J
C43			CK73FB1H102K	CHIP C	1000PF	K
C44			CK73FCH1H060D	CHIP C	6PF	D
C45			CK73FB1H102K	CHIP C	1000PF	K
C46			CK73FCH1H150J	CHIP C	15PF	J
C47			CK73FB1H102K	CHIP C	1000PF	K
C48			CE04NW1C101M	ELECTRO	100UF	16WV
C49			CK73FB1H102K	CHIP C	1000PF	K
C50			CE04NW1A330M	ELECTRO	33UF	10WV
C51 , 52			CK73FB1H102K	CHIP C	1000PF	K
C53			CE04NW1C101M	ELECTRO	100UF	16WV
C54 , 58			CK73FB1H102K	CHIP C	1000PF	K
C60			CE04NW1C220M	ELECTRO	22UF	16WV
C62			CK73FB1H102K	CHIP C	1000PF	K
C64 , 65			CK73FB1H102K	CHIP C	1000PF	K
C66			CK73F2H050D	CHIP C	5.0PF	D
C66			CK73F2H060D	CHIP C	6.0PF	D
C67			CK73FCH1H070D	CHIP C	7PF	D
C68			CC455L2H150J	CERAMIC	15PF	J
C69			CC455L2H220J	CERAMIC	22PF	J
C70			CC455L2H220J	CERAMIC	22PF	J
C71			CK73FCH1H0R5C	CHIP C	0.5PF	C
C72			CK73FCH1H020C	CHIP C	2.0PF	C
C73			CC455L2H050D	CERAMIC	0.5PF	D
C74			CC455L2H100D	CERAMIC	10PF	D
C75			CK73FCH1H0R5C	CHIP C	0.5PF	C
C76			CK73FCH1H020C	CHIP C	2.0PF	C
C77			CK73F2H050D	CHIP C	5.0PF	D

L:Scandinavia

K:USA

P:Canada

Y:PX(Far East, Hawaii)

E:England

EE:Europe

Y:AFES(Europe)

X:Australia

M:Other Areas

△ indicates safety critical components

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis

Teile ohne Parts No. werden nicht geliefert

430/440M TX-RX UNIT (X57-359X-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名/規格	Desti- nation 仕向	Re- marks 備考
C78 -80			CK73FB1H102K	CHIP C 1000PF K		
C81			C90-2092-05	ELECTRO 1800UF 16WV		
C82 -85			CK73FSL1H101J	CHIP C 100PF J		
C86			CK73FB1H102K	CHIP C 1000PF K		
C87			CK73FB1H333K	CHIP C 0.033UF K		
C88			CE04NW1A221M	ELECTRO 220UF 10WV		
C89 -91			CK73FB1H102K	CHIP C 1000PF K		
C92			CK73FB1H471K	CHIP C 4700PF K		
C93			CE04NW1C470M	ELECTRO 47UF 16WV		
C94			CK73FCH1H030C	CHIP C 3PF C		
C96			CK73FB1H102K	CHIP C 1000PF K		
C97			CK73FB1E104K	CHIP C 0.10UF K		
C98			CK73FCH1H040C	CHIP C 4PF C		
C99			CK73FCH1H020C	CHIP C 2.0PF C		
C100			CK73FCH1H070B	CHIP C 7PF D		
C102			CE04NW1C100M	ELECTRO 10UF 16WV		
C103, 104			CK73FB1H102K	CHIP C 1000PF K		
C105-110			CK73FSL1H101J	CHIP C 100PF J		
C111			CK73FB1H103K	CHIP C 0.010UF K		
C112			CK73FB1H102K	CHIP C 1000PF K		
C113			CK73FCH1H020C	CHIP C 2.0PF C		
C114			CK73FB1E223K	CHIP C 0.002UF K		
C115			CK73FB1H102K	CHIP C 1000PF K		
C118			CK73FCH1H150J	CHIP C 15PF J		
T01 .2			C05-0346-05	TRIM CAP 6PF		
T03			C05-0371-05	TRIM CAP 10PF		
			B22-0672-04	TERMINAL BOARD(-)		
			B22-0673-04	TERMINAL BOARD(+)		
			B30-3009-05	ANT CABLE		
			B30-3010-05	ANT CABLE		
CN1 .2			B40-9461-05	PIN ASSY(12P)	KPM42 E	
J1			B11-0442-05	PHONE JACK		
TP1			B04-0154-05	RF COAXIAL CABLE RECEPTACLE		
			F10-1444-03	SHIELDING PLATE		
			F10-1446-04	SHIELDING PLATE		
			F10-1477-24	SHIELDING PLATE		
			F10-2012-04	SHIELDING CASE(VCO-PLL)		
			G02-0599-04	FLAT SPRING(DB TR)		
			G02-0600-14	FLAT SPRING(THERMAL SW)		
			G02-0704-04	EARTH SPRING		
			G02-0705-C4	EARTH SPRING		
			G09-0426-05	SPRING(DC CORD)		
			G11-0655-04	CUSHION(CN1, CN2)		
			G11-0656-14	CONDUCTIVE RUBBER(MCF)		
			G11-0660-04	CUSHION(VCO)		
			G11-0661-C4	INSULATION SHEET(DB TR)		
			G13-0841-04	CUSHION(12.8MHZ XTAL)		
			G13-1319-04	CUSHION(VCO)		
			G13-1351-04	CUSHION(CN1, CN2)		
			G53-0508-C4	CUSHION		
			J42-0471-04	DC CORD BUSHING		
CD1			L79-1013-05	FILTER		

L:Scandinavia

K:USA

P:Canada

Y:PX(Hon. Hawaii)

T:England

E:France

Y:AFES(Europe)

X:Australia

M:Other Areas

⚠ indicates safety critical components.

PARTS LIST

△ New Parts

Parts without Parts No. are not supplied

Les articles non mentionnés dans le Parts No. ne sont pas fournis

Teile ohne Parts No. werden nicht geliefert.

430/440M TX-RX UNIT (X57-359X-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向備考	Re- marks 備考
CF1			L72-0372-05	CERAMIC FILTER(CFWM455F)		
L1			L40-1872-80	SMALL FIXED INDUCTOR(18NH)		
L2			L40-1572-48	SMALL FIXED INDUCTOR(15NH)		
L3			L79-1016-05	HERICAL BLOCK		
L4			L79-1917-05	HERICAL BLOCK	EMX2	
L4			L79-1016-05	HERICAL BLOCK	KP	
L5			L40-2772-48	SMALL FIXED INDUCTOR(27NH)	XP	
L5			L40-3372-48	SMALL FIXED INDUCTOR(33NH)	EMX2	
L6			L40-2272-48	SMALL FIXED INDUCTOR(22NH)		
L7			L34-4250-05	COIL		
L8			L40-2272-48	SMALL FIXED INDUCTOR(22NH)		
L9			L34-1238-05	COIL(9.5T)		
L10			L34-1185-05	COIL(2.5T)		
L11			L34-1032-05	COIL(3.5T)		
L12			L34-1226-05	COIL(1.5T)		
L13			L34-1238-05	COIL(9.5T)		
L14			L34-1226-05	COIL(1.5T)		
L15			L40-1672-48	SMALL FIXED INDUCTOR(16NH)		
L16			L40-1001-19	SMALL FIXED INDUCTOR(10NH)		
X1			L77-1445-05	CRYSTAL RESONATOR(21.145MHZ)		
X2			L77-1405-05	CRYSTAL RESONATOR(12.8MHZ)		
XF1			L77-0411-05	KCF(21.6MHZ)		
			X09-2077-05	SCREW(MODULE)		
			X87-2606-46	BRAZIER HEAD TAPTITE SCREW		
			X88-2606-46	FLAT HEAD TAPTITE SCREW		
R2			RK73FB2A104J	CHIP R 100K J 1/10W		
R3			RK73FB2A333J	CHIP R 33K J 1/10W		
R4	5		RK73FB2A101J	CHIP R 100 J 1/10W		
R6			RK73FB2A470J	CHIP R 47 J 1/10W		
R7			RK73FB2A220J	CHIP R 22 J 1/10W		
R8			RK73FB2A471J	CHIP R 470 J 1/10W		
R10			RK73FB2A223J	CHIP R 22K J 1/10W		
R11			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R14	15		RK73FB2A102J	CHIP R 1.0K J 1/10W		
R16			RK73FB2A221J	CHIP R 220 J 1/10W		
R18			RK73FB2A222J	CHIP R 2.2K J 1/10W		
R19			RK73FB2A470J	CHIP R 47 J 1/10W		
R20			R92-0670-05	CHIP R 0 OHM		
R21			RK73FB2A122J	CHIP R 1.2K J 1/10W		
R22			RK73FB2A334J	CHIP R 330K J 1/10W		
R24			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R25			RK73FB2A471J	CHIP R 470 J 1/10W		
R26			RK73FB2A473J	CHIP R 47K J 1/10W		
R27			RK73FB2A223J	CHIP R 22K J 1/10W		
R28			RK73FB2A182J	CHIP R 1.8K J 1/10W		
R29	-31		RK73FB2A103J	CHIP R 10K J 1/10W		
R32			RK73FB2A182J	CHIP R 1.8K J 1/10W		
R33	-35		RK73FB2A473J	CHIP R 47K J 1/10W		
R36			RK73FB2A154J	CHIP R 150K J 1/10W		
R37			RK73FB2A273J	CHIP R 27K J 1/10W		
R38			RK73FB2A152J	CHIP R 1.5K J 1/10W		
R40			RK73FB2A221J	CHIP R 220 J 1/10W		
R42			R92-0670-05	CHIP R 0 OHM		
R43			RK73FB2A471J	CHIP R 470 J 1/10W		

L:Spainavia

K:USA

P:Canada

Y:PX(Far East, Hawaii)

T:England

E:Europe

Y:ANFES(Europe)

X:Australia

M:Other Areas

△ indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans la Parts No. ne sont pas fournis.

Teil ohne Parts No. werden nicht geliefert.

430/440M TX-RX UNIT (X57-358X-XX)

Ref. No. 参照番号	Address 位置	New 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
R44			RK73FB2A103J	CHIP R 10K	J	1/10W
R45 ,46			RK73FB2A222J	CHIP R 2.2K	J	1/10W
R47			RK73FB2B220J	CHIP R 22	J	1/8W
R48			R92-0670-05	CHIP R 0 OHM		
R49			RK73FB2A102J	CHIP R 1.0K	J	1/10W
R51			RK73FB2A362J	CHIP R 5.6K	J	1/10W
R52			RK73FB2A104J	CHIP R 100K	J	1/10W
R53			R92-0688-05	CHIP R 22	J	1/2W
R55			R92-0670-05	CHIP R 0 OHM		
R58			R92-0679-05	CHIP R 0 OHM		
R59			R92-1214-05	CHIP R 120	J	1/2W
R60 ,61			RK73FB2A103J	CHIP R 10K	J	1/10W
R62			RK73FB2A221J	CHIP R 220	J	1/10W
R63			RK73FB2A473J	CHIP R 47K	J	1/10W
R64			RK73FB2A104J	CHIP R 100K	J	1/10W
R65			RK73FB2A472J	CHIP R 4.7K	J	1/10W
R66			RK73FB2A473J	CHIP R 47K	J	1/10W
R67 ,68			RK73FB2A103J	CHIP R 10K	J	1/10W
VR1			R12-6429-05	TRIMMING PGT. 100K		
VR2			R12-6427-05	TRIM PGT. 47K		
VR3 ,4			R12-6423-05	TRIM PGT. 10K		
TS1			SS9-0444-05	THERMAL SWITCH(90°C)		
D1			HSK277	DIODE		
D2			1SV126	DIODE		
D3			1SS184	DIODE		
D4			MA862	DIODE		
D5			1SS181	DIODE		
D6			1SS184	DIODE		
D7			1SS184	DIODE		
D8			ME407	DIODE		
D9			MT308	DIODE		
D10 ,11			MA716	DIODE		
D12			6SA3A1	DIODE		
D13			1SS184	DIODE		
D14			MA716	DIODE		
D15			MA862	DIODE		
IC1			KC004	IC(PM IF)		
IC2			KCA04	IC(MIC AMP)		
IC3			BU4094BE	IC		
IC4			LA5010M	IC(LOW SATURATION REGULATOR)		
IC5			KCC04	IC(APC)		
IC6			KCB14	IC(DRIVE)		
IC7			M57788M	IC(POWER MODULE/ 450-450MHZ)		
IC8			KCB12	IC(300M FRONT)		
IC9			KCB13	IC(600M FRONT)		
IC10			KCH07	IC(VCC+PLL/450)		
Q1			3SK184(S)	FET		
Q2			2SK582	FET		
Q3			3SK184(S)	FET		
Q4			DTC114EK	DIGITAL TRANSISTOR		
Q5			2SC2714(Y)	TRANSISTOR		
Q6 ,7			PMAS	TRANSISTOR		
Q8			2SA1362(Y)	TRANSISTOR		

L:Scandinavia

K:USA

P:Canada

Y:PX(Far East, Hawaii)

T:England

E:Europe

Y:AFES(Europe)

X:Australia

M:Other Areas

△ indicates safety critical components

PARTS LIST

New Parts

Parts without Parts No. are not supplied

Les articles non répertoriés dans le Parts No. ne sont pas fournis

Teile ohne Parts No. werden nicht geliefert

430/440M TX-RX UNIT (X57-359X-XX)

1200M TX-RX UNIT (X57-3600-11)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
Q9 Q10 , 11 Q12 Q13 -15 Q16			DTC144WK 2SC2712(Y) 2SB1119S DTC144EK 2SD1757K	DIGITAL TRANSISTOR TRANSISTOR TRANSISTOR DIGITAL TRANSISTOR TRANSISTOR		
Q17 Q18 Q19 Q20 Q21			2SC2712(Y) 2SC3123 FMG1 2SD1760(C) 2SD106(OR)	TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR -ET		
1200M TX-RX UNIT (X57-3600-11)						
			A16-1316-G1	CHASSIS		
			B42-2437-04	LABEL(S/N0)		
C1 C2 -5 C7 C8 C9			CC73FCH1H220J CK73FB1H471K CC73FCH1H100J CC73PSL1H101J CC73FCH1H1R5B	CHIP C CHIP C CHIP C CHIP C CHIP C	22PF 470PF 10PF 100PF 1.5PF	J K D C B
C10 , 11 C12 C13 C14 C15			CC73FCH1H470J CK73FB1E103K CC73FCH1H1R5B CC73PSL1H101J CK73FB1H471K	CHIP C CHIP C CHIP C CHIP C CHIP C	47PF 0.01UF 1.5PF 100PF 470PF	J K S C K
C17 C18 C19 C21 , 22 C23			CC73PSL1H101J CC73FCH1H1R5B CE04NW1C47CM CK73FB1H471K CC73FCH1H030C	CHIP C CHIP C ELECTRO CHIP C CHIP C	100PF 1.5PF 47UF 470PF 3PF	J D 16WV K C
C24 C25 C26 C27 C28			CC73FCH1H1R5C CK73FB1H102K CK73FB1H471K CK73FB1E223K CC73FCH1H080C	CHIP C CHIP C CHIP C CHIP C CHIP C	1.5PF 1000PF 470PF 0.022UF 82PF	C K K K S
C29 C30 C31 C32 C33			CK73FB1E103K CC73FCH1H030C CC73PSL1H101J CC73FCH1H030C CK73FB1H471K	CHIP C CHIP C CHIP C CHIP C CHIP C	0.01UF 3PF 100PF 3PF 470PF	K C J C K
C34 C35 C36 C37 C38 -41			CK73FB1H472K CK73FB1H102K CC73FCH1H150J CC73FCH1H220J CK73FB1E103K	CHIP C CHIP C CHIP C CHIP C CHIP C	4700PF 1000PF 15PF 22PF 0.01UF	K K J J K
C42 C43 , 44 C45 C46 C47			CE04NW1C47CM CK73FB1C105Z C92-0002-05 CK73FB1E104K CK73FB1H471K	ELECTRO CHIP C CHIP TAN CHIP C CHIP C	47UF 1.0UF 0.22UF 0.10UF 470PF	16WV Z 35WV K K
C48 C49 C50 C51 C52			C92-0504-05 C92-0004-05 CK73FB1E223K CK73FB1C105Z CC73FCH1H030C	CHIP TAN ELECTRO CHIP C CHIP C CHIP C	0.68UF 1.0UF 0.022UF 1.0UF 3PF	20WV 16WV K Z C

L:Scandinavia

K:USA

P:Canada

Y:PX(Far East, Hawaii)

T:England

E:Europe

Y:AFES(Europe)

X:Australia

M:Other Areas

 indicates safety critical components

PARTS LIST

X: NEW PARTS

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis

Teile ohne Parts No. werden nicht geliefert.

1200M TX-RX UNIT (X57-3600-11)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名/規格	Desti- nation 仕向	Re- marks 備考
C53			CK73FB1E473K	CHIP C 0.047UF K		
C54			CE04NW1C470M	ELECTRO 47UF 16WV		
C55			CK73EF1C105Z	CHIP C 1.0UF Z		
C56			CK73FB1E223K	CHIP C 0.022UF K		
C57			CK73FB1H471K	CHIP C 470PF K		
C58 ,59			CE04NW1C101M	ELECTRO 100UF 16WV		
C60			CK73FB1H471K	CHIP C 470PF K		
C61			CE04NW1A330M	ELECTRO 33UF 10WV		
C62 ,63			CK73FB1E103K	CHIP C 0.01UF K		
C64			CE04NW1C101M	ELECTRO 100UF 16WV		
C65			CC73GCH1H030C	CHIP C 3PF C		
C66			CC73GCH1H101J	CHIP C 100PF J		
C67 ,68			CC73GCH1H020C	CHIP C 2.0PF C		
C69			CC73GCH1K101J	CHIP C 100PF J		
C70			CC73GCH1H050C	CHIP C 5PF C		
C71			CK73EP1C105Z	CHIP C 1.0UF Z		
C72			CE04NW1E100M	ELECTRO 10UF 25WV		
C73 ,74			CK73FB1H471K	CHIP C 470PF K		
C75			CK73GB1H471K	CHIP C 470PF K		
C76			CK73FB1H471K	CHIP C 470PF K		
C77			CK73FB1E103K	CHIP C 0.01UF K		
C78 -80			CK73FB1H471K	CHIP C 470PF K		
C81			CK73EP1C105Z	CHIP C 1.0UF Z		
C82 -83			CK73FB1H471K	CHIP C 470PF K		
C84			CK73FB1H471K	CHIP C 470PF K		
C85			CE04NW1E100M	ELECTRO 10UF 25WV		
C86			CK73EP1C105Z	CHIP C 1.0UF Z		
C87 ,88			CK73GB1H471K	CHIP C 470PF K		
C89 ,90			CK73TB1H471K	CHIP C 470PF K		
C91			CE04NW1C470M	ELECTRO 47UF 16WV		
C92			CC73FCH1H470J	CHIP C 47PF J		
C93 ,94			CK73FB1H471K	CHIP C 470PF K		
C95			CC73FCH1H010C	CHIP C 1PF C		
C96			CC73FCH1H100D	CHIP C 10PF C		
C97			CK73FB1H471K	CHIP C 470PF K		
C98			CM73F2H470J	CHIP C 47PF J		
C99			CC73PSL1H101J	CHIP C 100PF J		
C100			CK73FB1E103K	CHIP C 0.01UF K		
C101			CC73FCH1H080D	CHIP C 8PF D		
C102-104			CK73FB1H471K	CHIP C 470PF K		
C105		*	CC73FCH1HR75B	CHIP C 0.75PF B		
C106			CK73FB1H471K	CHIP C 470PF K		
C107			CC73PSL1H101J	CHIP C 100PF J		
C108-110			CK73FB1H471K	CHIP C 470PF K		
C111			CC73PSL1H101J	CHIP C 100PF J		
C112			CK73FB1H471K	CHIP C 470PF K		
C113			CK73FB1H102K	CHIP C 1000PF K		
C114-116			CK73FB1H471K	CHIP C 470PF K		
C117			CK73GB1H102K	CHIP C 1000PF K		
C118			CK73FB1E103K	CHIP C 0.01UF K		
C119			CC73PSL1H101J	CHIP C 100PF J		
C120			CC73PUJ1H221J	CHIP C 220PF J		
C123-125			CK73FB1H471K	CHIP C 470PF K		
C126-130			CK73FB1H471K	CHIP C 470PF K		
C131			CK73GB1E103K	CHIP C 0.01UF K		

L:Scandinavia

K:USA

P:Canada

Y:FX(Far East, Hawaii)

T:England

E:Europe

Y:AFES(Europe)

X:Australia

M:Other Areas

△ indicates safety critical components

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

1200M YX-RX UNIT (X57-3600-11)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
C132			CK73GB1H471K	CHIP C 470PF K		
C133			CK73FB1E103K	CHIP C 0.01UF K		
C134-137			CK73FB1H471K	CHIP C 470PF K		
C138			CE94NW0J470M	ELECTRO 470F 6.3W		
C139			CC73PS1H101J	CHIP C 100PF J		
C140			CK73FB1E104K	CHIP C 0.10UF K		
C141,142			CK73FB1H471K	CHIP C 470PF K		
C144,145			CC73FSL1H101J	CHIP C 100PF J		
C147-156			CC73GCH1H101J	CHIP C 100PF J		
C157			CK73GB1H102K	CHIP C 1000PF K		
C158			CK73FB1H102K	CHIP C 1000PF K		
C159			CC73FSL1H101J	CHIP C 100PF J		
CN1, 2			E22-0672-04	TERMINAL BOARD(-)		
			E22-0673-04	TERMINAL BOARD(+)		
			E23-0467-05	TERMINAL		
			E30-3011-05	ANT. CABLE		
			E40-5481-05	PIN CONNECTOR(12P)		
J3			E11-0412-05	PHONE JACK		
			F10-1444-03	SHIELDING COVER		
			F10-1445-04	SHIELDING(VCO)		
			F10-1446-04	SHIELDING(MODULE)		
			F10-1457-14	SHIELDING CASE		
			F10-1475-04	SHIELDING COVER(MODULE)		
			G02-0599-04	FLAT SPRING(IC)		
			G02-0706-04	FLAT SPRING(ANT)		
			G11-0654-04	SHEET(VCO 30X20)		
			G11-0655-04	SHEET(CN1,CN2 55X8)		
			G11-0660-04	SHEET(VCO 25X10)		
			G11-0661-04	INSULATION SHEET		
			G13-1319-04	FORMED PLATE		
			G53-0508-04	NON-WEAVING FABRIC		
			J42-0471-04	DC CORD BUSHING		
CD1			L79-1013-05	FILTER		
CF1			L72-0366-05	CERAMIC FILTER		
L1, 2		*	L79-1015-05	FILTER		
L4		*	L34-4259-05	COIL		
L5			L71-0280-05	MCP		
L6			L34-2034-05	COIL(VX0)		
L7		*	L40-3962-19	SMALL FIXED INDUCTOR(0.39UH)		
L8			L40-5682-19	SMALL FIXED INDUCTOR(0.56UH)		
X1			L77-1375-05	CRYSTAL RESONATOR(59.245MHZ)		
X2			L77-1376-25	TCXO(12.8MHZ)		
			N09-2077-05	SCREW		
			N67-2606-46	BRAZIER HEAD TAPTITE SCREW		
			N68-2606-46	FLAT HEAD TAPTITE SCREW		
R1, 2			RK73FB2A222J	CHIP R 2.2K J 1/10W		
R4			RK73FB2A473C	CHIP R 47K J 1/10W		
R5			RK73GB1J473J	CHIP R 47K J 1/16W		
R6			RK73FB2A560J	CHIP R 56 J 1/10W		
R7			RK73FB2A221J	CHIP R 220 J 1/10W		
R9			RK73FB2A472C	CHIP R 4.7K J 1/10W		
R10			RK73FB2A153J	CHIP R 15K J 1/10W		

L:Scandinavia

K:USA

P:Canada

Y:YX(Far East, Hawaii)

T:England

E:Europe

V:AFES(Europe)

X:Australia

M:Other Areas

A indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans la Parts No. ne sont pas fournis

Teile ohne Parts No. werden nicht geliefert.

1200M TX-RX UNIT (X57-3600-11)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名/規格	Desti- nation 位置	Re- marks 備考
R11			RK73FB2A471J	CHIP R 470 J 1/10W		
R13			R92-0670-05	CHIP R 0 OHM		
R14			RK73GB1J180J	CHIP R 18 J 1/16W		
R15			RK73FB2A101J	CHIP R 10C J 1/10W		
R16			RK73FB2A331J	CHIP R 330 J 1/10W		
R17			RK73FB2A100J	CHIP R 1C J 1/10W		
R19			RK73FB2A151J	CHIP R 150 J 1/10W		
R20			RK73FB2A101J	CHIP R 100 J 1/10W		
R21			R92-0670-05	CHIP R 0 OHM		
R22			RK73FB2A331J	CHIP R 330 J 1/10W		
R23			RK73FB2A224J	CHIP R 220K J 1/10W		
R24			RK73FB2A561J	CHIP R 56C J 1/10W		
R25			RK73FB2A103J	CHIP R 10K J 1/10W		
R26			RK73FB2A473J	CHIP R 47K J 1/10W		
R27			RK73FB2A471J	CHIP R 470 J 1/10W		
R29			R92-0670-05	CHIP R 0 OHM		
R30			RK73FB2A221J	CHIP R 220 J 1/10W		
R31			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R32			RK73FB2A222J	CHIP R 2.2K J 1/10W		
R33			RK73FB2A334J	CHIP R 330K J 1/10W		
R34			RK73FB2A223J	CHIP R 22K J 1/10W		
R35			RK73FB2A182J	CHIP R 1.8K J 1/10W		
R36 , 37			RK73FB2A103J	CHIP R 10K J 1/10W		
R38			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R39 -41			RK73FB2A103J	CHIP R 10K J 1/10W		
R42			RK73FB2A474J	CHIP R 470K J 1/10W		
R43 -45			RK73GB1J472J	CHIP R 4.7K J 1/16W		
R46			RK73FB2A684J	CHIP R 680K J 1/10W		
R47			RK73FB2A823J	CHIP R 82K J 1/10W		
R48			RK73FB2A331J	CHIP R 330 J 1/10W		
R49			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R50			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R51			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R52			RK73FB2A560J	CHIP R 56 J 1/10W		
R53			RK73GB1J271J	CHIP R 270 J 1/16W		
R54			RK73GB1J103J	CHIP R 10K J 1/16W		
R55			RK73GB1J222J	CHIP R 2.2K J 1/16W		
R56			RK73GB1J471J	CHIP R 47C J 1/16W		
R57			RK73FB2A100J	CHIP R 10 J 1/10W		
R58			RK73FB2A152J	CHIP R 1.5K J 1/10W		
R59			RK73FB2A683J	CHIP R 68K J 1/10W		
R60			R92-0670-05	CHIP R 0 OHM		
R61 , 62			RK73FB2A220J	CHIP R 22 J 1/10W		
R63			RK73GB1J472C	CHIP R 4.7K J 1/16W		
R64			RK73GB1J222J	CHIP R 2.2K J 1/16W		
R65			RK73GB1J471J	CHIP R 470 J 1/16W		
R66 , 67			RK73FB2A180J	CHIP R 18 J 1/10W		
R68			R92-0670-05	CHIP R 0 OHM		
R69			RK73FB2A333J	CHIP R 33K J 1/10W		
R70			R92-1201-05	SILIC 220 1/2W		
R71			R92-0670-05	CHIP R 0 OHM		
R72		*	R92-1264-05	FIXED RESISTOR		
R73			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R74			R92-0700-05	CHIP R 18C 1/2W		
R75			RK73FB2A470J	CHIP R 47 J 1/10W		

L:Scandinavia

K:USA

P:Canada

Y:FX(Far East, Hawaii)

T:England

E:Europe

Y:AA-FES(Europe)

A:Australia

M:Other Areas

△ indicates safety critical components

87

PARTS LIST

New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans la Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

1200M TX-RX UNIT (X57-3600-11)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名/規格	Desti- nation 仕向	Re- marks 備考
R76			RK73FB2A222J	CHIP R 2.2K J 1/10W		
R77			R92-0670-05	CHIP R 0.0HM		
R78			RK73GB1J271J	CHIP R 270 J 1/16W		
R79 , 80			RK73FB2A103J	CHIP R 10K J 1/10W		
R81			RK73GB2A471J	CHIP R 470 J 1/10W		
R82			R92-0670-05	CHIP R 0.0HM		
R83			RK73FB2A471J	CHIP R 4.7 J 1/10W		
VR1			R12-6429-05	TRIMMING POT. 100K		
VR2			R12-6421-05	TRIM POT. 4.7K		
VR3			R12-6427-05	TRIM POT. 47K		
VR4			R12-6423-05	TRIM POT. 30K		
VR5			R12-6427-05	TRIM POT. 47K		
D1			MA862	DIODE		
D3			MA716	DIODE		
D4			1SS193	DIODE		
D5			02C26.2(X,Y)	DIODE		
D6			1SS193	DIODE		
D7			1SS187	DIODE		
D8			02C212(X,Y)	DIODE		
D9			HSX151	DIODE		
D10 -13			M1808	DIODE		
D14			0SA3A1	DIODE		
D15			02C23.6(Y,Z)	DIODE		
D17			DAP202U	DIODE		
D19			M1808	DIODE		
IC2			KCB04	IC(IF)		
IC3		*	KCX03	IC(ALT)		
IC4			KCA04	IC(MIC)		
IC5			BU4094BF	IC		
IC6			LA5009M	IC		
IC7			KCB09	IC(PRE DRIVE)		
IC8			KCB10	IC(DRIVE)		
IC9			KCC04	IC(APC)		
IC10			M67211	IC(POWER MODULE/ 1.24-1.32Hz)		
IC11			KCH03	IC(PLL)		
IC12			NJN78L05UA	IC		
IC12			RC78L05UA	IC		
Q1			HGF1502	IC		
Q2			2SC4095(S47.6)	TRANSISTOR		
Q3			3SK104(S)	FET		
Q6			2SC3356	TRANSISTOR		
Q7			2SC3120	TRANSISTOR		
Q8			2SA1362(Y)	TRANSISTOR		
Q9			2SB1302S	TRANSISTOR		
Q10			DTC144EK	DIGITAL TRANSISTOR		
Q11			FMW1	TRANSISTOR		
Q12 ,13			2SC2712(Y)	TRANSISTOR		
Q15 -17			DTC144EU	DIGITAL TRANSISTOR		
Q18			2SD1757(K)	TRANSISTOR		
Q19			2SA1362(Y)	TRANSISTOR		
Q20			DTC124EK	DIGITAL TRANSISTOR		
Q21 ,22			2SC4226(S23,24)	TRANSISTOR		
Q23			2SC2712(Y)	TRANSISTOR		
Q24			2SD1762(Q)	TRANSISTOR		

L:Scandinavia

K:USA

P:Canada

Y:FX(Far East, Hawaii)

T:England

E:Europe

Y:AAFS(Europe)

X:Australia

M:Other Areas

 indicates safety critical components.

PARTS LIST

K: New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

1200M TX-RX UNIT (X57-3600-11)

28M TX-RX UNIT (X57-3790-01)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名/規格	Desti- nation 仕向	Re- marks 備考
Q25 Q26 Q28			PKG1 2SJ106(GR) DTC114EK	TRANSISTOR FET DIGITAL TRANSISTOR		
28M TX-RX UNIT (X57-3790-01)						
			A10-1325-01	CHASSIS		
			B42-2437-04	LABEL(S/NO, UNIT)		
C1			CC45SL2H1B1J	CERAMIC 180PF J		
C2 , 3			CC45SL2H221J	CERAMIC 220PF J		
C4			CC45SL2H271J	CERAMIC 270PF J		
C5			CC45SL2H151J	CERAMIC 150PF J		
C9			CK73GB1H103K	CHIP C 0.01UF K		
C10			CK73FB1B103K	CHIP C 0.01UF K		
C11 , 12			CK73GB1H103K	CHIP C 0.01UF K		
C13			CK73FB1B103K	CHIP C 0.01UF K		
C14 , 15			CK73GB1H103K	CHIP C 0.01UF K		
C16			CK73FB1B103K	CHIP C 0.01UF K		
C17			CC73GCH1E220J	CHIP C 22PF J		
C18			CK73GB1H103K	CHIP C 0.01UF K		
C19			CC73FCH1H03GC	CHIP C 3PF C		
C20			CK73GB1H103K	CHIP C 0.01UF K		
C21 -24			CK73FB1B103K	CHIP C 0.01UF K		
C25			CC73FSL1H101J	CHIP C 100PF J		
C26			CK73FB1B103K	CHIP C 0.01UF K		
C28			CE04NW1C470M	ELECTRO 47UF 16WV		
C29			CK73GB1H103K	CHIP C 0.01UF K		
C30 , 31			CK73EF1C105Z	CHIP C 1.0UF Z		
C32			C92-0002-05	CHIP TAN 0.47UF 25WV		
C33			CK73FB1B104K	CHIP C 0.10UF K		
C34			C92-0504-05	CHIP TAN 0.68UF 20WV		
C35			CE04NW1C470M	ELECTRO 47UF 16WV		
C36			CK73FB1B103K	CHIP C 0.01UF K		
C37			CC73GCH1S330C	CHIP C 33PF J		
C38			CE04NW1C470M	ELECTRO 47UF 16WV		
C39			CK73FB1B103K	CHIP C 0.01UF K		
C40			C92-0004-05	ELECTRO 1.0UF 16WV		
C41			CK73FB1B103K	CHIP C 0.01UF K		
C42			CE04NW1E100M	ELECTRO 10UF 25WV		
C43 , 44			CK73FB1B103K	CHIP C 0.01UF K		
C45			CK73FB1B103K	CHIP C 0.01UF K		
C46			CE04NW1C470M	ELECTRO 47UF 16WV		
C47			CK73FB1B103K	CHIP C 0.01UF K		
C48			CK73FB1B822K	CHIP C 8200PF K		
C49			CK73FB1B102K	CHIP C 1000PF K		
C50			CC73FCH1H270C	CHIP C 27PF J		
C51			CC73FU1H1000	CHIP C 10PF D		
C52			CK73EF1C105Z	CHIP C 1.0UF Z		
C53			CK73FB1B103K	CHIP C 0.01UF K		
C54			CK73FB1B102K	CHIP C 1000PF K		
C55 -57			CK73FB1B103K	CHIP C 0.01UF K		
C58			CE04NW1E100M	ELECTRO 10UF 25WV		
C59			CE04NW1A330M	ELECTRO 33UF 10WV		
C60			CK73FB1B103K	CHIP C 0.01UF K		
C61			CE04NW1A221M	ELECTRO 220UF 10WV		

L:Scandinavia

K:USA

P:Canada

Y:PX(Far East, Hawaii)

T:England

E:Europe

Y:AFES(Europe)

X:Australia

M:Other Areas

△ indicates safety critical components

PARTS LIST

x: New Parts

Parts without Parts No. are not supplied

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

28M TX-RX UNIT (X57-3790-01)

Ref. No	Address New	Parts No.	Description	Desti-	Re-
参照番号	位置	部品番号	部品名 / 規格	仕向	備考
C62		CC73PCF1H0300	CHIP C 3PF C		
C63		CK73FB1E103K	CHIP C 10PF J		
C64		CK73FB1E103K	CHIP C 0.01UF K		
C65		CC73PCF1H180J	CHIP C 18PF J		
C66		CK73FB1E103K	CHIP C 0.01UF K		
C67		CE04NW1C101M	ELECTRO 100UF 16WV		
C68	.69	CK73FB1E103K	CHIP C 0.01UF K		
C70		CK73FB1H223K	CHIP C 0.022UF K		
C71		CK73FB1E103K	CHIP C 0.01UF K		
C72		CK73EF1C105Z	CHIP C 1.0UF Z		
C73		CE04NW1E100M	ELECTRO 100UF 25WV		
C74		CK73FB1E103K	CHIP C 0.01UF K		
C75		CK73EF1C105Z	CHIP C 1.0UF Z		
C76		CK73FB1H223K	CHIP C 0.022UF K		
C77		CK73FB1E103K	CHIP C 0.01UF K		
C79	.80	CK73FB1E103K	CHIP C 0.01UF K		
C81		CK73FB1H102K	CHIP C 1000PF K		
C82		CE04NW1E330M	ELECTRO 33UF 25WV		
C83		CK73FB1E103K	CHIP C 0.01UF K		
C84		CK73F2H102J	CHIP C 1000PF J		
C85		CM73F2H271J	CHIP C 270PF J		
C86		C93-0509-C5			
C87		CC73PCF1H350J	CHIP C 33PF J		
C88		C93-0509-05			
C89		CK73FB1E103K	CHIP C 0.01UF K		
C90		CC73PCF1H040C	CHIP C 4PF C		
C91		CC73PCF1H0P5C	CHIP C 0.5PF C		
C92	-96	CK73FB1E103K	CHIP C 0.01UF K		
C97		CC73PCF1H080C	CHIP C 8PF C		
C98		CC73FSL1H101J	CHIP C 100PF J		
C99		CC73PCF1H820J	CHIP C 82PF J		
C100		CK73FB1E103K	CHIP C 0.01UF K		
C101		CC73PCF1H5R5C	CHIP C 0.5PF C		
C102-111		CC73FSL1H101J	CHIP C 100PF J		
C112, 113		CK73FB1E103K	CHIP C 0.01UF K		
C114		CK73GB1H103K	CHIP C 0.01UF K		
C115		CK73FB1E103K	CHIP C 0.01UF K		
C116		CK73FB1E103K	CHIP C 0.01UF K		
C117		CK73FB1E102K	CHIP C 1000PF K		
C118		CE04NW1E100M	ELECTRO 10UF 25WV		
C119		CK73FB1E103K	CHIP C 0.01UF K		
C120		CC73GCH1H6E0J	CHIP C 68PF J		
C121		CC73GCH1E151J	CHIP C 150PF J		
C122, 123		CC73GCH1H151J	CHIP C 150PF J		
C124, 125		CK73FB1E103K	CHIP C 0.01UF K		
C126		CK73GB1H102K	CHIP C 1000PF K		
C127		CK73FB1E103K	CHIP C 0.01UF K		
C129		CC73PCF1E560J	CHIP C 56PF J		
C135		CC73PCF1H680J	CHIP C 68PF J		
C137		CC73PCF1F040C	CHIP C 4PF C		
C138		CC73GCH1H181J	CHIP C 180PF J		
TC1		C05-0345-05	TRIMMING CAP 10PF		
		E22-0675-C4	TERMINAL BOARD(4)		
		E30-3009-05	ANT. CABLE		

L:Scandinavia

K:USA

P:Canada

Y:Pacific East, Hawaii

T:England

E:Europe

Y:AFES(Europe)

X:Australia

M:Other Areas

△ indicates safety critical components

PARTS LIST

X: New Parts

Parts without Parts No. are not supplied

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert

28M TX-RX UNIT (X57-3790-01)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向備考	Re- marks
CN1 ,2 J1 TP2			B40-5461-05 E11-0442-03 E23-0465-05	PIN ASSY(12P) PHONE JACK TERMINAL(7P)		
		*	F10-2006-04 F10-2009-04 F10-2010-03 F10-2012-04 F12-0421-04	SHIELDING PLATE(FINAL) SHIELDING PLATE(L TYPE) SHIELDING COVER SHIELDING CASE (VCO-PLL) CONDUCTIVE SHEET(25.4X43)		
		*	F12-0422-01 F20-1008-04 F20-1090-04	CONDUCTIVE SHEET(25.4X15) INSULATING BOARD(APC) INSULATING BOARD(60X22)		
		*	G02-0600-14 G02-0715-04 G02-0718-04 G02-0720-04 G11-0655-04	FLAT SPRING(THERMAL SWITCH) FLAT SPRING(APC TR) FLAT SPRING(VCO) FLAT SPRING(FRONT) CONDUCTIVE RUBBER(CN1,CN1 55X8)		
		*	G11-0661-04 G13-0841-04 G13-1319-04 G13-1337-04	INSULATING SHEET(APC TR) CUSHION(XTAL) CUSHION(VCO) CUSHION(VCO)		
		*	J30-0583-14 J42-0471-04	SPACER(FINAL) DC CORD BUSHING		
CD1 CF1 L1 L2 -4 L5			L79-1013-05 L72-0372-05 L34-4283-05 L34-4284-05 L34-4285-05	FILTER CERAMIC FILTER(CFWM455P) COIL(7.5T) COIL(10.5T) COIL(1ST IF)		
L6 L7 L8 L9 L10			L40-6891-19 L40-1001-19 L34-1355-05 L40-6882-19 L40-3982-19	SMALL FIXED INDUCTOR(6.80UH) SMALL FIXED INDUCTOR(10UH) COIL(10.5T) SMALL FIXED INDUCTOR(0.63UH) SMALL FIXED INDUCTOR(0.39UH)		
L11 L12 L13 L14 L15		*	L34-1361-05 L34-1354-05 L34-1352-05 L34-1363-05 L34-1351-05	COIL(4.5T) COIL(8.5T) COIL(8T) COIL(2T) COIL(7T)		
L16 L17 L18 L19 L20 ,21		*	L34-1364-05 L34-1356-05 L34-1355-05 L33-0741-05 L34-1355-05	COIL COIL COIL CHOKE COIL COIL(10.5T)		
L22 ,23 L24 L25 L27 X1		*	L40-5691-19 L40-3982-19 L40-1001-19 L40-1892-19 L77-1465-05	SMALL FIXED INDUCTOR(5.6UH) SMALL FIXED INDUCTOR(0.39UH) SMALL FIXED INDUCTOR(10UH) SMALL FIXED INDUCTOR(1.8UH) CRYSTAL RESONATOR(9.295MHZ)		
XF1		*	L71-0422-05	CRYSTAL FILTER(8.85MHZ)		
			N09-2179-05 N87-2606-46 N87-2608-46 N88-2606-46	SCREW BRAZIER HEAD TAPTITE SCREW BRAZIER HEAD TAPTITE SCREW FLAT HEAD TAPTITE SCREW		

L:Scandinavia

K:USA

P:Canada

Y:FX(Far East, Hawaii)

T:England

E:Europe

Y:AAFS(Europe)

X:Australia

M:Other Areas

△ indicates safety critical components

PARTS LIST

X: New Parts

Parts without Parts No. are not supplied

Les pièces sans numéro mentionnées dans ce Parts No. ne sont pas fournies.

Teile ohne Parts No. werden nicht geliefert

28M TX-RX UNIT (X57-3790-01)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
R1			RK73FB2A472J	CHIP R 4.7K	J	1/10W
R2			RK73FB2A103J	CHIP R 10K	J	1/10W
R3			RK73FB2A472J	CHIP R 4.7K	J	1/10W
R4			RK73FB2A680J	CHIP R 68	J	1/10W
R5			RK73FB2A271J	CHIP R 270	J	1/10W
R6			RK73FB2A680J	CHIP R 68	J	1/10W
R7	8		RK73GB1J104J	CHIP R 100K	J	1/16W
R9			RK73GB1J682J	CHIP R 6.8K	J	1/16W
R10			RK73GB1J154J	CHIP R 150K	J	1/16W
R11			RK73GB1J470J	CHIP R 47	J	1/16W
R12			RK73GB1J103J	CHIP R 10K	J	1/16W
R13	-15		RK73GB1J104J	CHIP R 100K	J	1/16W
R16			RK73GB1J100J	CHIP R 10	J	1/16W
R17			RK73FB2A101J	CHIP R 100	J	1/10W
R18			RK73FB2A473J	CHIP R 47K	J	1/10W
R19	20		RK73FB2A102J	CHIP R 1.0K	J	1/10W
R21			RK73FB2A223J	CHIP R 22K	J	1/10W
R22			RK73GB1J152J	CHIP R 1.5K	J	1/16W
R23			RK73FB2A101J	CHIP R 100	J	1/10W
R24			RK73FB2A472J	CHIP R 4.7K	J	1/10W
R25			RK73FB2A391J	CHIP R 390	J	1/10W
R26			RK73FB2A563J	CHIP R 56K	J	1/10W
R27			RK73FB2A223J	CHIP R 22K	J	1/10W
R28			RK73FB2A331J	CHIP R 330	J	1/10W
R29			RK73FB2A334J	CHIP R 330K	J	1/10W
R30			RK73FB2A222J	CHIP R 2.2K	J	1/10W
R31			RK73FB2A274J	CHIP R 270K	J	1/10W
R32			RK73FB2A103J	CHIP R 100	J	1/10W
R33			RK73FB2A221J	CHIP R 220	J	1/10W
R34			RK73FB2A103J	CHIP R 10K	J	1/10W
R35			RK73FB2A104J	CHIP R 100K	J	1/10W
R36			RK73FB2A473J	CHIP R 47K	J	1/10W
R37			RK73FB2A471J	CHIP R 470	J	1/10W
R38	39		RK73FB2A472J	CHIP R 4.7K	J	1/10W
R40			RK73FB2A103J	CHIP R 10K	J	1/10W
R41			RK73FB2A474J	CHIP R 470K	J	1/10W
R42			RK73FB2A103J	CHIP R 10K	J	1/10W
R43			RK73FB2A223J	CHIP R 22K	J	1/10W
R44			RK73FB2A273J	CHIP R 270	J	1/10W
R45			RK73FB2A182J	CHIP R 1.8K	J	1/10W
R46	-48		RK73FB2A103J	CHIP R 10K	J	1/10W
R49			RK73FB2A162J	CHIP R 1.6K	J	1/10W
R50			RK73FB2A184J	CHIP R 180K	J	1/10W
R51			RK73FB2A223J	CHIP R 22K	J	1/10W
R52			RK73FB2A103J	CHIP R 10K	J	1/10W
R53			RK73FB2A223J	CHIP R 22K	J	1/10W
R54	55		RK73FB2A102J	CHIP R 1.0K	J	1/10W
R56	-58		RK73FB2A473J	CHIP R 47K	J	1/10W
R60			RK73FB2A471J	CHIP R 470	J	1/10W
R61			RK73FB2A105J	CHIP R 1.0K	J	1/10W
R62			RK73FB2A104J	CHIP R 100K	J	1/10W
R63			RK73FB2A103J	CHIP R 10K	J	1/10W
R64	65		RK73FB2A222J	CHIP R 2.2K	J	1/10W
R66			RK73FB2A102J	CHIP R 1.0K	J	1/10W
R67			RK73FB2A122J	CHIP R 1.2K	J	1/10W

L:Scandinavia

K:USA

P:Canada

Y:FX(Far East, Hawaii)

T:England

E:Europe

Y:AAFE(S:Europe)

X:Australia

M:Other Areas

⚠ indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

28M TX-RX UNIT (X57-3790-01)

Ref. No. 参照番号	Address 位置	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
R68		RK73FB2A220J	CHIP R 22 J 1/10W		
R69		R92-0670-05	CHIP R 0 OHM		
R70		RK73FB2A104J	CHIP R 100K J 1/10W		
R72		RK73FB2A221J	CHIP R 220 J 1/10W		
R73		RK73FB2A220J	CHIP R 22 J 1/10W		
R74		RK73FB2A221J	CHIP R 220 J 1/10W		
R75		RK73FB2A470J	CHIP R 47 J 1/10W		
R77		R92-1213-05	SOLID 100 1/2W		
R78 , 79		RK73FB2A223J	CHIP R 22K J 1/10W		
R80		R92-0699-05	SOLID 10 1/2W		
R81		RK73FB2A103J	CHIP R 10K J 1/10W		
R82		RK73GB1J222J	CHIP R 2.2K J 1/16W		
R83		RK73FB2A471J	CHIP R 470 J 1/10W		
R84		R92-1215-05	CHIP R 470 J 1/2W		
R85		RK73FB2A123J	CHIP R 12K J 1/10W		
R88		RK73FB2A102J	CHIP R 1.0K J 1/10W		
R89 -92		R92-1252-05	CHIP R 0 OHM		
R93 , 94		R92-0670-05	CHIP R 0 OHM		
R95		R92-0679-05	CHIP R 0 OHM		
R96 -98		R92-0670-05	CHIP R 0 OHM		
R99		R92-1217-05	CHIP R 0		
R100-103		R92-0670-05	CHIP R 0 OHM		
R104		RK73FB2A472J	CHIP R 4.7K J 1/10W		
R105, 106		R92-0670-05	CHIP R 0 OHM		
R108		RK73FB2A681J	CHIP R 680 J 1/10W		
R111		R92-0670-05	CHIP R 0 OHM		
R115, 116		R92-0670-05	CHIP R 0 OHM		
VR1		R12-6429-05	TRIMMING POT. 100K		
VR2		R12-6427-05	TRIM POT. 47K		
VR3		R12-6421-05	TRIM POT. 4.7K		
VR4		R12-6423-05	TRIM POT. 10K		
TS1		S79-0401-05	THERMAL SWITCH(95°C)		
D1 , 2		MA77	DIODE		
D3 -6		1SV228	DIODE		
D7		DAN235(K)	DIODE		
D8		1SS184	DIODE		
D9		DAN235(K)	DIODE		
D10		1SS184	DIODE		
D11		UR9401	DIODE		
D12		MI308	DIODE		
D13 , 14		1SS226	DIODE		
D15		0SA3A1	DIODE		
D16 , 17		1SS184	DIODE		
IC1		BU4094EF	IC		
IC2	*	KCE09	IC(28MHZ VCO-PLL)		
IC3		KCAC4	IC(MIC AMP)		
IC4	*	KCB16	IC(DRIVE)		
IC5		KCC04	IC(APC)		
IC6		KCB04	IC(FM IF)		
IC7		LA5009M	IC		
IC8	*	KCB17	IC(18-50MHZ FRONT)		
IC9		KCB05	IC(AM IF)		
Q1		ESK179(L)	DET		

L:Scandinavia

K:USA

P:Canada

Y:EPX(Far East, Hawaii)

T:England

E:Europe

Y:AAFE(S:Europe)

X:Australia

M:Other Areas

△ indicates safety critical components

PARTS LIST

x New Parts

Parts without Parts No. are not supplied.

Les articles mentionnés sans le Parts No. ne sont pas fournis

Teile ohne Parts No. werden nicht geliefert

28M TX-RX UNIT (X57-3790-01)

28M SUB UNIT (X58-3840-01)

50M TX-RX UNIT (X57-3800-01)

Ref. No. 参照番号	Address 位置	New Parts 部	Parts No. 部品番号	Description 部品名/規格	Desti- nation 仕向	Re- marks 備考
Q2			3SK131(V12)	FET		
Q3			2SC2714(Y)	TRANSISTOR		
Q4 , 5			DT0144BU	DIGITAL TRANSISTOR		
Q6 , 7			DTA114BK	DIGITAL TRANSISTOR		
Q8			2SC2714(Y)	TRANSISTOR		
Q9			2SC106(GR)	FET		
Q10			2SA1362(Y)	TRANSISTOR		
Q11			2SB1119S	TRANSISTOR		
Q12			DIC144BK	DIGITAL TRANSISTOR		
Q13			PMW1	TRANSISTOR		
Q14			2SC2712(Y)	TRANSISTOR		
Q15 -17			DT0144BK	DIGITAL TRANSISTOR		
Q18			2SD1757(X)	TRANSISTOR		
Q19			2SK208(Y)	FET		
Q20			2SC2714(Y)	TRANSISTOR		
Q21			2SC2712(Y)	TRANSISTOR		
Q22			FM01	TRANSISTOR		
Q23			2SD1902R	TRANSISTOR		
Q24			2SC2712(Y)	TRANSISTOR		
Q25			DTA114BK	DIGITAL TRANSISTOR		
Q26			DT0144BK	DIGITAL TRANSISTOR		
Q27			DT0144BK	DIGITAL TRANSISTOR		
Z1		x	X58-3840-01	SUB UNIT(28MHz 50W)		
28M SUB UNIT (X58-3840-01)						
C201			CC73FCF1H471J	CHIP C 470PF J		
C202, 203			CK73FB1H152K	CHIP C 1500PF K		
C204			CM73F2R241J	CHIP C 240PF J		
L201			L34-1357-05	C0IL(2T)		
L202			L40-1001-19	SMALL FIXED INDUCTOR(10UH)		
R201		x	R92-0684-05	CHIP R 33 J 1/2W		
Q201			2SC1971	TRANSISTOR		
Q202		x	2SC3240	TRANSISTOR		
50M TX-RX UNIT (X57-3800-01)						
			A10-1525-01	CHASSIS		
			B42-2437-04	LABEL(S/N0, UNIT)		
C1		x	CC45SL2H750J	CERAMIC 75PF J		
C2			CC45SL2H560J	CERAMIC 56PF J		
C3			CC45SL2H680J	CERAMIC 68PF J		
C4			CC45SL2H101J	CERAMIC 100PF J		
C5			CC45SL2H680J	CERAMIC 68PF J		
C6			CC45SL2H120J	CERAMIC 12PF J		
C7			CC45SL2H150J	CERAMIC 15PF J		
C8			CC45SL2H680J	CERAMIC 3.0PF C		
C9			CK73GB1H103K	CHIP C 0.01UF K		
C10			CK73FB1E103K	CHIP C 0.01UF K		
C11 , 12			CK73GB1H103K	CHIP C 0.01UF K		
C13			CK73FB1E103K	CHIP C 0.01UF K		
C14 , 15			CK73GB1H103K	CHIP C 0.01UF K		
C16			CK73FB1E103K	CHIP C 0.01UF K		
C17			CC73GCH1-120J	CHIP C 12PF J		

L:Scandinavia

K:USA

P:Canada

Y:PX(Far East, Hawaii)

T:England

E:Europe

Y:AAFGS(Europe)

K:Australia

M:Other Areas

⚠ indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied

Les articles non mentionnés dans le Parts No. ne sont pas fournis

Teile ohne Parts No. werden nicht geliefert.

50M TX-RX UNIT (X67-3800-01)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名/規格	Disti- nation 仕向	Re- marks 備考
C18			CK73GB1H103K	CHIP C 0.01UF K		
C19			CC73FCH1H0600	CHIP C 6PF D		
C20			CK73GB1H103K	CHIP C 0.01UF K		
C21	-24		CK73FB1E103K	CHIP C 0.01UF K		
C25			CK73FB1H102K	CHIP C 1000PF K		
C26			CK73FB1E103K	CHIP C 0.01UF K		
C27			CC73FCH1H0400	CHIP C 4.0PF C		
C28			CE04NW1C470M	ELECTRO 47UF 16WV		
C29			CK73GB1H103K	CHIP C 0.01UF K		
C30	,31		CK73EF1C105Z	CHIP C 1.0UF Z		
C32			C92-0003-C5	CHIP TAN 0.47UF 25WV		
C33			CK73FB1E104K	CHIP C 0.10UF K		
C34			C92-0504-05	CHIP TAN 0.68UF 20WV		
C35			CE04NW1C470M	ELECTRO 47UF 16WV		
C36			CK73FB1E103K	CHIP C 0.01UF K		
C37			CC73GCH1H100D	CHIP C 10PF D		
C38			CE04NW1C470M	ELECTRO 47UF 16WV		
C39			CK73FB1E103K	CHIP C 0.01UF K		
C40			C92-0004-05	ELECTRO 1.0UF 16WV		
C41			CK73FB1E103K	CHIP C 0.01UF K		
C42			CE04NW1E100M	ELECTRO 10UF 25WV		
C43	,44		CK73FB1E103K	CHIP C 0.01UF K		
C45			CK73FB1E103K	CHIP C 0.01UF K		
C46			CE04NW1C470M	ELECTRO 47UF 16WV		
C47	-49		CK73FB1E103K	CHIP C 0.01UF K		
C50			CC73FCH1H270J	CHIP C 27PF J		
C51			CC73FCH1H120J	CHIP C 12PF J		
C52			CK73EF1C105Z	CHIP C 1.0UF Z		
C53			CK73FB1E103K	CHIP C 0.01UF K		
C54			CK73FB1H102K	CHIP C 1000PF K		
C55	-57		CK73FB1E103K	CHIP C 0.01UF K		
C58			CE04NW1E100M	ELECTRO 10UF 25WV		
C59			CE04NW1A330M	ELECTRO 33UF 10WV		
C60			CK73FB1E103K	CHIP C 0.01UF K		
C61			CE04NW1A221M	ELECTRO 220UF 10WV		
C62			CC73FCH1H100D	CHIP C 10PF D		
C63	,64		CK73FB1E103K	CHIP C 0.01UF K		
C65			CC73FCH1H150J	CHIP C 15PF J		
C66			CK73FB1E103K	CHIP C 0.01UF K		
C67			CE04NW1C101M	ELECTRO 100UF 16WV		
C68	,69		CK73FB1E103K	CHIP C 0.01UF K		
C70			CK73FB1E223K	CHIP C 0.022UF K		
C71			CK73FB1E103K	CHIP C 0.01UF K		
C72			CK73EF1C105Z	CHIP C 1.0UF Z		
C73			CE04NW1E100M	ELECTRO 10UF 25WV		
C74			CK73FB1E103K	CHIP C 0.01UF K		
C75			CK73EF1C105Z	CHIP C 1.0UF Z		
C76			CK73FB1E223K	CHIP C 0.022UF K		
C77			CK73FB1H681K	CHIP C 680PF K		
C78			CC73FCH1H221J	CHIP C 220PF J		
C79	,80		CK73FB1E103K	CHIP C 0.01UF K		
C81			CK73FB1H102K	CHIP C 1000PF K		
C82			CE04NW1E330M	ELECTRO 33UF 25WV		
C83			CK73FB1E103K	CHIP C 0.01UF K		
C84			CM73F2N391J	CHIP C 390PF J		

L:Scandinavia

K:USA

P:Canada

Y:PX(Far East, Hawaii)

T:England

E:Europe

Y:AAFE(S:Europe)

X:Australia

M:Other Areas

⚡ indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

60M TX-RX UNIT (X57-3800-01)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名/規格	Desti- nation 仕向	Re- marks 備考
C85			CM73F24820J	CHIP C 82PF J		
C86		*	C93-0509-05	CERAMIC 0.0068UF J		
C87			CC73FCH1H390J	CHIP C 39PF J		
C88		*	C93-0509-05	CERAMIC 0.0068UF J		
C89			CK73F21E103K	CHIP C 0.01UF K		
C90			CC73FCH1H020C	CHIP C 2.0PF C		
C91			CC73FCH1H050C	CHIP C 0.5PF C		
C92-96			CK73F21E103K	CHIP C 0.01UF K		
C97			CC73FCH1H020C	CHIP C 2.0PF C		
C98-99			CC73FCH1H390J	CHIP C 39PF J		
C100			CK73F21E103K	CHIP C 0.01UF K		
C101			CC73FCH1H050C	CHIP C 0.5PF C		
C102-111			CC73FSL1H101J	CHIP C 100PF J		
C112-113			CK73F21E103K	CHIP C 0.01UF K		
C114			CK73F21H103K	CHIP C 0.01UF K		
C115, 116			CK73F21E103K	CHIP C 0.01UF K		
C117			CK73F21H102K	CHIP C 1000PF K		
C118			CE04NW1E100M	ELECTRO 10UF 25VW		
C119			CK73F21E103K	CHIP C 0.01UF K		
C124, 125			CK73F21E103K	CHIP C 0.01UF K		
C126			CK73G21H102K	CHIP C 1000PF K		
C127			CK73F21E105K	CHIP C 0.01UF K		
C128			CC73GCH1H270J	CHIP C 27PF J		
C130, 131			CC73FCH1H1R5C	CHIP C 1.5PF C		
C132			CC73FCH1H150J	CHIP C 15PF J		
C133			CC73FCH1H560J	CHIP C 56PF J		
C134			CC73GCH1H050C	CHIP C 5PF C		
C135			CC73FSL1H101J	CHIP C 100PF J		
C136			CK73F21E104K	CHIP C 0.10UF K		
C138			CC73GCH1H154J	CHIP C 150PF J		
C139, 140			CC73F241H470J	CHIP C 47PF J		
TC1			C05-0345-05	TRIMMING CAP. 10PF		
CN1, 2			E22-0673-04	TERMINAL(+))		
J1			E30-3009-05	ANT. CABLE		
TP2			E40-5461-05	PIN ASSY(12P)		
			E11-0442-05	PHONE JACK		
			E23-0465-05	TERMINAL(TP))		
		*	F10-2006-04	SHIELDING PLATE(FINAL)		
			F10-2009-04	SHIELDING PLATE(L TYPE)		
		*	F10-2010-03	SHIELDING COVER		
			F10-2012-04	SHIELDING CASE(VCO-PLL)		
			F20-1008-04	INSULATING SHEET(APC)		
			F20-1090-04	INSULATING SHEET(80X22)		
			G02-0600-14	PLAT SPRING(THERMAL SWITCH)		
			G02-0705-04	PLAT SPRING(BPF COIL)		
		*	G02-0715-04	PLAT SPRING(APC TR)		
			G02-0718-04	PLAT SPRING(VCO)		
			G11-C655-04	CONDUCTIVE RUBBER(CN1, CN2 55X8)		
			G11-0661-04	INSULATING SHEET(APC TR)		
			G13-0841-04	CUSHION(XTAL)		
			G13-1319-04	CUSHION(VCO 22X15)		
			G13-1332-04	CUSHION		
			G13-1337-04	CUSHION(BPF COIL, VCO)		

L:Scandinavia

K:USA

P:Canada

Y:PK(Far East, Hawaii)

T:England

E:Europe

Y:AFES(Europe)

X:Australia

M:Other Areas

△ indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

50M TX-RX UNIT (X57-3800-01)

Ref. No. 参照番号	Address 位 置	New Parts 新	Parts No. 部 品 番 号	Description 部 品 名 / 規 格	Desti- nation 仕 向	Re- marks 備考
			G53-0508-04	PACKING		
		*	G30-0583-14	SPACER(FINAL)		
			J42-0471-04	DC COND BUSHING		
C01			L79-1013-05	FILTER		
CF1			L72-0372-05	CERAMIC FILTER(CFWM455F)		
L1		*	L34-4281-05	COIL(YELLOW)		
L2	-4		L34-4283-05	COIL(WHITE)		
L5			L34-4251-05	COIL(1ST IF)		
L6			L40-1582-19	SMALL FIXED INDUCTOR(0.150H)		
L7			L40-1001-19	SMALL FIXED INDUCTOR(100H)		
L8		*	L34-1347-05	COIL (6.5T)		
L9			L40-4782-19	SMALL FIXED INDUCTOR(0.470H)		
L10		*	L40-1882-19	SMALL FIXED INDUCTOR(0.180H)		
L11		*	L34-1344-05	COIL (2.5T)		
L12			L34-1354-05	COIL (8.5T)		
L13		*	L34-1352-05	COIL (8T)		
L14		*	L34-1345-05	COIL (1T)		
L15		*	L34-1346-05	COIL (4T)		
L16			L34-1364-05	COIL (20.5T)		
L17		*	L34-1349-05	COIL (5.5T)		
L18		*	L34-1348-05	COIL (5.5T)		
L19		*	L33-0742-05	SMALL FIXED INDUCTOR(100H)		
L20	,21	*	L34-1347-05	COIL (6.5T)		
L25			L40-1001-19	SMALL FIXED INDUCTOR(100H)		
L26			L40-1582-19	SMALL FIXED INDUCTOR(0.150H)		
L27		*	L40-1592-19	SMALL FIXED INDUCTOR(0.150H)		
L28			L40-2282-19	SMALL FIXED INDUCTOR(0.220H)		
X1		*	L77-1464-05	CRYSTAL RESONATOR(11.05MHZ)		
XF1		*	L71-0421-05	CRYSTAL FILTER(10.595MHZ)		
		*	N07-2179-05	SCREW (X3)		
			N87-2606-46	BRAZIER HEAD TAPTITE SCREW		
			N87-2606-46	BRAZIER HEAD TAPTITE SCREW		
			N88-2606-46	FLAT HEAD TAPTITE SCREW		
R1			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R2			RK73FB2A103J	CHIP R 10K J 1/10W		
R3			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R4			RK73FB2A680J	CHIP R 68 J 1/10W		
R5			RK73FB2A271J	CHIP R 270 J 1/10W		
R6			RK73FB2A680J	CHIP R 68 J 1/10W		
R7	,8		RK73GB1J104J	CHIP R 100K J 1/16W		
R9			RK73GB1J552J	CHIP R 5.6K J 1/16W		
R10			RK73GB1J154J	CHIP R 150K J 1/16W		
R11			RK73GB1J101J	CHIP R 100 J 1/16W		
R12			RK73GB1J103J	CHIP R 10K J 1/16W		
R13	-15		RK73GB1J104J	CHIP R 100K J 1/16W		
R16			RK73GB1J100J	CHIP R 10 J 1/16W		
R17			RK73FB2A101J	CHIP R 100 J 1/10W		
R18			RK73FB2A473J	CHIP R 47K J 1/10W		
R19	,20		RK73FB2A102J	CHIP R 1.0K J 1/10W		
R21			RK73FB2A223J	CHIP R 22K J 1/10W		
R22			RK73GB1J152J	CHIP R 1.5K J 1/16W		
R23			RK73FB2A101J	CHIP R 100 J 1/10W		
R24			RK73FB2A152J	CHIP R 1.5K J 1/10W		

L:Scandinavia

K:USA

P:Canada

Y:PX(Far East, Hawaii)

T:England

E:Europe

Y:AAFPES(Europe)

A:Australia

M:Other Areas

△ indicates safety critical components.

PARTS LIST

X: New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

50M TX-RX UNIT (X57-3800-01)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名/規格	Desti- nation 仕向	Re- marks 備考
R25			RK73FB24391J	CHIP R 390 J 1/10W		
R26			RK73FB24563J	CHIP R 56K J 1/10W		
R27			RK73FB24223J	CHIP R 22K J 1/10W		
R28			RK73FB24311J	CHIP R 330 J 1/10W		
R30			RK73FB24222J	CHIP R 2.2K J 1/10W		
R31			RK73FB24274J	CHIP R 270K J 1/10W		
R32			RK73FB24101J	CHIP R 100 J 1/10W		
R33			RK73FB24221J	CHIP R 220 J 1/10W		
R34			RK73FB24103J	CHIP R 10K J 1/10W		
R35			RK73FB24324J	CHIP R 330K J 1/10W		
R36			RK73FB24473J	CHIP R 47K J 1/10W		
R37			RK73FB24471J	CHIP R 470 J 1/10W		
R38			RK73FB24472J	CHIP R 4.7K J 1/10W		
R40			RK73FB24103J	CHIP R 10K J 1/10W		
R41			RK73FB24474J	CHIP R 470K J 1/10W		
R42			RK73FB24103J	CHIP R 10K J 1/10W		
R43			RK73FB24223J	CHIP R 22K J 1/10W		
R44			RK73FB24273J	CHIP R 27K J 1/10W		
R45			RK73FB24182J	CHIP R 1.8K J 1/10W		
R46 -48			RK73FB24103J	CHIP R 10K J 1/10W		
R49			RK73FB24182J	CHIP R 1.8K J 1/10W		
R50			RK73FB24154J	CHIP R 150K J 1/10W		
R51			RK73FB24223J	CHIP R 22K J 1/10W		
R52			RK73FB24103J	CHIP R 10K J 1/10W		
R53			RK73FB24223J	CHIP R 22K J 1/10W		
R54 ,55			RK73FB24102J	CHIP R 1.0K J 1/10W		
R56 -58			RK73FB24473J	CHIP R 47K J 1/10W		
R59 ,60			RK73FB24470J	CHIP R 47 J 1/10W		
R61			RK73FB24105J	CHIP R 1.0M J 1/10W		
R62			RK73FB24472J	CHIP R 4.7K J 1/10W		
R63			RK73FB24183J	CHIP R 18K J 1/10W		
R64 ,65			RK73FB24222J	CHIP R 2.2K J 1/10W		
R66			RK73FB24102J	CHIP R 1.0K J 1/10W		
R67			RK73FB24122J	CHIP R 1.2K J 1/10W		
R68			RK73FB24220J	CHIP R 22 J 1/10W		
R69			R92-0670-05	CHIP R 0 OHM		
R70			RK73FB24104J	CHIP R 100K J 1/10W		
R72			RK73FB24471J	CHIP R 470 J 1/10W		
R73			RK73FB24120J	CHIP R 12 2 A		
R74			RK73FB24471J	CHIP R 471 J 1/10W		
R75			RK73FB24470J	CHIP R 47 J 1/10W		
R76			RK73FB24472J	CHIP R 4.7K J 1/10W		
R77			R92-1213-05	SOLID 100 J 1/2W		
R78 ,79			RK73FB24223J	CHIP R 22K J 1/10W		
R80			R92-0685-05	CHIP R 22 J 1/2W		
R81			RK73FB24222J	CHIP R 2.2K J 1/10W		
R82			RK73GB10332J	CHIP R 3.3K J 1/16W		
R83			RK73FB24471J	CHIP R 470 J 1/10W		
R84			R92-1215-05	CHIP R 470 J 1/2W		
R86			R92-1252-05	CHIP R 0 OHM		
R88			RK73FB24102J	CHIP R 1.0K J 1/10W		
R90			RK73GB10105J	CHIP R 1.0M J 1/16W		
R93 ,94			R92-0670-05	CHIP R 0 OHM		
R95			R92-0679-05	CHIP R 0 OHM		
R96 -98			R92-0670-05	CHIP R 0 OHM		

L: Scandinavia

K: USA

P: Canada

V: PR (Far East, Hawaii)

T: England

E: Europe

Y: AFES (Europe)

X: Australia

M: Other Areas

 indicates safety critical components

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

50M TX-RX UNIT (X57-3B00-01)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕 向	Re- marks 備考
R99			R92-1217-05	CHIP R 0		
R100-103			R92-0670-05	CHIP R 0 0HM		
R104			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R105, 106			R92-0670-05	CHIP R 0 0HM		
R108			RK73FB2A107J	CHIP R 1.0K J 1/10W		
R109			RK73GB1J473J	CHIP R 47K J 1/16W		
R110			RK73FB2A221J	CHIP R 220 J 1/10W		
R111			R92-0670-05	CHIP R 0 0HM		
R112-114			R92-1252-05	CHIP R 0 0HM		
VR1			R12-6429-05	TRIM POT. 100K		
VR2			R12-6427-05	TRIM POT. 47K		
VR3			R12-6421-05	TRIM POT. 4.7K		
VR4			R12-6423-05	TRIM POT. 10K		
TS1			SS9-0444-05	THERMAL SWITCH(90°C)		
D1 ,2			MA77	DIODE		
D3 -6			1SV228	DIODE		
D7			DAN235(K)	DIODE		
D8			1SS184	DIODE		
D9			DAN235(K)	DIODE		
D10			1SS181	DIODE		
D11			MI407	DIODE		
D12			MI308	DIODE		
D13 ,14			1SS226	DIODE		
D15			DSA3A1	DIODE		
D16 ,17			1SS184	DIODE		
IC1			BU4094BP	IC		
IC2		*	KCK10	IC(50MHZ VCO-PLL)		
IC3			KCAC4	IC(MIC AMP)		
IC4		*	KCB18	IC(DRIVE)		
IC5			KCC04	IC(APC)		
IC6			KCD04	IC(FM IF DET)		
IC7			LA5010M	IC(10V AVR)		
IC8		*	KCB19	IC(40-76MHZ FRONT)		
IC9			KCD05	IC(LAM FM)		
Q1			3SK184(S)	FET		
Q2			3SK131(V12)	FET		
Q3			2SC2714(Y)	TRANSISTOR		
Q4			DTC1442K	DIGITAL TRANSISTOR		
Q5			DTC1445U	DIGITAL TRANSISTOR		
Q6 ,7			DTA114EK	DIGITAL TRANSISTOR		
Q8			2SC2714(Y)	TRANSISTOR		
Q9			2SJ106(GR)	FET		
Q10			2SA1362(Y)	TRANSISTOR		
Q11			2SB1119S	TRANSISTOR		
Q12			DTC144WK	デジタルトランジスタ		
Q13			FMW1	トランジスタ		
Q14			2SC2712(Y)	トランジスタ		
Q15 -17			DTC144EK	デジタルトランジスタ		
Q18			2SD1757K	トランジスタ		
Q19			2SK208(Y)	FET		
Q20			2SC2714(Y)	トランジスタ		
Q21			2SC2712(Y)	トランジスタ		
Q22			FMG1	トランジスタ		
Q23			2SD1902R	トランジスタ		

L:Scandinavia

K:USA

P:Canada

Y:PX(Far East, Hawaii)

T:England

E:Europe

V:AAFES(Europe)

X:Australia

M:Other Areas

△ indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

50M TX-RX UNIT (X57-3800-01)

50M SUB UNIT (X58-3840-03)

220M TX-RX UNIT (X57-3810-10)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名/規格	Desti- nation 仕向	Re- marks 備考
Q24 Q25 Q26			2SC2712(Y) 2TA114EK DTC143EK	トランジスタ キップトランジスタ デュアルトランジスタ		
Z1		*	X58-3840-03	SUB UNIT(50M 50M)		
50M SUB UNIT (X58-3840-03)						
C201 C202 C203 C204			CC73FCH1H391J CC73FCH1H221J CK73FB1H471K CM73F2H910J	CHIP C 390PF J CHIP C 220PF J CHIP C 470PF K CHIP C 91PF J		
L201 L202		*	L34-1357-05 L40-1001-19	インダクタ (2T) コイル (10UH)		
Q201 Q202		*	2SC1972 MRF492	トランジスタ トランジスタ		
220M TX-RX UNIT (X57-3810-10)						
			A10-1316-01	CHASSIS		
			B42-2437-04	LABEL(S/N, UNIT)		
C5 C7 -9 C10 C11 C12			CC73FCH1H030C CK73FB1H102K CK73FB1E103K CC73FCH1H050C CC73FCH1H560J	CHIP C 3PF C CHIP C 1000PF K CHIP C 0.01UF K CHIP C 0.5PF C CHIP C 56PF J		
C14 C15 C17 C18 C19			CC73FCH1H050C CC73FCH1H120J CC73FCH1H120J CK73FB1H102K CC73FCH1H060D	CHIP C 0.5PF C CHIP C 12PF J CHIP C 12PF J CHIP C 1000PF K CHIP C 6PF J		
C20 C21 C22 C24 C25			CK73FB1H102K CC73FCH1H060D CK73FB1E103K CK73FB1E103K CC45SL2H030C	CHIP C 1000PF K CHIP C 4PF J CHIP C 0.01UF K CHIP C 0.01UF K CERAMIC 3.0PF C		
C26 C29 C30 C31 C33			CK73FB1H102K CK73FB1E103K CC73FCH1H150J CK73FB1H102K CK73FB1E104K	CHIP C 1000PF K CHIP C 0.01UF K CHIP C 15PF J CHIP C 1000PF K CHIP C 0.15UF K		
C34 ,35 C36 ,37 C44 ,45 C46 C47			CK73EF1C105Z CK73FB1E103K CE04NW1C470M C92-05D4-06 CE04NW1C470M	CHIP C 1.0UF Z CHIP C 0.01UF K ELECTRO 47UF 16WV CHIP TAN 0.68UF 20WV ELECTRO 47UF 16WV		
C48 C50 C51 ,52 C53 ,54 C55			C92-00D3-05 CE04NW1C470M CK73FB1E103K CK73FB1H102K CK73EF1C105Z	CHIP TAN 0.47UF 25WV ELECTRO 47UF 16WV CHIP C 0.01UF K CHIP C 1000PF K CHIP C 1.0UF Z		
C56 C57 C58 C59 ,60 C61			CC73FUJ1H150J CK73FB1H102K CC73FUJ1H200J CK73FB1H102K CE04NW1C470M	CHIP C 15PF J CHIP C 1000PF K CHIP C 20PF J CHIP C 1000PF K ELECTRO 47UF 16WV		

L:Scandinavia

K:USA

P:Canada

V:PX(Far East, Hawaii)

T:England

E:Europe

Y:AFES(Europe)

X:Australia

M:Other Areas

△ indicates safety critical components.

PARTS LIST

X: New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

220M TX-RX UNIT (X57-3810-10)

Ref. No. 参照番号	Address 位 置	New Parts 新	Parts No. 部 品 番 号	Description 部 品 名 / 規 格	Desti- nation 仕 向	Re- marks 備考
C62			CK73FB1E102K	CHIP C 1000PF X		
C63			CK73FB1E103K	CHIP C 0.01UF K		
C64			CE04NW1E100M	ELECTRO 10UF 25WV		
C65			CE04NW1A330X	ELECTRO 33UF 10WV		
C66			CK73FB1E103K	CHIP C 0.01UF K		
C67			CK73FB1E102K	CHIP C 1000PF K		
C68 ,69			CC73FCH1H100D	CHIP C 10PF D		
C70			CK73FB1E103K	CHIP C 0.01UF K		
C71 -73			CK73FB1H102K	CHIP C 1000PF K		
C74			CK73FB1H223K	CHIP C 0.022UF K		
C75			CE04NW1C101M	ELECTRO 100UF 16WV		
C76			CK73FB1C105Z	CHIP C 1.0UF Z		
C77 ,78			CK73FB1H102K	CHIP C 1000PF K		
C79			CK73FB1C105Z	CHIP C 1.0UF Z		
C81			CC45SL2H180J	CERAMIC 18PF J		
C82			CK73FB1H102K	CHIP C 1000PF K		
C83			CC45B2H102K	CERAMIC 1000PF K		
C84			CC45SL2H040C	CERAMIC 4.0PF C		
C85			CC73FCH1H0R5C	CHIP C 0.5PF C		
C86			CC73FCH1H0R5C	CHIP C 0.5PF C		
C87			CC73FCH1H020C	CHIP C 2.0PF C		
C88			CC45SL2H220J	CERAMIC 22PF J		
C89			CC45SL2H180J	CERAMIC 18PF J		
C90 -92			CK73FB1H102K	CHIP C 1000PF K		
C93			CC73FCH1H0R5C	CHIP C 0.5PF C		
C94			CK73F2H050D	CHIP C 5.0PF D		
C95			CC73FCH1H020C	CHIP C 2.0PF C		
C96			CK73FB1E103K	CHIP C 0.01UF K		
C97			CC73FCH1H150J	CHIP C 15PF J		
C98			CK73F91H102K	CHIP C 1000PF K		
C99			CE04NW1E100M	ELECTRO 10UF 25WV		
C100			CC73FCH1H010C	CHIP C 1PF C		
C101			CE04NW1E100M	ELECTRO 10UF 25WV		
C102			CC73FCH1H470J	CHIP C 47PF J		
C103			CK73FB1H102K	CHIP C 1000PF K		
C104			CK73FB1E103K	CHIP C 0.01UF K		
C105			CK73FB1H223K	CHIP C 0.022UF K		
C106			CC73FCH1H470J	CHIP C 47PF J		
C108			CC73FCH1H390J	CHIP C 39PF J		
C109,110			CK73FB1E102K	CHIP C 1000PF K		
C111			CK73FB1E103K	CHIP C 0.01UF K		
C112			CE04NW1A221M	ELECTRO 220UF 10WV		
C113			CC73FSL1H100D	CHIP C 10PF D		
C114,115			CC73FSL1H101J	CHIP C 100PF C		
C116			CC73FCH1H060D	CHIP C 6PF D		
C119			CE04NW1E100M	ELECTRO 10UF 25WV		
C120-127			CC73FSL1H101J	CHIP C 100PF J		
C128,129			CK73FB1H102K	CHIP C 1000PF K		
C130			CE04EW1C102M	ELECTRO 1000UF 16WV		
C131			CC73FCH1H070D	CHIP C 7PF D		
C133			CC73FCH1H100D	CHIP C 10PF D		
C134			CK73FB1E103K	CHIP C 0.01UF K		
C135-137			CK73FB1H102K	CHIP C 1000PF K		
C140			CC73FCH1H010C	CHIP C 1PF C		
C01			CC5-0371-05	TRIM CAP 10PF		

L:Scandinavia

K:USA

P:Canada

Y:PX(Far East, Hawaii)

T:England

E:Europe

Y:AFES(Europe)

A:Australia

M:Other Areas

△ indicates safety critical components

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les parties non mentionnées dans le Parts No. ne sont pas fournies.

Teile ohne Parts No. werden nicht geliefert.

220M 1X-RX UNIT (X57-3810-10)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名/規格	Desti- nation 仕向	Re- marks 備考
CN1, 2 J1 J2			E22-0673-04	TERMINAL BOARD(+)		
			E30-3009-05	ANT. CABLE		
			Q40-5461-05	PIN ASSY		
			E11-0442-05	PHONE JACK		
			Q23-0619-05	TERMINAL(7P)		
			F10-1446-04	SHIELDING PLATE		
			F10-2010-03	SHIELDING COVER		
			F10-2012-04	SHIELDING PLATE(VCM-PLL)		
			F20-1008-04	INSULATING SHEET(AFC)		
			G02-0600-14	FLAT SPRING(THERMAL SWITCH)		
			G02-0705-04	FLAT SPRING		
			G02-0715-04	FLAT SPRING(APC TR)		
			G02-0718-04	FLAT SPRING(VCO)		
			G11-0655-04	SHEET(CN1,CN2 55X8)		
			G11-0656-14	CONDUCTIVE RUBBER		
CD1 CF1 L1 -4 L5 L6		*	G11-0661-04	INSULATING SHEET(AFC TR)		
			G13-0841-04	CUSHION(XTAL)		
			G13-1337-04	CUSHION(VCO)		
			G13-1349-04	CUSHION(VCO 22X7)		
			G13-1351-04	CUSHION(55X8)		
			J42-0471-04	DC CORD BUSHING		
			L79-1013-05	FILTER		
			L72-0372-05	CERAMIC FILTER(CFWM455F)		
			L34-4275-05	COIL(1ST IF)		
			L40-1082-19	SMALL FIXED INDUCTOR(0.104)		
L10 L11 L12 L13 L14		*	L34-4280-05	COIL		
			L40-1582-19	SMALL FIXED INDUCTOR(0.15JH)		
			L34-1239-05	COIL		
			L34-1207-05	COIL		
			L34-1208-05	COIL		
			L34-0908-05	COIL		
			L34-0641-05	COIL		
L15, 16 L19 L20 L21 L22		*	L40-8272-48	SMALL FIXED INDUCTOR(82NH)		
			L40-1001-19	SMALL FIXED INDUCTOR(100H)		
			L40-1092-19	SMALL FIXED INDUCTOR(10H)		
			L40-3372-48	SMALL FIXED INDUCTOR(33NH)		
			L77-1405-05	CRYSTAL RESONATOR(12.8MHZ)		
X1 X2 XF1		*	L77-1463-05	CRYSTAL RESONATOR(30.37MHZ)		
			L71-0420-05	CRYSTAL FILTER(30.625MHZ)		
			N09-2077-05	SCREW(MODULE)		
R5 R6 R7 R8 R9			N87-2606-46	BRAZIER HEAD TAPTITE SCREW		
			N88-2606-46	FLAT HEAD TAPTITE SCREW		
			RK73FB2A333J	CHIP R 33K J 1/10W		
			RK73FB2A104J	CHIP R 100K J 1/10W		
			RK73FB2A101J	CHIP R 100 J 1/10W		
R10 -12 R13 R14 R18 R19			RK73FB2A103J	CHIP R 10K J 1/10W		
			RK73FB2A153J	CHIP R 150K J 1/10W		
			RK73FB2A101J	CHIP R 100 J 1/10W		
			RK73FB2A104J	CHIP R 100K J 1/10W		
			RK73FB2A473J	CHIP R 47K J 1/10W		
			RK73FB2A103J	CHIP R 10K J 1/10W		
			RK73FB2A151J	CHIP R 150 J 1/10W		
R92			R92-0670-05	CHIP R 0 OHM		

L:Scandinavia

R:USA

P:Canada

Y:PX(Far East, Hawaii)

T:England

E:Europe

Y:AFES(Europe)

A:Australia

M:Other Areas

△ indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

220M TX-RX UNIT (X57-3810-10)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
R20			RK73FB2A122J	CHIP R 1.2K J 1/10W		
R21			RK73FB2A471J	CHIP R 470 J 1/10W		
R22			RK73FB2A101J	CHIP R 100 J 1/10W		
R23			RK73FB2A103J	CHIP R 10K J 1/10W		
R24			RK73FB2A473J	CHIP R 47K J 1/10W		
R25			RK73FB2A103J	CHIP R 10K J 1/10W		
R31			RK73FB2A394J	CHIP R 390K J 1/10W		
R32			RK73FB2A103J	CHIP R 10K J 1/10W		
R33 , 34			R92-0670-05	CHIP R 0 OHM		
R35			RK73FB2A222J	CHIP R 2.2K J 1/10W		
R36			RK73FB2A101J	CHIP R 100 J 1/10W		
R37			R92-0670-05	CHIP R 0 OHM		
R38			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R39 -41			RK73FB2A103J	CHIP R 10K J 1/10W		
R42			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R43			RK73FB2A223J	CHIP R 22K J 1/10W		
R44			RK73FB2A273J	CHIP R 27K J 1/10W		
R45			RK73FB2A473J	CHIP R 47K J 1/10W		
R46			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R47			R92-0670-05	CHIP R 0 OHM		
R49			RK73FB2A223J	CHIP R 22K J 1/10W		
R50			RK73FB2A124J	CHIP R 120K J 1/10W		
R52 -54			RK73FB2A473J	CHIP R 47K J 1/10W		
R55			RK73FB2A471J	CHIP R 470 J 1/10W		
R56			RK73FB2A104J	CHIP R 100K J 1/10W		
R57			RK73FB2A105J	CHIP R 1.0M J 1/10W		
R59			R92-0670-05	CHIP R 0 OHM		
R60			RK73FB2A103J	CHIP R 10K J 1/10W		
R61			RK73FB2A471J	CHIP R 470 J 1/10W		
R62			R92-0670-05	CHIP R 0 OHM		
R63 , 64			RK73FB2A222J	CHIP R 2.2K J 1/10W		
R65 , 66			R92-0670-05	CHIP R 0 OHM		
R67			RK73FB2A122J	CHIP R 1.2K J 1/10W		
R68			RK73FB2A220J	CHIP R 22 J 1/10W		
R69			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R71			R92-0670-05	CHIP R 0 OHM		
R73			RK73FB2A104J	CHIP R 100K J 1/10W		
R74			R92-0679-05	CHIP R 0 OHM		
R75			RK73FB2A392J	CHIP R 3.9K J 1/10W		
R76 , 77			R92-0670-05	CHIP R 0 OHM		
R78			R92-1213-05	CAPACITOR 100 J 1/2W		
R79 , 80			RK73FB2A223J	CHIP R 22K J 1/10W		
R81			RK73FB2A471J	CHIP R 470 J 1/10W		
R82			R92-0699-05	SOLDER 10 1/2W		
R83 -86			R92-0670-05	CHIP R 0 OHM		
R89			RK73FB2A332J	CHIP R 3.3K J 1/10W		
R90			RK73FB2A221J	CHIP R 220 J 1/10W		
R91			RK73FB2A473J	CHIP R 47K J 1/10W		
R92 , 93			RK73FB2A104J	CHIP R 100K J 1/10W		
R98			RK73FB2A223J	CHIP R 22K J 1/10W		
R99			RK73FB2A103J	CHIP R 10K J 1/10W		
R100			R92-0670-05	CHIP R 0 OHM		
R101			RK73FB2A102J	CHIP R 1K J 1/10W		
VR1			R12-6429-05	TRIMMING POT. 100K		
VR2			R12-6427-05	TRIM POT. 47K		

L:Scandinavia

K:USA

P:Canada

F:FX(Far East, Hawaii)

T:England

E:Europe

M:AFES(Europe)

X:Australia

O:Other Areas

△ indicates safety critical components

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés (sans le Parts No.) ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

220M TX-RX UNIT (X57-3810-10)

Ref. No 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名/規格	Desti- nation 仕向	Re- marks 備考
VR3 , 4			R12-6423-05	TRIM POT. 10K		
TS1			S79-0401-05	THERMAL SWITCH(95°C)		
D3			1SV164	DIODE		
D5			1SV164	DIODE		
D7			1SV164	DIODE		
D11 , 12			1SS184	DIODE		
D13			2AN225(X)	DIODE		
D14			1SS181	DIODE		
D15			MI407	DIODE		
D16			MI306	DIODE		
D17 , 18			1SS226	DIODE		
D19			2SA341	DIODE		
D20			1SV164	DIODE		
IC1			BU40948P	IC		
IC2			LA5009M	IC		
IC5			KCD04	IC(PM IF)		
IC7			KCA04	IC(MIC AMP)		
IC8		*	KCB15	IC(DRIVE)		
IC9			KCC04	IC(APC)		
IC10			M57774	IC(POWER MODULE)		
IC11		*	KCH08	IC(220PLL-VC0)		
Q1 , 2			3SK184(S)	FET		
Q3			2SC2714(Y)	TRANSISTOR		
Q10			2SA1362(Y)	TRANSISTOR		
Q11			2SB1195	TRANSISTOR		
Q12			DTC144WK	DIGITAL TRANSISTOR		
Q13 , 14			2SC2712(Y)	TRANSISTOR		
Q15 -17			DTC144EK	DIGITAL TRANSISTOR		
Q18			2SD1757(K)	TRANSISTOR		
Q19			2SK208(Y)	FET		
Q20			2SC2714(Y)	TRANSISTOR		
Q21			2SC2712(Y)	TRANSISTOR		
Q22			FMG1	TRANSISTOR		
Q23			2SD1902R	TRANSISTOR		
Q24			2SJ106(GR)	FET		

L:Scandinavia

K:USA

P:Canada

Y:PX(Far East, Hawaii)

T:England

E:Europe


Y:AAFES(Europe)

X:Australia


M:Other Areas

A indicates safety critical components


EXPLODED VIEW

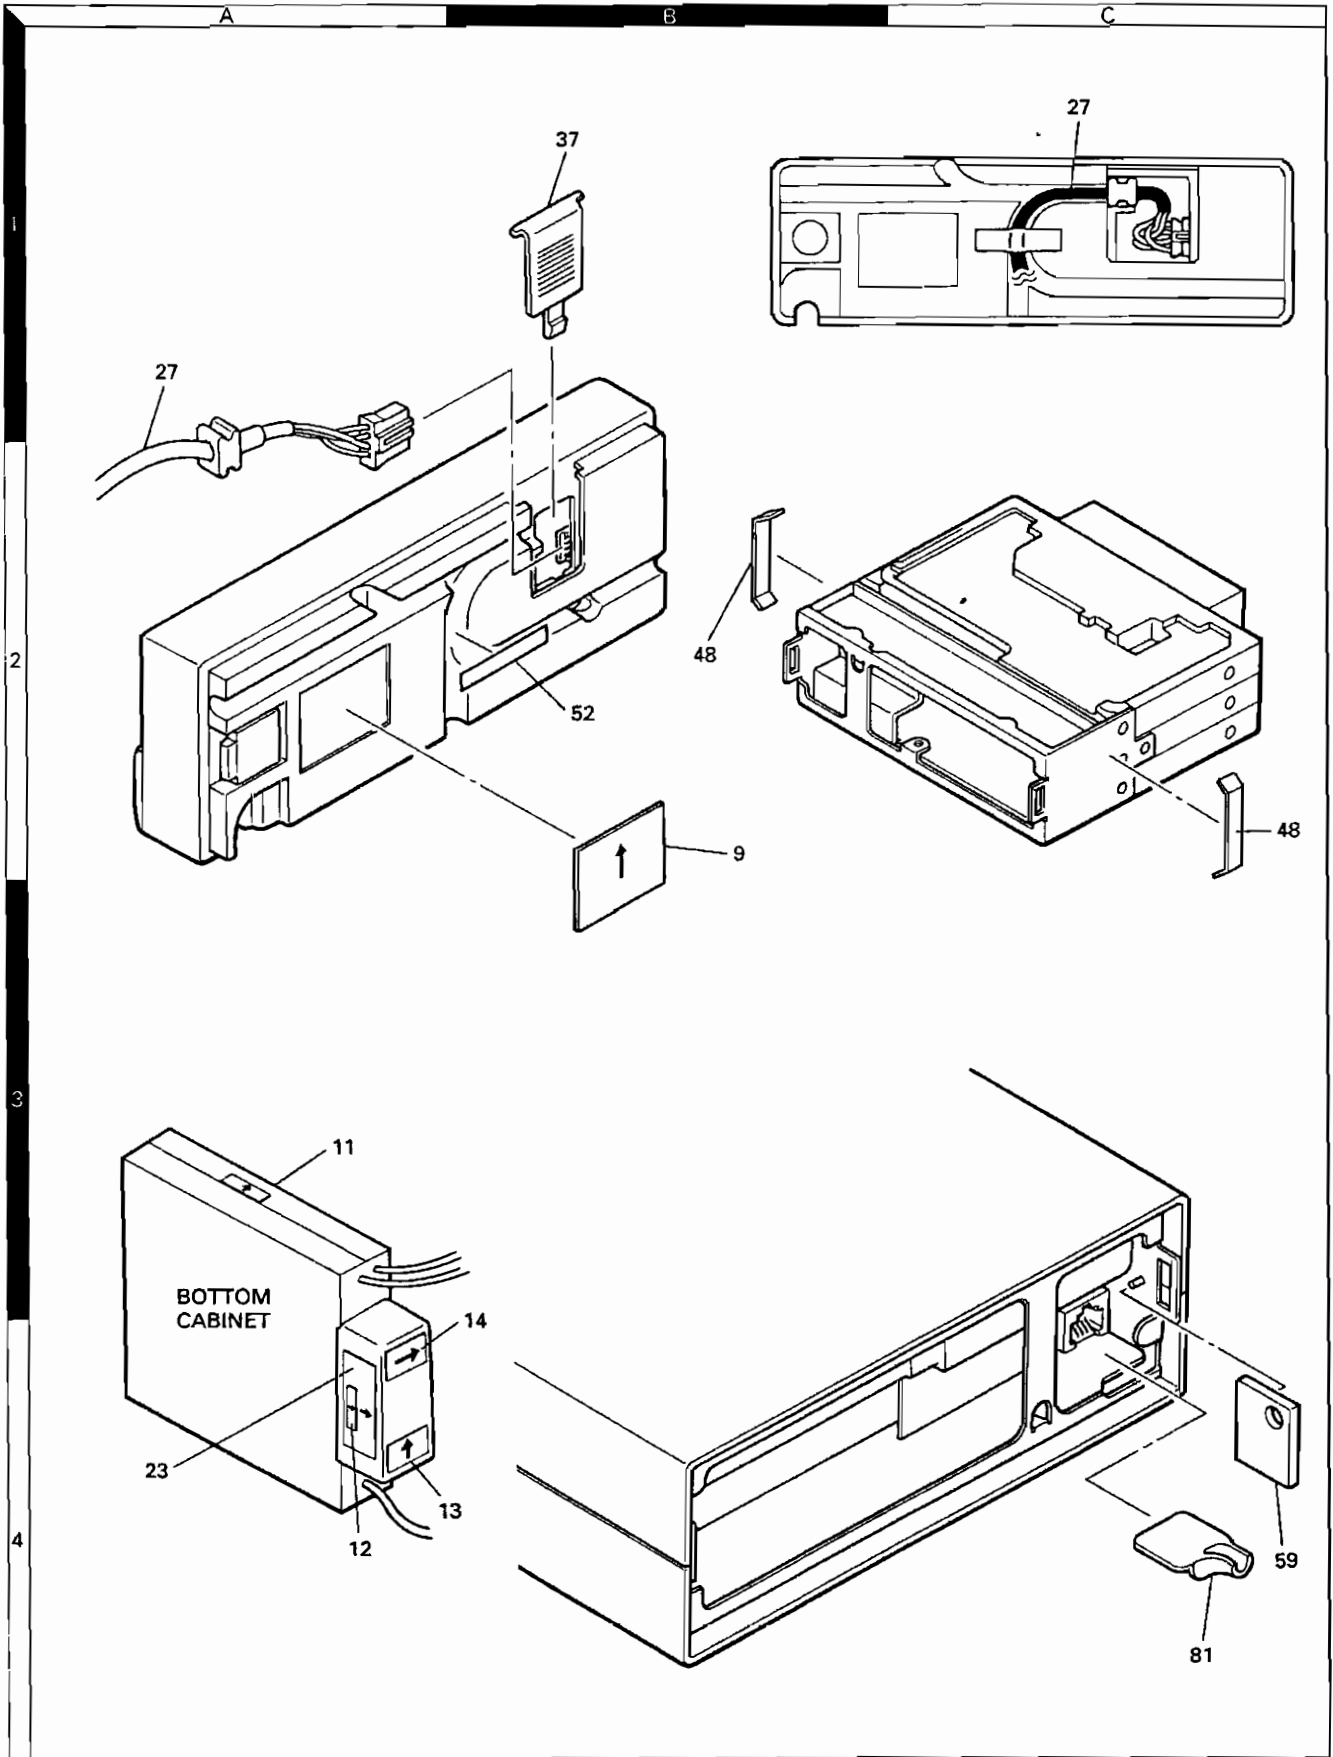


EXPLODED VIEW

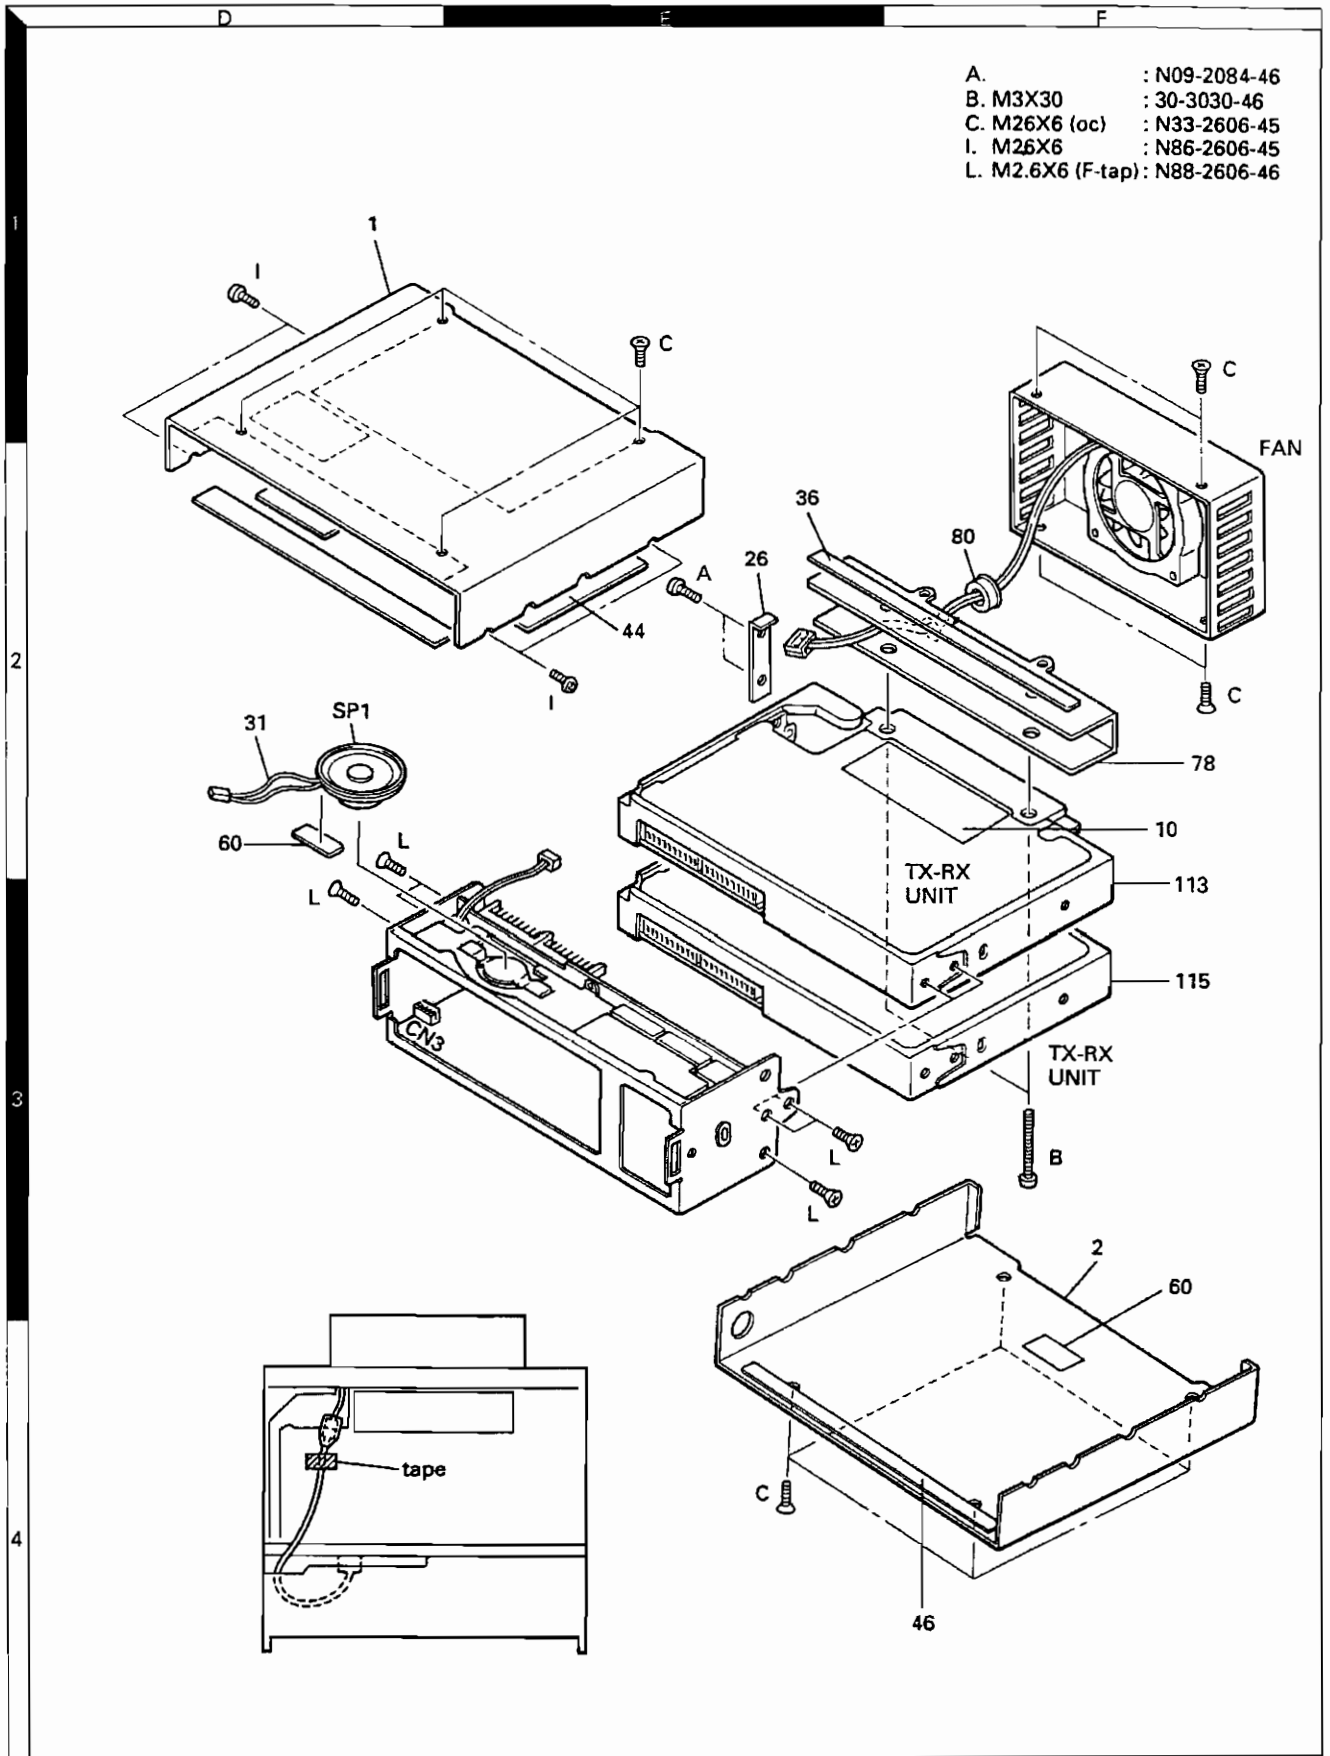

EXPLODED VIEW

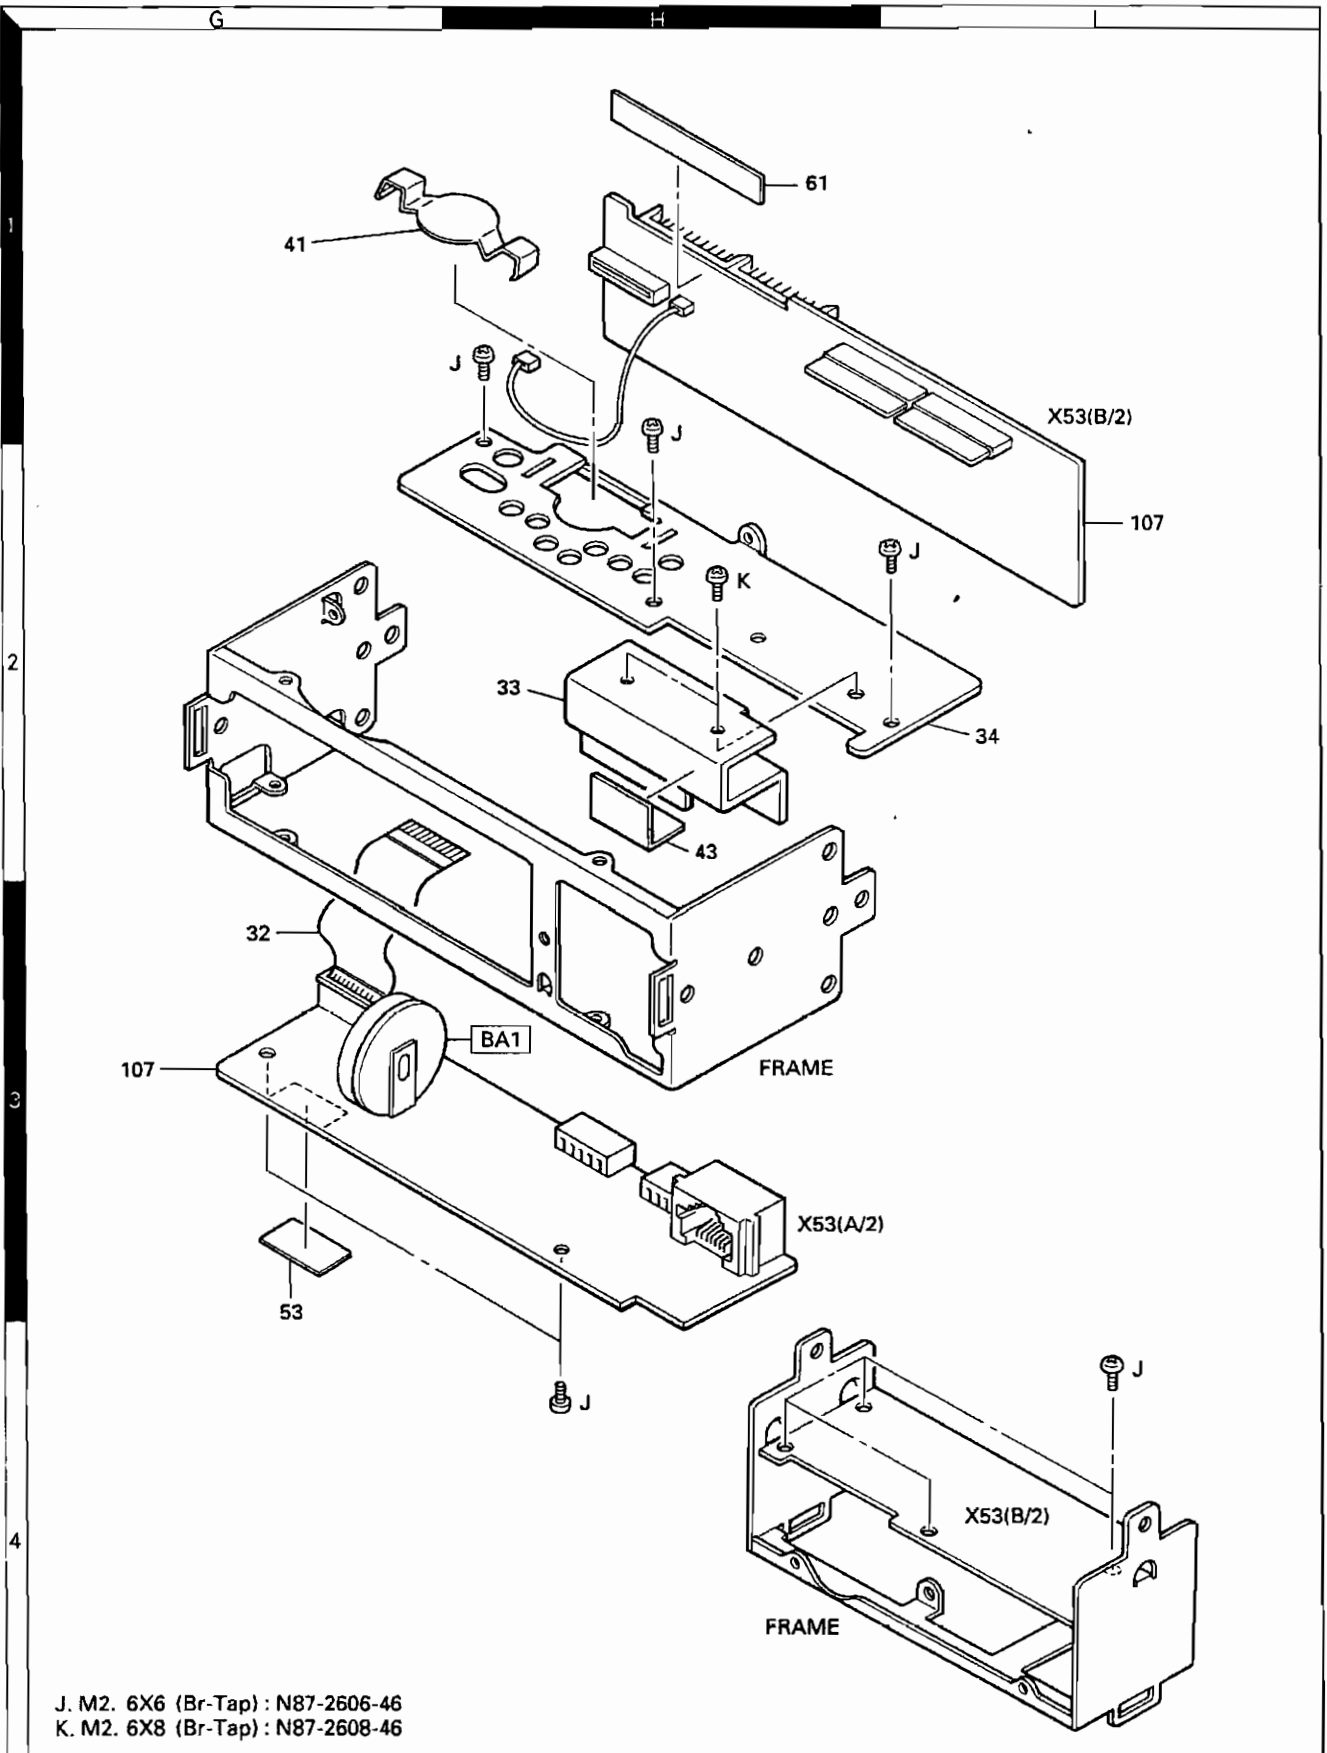


EXPLODED VIEW

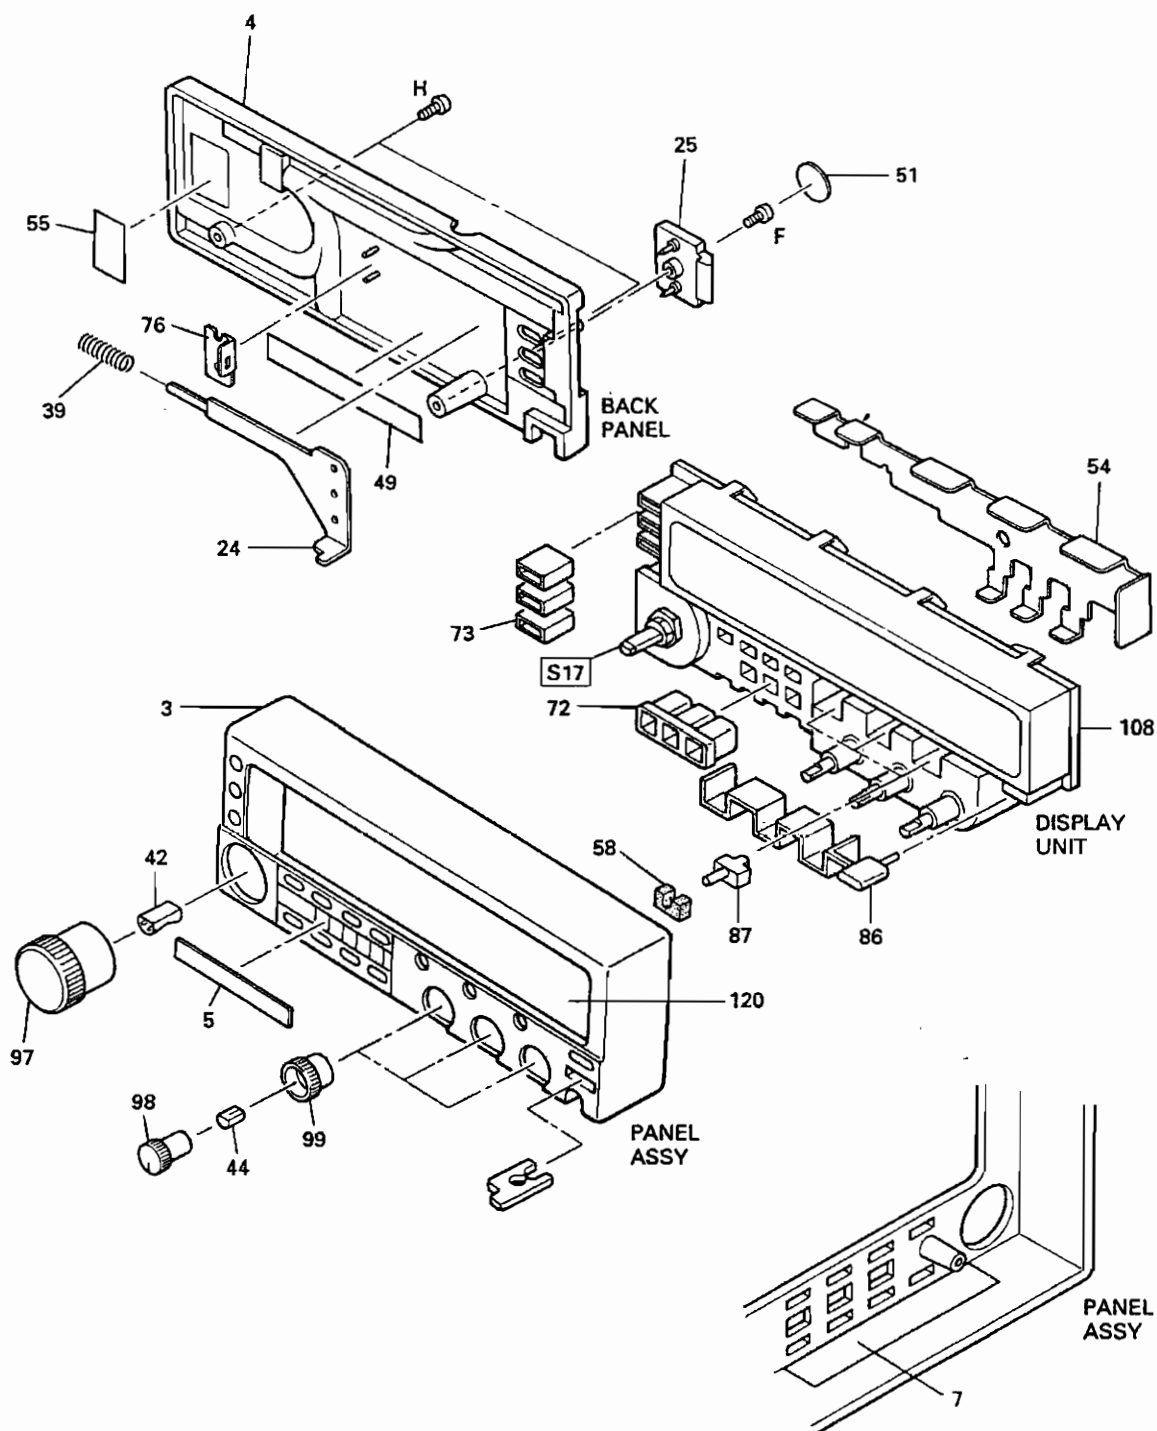


F. M2 :N38-2050-45
H. M2X6 :N80-2006-45

EXPLODED VIEW

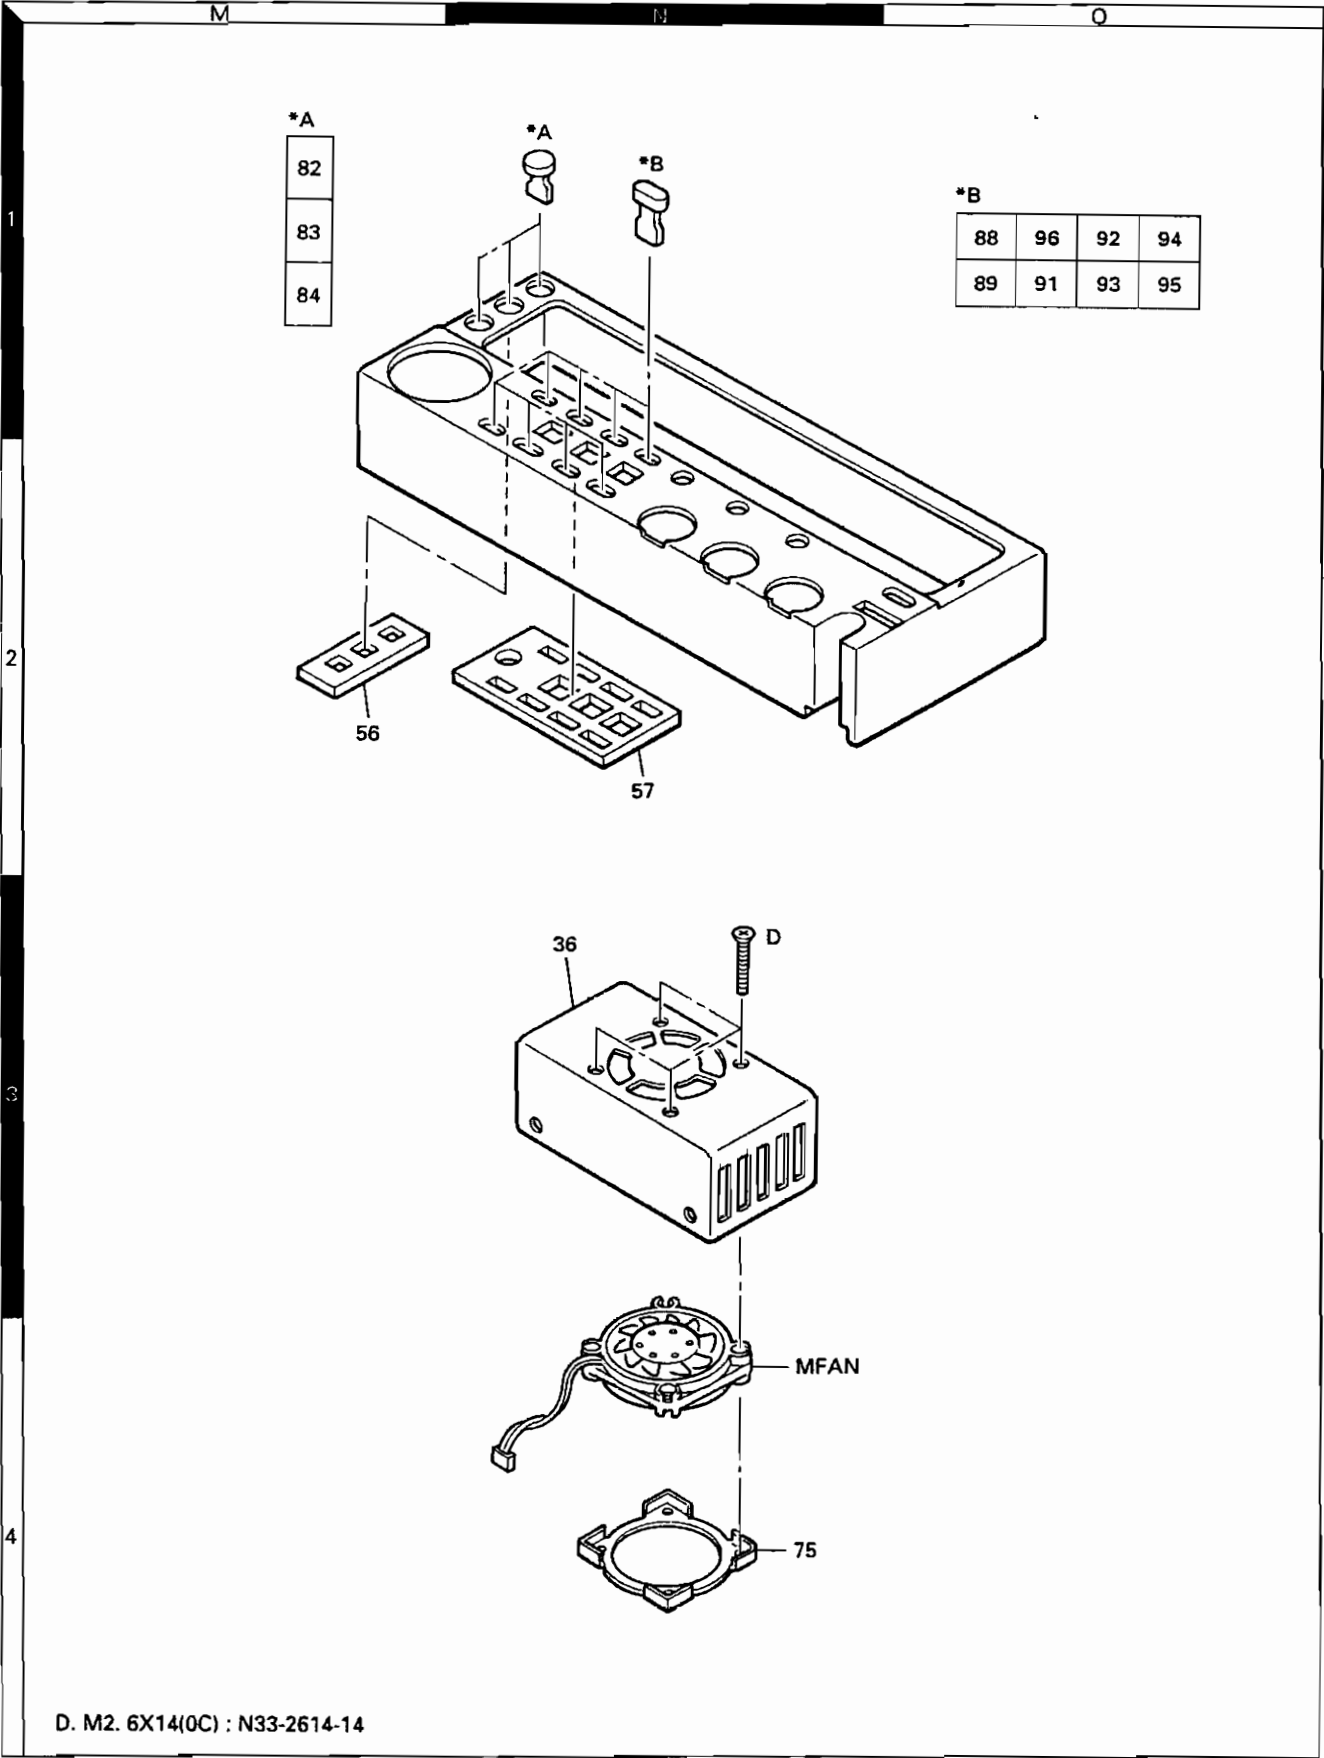


D. M2. 6X14(OC) : N33-2614-14

PACKING (MAIN UNIT)

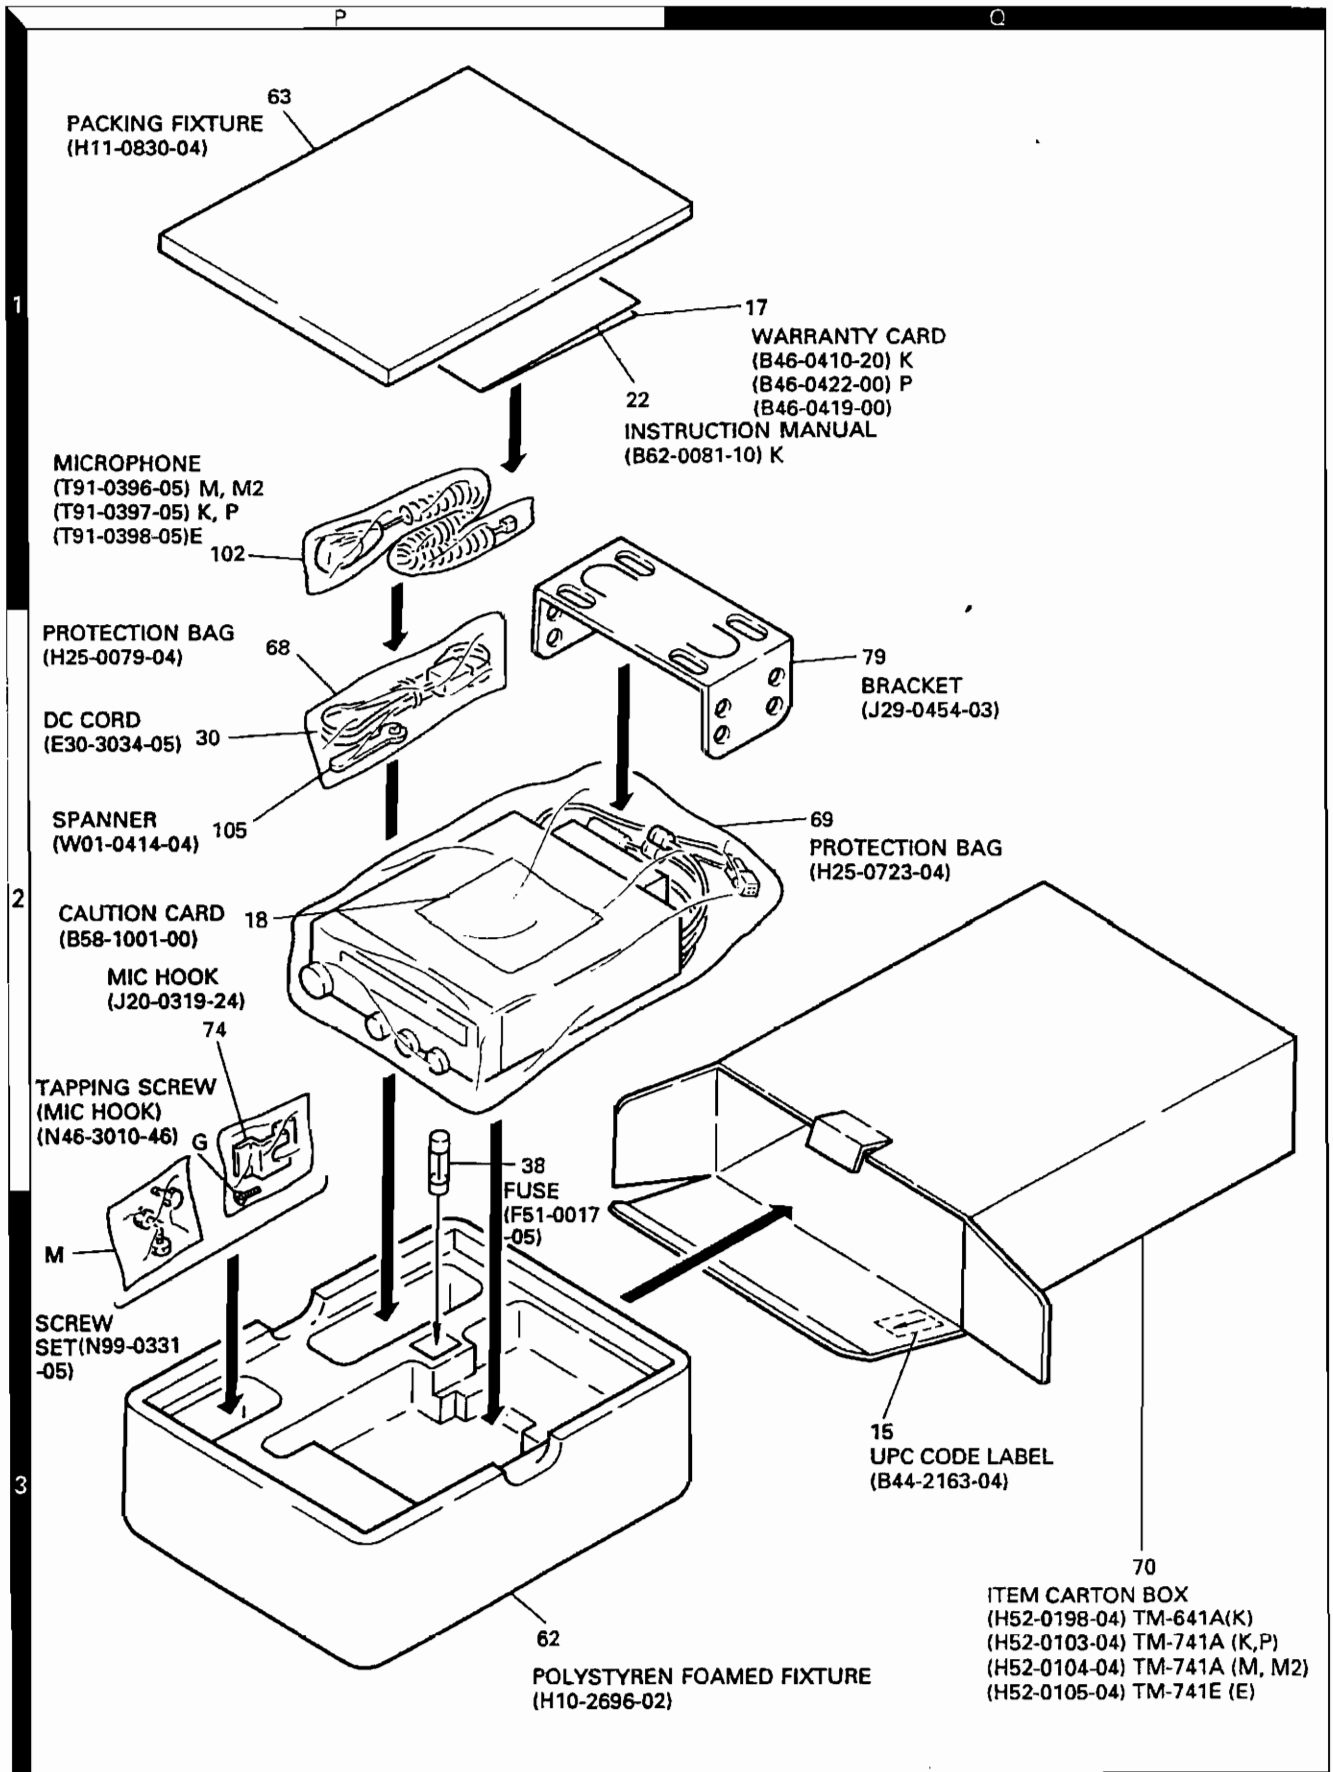


PACKING (MAIN UNIT)


TM-741A

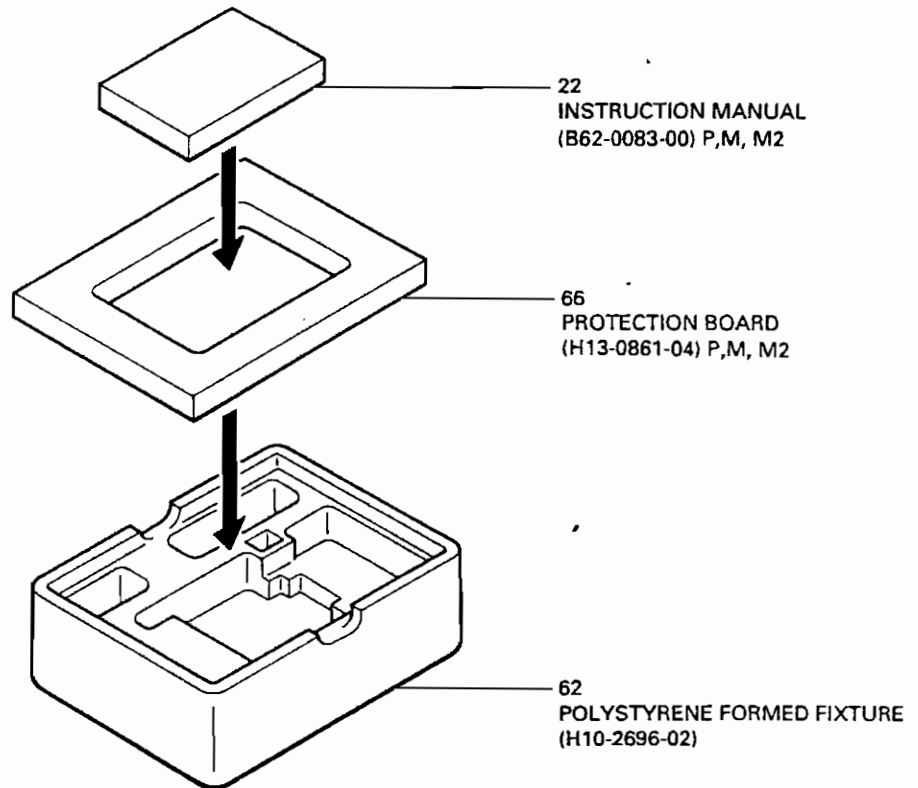

TM-741E

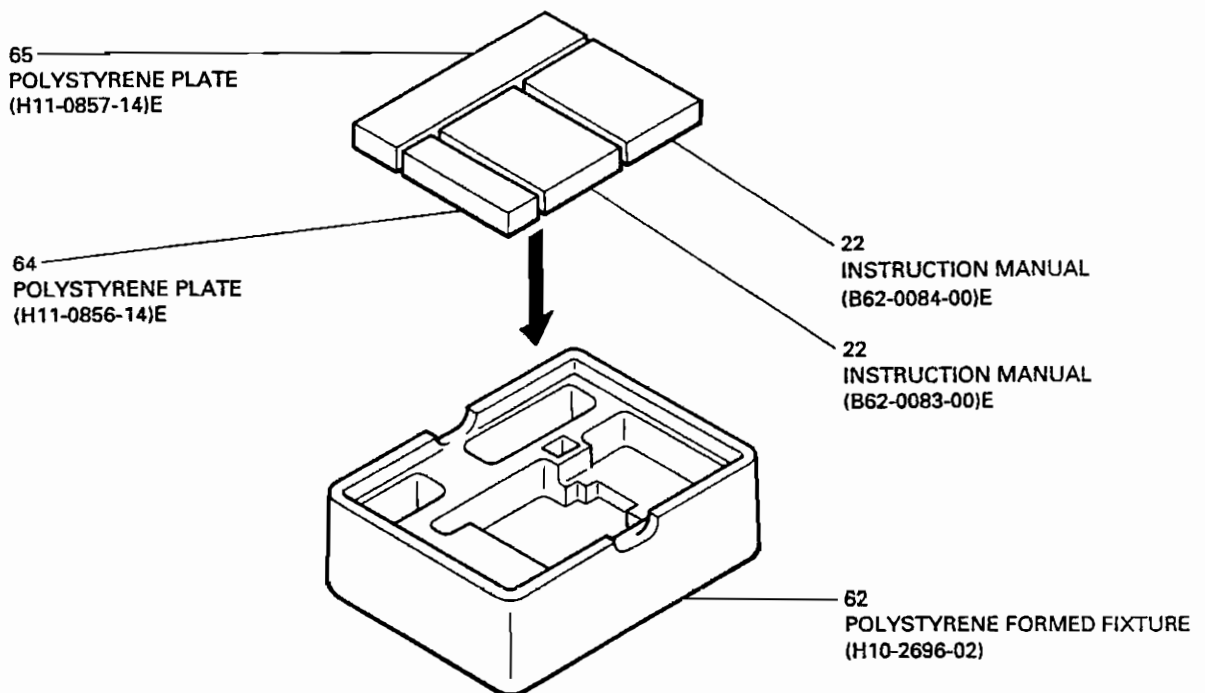

PACKING (OPTIONAL BAND UNIT)

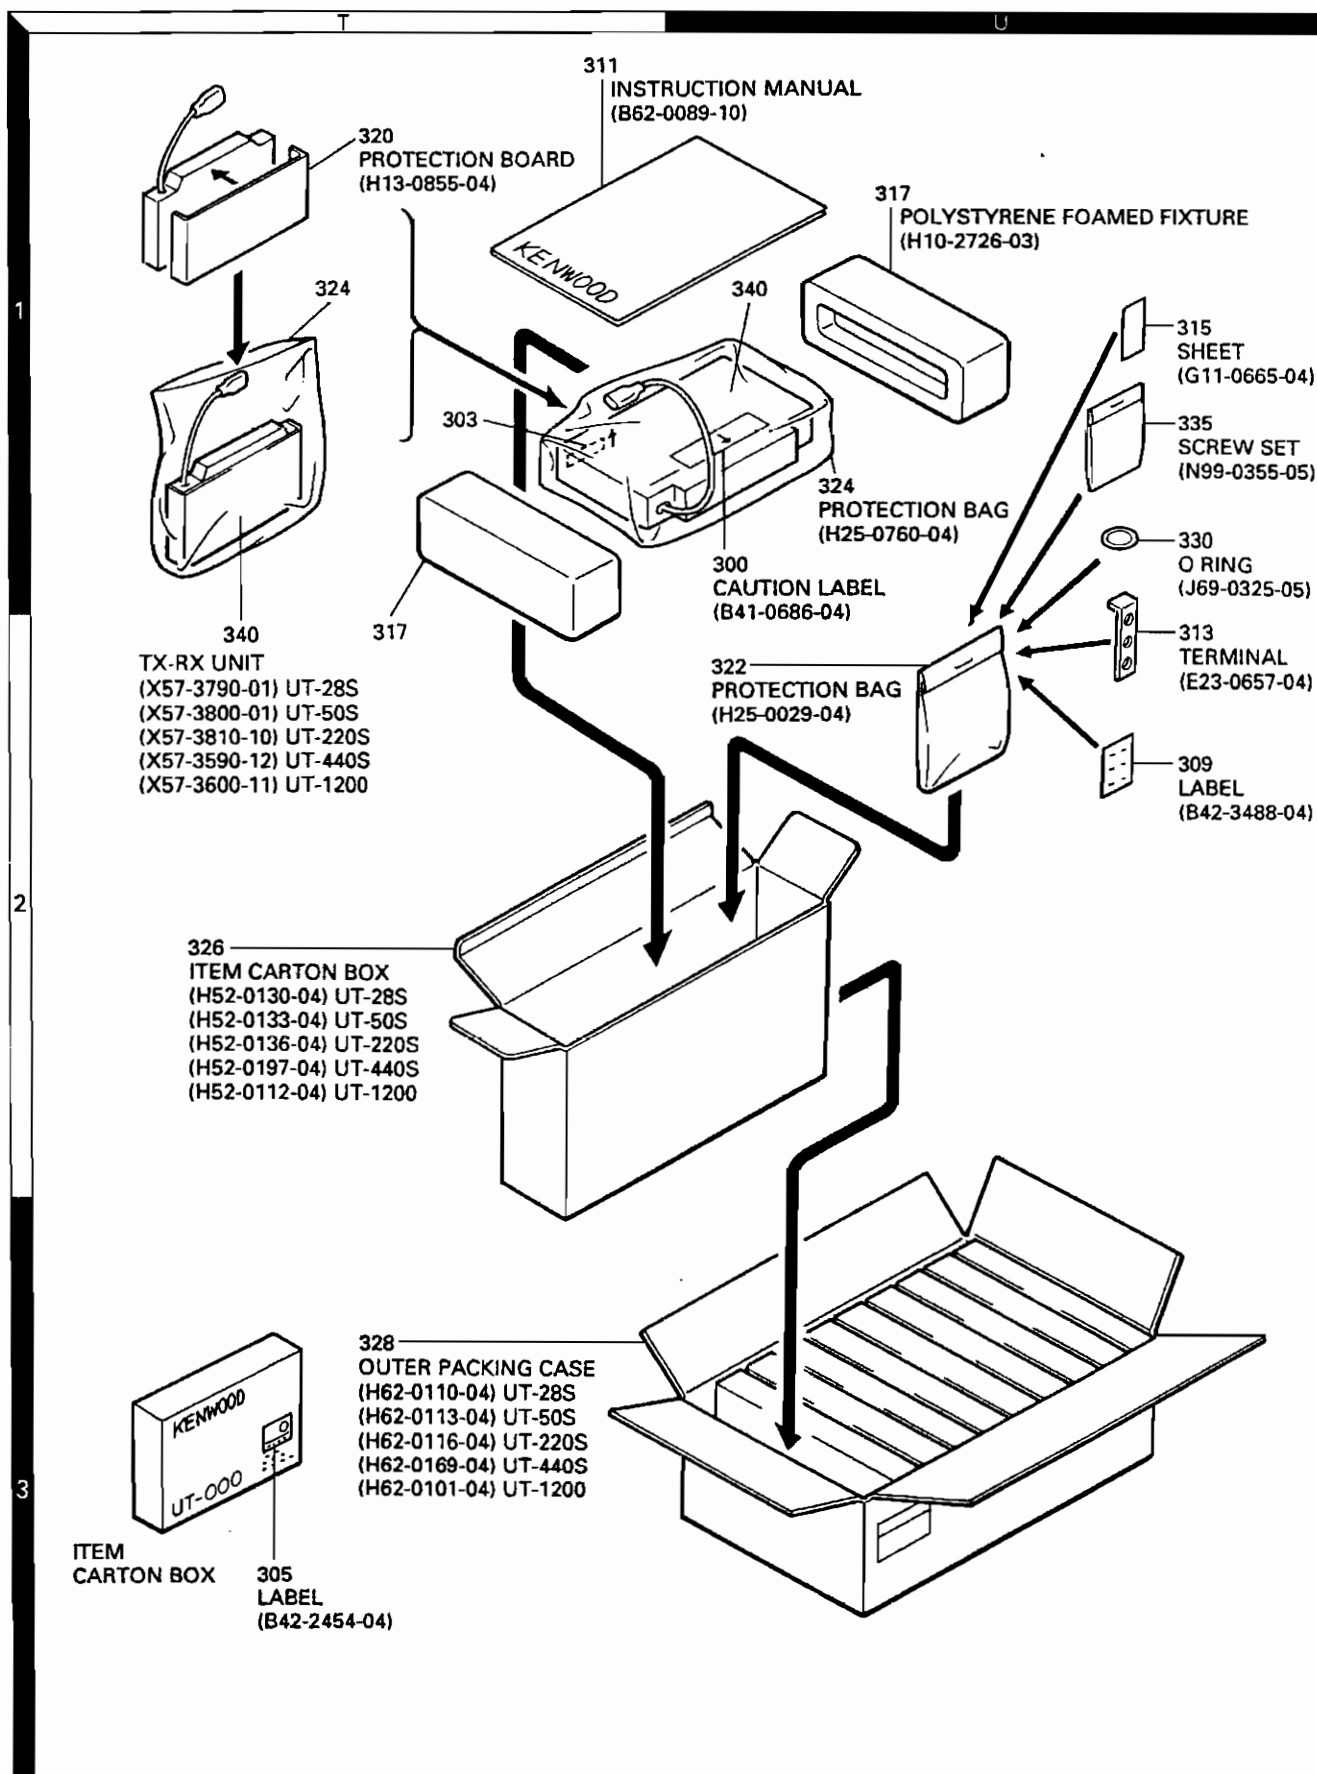

ADJUSTMENT

Required Test Equipment

1. Tester and DC V.M
Use a tester with high input impedance.
2. RF VTVM (RF VM)
Input impedance: 1 M ohms or more, 2 pF or less
Voltage range: FS = 10 mV to 300 V
Measurable frequency: 1,300 MHz (maximum)
3. Frequency counter (F counter)
Input sensitivity: Approximately 50 mV
Measurable frequency: 1,300 MHz or more
4. DC power supply
Voltage: 10 to 17 V (variable)
Current: 12 A or more
5. Power meter
Power measurement ranges: 100 W, 50 W, and 15 W
Input impedance: 50 ohms
Measurable frequency: 1,300 MHz
6. AF vacuum voltmeter (AF VM)
Input impedance: 1 M ohms or more
Voltage range: FS = 1 mV to 30 V
Measurable frequency: 50 Hz to 10 kHz
7. AF generator (AG)
Output frequency: 100 Hz to 10 kHz
Output voltage: 0.5 mV to 1 V
8. Linear detector
Measurable frequency: 1,300 MHz
9. Spectrum analyzer
Measurable frequency: 1,300 MHz
10. Directional coupler
11. Oscilloscope
Use a high-sensitivity oscilloscope with horizontal input socket.
12. SSG
Use an SSG that produces a frequency of 20 to 1,300 MHz with amplitude and frequency modulation.
Output level: 0.1 μ V to 100 mV
13. Dummy resistor
Use an 8-ohm resistor exceeding the rated value in each band.

14. Noise generator

Use a noise generator whose output contains a high-frequency component of more than 1,300 MHz (near ignition noise).

15. Sweep generator

Use a sweep generator that can sweep the 1,300 MHz band.

16. Tracking generator

Preparation

- Set controls to the position shown in Table 22 unless otherwise specified.

POWER SW	ON	CALL SW	OFF
AF VOL VR	MIN	SHIFT, AGC	OFF
SQL VOL VR	MIN	TONE, SHIFT	OFF
MR/M	OFF	REV, STEP	OFF
VFO, MR/M	VFO	DTSS	OFF

Table 22

(When viewed from the front of the set)

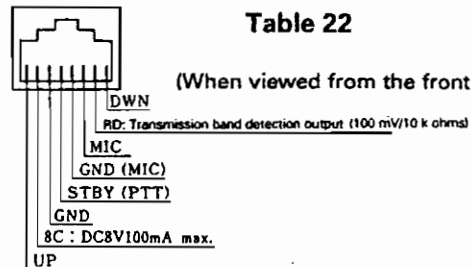


Fig. 43 Microphone Socket (on Front Panel)

- Use an insulated tool such as a plastic tool during adjustment (especially trimmer coil adjustment).
- For SSG protection, do not connect a microphone to the microphone socket during receiver block adjustment.
- Check that the power switch is off before the power cord is connected.
- The SSG output level is displayed at the release end.
- Check that the display and LCD display are shown in Figure 44 after controls are set as in shown in Table 22.

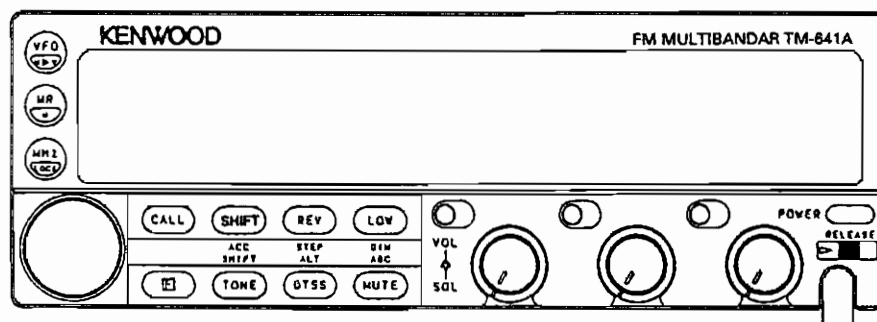


Fig. 44

ADJUSTMENT

● 144 MHz Band (TM-641A, 741A/E)

Common Section Adjustment

Item	Condition	Measurement point			Adjustment point			Specification
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. Lock voltage check	1. Frequency: 144.040MHz Receive	Digital voltmeter	TX-RX	TP2			Check the lock voltage.	1.8 ~ 3.0 V

The DC power supply must be set to the rated voltage.


Receiver Section Adjustment

Item	Condition	Measurement point			Adjustment point			Specification
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. Bandpass filter (BPF) adjustment	1. Frequency: 144.040MHz SSG output: 0 dBμ Modulation: 1 KHz Deviation: 3 KHz Receive	Digital voltmeter SSG			TX-RX	L1-4	Adjust so that the voltmeter reading is maximum.	Voltmeter reading is maximum.
2. Receive sensitivity	1. Frequency: 144.040 MHz 145.940 MHz 147.940 MHz SSG output: -9 dBμ Modulation: 1 KHz Deviation: 3 KHz	Distortion meter Millivoltmeter Oscilloscope SSG	Rear panel	EXT.SP			Check	12 dB SINAD or more
	2. AM sensitivity (K and P models only) Frequency: 118.040 MHz SSG output: 25 dBμ Modulation: 1 KHz Deviation: 30%						Press the MHz key and check that the frequency is set to 118.040 with an encoder.	12 dB SINAD or more
	Press the MR key							
3. Distortion factor	1. Frequency: 145.940 MHz SSG output: 40 dBμ Modulation: 1 KHz Deviation: 3 KHz AF output: 4V/8 ohms	Distortion factor Oscilloscope SSG	Rear panel	EXT.SP	TX-RX	L6	Minimize the distortion factor.	5% or less
4. Signal strength meter adjustment	1. Frequency: 145.940 MHz SSG output: 22dBμ Modulation: 1 KHz Deviation: 3 KHz	SSG			TX-RX	VR1	Adjust so that all LEDs go on, then one LED goes off.	
	2 SSG output: 23 dBμ						Adjust the SSG output so that all signal strength meter LEDs go on.	The SSG output is 20 ± 6 dBμ
5. Squelch check	1. Frequency: 145.940 MHz SSG output: Off Modulation: 1 KHz Deviation: 3 KHz	SSG	Rear panel	EXT.SP			1. Set the SQL knob to the closed position when the SSG output is off.	The SQL knob position is between 8 o'clock and 11 o'clock. The BUSY LED goes off.
	2 SSG output: -14dBμ							The squelch is open. the BUSY LED goes on.

ADJUSTMENT

Transmitter Section Adjustment

Item	Condition	Measurement point			Adjustment point			Specification
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. Power adjustment	1. Maximum power check Frequency: 136.000 MHz 145.980 MHz 147.980 MHz Transmit	Powermeter Ammeter	Rear Panel	ANT	TX-RX	VR3	Check	57 W or more
	2. High-power adjustment Transmit				TX-RX	VR3	Adjust. 54W	46 to 59 W (11.5 A or less)
	3. Medium-power adjustment Transmit				TX-RX	VR4	Adjust. 12W	10 to 14 W
	4. Low-power check Transmit						Check	3 to 8 W
2. Deviation adjustment	1. Frequency: 145.980 MHz AG: 1 KHz, 50 mV (K,P, M,M2) 25 mV (E) Filter: 25 15K Transmit	DC detector Oscilloscope	Rear Panel	ANT	TX-RX	VR2	Adjust (in the higher + or - direction). 4.2 KHz	± 4.0 to 5.0 KHz
	2. Frequency: 145.980 MHz AG: 1 KHz, 5.0 mV (K,P, M,M2) 2.5 mV (E) Transmit						Check	± 2.2 to 3.6 KHz
3. Tone check	1. Frequency: 145.220 MHz Tone: On Transmit	DC detector Oscilloscope	Rear Panel	ANT			Check	± 0.5 to 1.5 KHz
4. Protection check	1. Frequency: 147.980 MHz Antenna: Open Transmit	Ammeter					Check	12.0 A or less
5. Frequency check	1. Frequency: 145.980 MHz Transmit	Frequency counter Powermeter			TX-RX	TC1	145.980 MHz	± 100 Hz

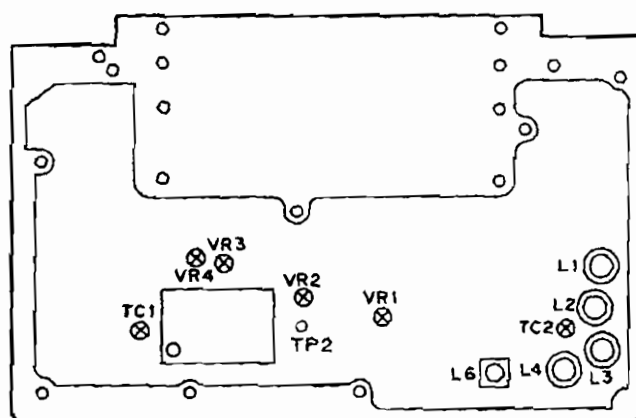

Note: Use an adjustment tool with a ceramic or plastic tip 1.5 mm square for L1 through L4.

Fig. 45 144 MHz band adjustment: Component layout (upper view)


ADJUSTMENT

● 430/440 MHz Band (TM-740A/E, UT-440S)

Common Section adjustment

Item	Condition	Measurement point			Adjustment point			Specification
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. Lock voltage check	1. Frequency: 468.000 MHz Receive	Digital voltmeter	TX-RX	TP2			Check the lock voltage.	7.5 ~ 9.1 V (K, P) 7.0 ~ 9.5 V (E, M, M2)


Receiver Section Adjustment

Item	Condition	Measurement point			Adjustment point			Specification
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. Helical scanning adjustment	1. Frequency: 445.050 MHz (K and P) 435.050 MHz (E, M, M2) Spectrum analyzer: Center of above frequency Tracking generator: Output: -30 dBm	Digital voltmeter Spectrum analyzer Tracking generator			TX-RX	TC1, TC2, L3, L4X3	 Adjust each frequency as shown in the figure.	
2. Receive sensitivity	1. Frequency: 445.050 MHz (K and P) 435.050 MHz (E, M, M2) SSG output: -9 dBμ Modulation: 1 KHz Deviation: 3 KHz	Distortion meter Millivoltmeter Oscilloscope SSG	Rear panel	EXT.SP			Check	12 dB SINAD or more
3. Distortion factor	1. Frequency: 445.050 MHz (K and P) 435.050 MHz (E, M, M2) SSG output: 40 dBμ Modulation: 1 KHz Deviation: 3 KHz AF output: 4 V/8 ohms	Distortion meter Oscilloscope SSG	Rear panel	EXT.SP	TX-RX	L7	Minimize the distortion factor.	5% or less
4. Signal strength meter adjustment (check)	1. Frequency: 445.050 MHz (K and P) 435.050 MHz (E, M, M2) SSG output: 23 dBμ Modulation: 1 KHz Deviation: 3 KHz	SSG			TX-RX	VR1		Adjust so that all LEDs go on, then one LED goes off.
	2. SSG output: 24 dBμ						Adjust the SSG output so that all signal strength meter LEDs go on.	The SSG output is 20 ± 6 dBμ.
5. Squelch check	1. Frequency: 445.050 MHz (K and P) 435.050 MHz (E, M, M2) SSG output: Off Modulation: 1 KHz Deviation: 3 KHz	SSG	Rear panel	EXT.SP			1. Set the SQL knob to the closed position when the SSG output is off.	The knob position is between 8 o'clock and 11 o'clock. The BUSY LED goes off.
	2. SSG output: -14 dBμ							The squelch is open. The BUSY LED goes on.

ADJUSTMENT

Transmitter Section Adjustment

Item	Condition	Measurement point			Adjustment point			Specification
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. Power adjustment	1. Maximum power check Frequency: 445.000 MHz (K and P) 435.000 MHz (E, M, M2) Transmit	Powermeter Ammeter	Rear panel	ANT	TX-RX	VR3	Check	38 W or more
	2. High power adjustment Frequency: 445.000 MHz (K and P) 435.000 MHz (E, M, M2) Transmit				TX-RX	VR3	Adjust. 37W	31 to 42 W (10 A or less)
	3. Medium power adjustment Frequency: 445.000 MHz (K and P) 435.000 MHz (E, M, M2) Transmit				TX-RX	VR4	Adjust. 13W	10 to 14 W
	4. Low power check Frequency: 445.000 MHz (K and P) 435.000 MHz (E, M, M2) Transmit						Check	3 to 8 W
2. Deviation adjustment	1. Frequency: 445.000 MHz (K and P) 435.000 MHz (E, M, M2) AG: 1 KHz, 50 mV (K, P, M, M2) 25 mV (E), Filter: 25 15K Transmit	DC detector Oscilloscope	Rear panel	ANT	TX-RX	VR2	Adjust (ig the higher + or - direction). 4.2 KHz	± 4.0 to 5.0 KHz
	2. Frequency: 445.000 MHz (K and P) 435.000 MHz (E, M, M2) AG: 1 KHz, 5.0 mV (K, P, M, M2) 2.5 mV (E) Transmit						Check	± 2.2 to 3.6 KHz
3. Tone check	1. Frequency: 438.200 MHz (E, M, M2) 448.200 MHz (K, P) Tone: On Transmit	DC detector Oscilloscope	Rear panel	ANT			Check	± 0.5 to 1.5 KHz
4. Protection check	1. Frequency: 449.980 MHz (K and P) 439.980 MHz (E, M, M2) Antenna: Open Transmit	Ammeter					Check	10 A or less
5. Frequecy check	1. Frequency: 445.000 MHz (K and P) 435.000 MHz (E, M, M2) Transmit	Frequency counter Powermeter			TX-RX	TC3	445.000 MHz K, P 435.000 MHz E, M, M2	± 500 Hz

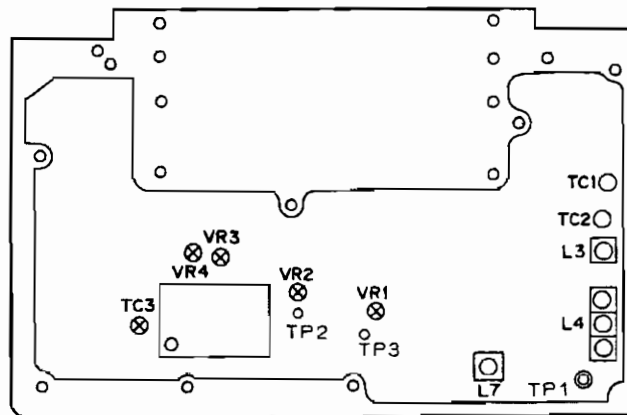

To adjust the 430 MHz band, remove the 144 MHz band unit from the control unit.

Fig. 46 430 MHz band adjustment: Component layout (upper view)

ADJUSTMENT

Transmitter Section Adjustment

Item	Condition	Measurement point			Adjustment point			Specification
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. Power adjustment	1. Maximum power check Frequency: 1270.000 MHz Transmit	Powermeter Ammeter	Rear panel	ANT	TX-RX	VR4	Check	11 W or more
	2. High-power adjustment Frequency: 1270.000 MHz Transmit				TX-RX	VR4	Adjust 10W The fan runs when the PTT switch is pressed. (It continues for a while after the PTT switch is released, then stops.)	8 to 14 W (6.5 A or less)
	3. Low-power check Frequency: 1270.000 MHz Transmit				TX-RX	VR5	Check	0.7 to 1.4 W
2. Deviation adjustment	1. Frequency: 1270.000 MHz AG: 1 KHz, 50 mV (K, P, M, M2) 25 mV (E) Transmit	DC detector Oscilloscope	Rear panel	ANT	TX-RX	VR3	Adjust (in the higher + or - direction). 4.2 KHz	± 4.0 to 5.0 KHz
	2. Frequency: 1270.000 MHz AG: 1 KHz, 5.0 mV (K, P, M, M2) 2.5 mV (E) Transmit						Check	± 2.2 to 3.6 KHz
3. Tone check	1. Frequency: 1282.200 MHz Tone: On Transmit	DC detector Oscilloscope	Rear panel	ANT			Check	± 0.5 to 1.5 KHz
4. Protection check	1. Frequency: 1240.000 MHz 1270.000 MHz 1299.980 MHz Antenna: Open Transmit	Ammeter					Check	8.5 A or less
5. Frequency check	1. Frequency: 1270.000 MHz Transmit	Frequency counter Powermeter					1270.000 MHz	± 1 KHz

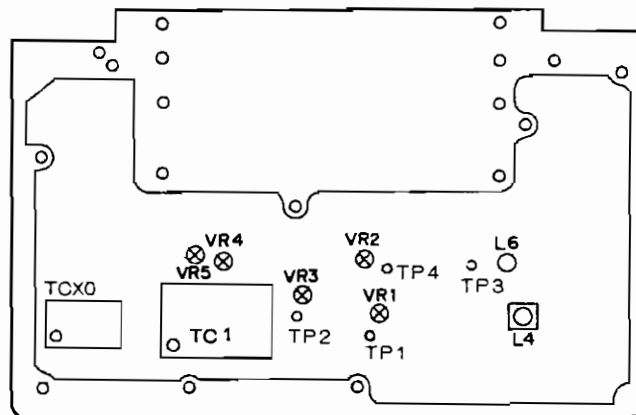


Fig. 47 1200 MHz band adjustment: Component layout (upper view)

ADJUSTMENT

● 28 MHz Band (UT-28S)

Common Section Adjustment

Item	Condition	Measurement point			Adjustment point			Specification
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. Lock Voltage check	1. Frequency: 29.700MHz Receive	Digital voltmeter	TX-RX	TP3			Check the lock voltage	5.5 - 7.0 V

Receiver Section Adjustment

Item	Condition	Measurement point			Adjustment point			Specification
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. Band pass filter (BPF)	1. Frequency: 29.700MHz SSG output: 0 dBμ Modulation: 1KHz Deviation: 3 KHz Receive	Digital voltmeter SSG	Rear panel	ANT	TX-RX	L1-4	Adjust so that the voltmeter reading is maximum	voltmeter reading is maximum
2. Distortion factor	1. Frequency: 28.890MHz SSG output: 60 dBμ Modulation: 1KHz Deviation: 3KHz	Distortion meter Oscilloscope SSG	Rear panel	EXT.SP	TX-RX	L5	Minimize the distortion factor	5% or less
3. Receive sensitivity	1. Frequency: 28.040MHz SSG output: -9 dBμ Modulation: 1KHz Deviation: 3 KHz	Distortion meter Millivoltmeter Oscilloscope SSG	Rear panel	EXT.SP			Check	12 dB SINAND or more
	2. Frequency: 29.700 MHz SSG output: -9 dBμ Modulation: 1KHz Deviation: 3 KHz		Rear panel	EXT.SP			Check	12 dB SINAND or more
	3. Frequency: 22.040 MHz SSG output: 20 dBμ Modulation: 1KHz Deviation: 3 KHz		Rear panel	EXT.SP			Check	12 dB SINAND or more
4. Signal strength meter adjustment	1. Frequency: 28.890 MHz SSG output: 24 dBμ Modulation: 1 KHz Deviation: 3 KHz	SSG			TX-RX	VR1	Adjust so that all LEDS go on, then one LED goes off.	
5. Signal strength meter check	2. Frequency: 28.890 MHz SSG output: 25 dBμ Modulation: 1 KHz Deviation: 3 KHz						Adjust the SSG output so that all signal strength meter LEDs go on.	The SSG output is 20 ± 6 dBμ
6. Squelch check	1. Frequency: 28.890 MHz SSG output: OFF	SSG	Rear panel	EXT.SP			Set the SQL knob to the closed position when the SSG output is off.	
	2. Frequency: 28.890 MHz SSG output: -14 dBμ Modulation: 1 KHz Deviation: 3 KHz		Rear panel	EXT.SP			The squelch is open.	

TM-641A/741A/741

ADJUSTMENT

Transmitter Section Adjustment

Item	Condition	Measurement point			Adjustment point			Specification
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. Maximum power check	1. Frequency: 28.850 MHz Transmit	Powermeter Ammeter	Rear panel	ANT	TX-RX	VR3	Check	52 W or more
2. High-power adjustment	1. Frequency: 28.850 MHz Transmit				TX-RX	VR3	Adjust	50 W
	2. Frequency: 28.000 MHz Transmit						Check	44 W or more
	3. Frequency: 29.640 MHz Transmit						Check	44 W or more
3. Medium-power adjustment	1. Frequency: 28.850 MHz Transmit	Powermeter	Rear panel	ANT	TX-RX	VR4	Adjust	11.5 W
	2. Frequency: 28.000 MHz Transmit						Check	9.5 W or more
	3. Frequency: 29.640 MHz Transmit						Check	9.5 W or more
4. Low-power check	1. Frequency: 28.850 MHz Transmit	Powermeter	Rear panel	ANT			Check	3.0 ~ 8.0 W
	2. Frequency: 28.000 MHz Transmit						Check	3.0 ~ 8.0 W
	3. Frequency: 29.640 MHz Transmit						Check	3.0 ~ 8.0 W
5. Deviation adjustment	1. Frequency: 28.850 MHz AG: 1 KHz, 50 mV (K, P, M, M2) 25 mV (E) Filter: 25 15K Transmit	DC detector Oscilloscope AG	Rear panel	ANT	TX-RX	VR2	Adjust 4.4 KHz	$\pm 4.4 \text{ KHz} \pm 200 \text{ Hz}$
	2. Frequency: 28.050 MHz AG: 1 KHz, 5.0 mV (K, P, M, M2) 2.5 mV (E) Filter: 25 15K Transmit						Check	$\pm 2.2 \text{ to } 3.6 \text{ KHz}$
6. Frequency check	1. Frequency: 28.850 MHz Transmit	Frequency counter Powermeter	Rear panel	ANT	TX-RX	TC1	Adjust	28.850 MHz $\pm$ 20 Hz
7. Protection check	1. Frequency: 29.690 MHz Antenna: Open Transmit	Ammeter					Check	12A or less

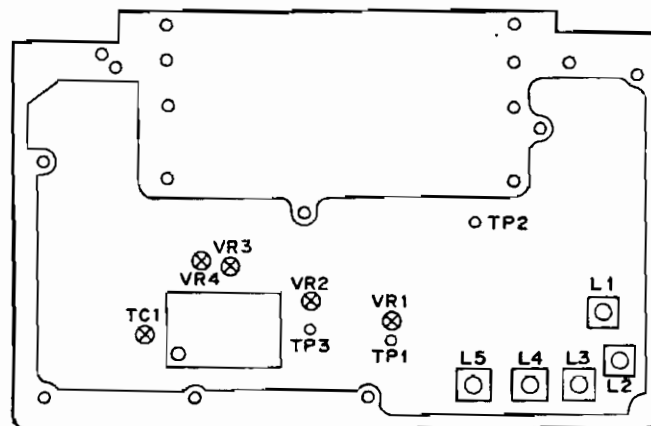


Fig. 48 28 MHz Band adjustment: Component layout (upper view)

ADJUSTMENT

● 50 MHz Band (UT-50S)

Common Section Adjustment

Item	Condition	Measurement point			Adjustment point			Specification
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. Lock Voltage check	1. Frequency: 54.000 MHz Receive	Digital voltmeter	TX-RX	TP3			Check the lock voltage	6.0 - 7.6 V

Receiver Section Adjustment

Item	Condition	Measurement point			Adjustment point			Specification
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. Bandpass filter (BPF)	1. Frequency: 52.040 MHz SSG output: 0 dBμ Modulation: 1 KHz Deviation: 3 KHz Receive	Digital voltmeter SSG	Rear panel	ANT	TX-RX	L1-4	Adjust to that the voltmeter reading is maximum	voltmeter reading is maximum
2. Distortion factor	1. Frequency: 52.040 MHz SSG output: 60 dBμ Modulation: 1 KHz Deviation: 3 KHz	Distortion meter Oscilloscope SSG	Rear panel	EXT.SP	TX-RX	L5	Minimize the distortion factor	5% or less
3. Receive sensitivity	1. Frequency: 53.940 MHz SSG output: -9 dBμ Modulation: 1 KHz Deviation: 3 KHz	Distortion meter Millivoltmeter Oscilloscope SSG	Rear panel	EXT.SP			Check	12 dB SINAND or more
	2. Frequency: 50.040 MHz SSG output: -9 dBμ Modulation: 1 KHz Deviation: 3 KHz		Rear panel	EXT.SP			Check	12 dB SINAND or more
	3. Frequency: 40.040 MHz SSG output: 20 dBμ Modulation: 1 KHz Deviation: 3 KHz		Rear panel	EXT.SP			Check	12 dB SINAND or more
4. Signal strength meter adjustment	1. Frequency: 52.040 MHz SSG output: 24 dBμ Modulation: 1 KHz Deviation: 3 KHz	SSG			TX-RX	VR1	Adjust so that all LEDs go on, then one LED goes off.	
5. Signal strength meter check	2. Frequency: 52.040 MHz SSG output: 25 dBμ Modulation: 1 KHz Deviation: 3 KHz						Adjust the SSG output so that all signal strength meter LEDs go on.	The SSG output is 20 ± 6 dBμ
6. Squelch check	1. Frequency: 52.040 MHz SSG output: Off	SSG	Rear panel	EXT.SP			Set the SQL knob to the closed position when the SSG output is off.	
	2. Frequency: 52.040 MHz SSG output: -14 dB Modulation: 1 KHz Deviation: 3 KHz		Rear panel	EXT.SP			The squelch is open.	

Transmitter Section Adjustment

Item	Condition	Measurement point			Adjustment point			Specification
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. Maximum power check	1. Frequency: 52.000 MHz Transmit	Powermeter Ammeter	Rear Panel	ANT	TX-RX	VR3	Check	53W or more
2. High-power adjustment	1. Frequency: 52.000 MHz Transmit				TX-RX	VR3	Adjust	51W
	2. Frequency: 50.000 MHz Transmit						Check	45W or more
	3. Frequency: 53.940 MHz Transmit						Check	45W or more
3. Medium-power adjustment	1. Frequency: 52.000 MHz Transmit	Powermeter	Rear Panel	ANT	TX-RX	VR4	Adjust	11.5W
	2. Frequency: 50.000 MHz Transmit						Check	9.5W or more
	3. Frequency: 53.940 MHz Transmit						Check	9.5W or more
4. Low-power check	1. Frequency: 52.000 MHz Transmit	Powermeter	Rear Panel	ANT			Check	3.0 ~ 8.0W
	2. Frequency: 50.000 MHz Transmit						Check	3.0 ~ 8.0W
	3. Frequency: 53.940 MHz Transmit						Check	3.0 ~ 8.0W
5. Deviation adjustment	1. Frequency: 52.000 MHz AG: 1KHz, 50 mV (K, P,M, M2) 25 mV (E) Filter: 25 15K Transmit	DC detector Oscilloscope AG	Rear Panel	ANT	TX-RX	VR2	Adjust 4.4 KHz	$\pm 4.4 \text{ KHz} \pm 200 \text{ Hz}$
	2. Frequency: 52.000 MHz AG: 1KHz, 5.0 mV (K, P,M, M2) 2.5 mV (E) Filter: 25 15K Transmit						Check	$\pm 2.2 \text{ to } 3.6 \text{ KHz}$
6. Frequency check	1. Frequency: 52.000 MHz Transmit	Frequency counter Powermeter	Rear Panel	ANT	TX-RX	TC1	Adjust	52.000 MHz $\pm 20 \text{ Hz}$
7. Protection check	1. Frequency: 53.990MHz Antenna: Open Transmit	Ammeter					Check	12A or less.

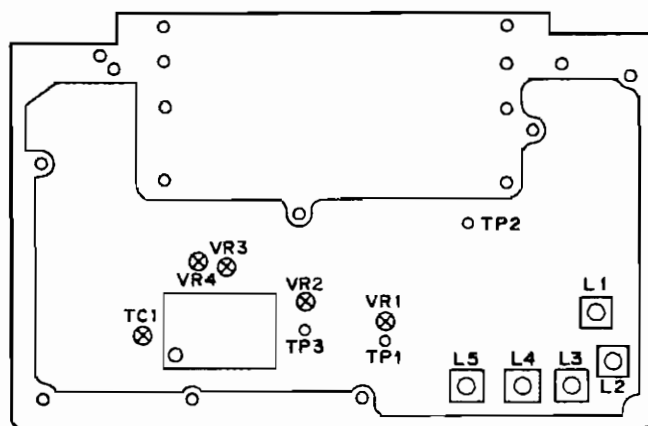


Fig. 49 50 MHz BAND adjustment: Component layout (upper view)

ADJUSTMENT

● 220 MHz Band (TM-641A, UT-220S)

Common Section Adjustment

Item	Condition	Measurement point			Adjustment point			Specification
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. Lock voltage check	1. Frequency: 215.000 MHz Receive	Digital voltmeter	TX-RX	TP2			Check the lock voltage	1.2 ~ 2.6V

Receiver Section Adjustment

Item	Condition	Measurement point			Adjustment point			Specification
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. Bandpass filter (BPF)	1. Frequency: 222.540 MHz SSG output: 0dBμ Modulation: 1KHz Deviation: 3KHz Receive	Digital voltmeter SSG	Rear Panel	ANT.	TX-RX	L1~4	Voltmeter reading is maximum.	Voltmeter reading is maximum.
2. Distortion factor	1. Frequency: 222.540 MHz SSG output: 60dBμ Modulation: 1KHz Deviation: 3KHz	Distortion meter Oscilloscope SSG	Rear Panel	EXT. SP	TX-RX	L6	Minimize the distortion factor	5% or less
3. Receive sensitivity	1. Frequency: 222.540 MHz SSG output: -9dBμ Modulation: 1KHz Deviation: 3KHz	Distortion meter Millivoltmeter Oscilloscope SSG	Rear Panel	EXT. SP			Check	12dB SINAND or more
	2. Frequency: 215.040 MHz SSG output: 5dBμ Modulation: 1KHz Deviation: 3KHz		Rear panel	EXT. SP			Check	12dB SINAND or more
	3. Frequency: 229.980 MHz SSG output: -5dBμ Modulation: 1KHz Deviation: 3KHz		Rear panel	EXT. SP			Check	12dB SINAND or more
4. Signal strength meter adjustment	1. Frequency: 222.540 MHz SSG output: 21dBμ Modulation: 1KHz Deviation: 3KHz	SSG			TX-RX	VR1	Adjust so that all LEDs go on, then one LED goes off.	
5. Signal strength meter check	2. Frequency: 222.540 MHz SSG output: 22dBμ Modulation: 1KHz Deviation: 3KHz						Adjust the SSG output so that all signal strength meter LEDs go on.	The SSG output is 20 ± 6 dBμ
6. Squelch check	1. Frequency: 222.540 MHz SSG output: OFF	SSG	Rear Panel	EXT. SP			Set the SQL knob to the closed position when the SSG output is off.	
	2. Frequency: 222.540 MHz SSG output: -14dB Modulation: 1KHz Deviation: 3KHz		Rear Panel	EXT. SP			The squelch is open.	

Transmitter Section Adjustment

Item	Condition	Measurement point			Adjustment point			Specification
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. Maximum power check	1. Frequency: 222.500 MHz Transmit	Powermeter Ammeter	Rear Panel	ANT	TX-RX	VR3	Check	28W or more (reference)
2. High-power adjustment	1. Frequency: 222.500 MHz Transmit				TX-RX	VR3	Adjust	26W
	2. Frequency: 222.000 MHz Transmit						Check	22W or more
	3. Frequency: 224.980 MHz Transmit						Check	22W or more
3. Medium-power adjustment	1. Frequency: 222.540 MHz Transmit	Powermeter	Rear Panel	ANT	TX-RX	VR4	Adjust	11W
	2. Frequency: 222.000 MHz Transmit						Check	9W or more
	3. Frequency: 224.980 MHz Transmit						Check	9W or more
4. Low-power check	1. Frequency: 222.540 MHz Transmit	Powermeter	Rear Panel	ANT			Check	3.0 ~ 8.0W
	2. Frequency: 220.000 MHz Transmit						Check	3.0 ~ 8.0W
	3. Frequency: 222.980 MHz Transmit						Check	3.0 ~ 8.0W
5. Deviation adjustment	1. Frequency: 222.500 MHz AG: 1KHz, 50 mV Filter: 25 15K Transmit	DC detector Oscilloscope AG	Rear Panel	ANT	TX-RX	VR2	Adjust 4.4 KHz	$\pm 4.4\text{KHz} \pm 200\text{ Hz}$
	2. Frequency: 222.500 MHz AG: 1KHz, 5.0 mV Filter: 25 15K Transmit						Check	$\pm 2.2\text{ to }3.6\text{ KHz}$
6. Frequency check.	1. Frequency: 222.500 MHz Transmit	Frequency counter Powermeter	Rear Panel	ANT	TX-RX	TC1	Adjust	$222.500\text{ MHz} \pm 2\text{KHz}$
7. Protection check	1. Frequency: 224.980 MHz Antenna: Open Transmit	Ammeter					Check	7.5A or less

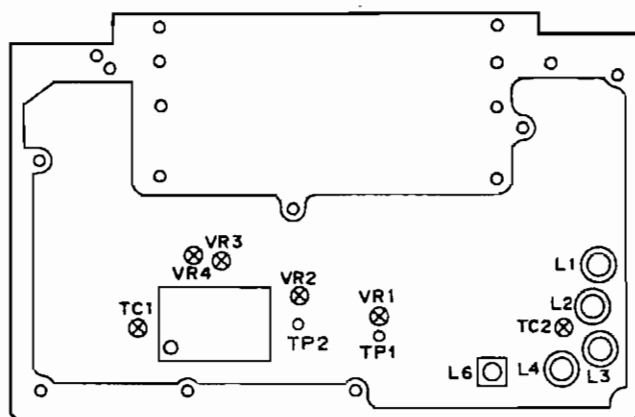




Fig. 50 220 MHz band adjustment: Component layout (upper view)

TM-641A/741A/741E

CONTROL UNIT X53-331X-XX 0-12: 641A(K), 741A (K, P, M, M2), 2-71: 741 E (E)

Component side view

IC1:75517GF-014-389 IC2:L3564PML-12, 15 IC3:TA78L06F IC4, 5:TC9154AP IC6, 7:BU4094BF IC8, 9:BU4053BF IC10:NJM4558E IC11, 12:TCAS11F
Q1:2SC324 (G) Q2, 4-8, 17:2SC2712V (Q3-9-11:DTCT14EK Q12-15:2SD175 (K) Q16:2SA1519
D1:1SS184 D2, 4, 6:1FB01 D3:D2C26.8X D5:D2C23.0Z)

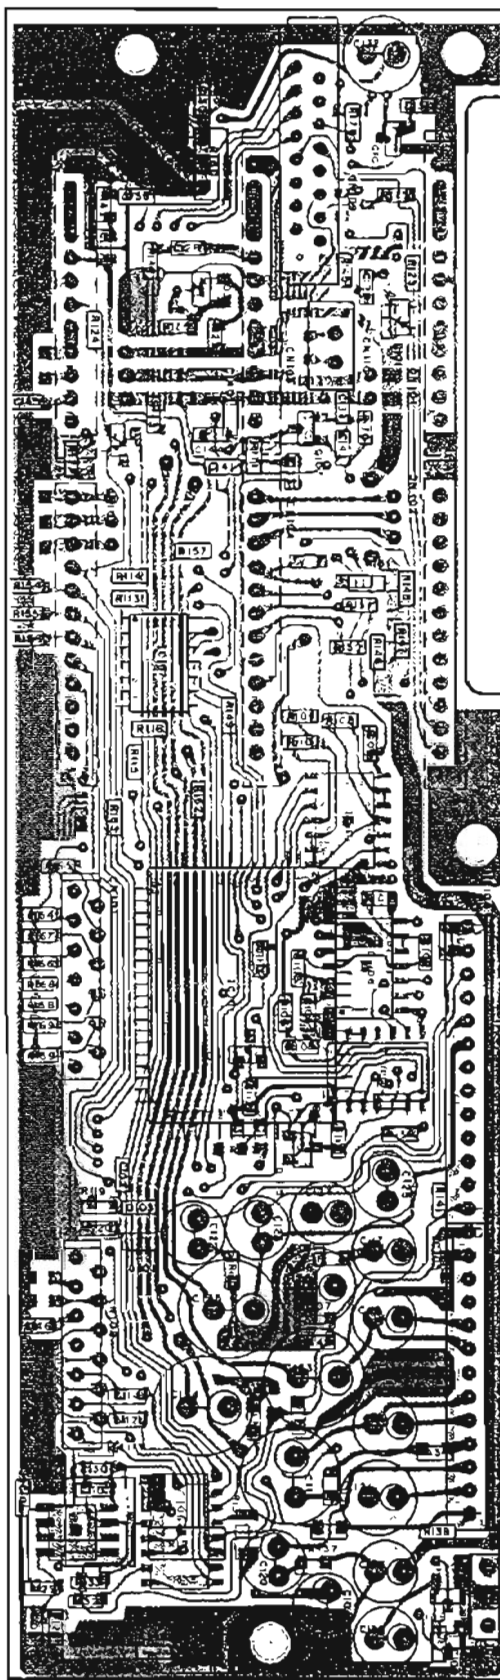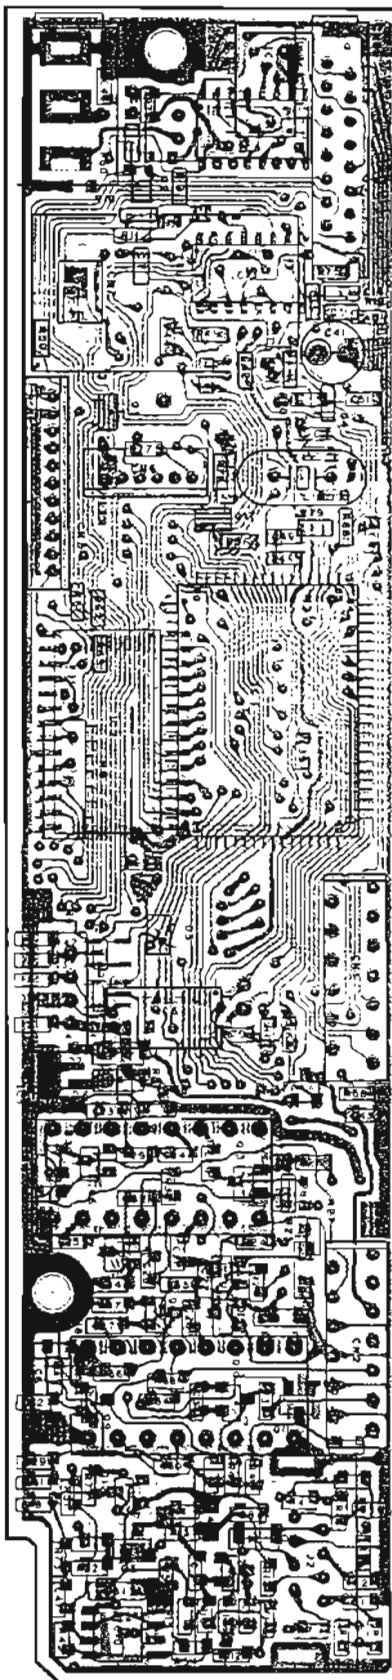

IC1:75517GF-014-389 IC2:L3564PML-12, 15 IC3:TA78L06F IC4, 5:TC9154AP IC6, 7:BU4094BF IC8, 9:BU4053BF IC10:NJM4558E IC11, 12:TCAS11F
Q1:2SC324 (G) Q2, 4-8, 17:2SC2712V (Q3-9-11:DTCT14EK Q12-15:2SD175 (K) Q16:2SA1519
D1:1SS184 D2, 4, 6:1FB01 D3:D2C26.8X D5:D2C23.0Z)

CONTROL UNIT

Foil side view





:Component side pattern :Foil side pattern

PC BOARD VIEW

CONTROL UNIT X53-331X-XX 0-12: 641A(K), 741A (K, P, M, M2), 2-71: 741 E (E)

Foil side view

IC1: 75S17GF-014-3B9 IC2: C3564PML-12, 15 IC3: TA78L06F IC4: 5: TC915AP IC6: 7: BU4094BF IC8: 9: BU4053BF IC10: NJM4558E IC11: 12: TCAS11F
 Q1: 2SC3324 (G) Q2: 4-8: 17: 2SC7121Y Q3: 9-11: DTCT1
 D1: 1: ISS184 D2: 4: 6: LFB01 D3: 02C26.8X D5: 02C23.0(Z)

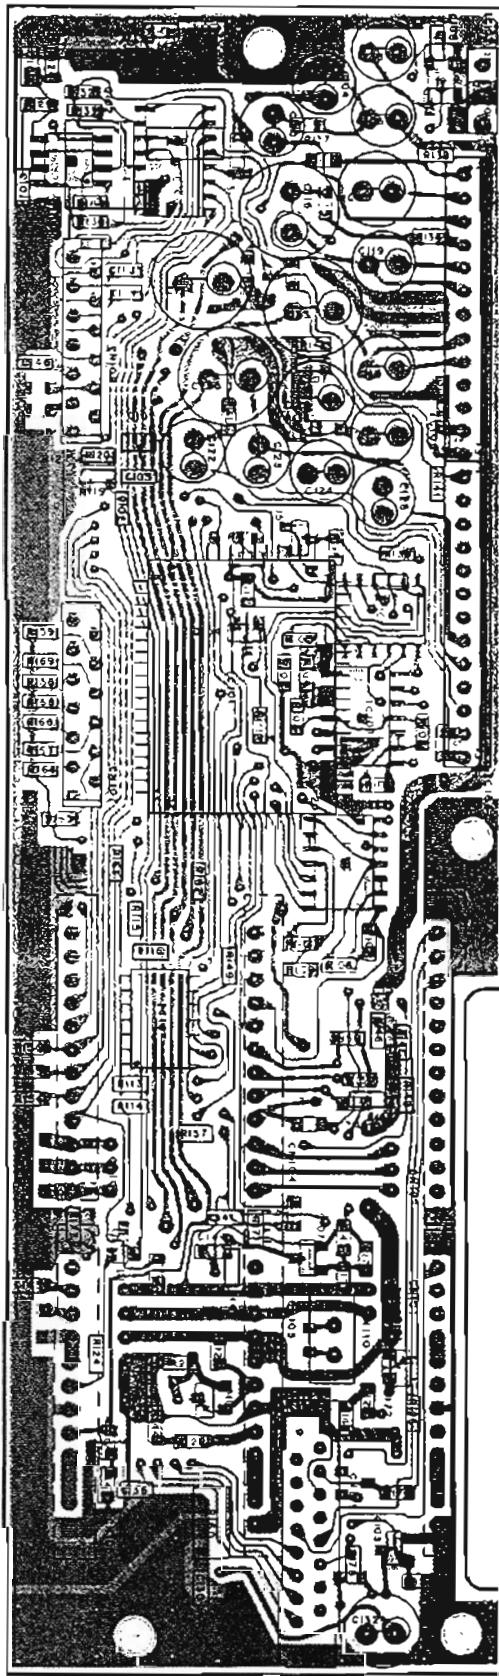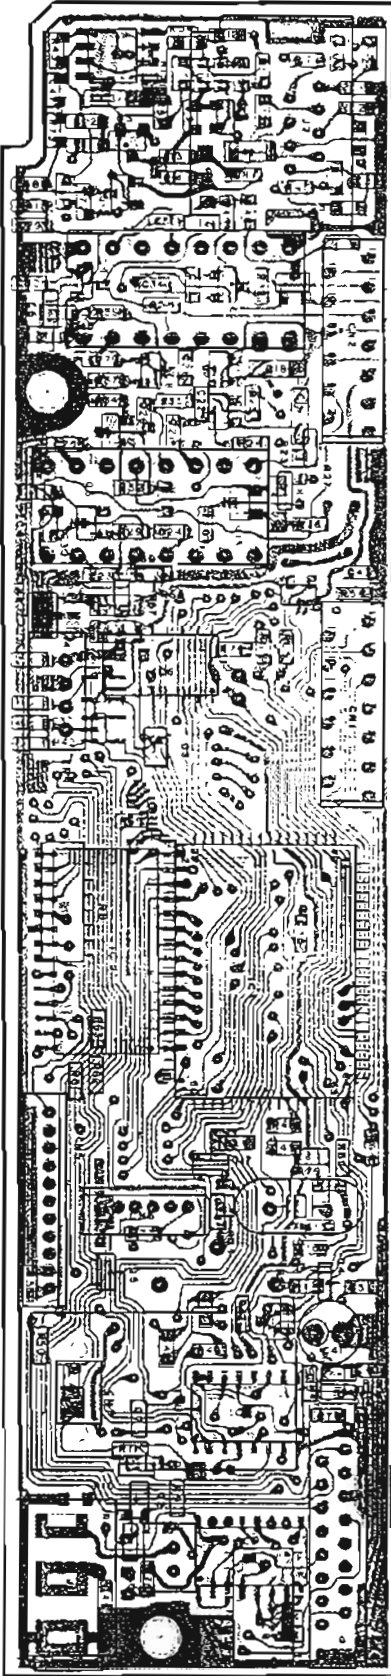


DISPLAY UNIT X54-312

Component side view


IC101: CX01095Q IC102: MC78T08CT IC103: NJM4558E IC104: 105: LA4446 IC106: BU4053BF IC107: 110: BU4068BF
 Q101: 107: 2SC7121Y Q102: 2SA1641S, T1 Q103: DT0143EK Q104: 105: DTCT14EK Q106: DTCT144EK Q108: DTCT144EK
 D101: 103: ISS226

IC1: 75S16GF-270-3B9 IC2: 3: MSMS265GS-V1K IC4: TA78L06F IC5: 6: TCAS11F IC7: S-8054ALR-LN O1: 3: 6: 2SC7121Y Q2: 2SA11621Y
 Q4: 2SA13071Y O5: 2SA11621Y Q7: 2SD1624IS, T1 O8: DTCT144EK D1: 2: ISS184 D3: 02C27.5IX Y) DA-9: B-30-2108-05 D10: LFB01

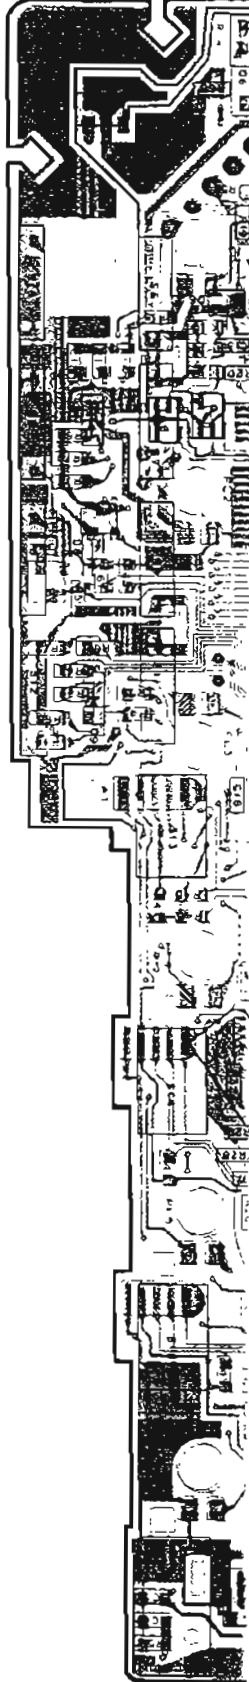


X-XX 0-11: 641A(K), 741A(K, P), 0-21:741A(M), 0-22:741A(M2), 2-71:741E(E)

Foil side view

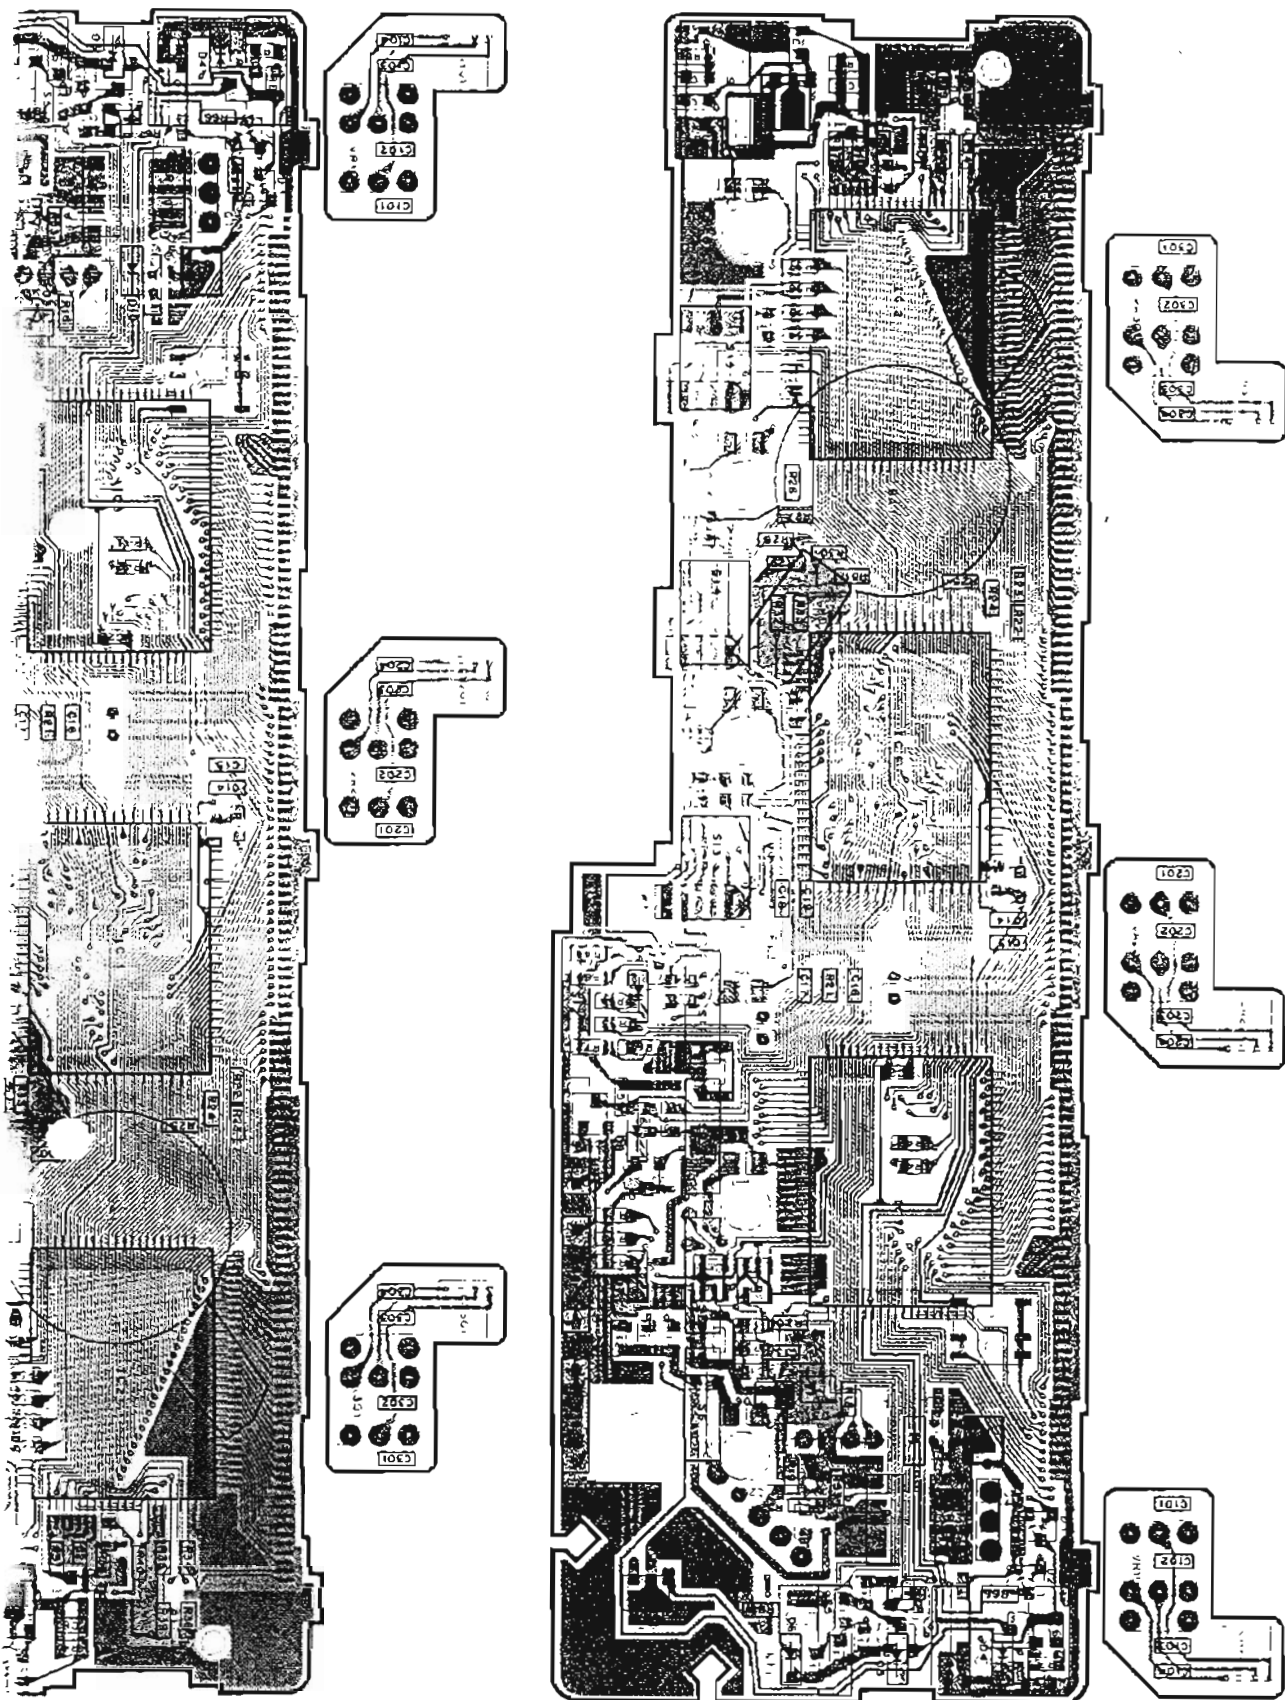


IC1: 75516GF 270-389 IC2: 3-MSM5265CS-V1K IC4: TA78L06F IC5: 6 TCAS11F IC7: S-8054ALR-LN O1,3,6: 2SC2712(Y) Q2: 2SA1162(Y)
Q4: 2SA1307(Y) Q5: 2SA1162(Y) Q7: 2SD1624(S,T) Q8: DTA114EK D1,7: 1SS184 D3: 02CZ7 S(X,Y) D4-9: B30-2108-05 D10: LFB01

— Signal line ——— Control line - - - Common DC line

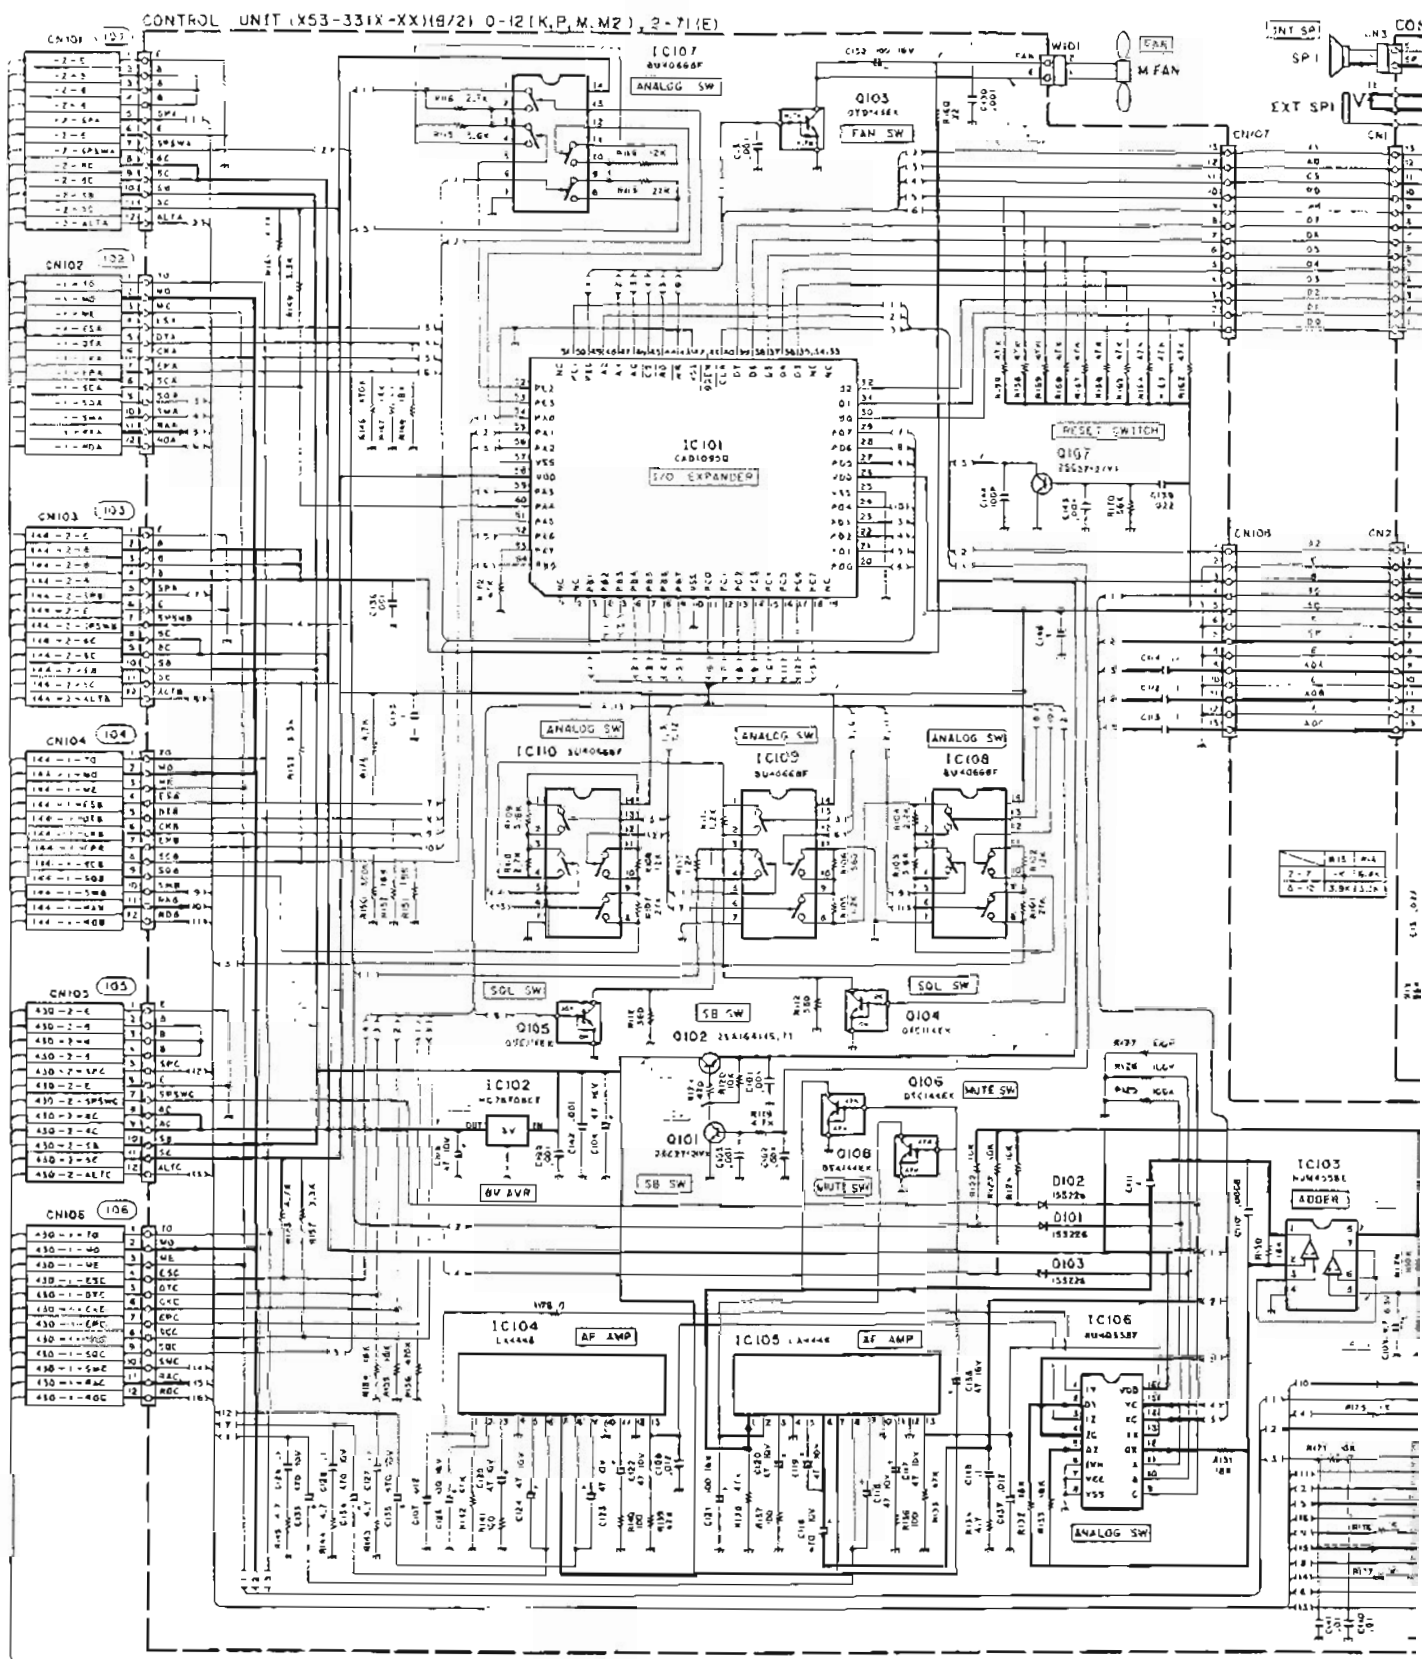


SCHEMATIC DIAGRAM

CONTROL UNIT (X53-331X-XX) (A/2) C-121K, P.M, M21, 2-71(E)

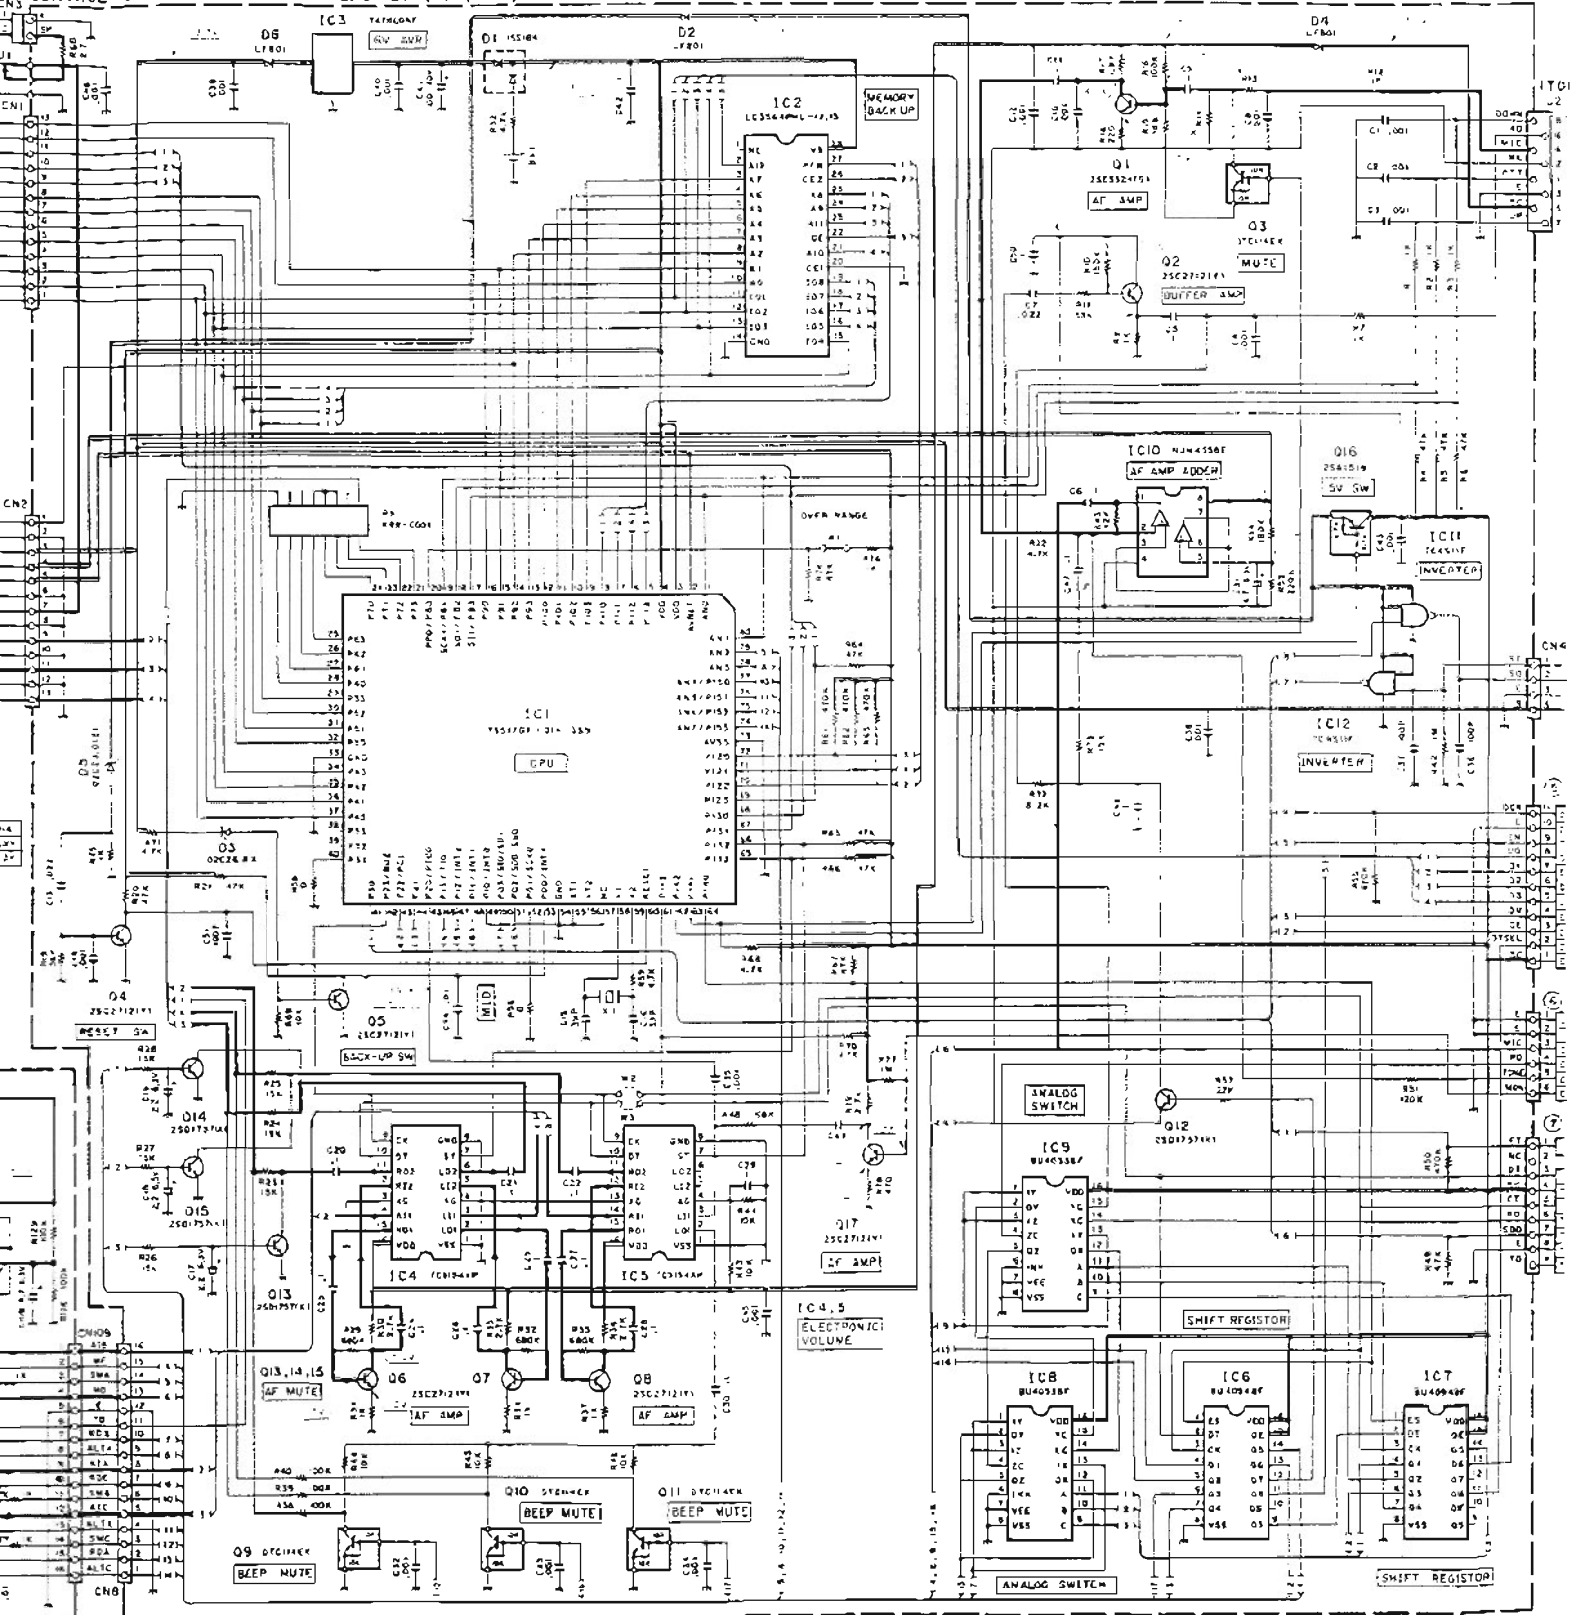

TM-641A/741A/741E

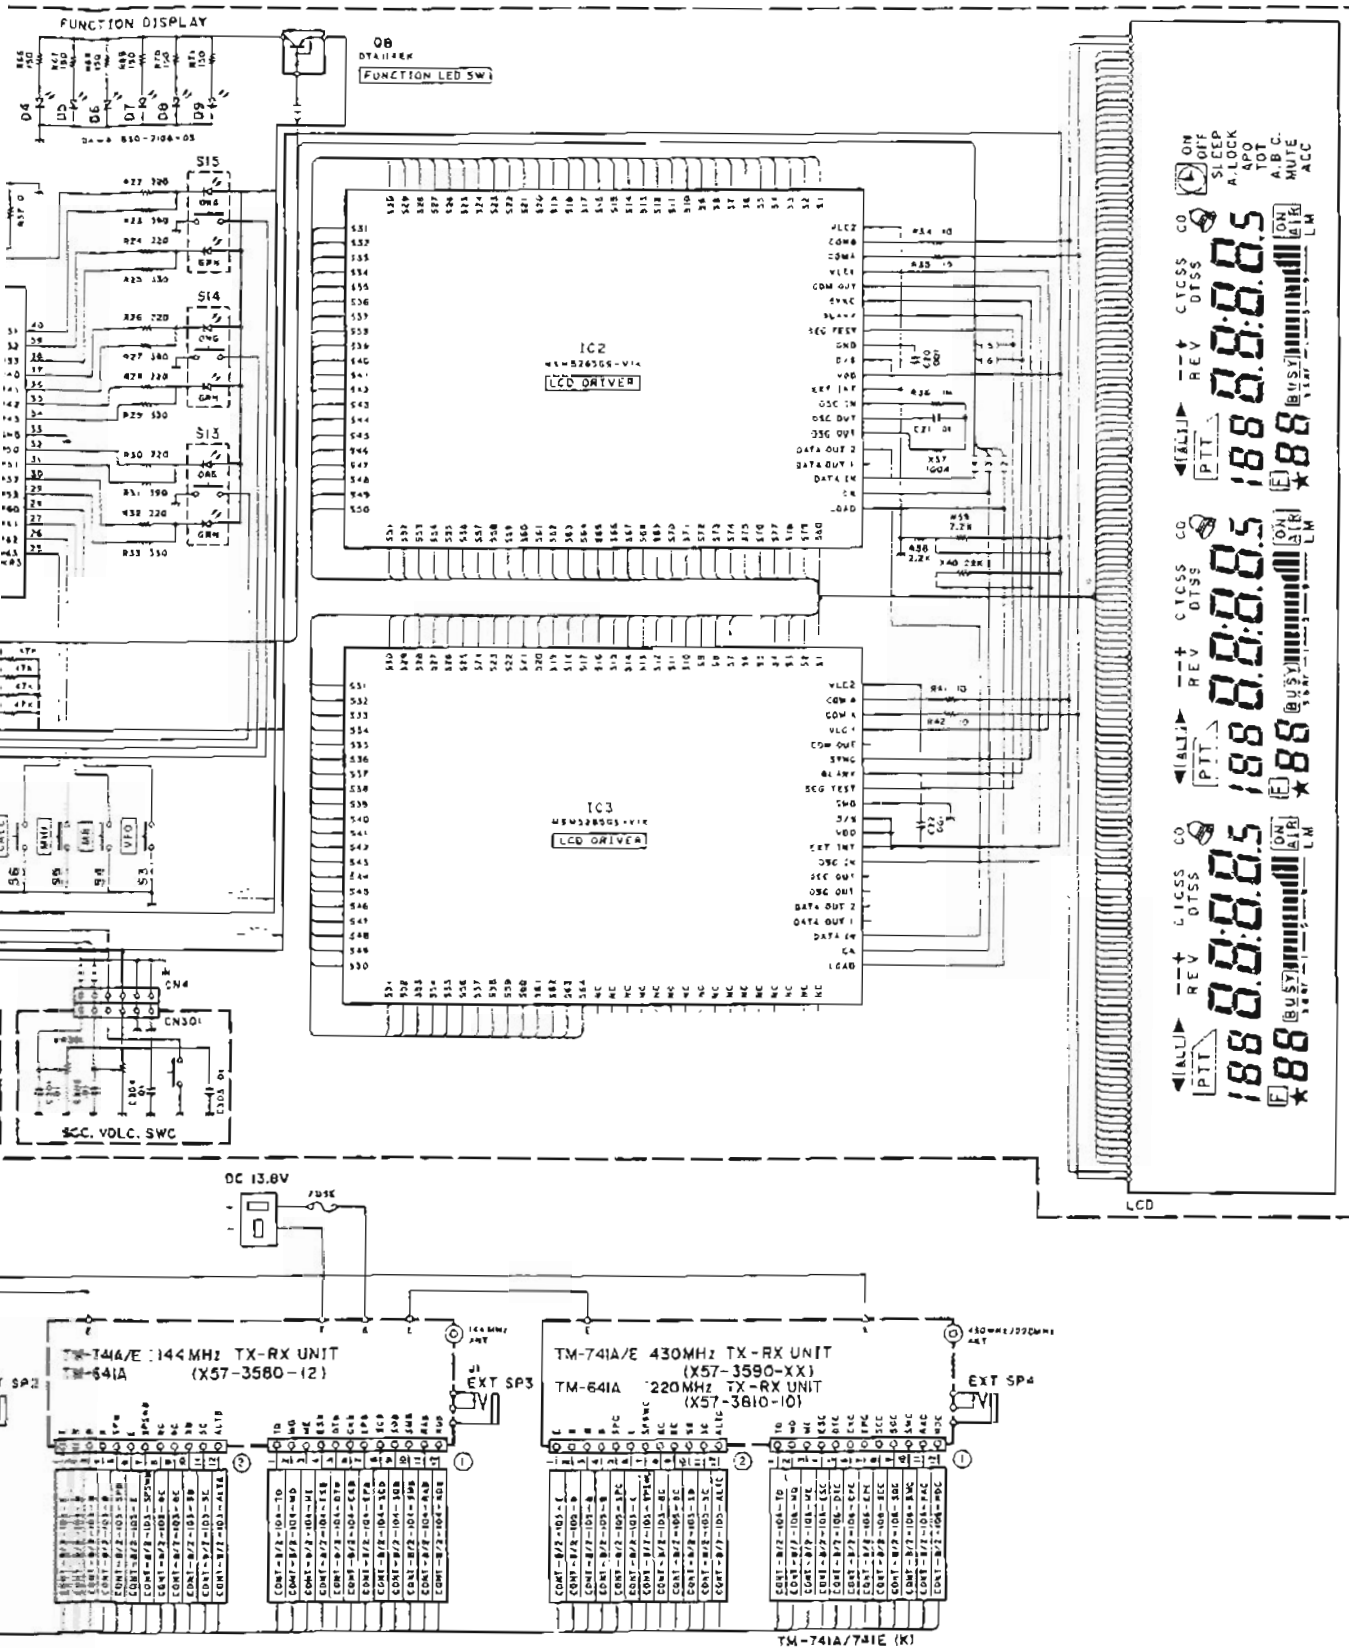

PC BOARD


28 M TX-RX UNIT (X57-3790-01) :UT-28S(M)

Component side view

28 M TX-RX UNIT

Foil side view

IC1: BU4094BF IC2: KCH09 IC3: KCA04 IC4: KCB16 IC5: KCC04 IC6: KCD04 IC7: LA509M IC8: KCB17 IC9: KCD05 Q1: 3SK179(L) Q2: 3SK131(V)12)
Q3: 8,20, 25C2714(Y) Q4,5: DTC144E U6,7,25: DTA114EK Q9: 2SJ106(GH) Q10: 2SA1362(Y) Q11: 2SB1119S Q12: DTC144WK Q13: FMV1
Q14,21,24: 2SC2712(Y) Q15-17,27: DTC144EK Q18: 2SD1757(K) Q19: 2SK208(Y) Q22: FMG1 Q23: 2SD1902R Q26: DTC143EK D1,2: MA77
D3-6: 1SV228 D7,9: DAN235(K) D8: 1SS184 D10: 1SS181 D11: UM9401 D12: M1308 D13,14: 1SS226 D15: DSA3A1 D16,17: 1SS184

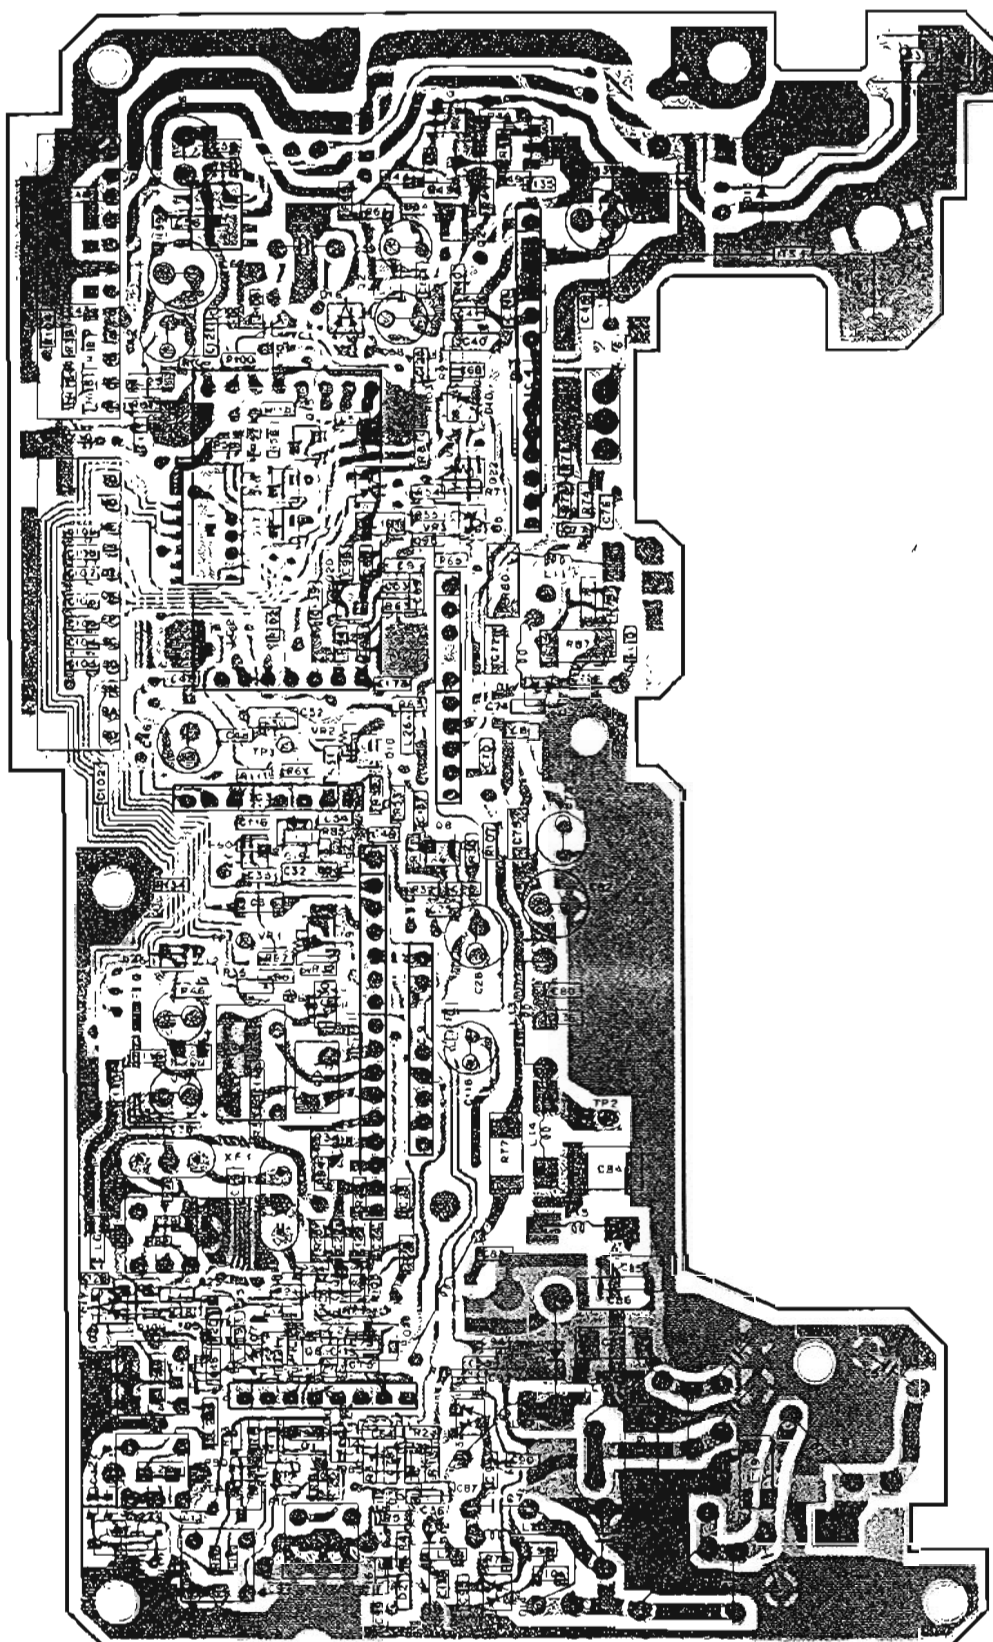


:Component side pattern

:Foil side pattern

BOARD VIEW

X UNIT (X57-3790-01) :UT-28S(M)

ew

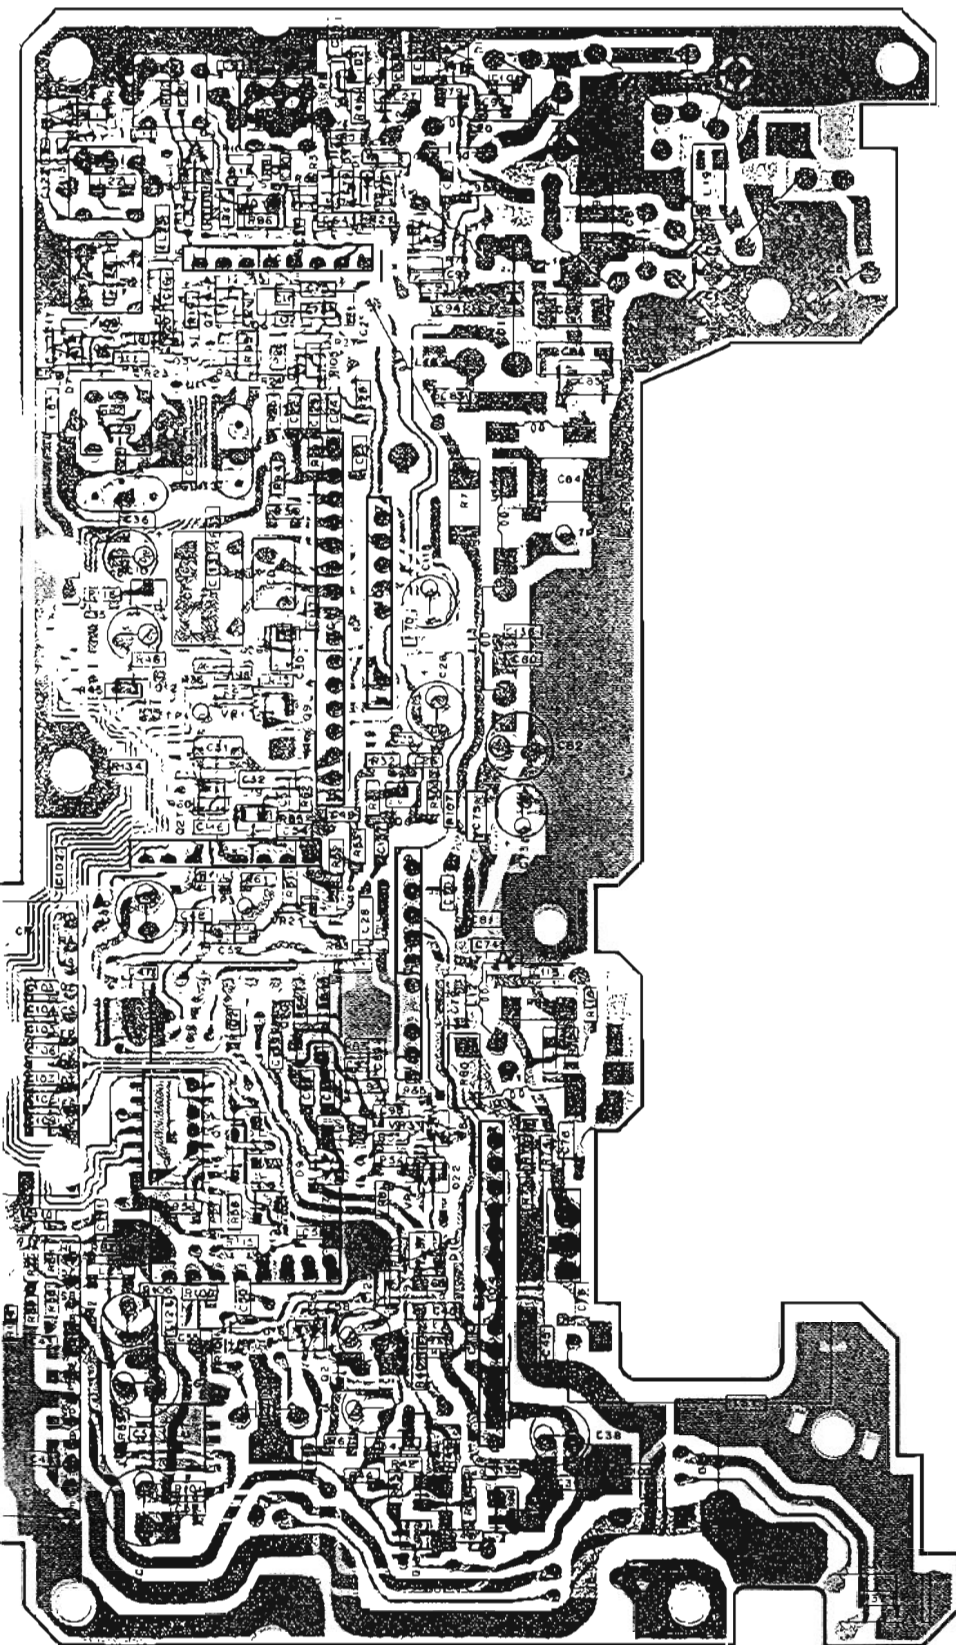


:Component side pattern



:Foil side pattern


SUB UNIT (X58-3840-01)


Component side view

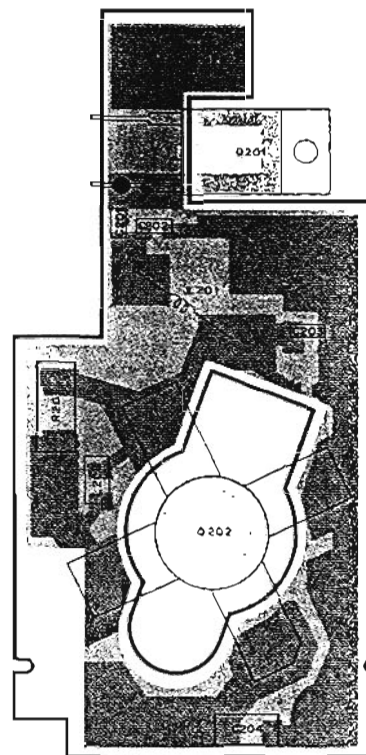

28M TX-RX UNIT (X57-3790-01): UT-28S(M)

— Signal line — Control line — Common DC line

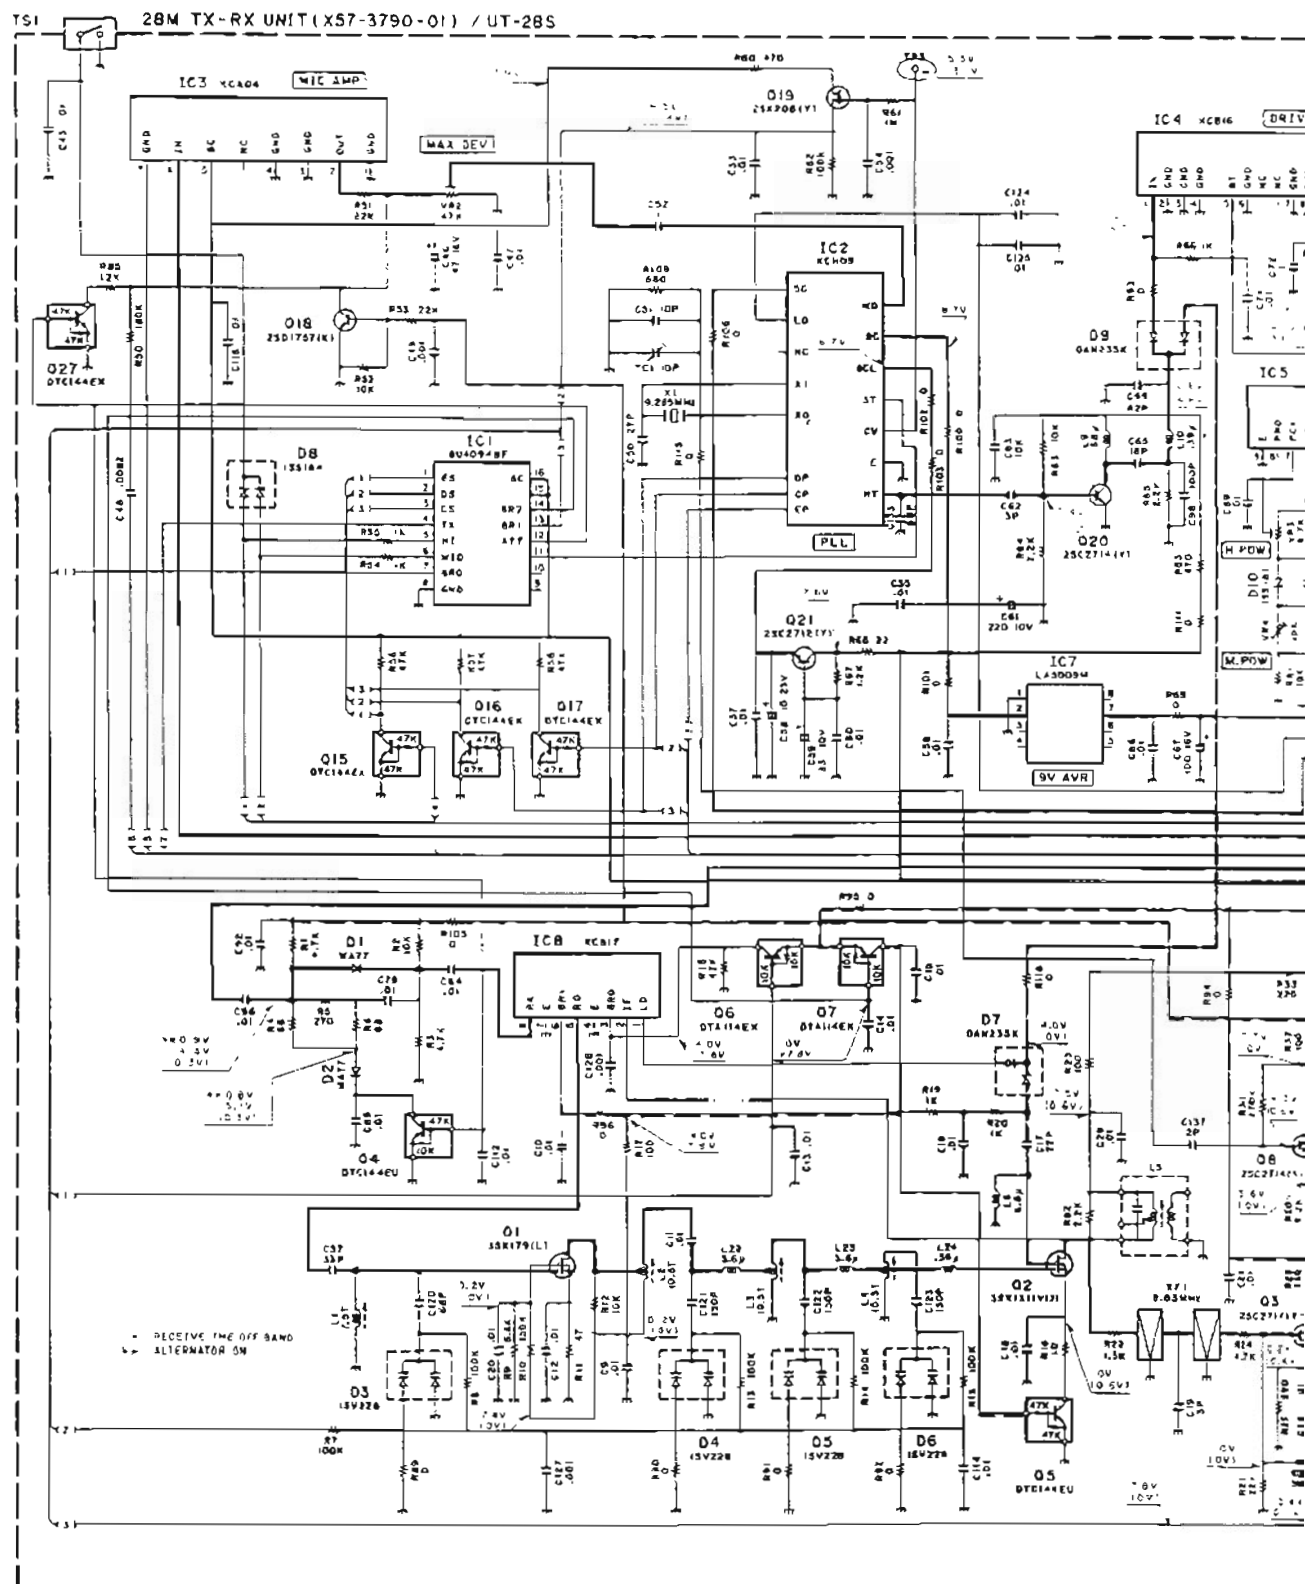

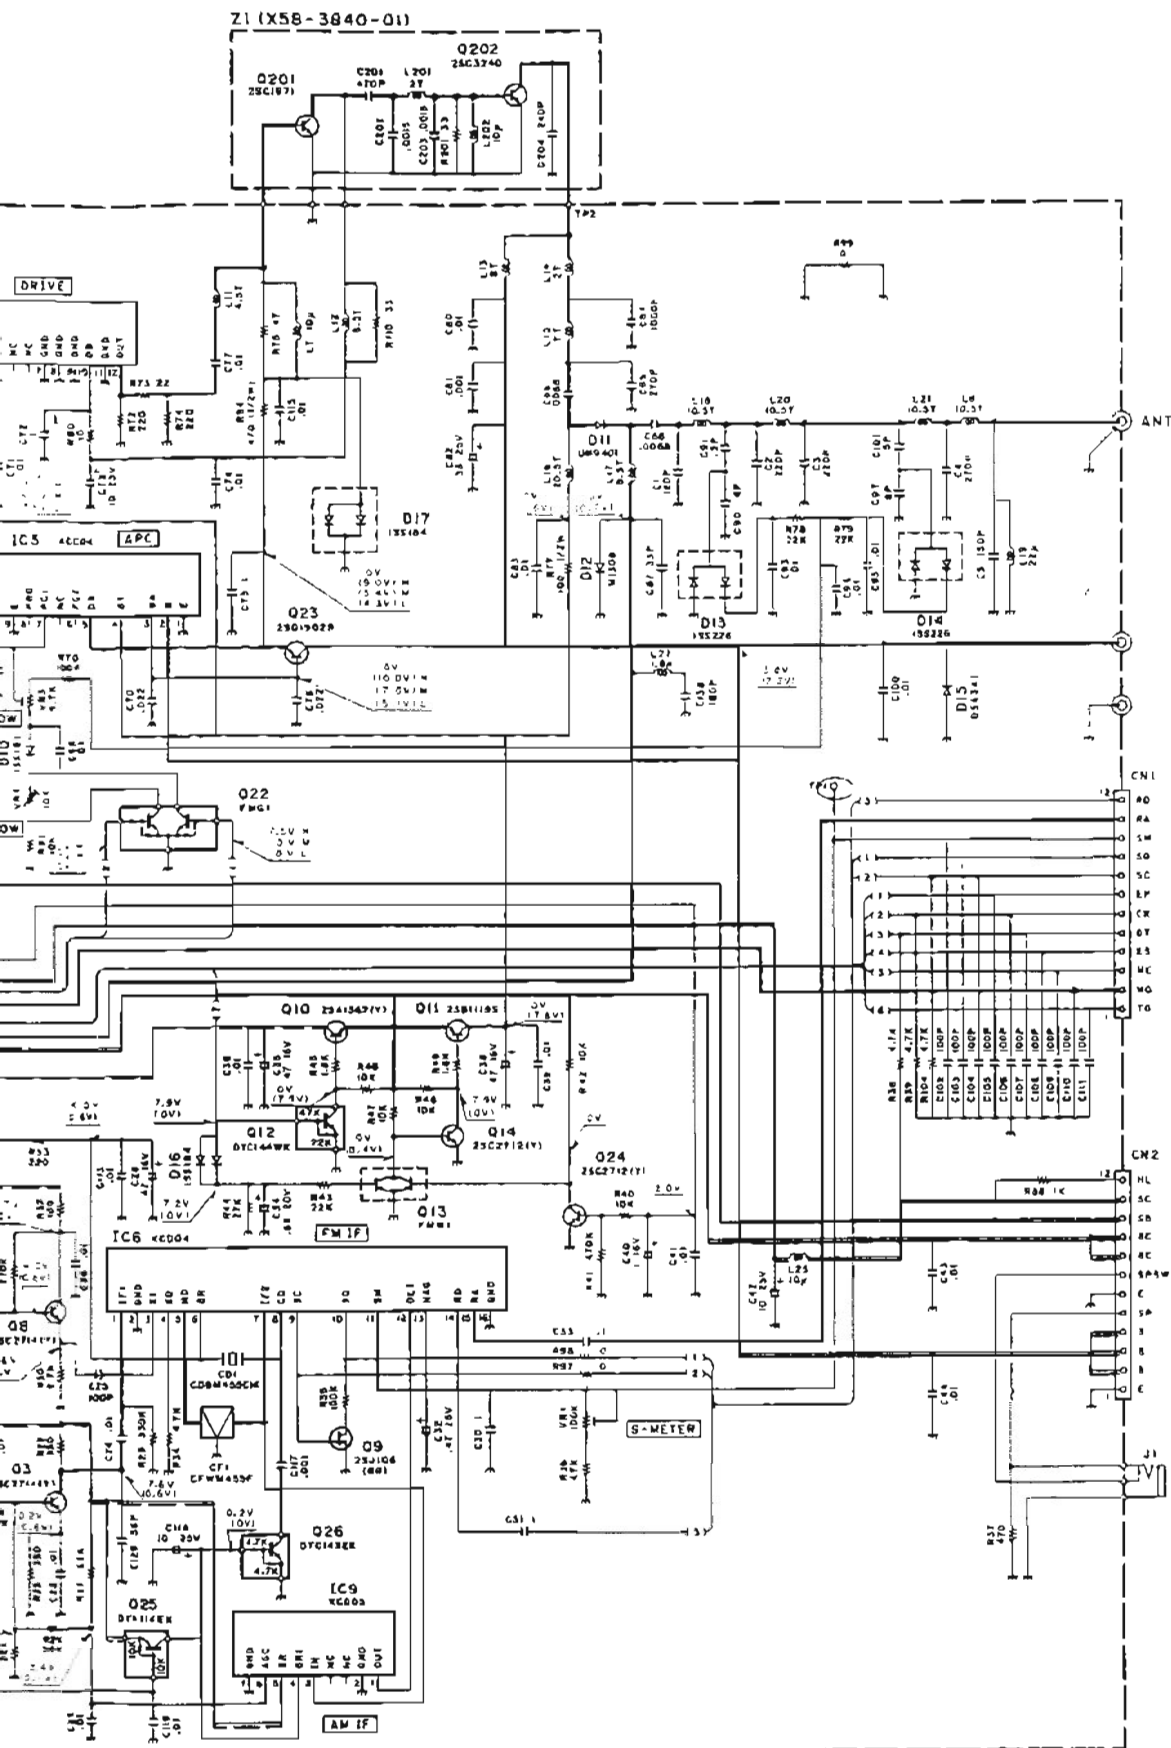


TM-641A/741A/741E

50M TX-RX UNIT (X57-3800-01) :UT-50S (M)

Component side view

IC1: BU4094BF IC2: KCH10 IC3: KCA04 IC4: KCB18 IC5: KCC04 IC6: KCD04 IC7: LA5010M IC8: KCB19 IC9: KCD05 Q1: 3SK184(S) Q2: 3SK131(V12)
Q3,8,20: 2SC2714(Y) Q4,15-17: DTC144EK Q5: DTC144EU Q6,7,25: DTA114EK Q9: 2SJ106(GR) Q10: 2SA1362(Y) Q11: 2SB1119S Q12: DTC144WK
Q13: EMW1 Q14,21,24: 2SC2712(Y) Q18: 2SD1757(K) Q19: 2SK208(Y) Q22: FMG1 Q23: 2SD1902R Q26: DTC143EK Q1,2: MA77 D3-6: 1SV228 D7,9: DAN235(K)
D8,16,17: 1SS184 D10: 1SS181 D11: M407 D12: M308 Q13,14: 1SS226 D15: DSA3A1

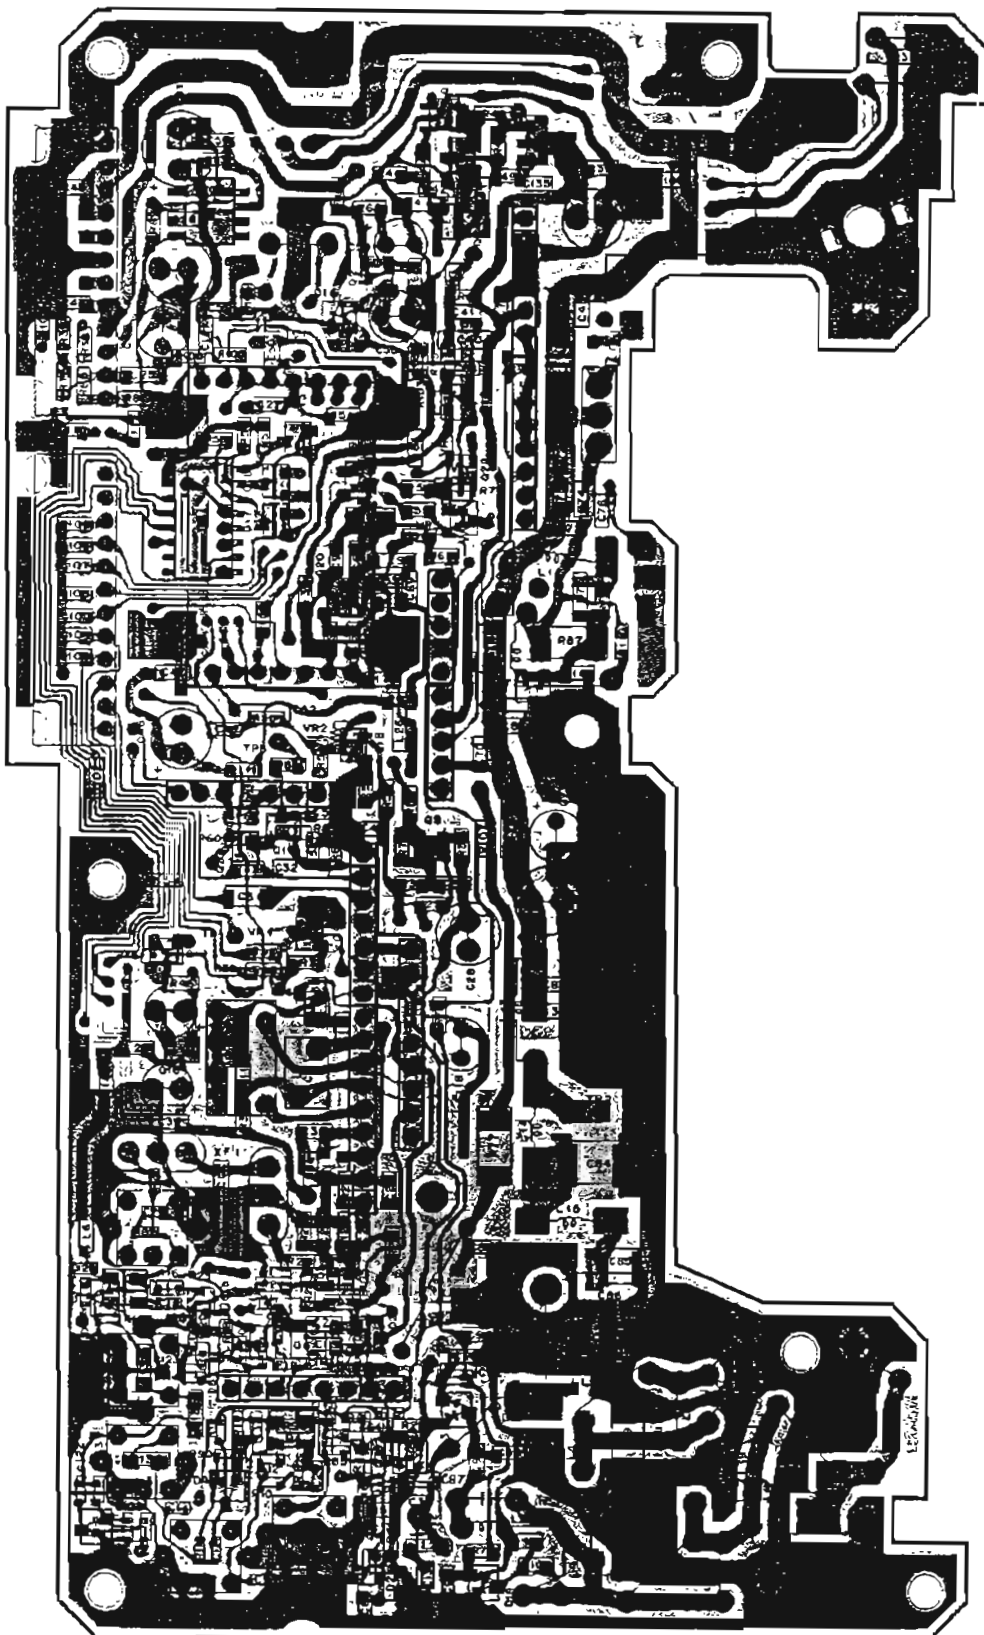

○ : Component side pattern ■ : Foil side pattern

PC B

50M T

Foil si


Q3,8,20: 2SC2714(Y) Q4,15-17: DTC144EK Q5: DTC144EU Q6,7,25: DTA114EK Q9: 2SJ106(GR) Q10: 2SA1362(Y) Q11: 2SB1119S Q12: DTC144WK
Q13: EMW1 Q14,21,24: 2SC2712(Y) Q18: 2SD1757(K) Q19: 2SK208(Y) Q22: FMG1 Q23: 2SD1902R Q26: DTC143EK Q1,2: MA77 D3-6: 1SV228 D7,9: DAN235(K)
D8,16,17: 1SS184 D10: 1SS181 D11: M407 D12: M308 Q13,14: 1SS226 D15: DSA3A1

C BOARD VIEW

TX-RX UNIT (X57-3800-01) :UT-50S (M)


Component side view

IC1: BU4094BF IC2: KCH10 IC3: KCA04 IC4: KCB18 IC5: KCC04 IC6: KCD04 IC7: LAB010M IC8: KCB19 IC9: KCD06 Q1: 3SK184(S) Q2: 3SK131(V12)
Q3: 820-25C271(KV) Q4: 15-17: D1C144EK Q5: D1C144EU Q6: 7.25: D1A114EK Q9: 2SJ106(GR) Q10: 2SA1362(V) Q11: 2SB1119S Q12: D1C144WK
Q13: EMW1 Q14: 21.24: 25C271(ZV) Q18: 2SD1757K Q19: 2SK208(Y) Q22: FMG1 Q23: 2SD1802R Q26: D1C143EK Q1.2: MAT7 D3-6: 1SV228 D7, 8: DAN235(K)

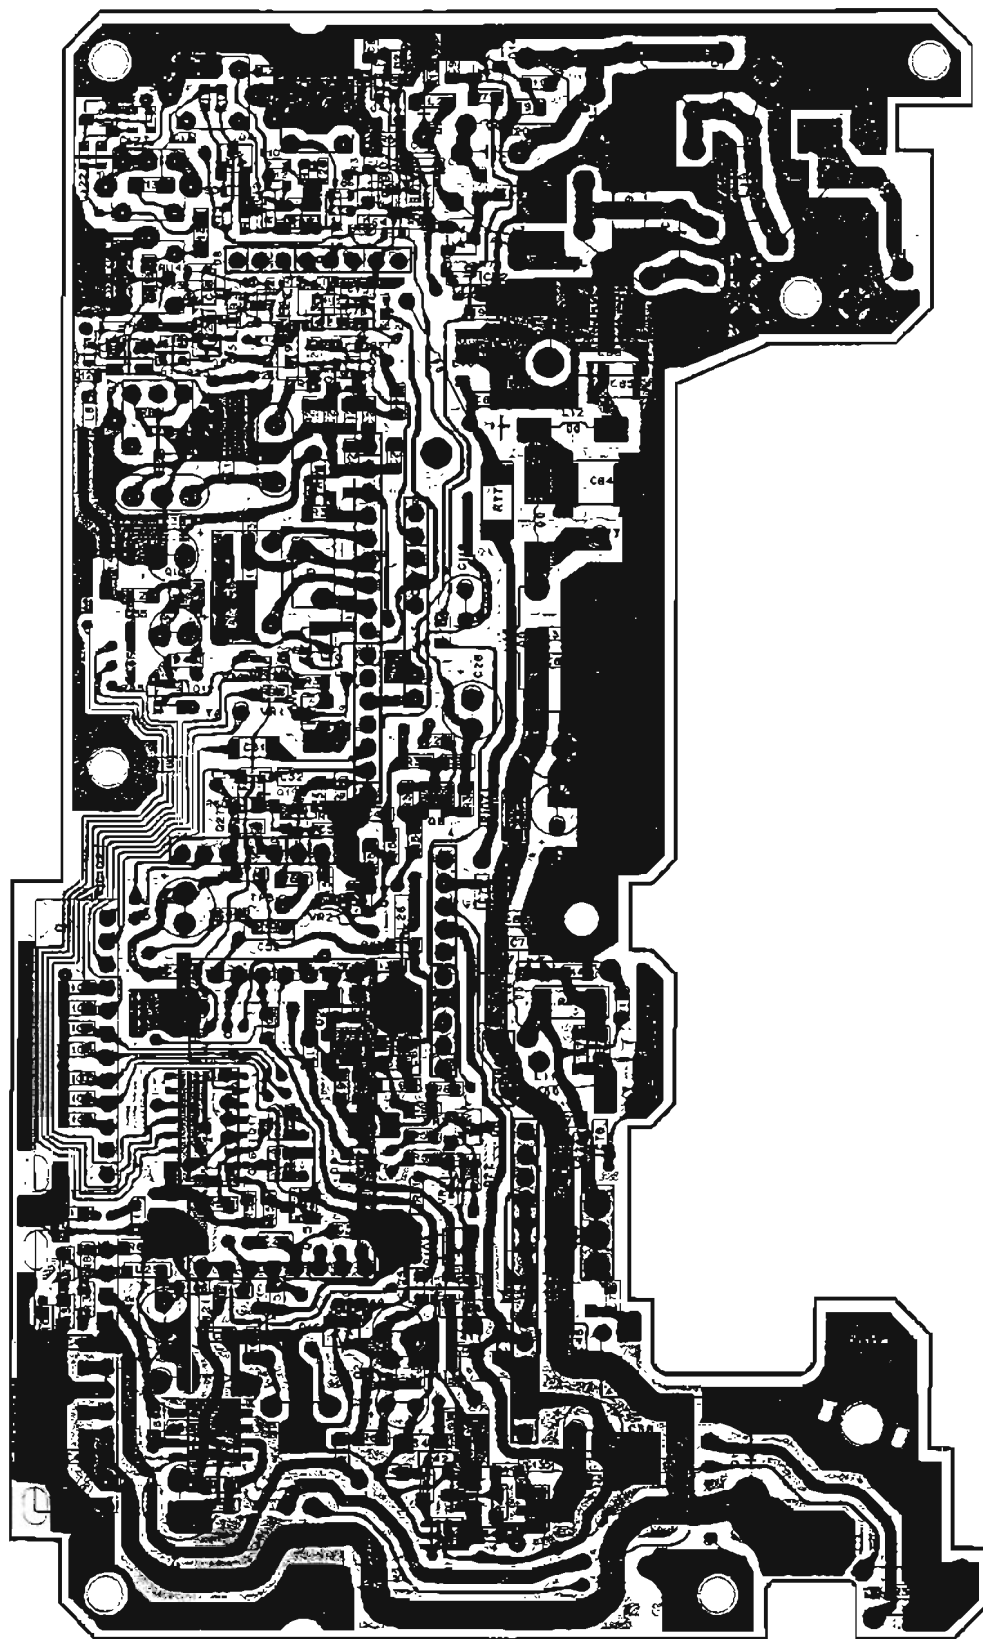

SUB UNIT (X58-3840-03)


Component side view

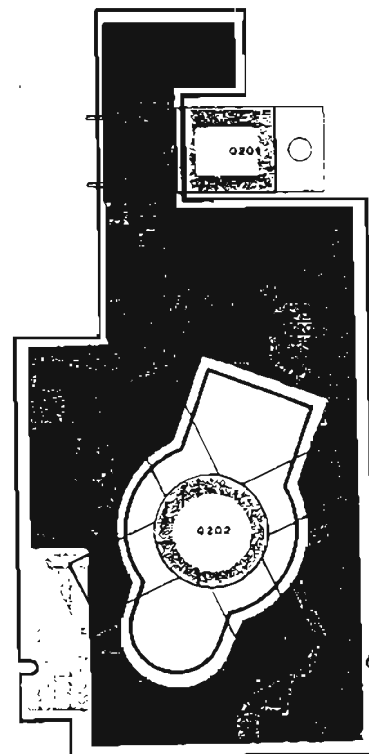


○ : Component side pattern ■ : Foil side pattern

50M TX-RX UNIT (X57-3800-01): UT-50S(M)

— Signal line — Control line — Common DC line

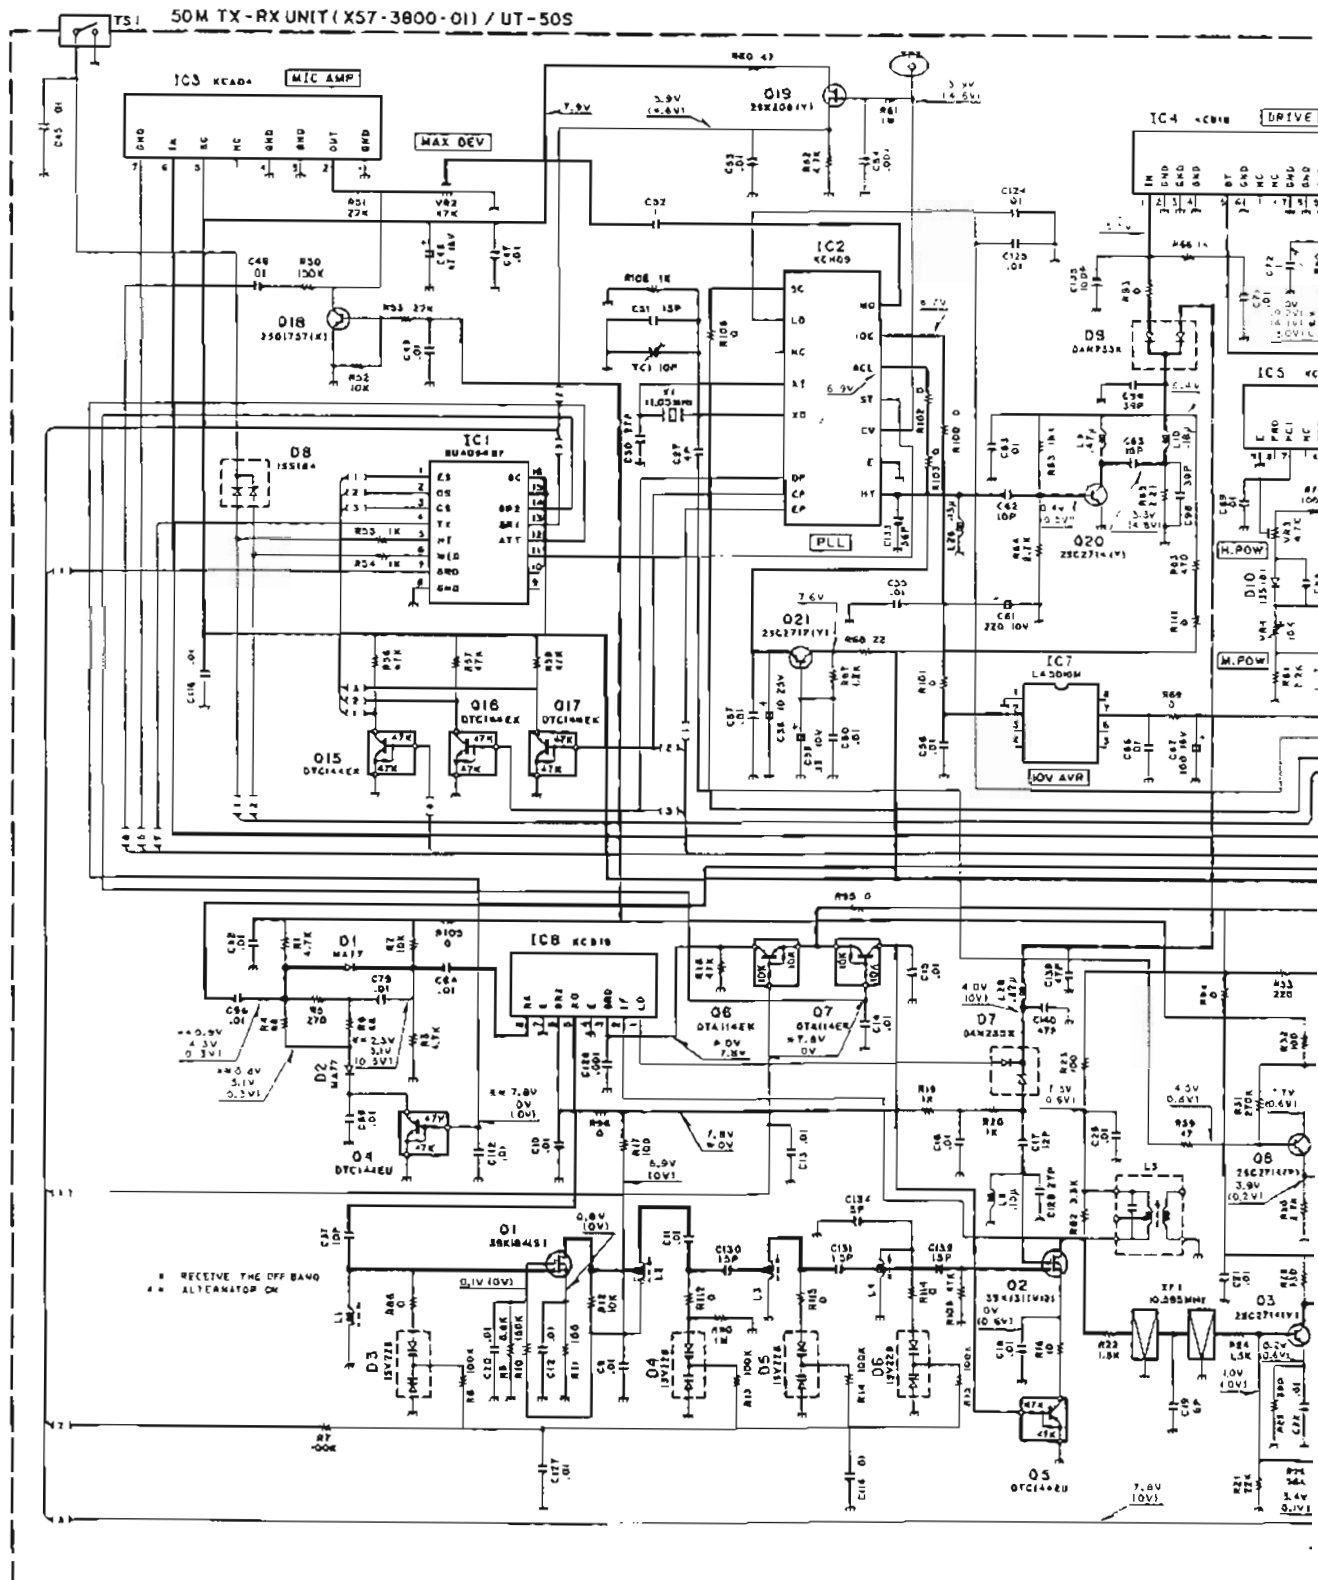


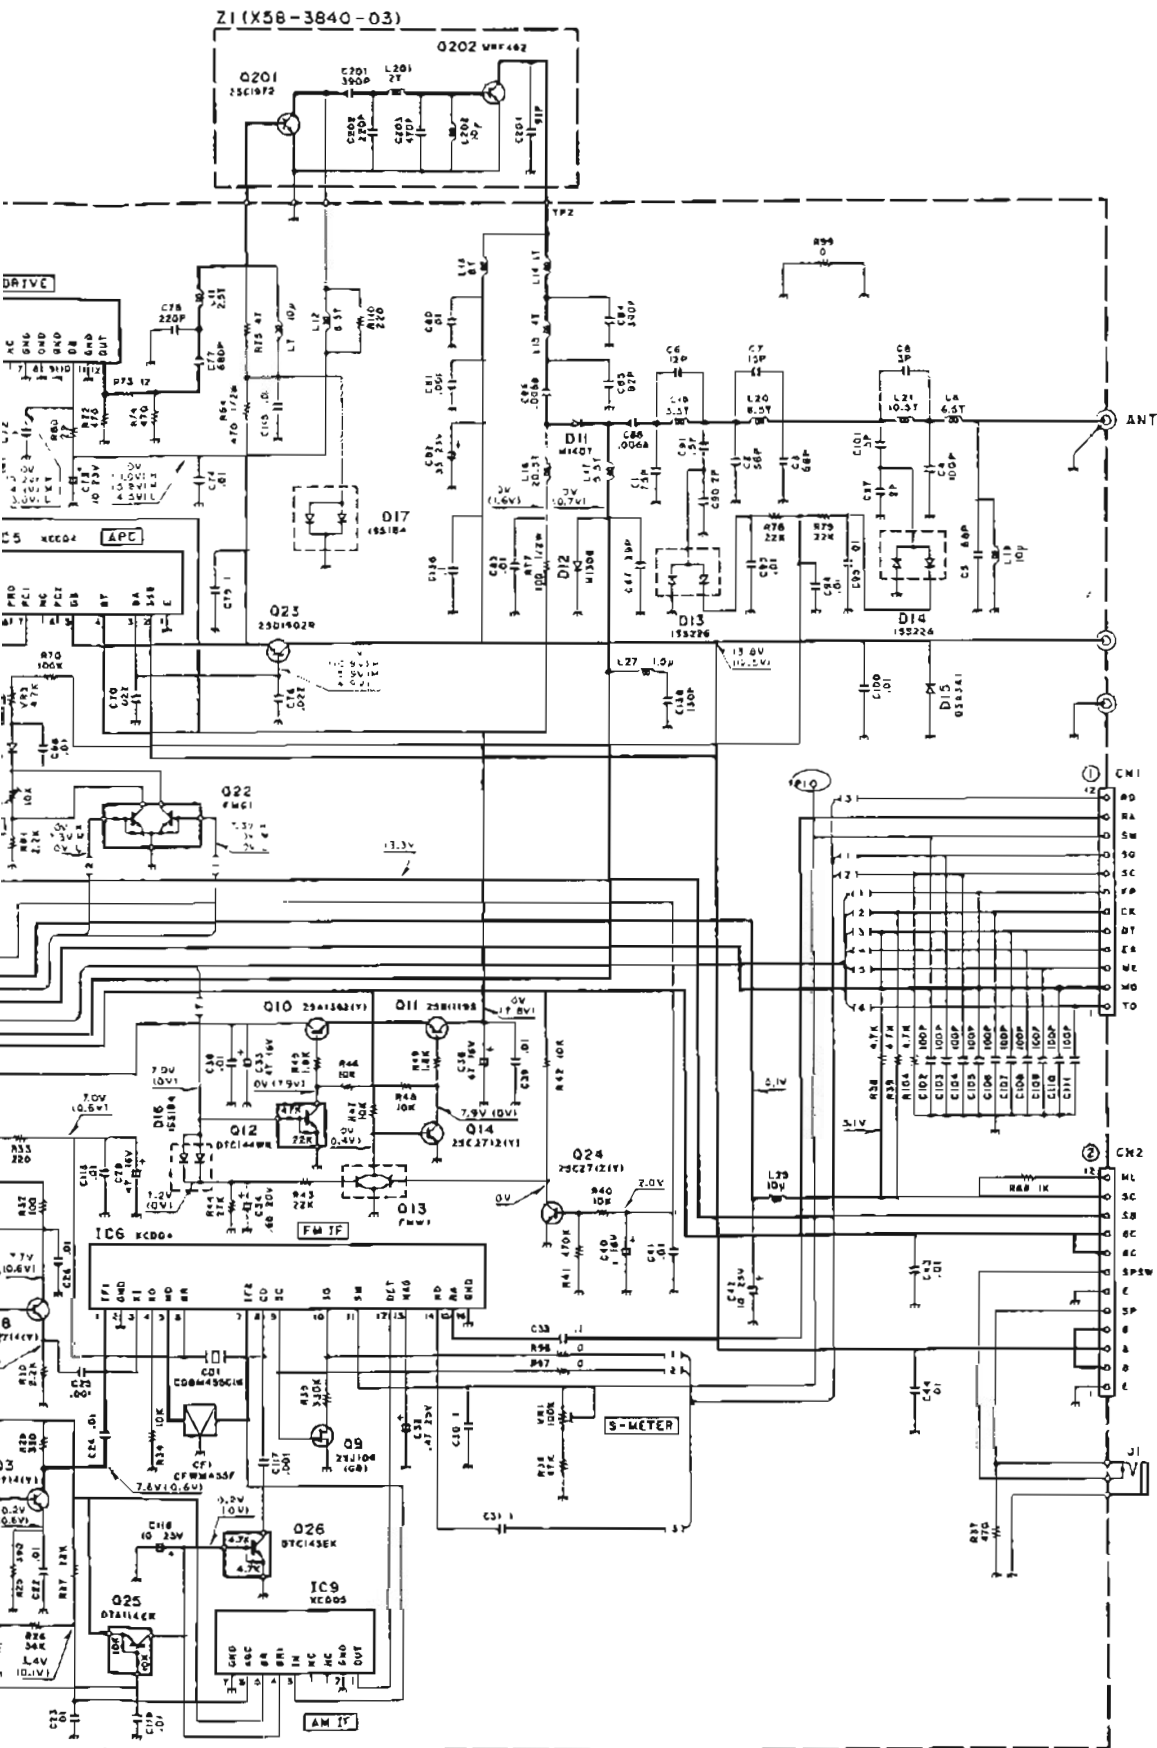

144M TX-RX UNIT (X57-3580-12) :641A, 741A, 741E

Component side view

IC1:BU4094BF IC2:LA5010M IC5:KCD04 IC6:KCD05 IC7:KCA04 IC8:KCB11 IC9:KCC04 IC10:S AV17 IC11:KCH05
 Q1:3SK184(S) Q2:3SK31(V) Q3: 202SC271(4Y) Q4:DTA114YK Q5: 6DTC123JK Q7:DTCT143EK Q10:2SA1362(Y) Q11:2SB1119S Q12:DTCT144WK
 Q13, 14: 212SC2712(V) Q15~17:DTCT144FK Q18:2SD1757(K) Q19:2SK208(Y) Q22:FMC1 Q23:2SD1902R Q24:2SJ106(GR)
 D1, 3, 4, 6:1SV164 D2, 5, 7:1SV166 D11, 12:1SS184 D13:DAN235(K) D14:1SS181 D15:MA407 D16:MA308 D17, 18:1SS226 D19:DSAA1


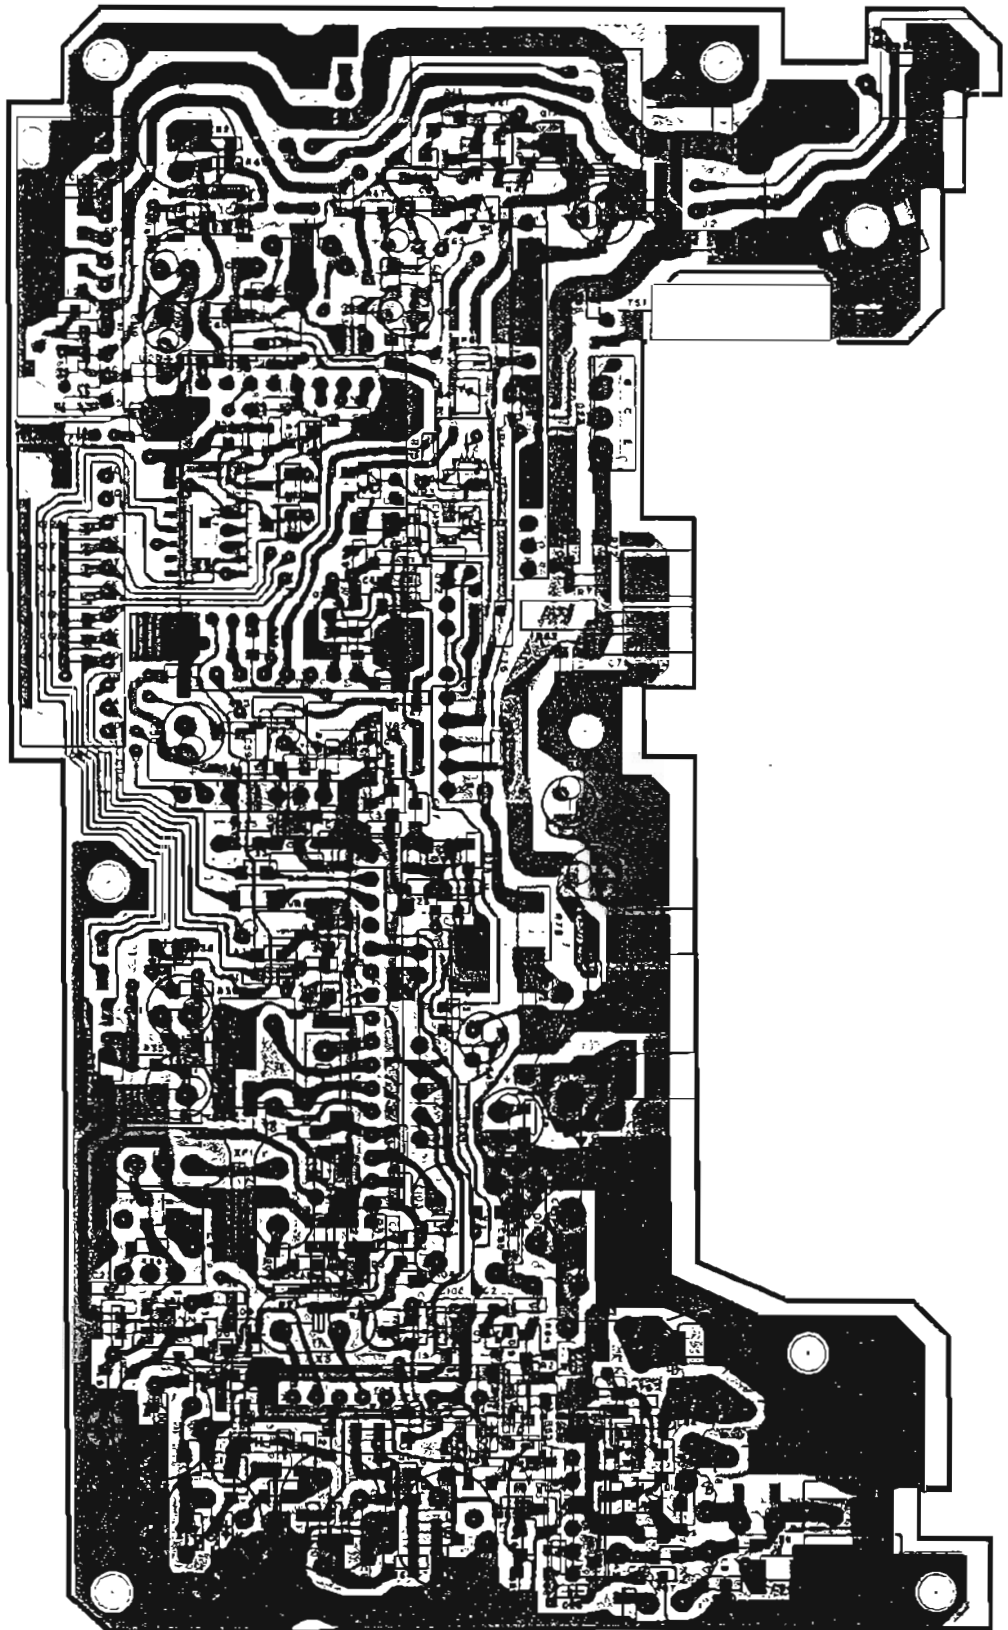


: Component side pattern  : Foil side pattern

BOARD VIEW

144M TX-RX UNIT (X57-3580-12) :641A, 741A, 741E


Foil side view

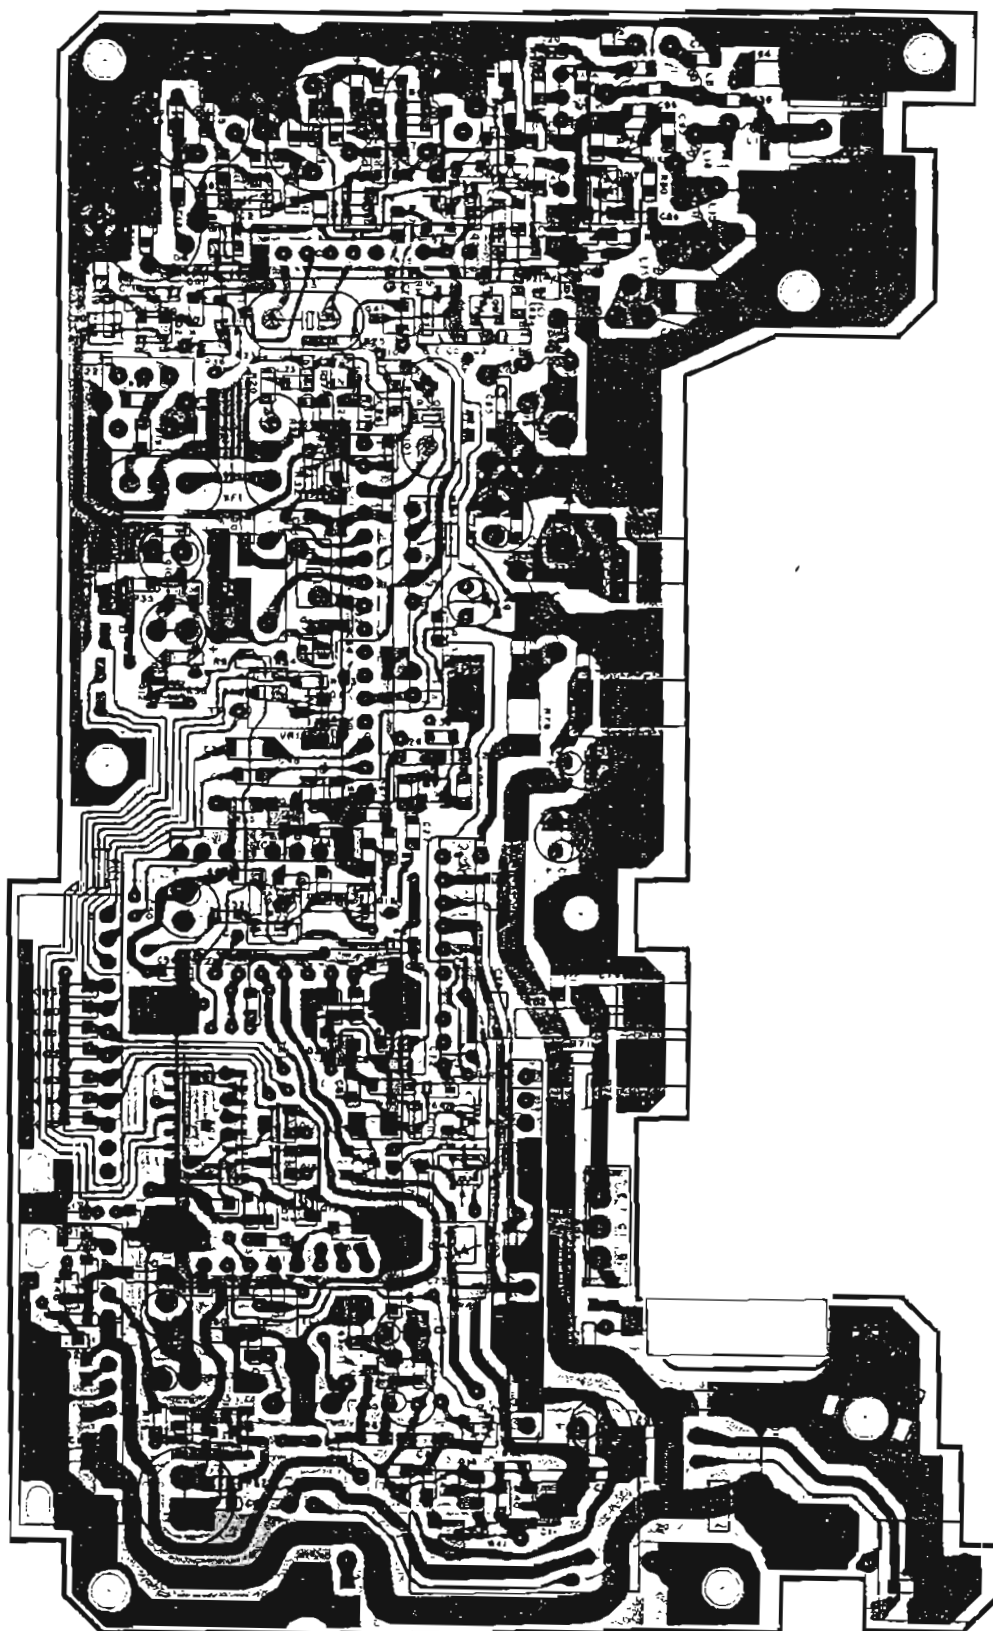

: Component side pattern : Foil side pattern

144M TX-RX UNIT (X57-3580-12); 641A, 741A, 741E


— Signal line — Control line — Common DC line

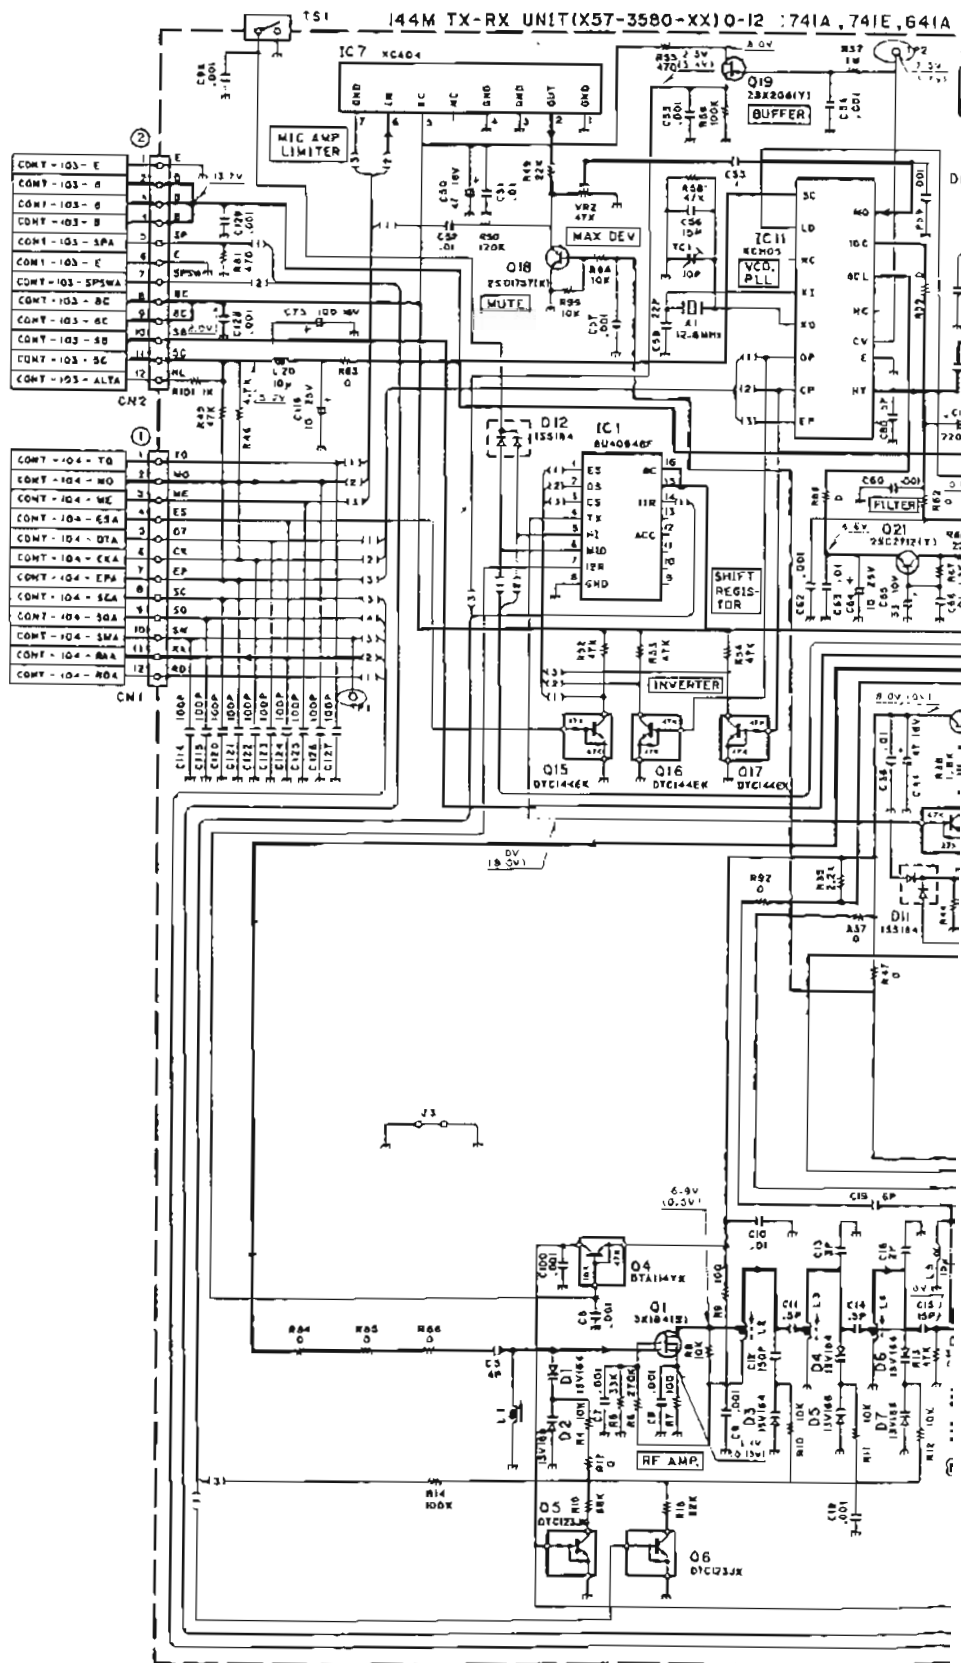

220M TX-RX UNIT (X57-3810-10) : TM-641A(K), UT -220S(K)

Component side view

IC1: BUJ4094BT IC2: LA5009M IC5: KCD04 IC7: KCA04 IC8: KCB15 IC9: KCC04 IC10: M57774 IC11: KCH08 Q1,2: 3SK184(S) Q3,20: 2SC2714(Y)
Q10: 2SA1362(Y) Q11: 2SB1195 Q12: D1C144WK Q13,14,21: 2SC2712(Y) Q15-17: D1C144FK Q18: 2SD1757(K) Q19: 2SK208(Y) Q22: FMG1 Q23: 2SD1902R
Q24: 2SJ106(GM) Q3,5,7,20: 1SV164 D11,12: 1SS184 D13: DANZ35(K) D14: 1SS181 D15: M407 D16: M308 D17,18: 1SS226 D19: DSA341

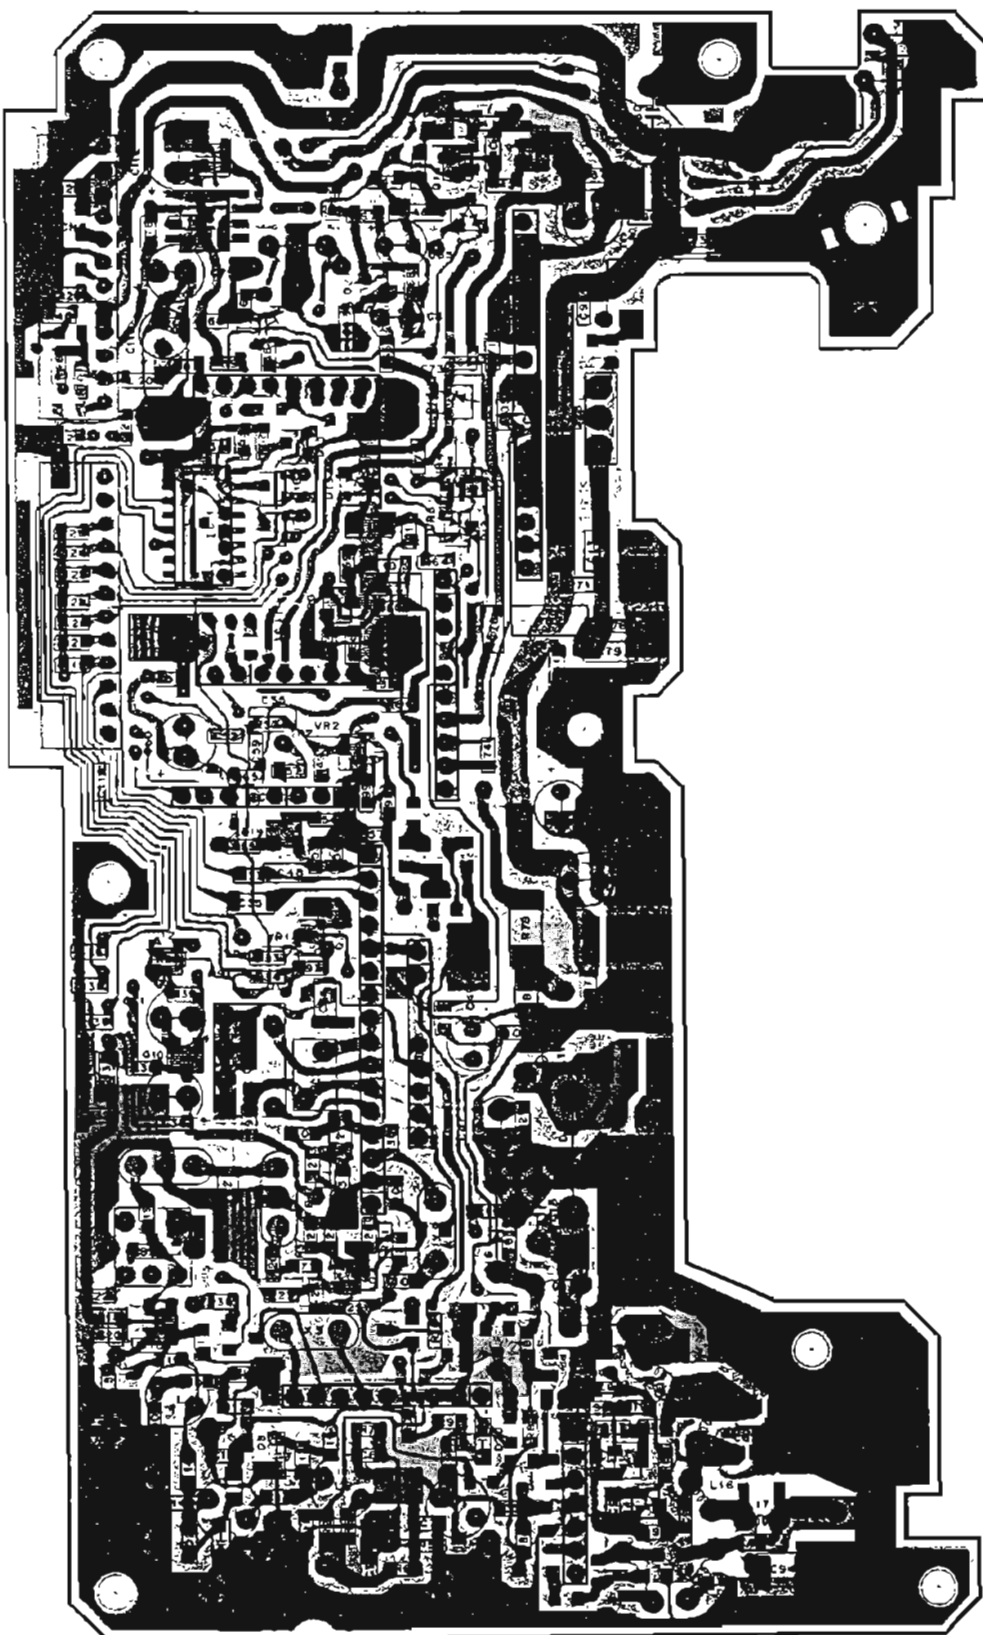


□ : Component side pattern ■ : Foil side pattern

BOARD VIEW

220M TX-RX UNIT (X57-3810-10) : TM-641A(K), UT -220S(K)

Foil side view


IC1: BU40948F IC2: LA5009M IC3: KCD04 IC7: KCA04 IC8: KCB15 IC9: KCC04 IC10: M57774 IC11: KCH08 Q1,2: 3SK184(S) Q3,20: 2SC2714(Y)
Q10: 2SA1362(Y) Q11: 2SB1195 Q12: DTC144WK Q13,14,21: 2SC2712(Y) Q15-17: DTC144EK Q18: 2SD1757(K) Q19: 2SK2081(Y) Q22: FMG1 Q23: 2SD1802R
Q24: 2SJ106(GR) Q3,5,7,20: 1SV164 D11,12: 1SS184 D13: DAN235(K) D14: 1SS181 D15: M1407 D16: M1308 D17,18: 1SS226 D19: DSA341

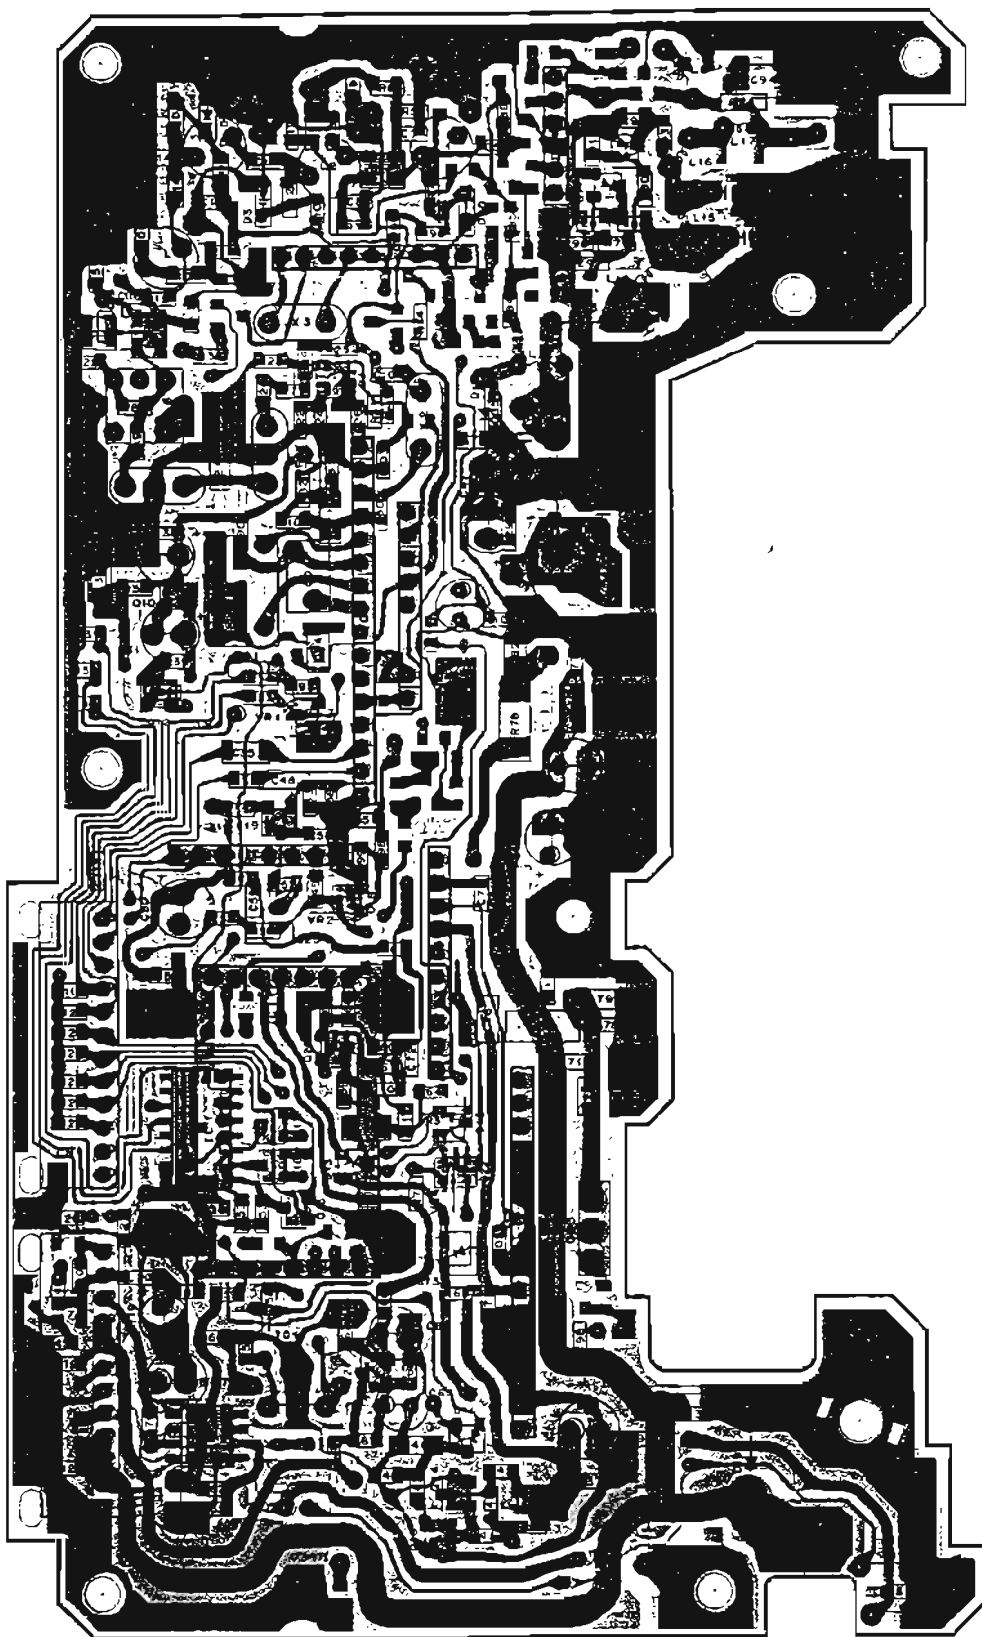

○ : Component side pattern ■ : Foil side pattern

220M TX-RX UNIT (X57-3810-10): TM-641A(K), UT-220S(K)

— Signal line — Control line — Common DC line

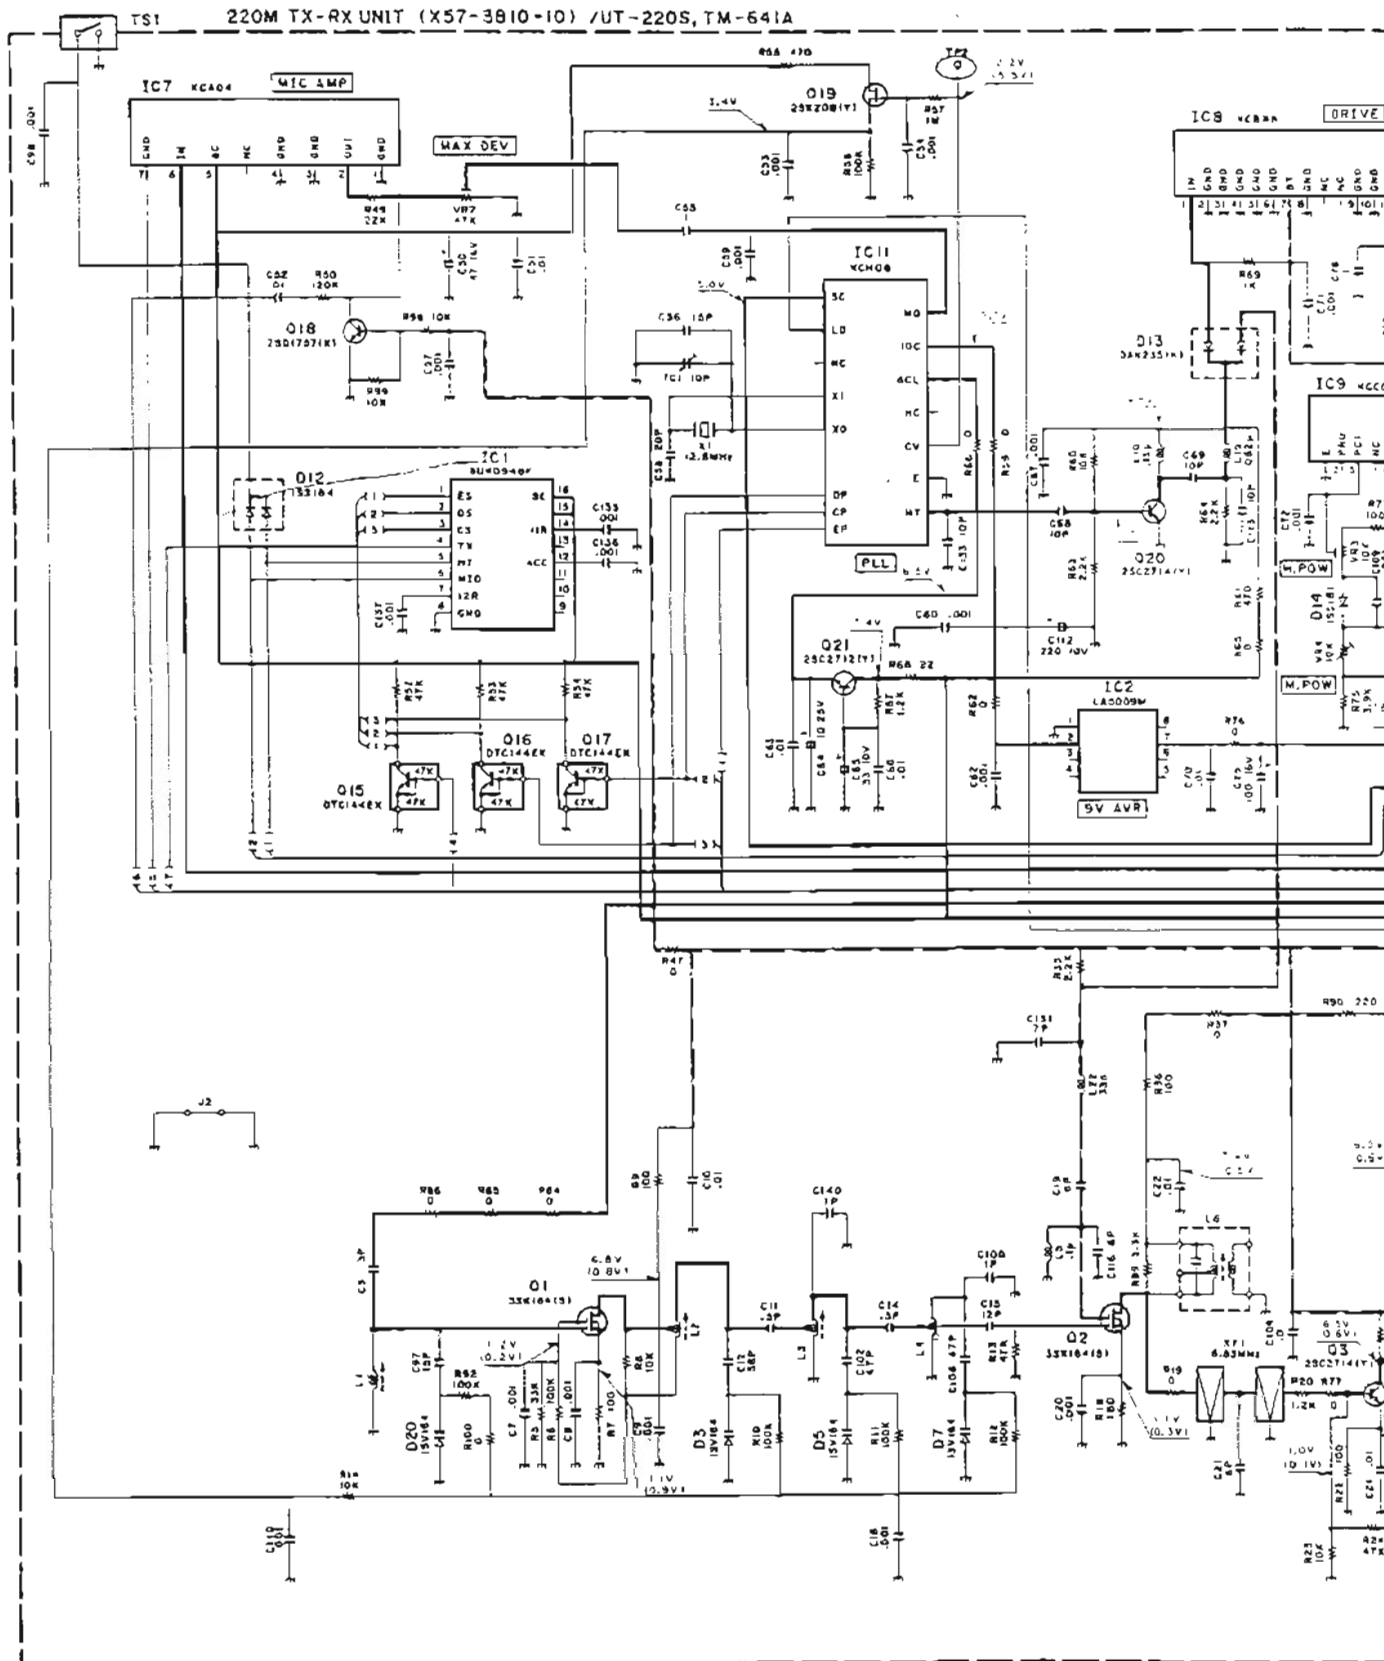



TM-641A/741A/741E

PC BO


430/440M TX-RX UNIT (X57-359X-XX)

0-12: 741A (K, P), UT-440S (K),

Component side view

0-22: 741A (M, M2), 2-72: 741E (E)

IC1:KCD04 IC2:KCA04 IC3:BU4094BF IC4:LA 5010M IC5:KCC04 IC6:KCB14 IC7:M57788M IC8:KCB12 IC9:KCB13 IC10:KCH07
 Q1:3ASK184SI Q2:2SK582 Q4:DTIC14EK Q5:2SC2714(Y) Q6:7, FMA5 Q8:2SA1362(Y) Q9:DTIC14WK Q10, 11, 17:2SC2712(Y) Q12:2SB1119S Q13-15:OTC144EK
 Q16:2SD1757(K) Q18:2SC3123 Q19:FMG1 Q20:2SD1760(Q) Q21:2SJ108(GR)
 D1:H5K277 D2:1SV128 D3:1SS184 D4, 15:MAB62 D5:1SS181 D6, 7, 13:1SS184 D8:MI407 D9:MI308 D10, 11, 14:MA716 Q12:DSA3A1

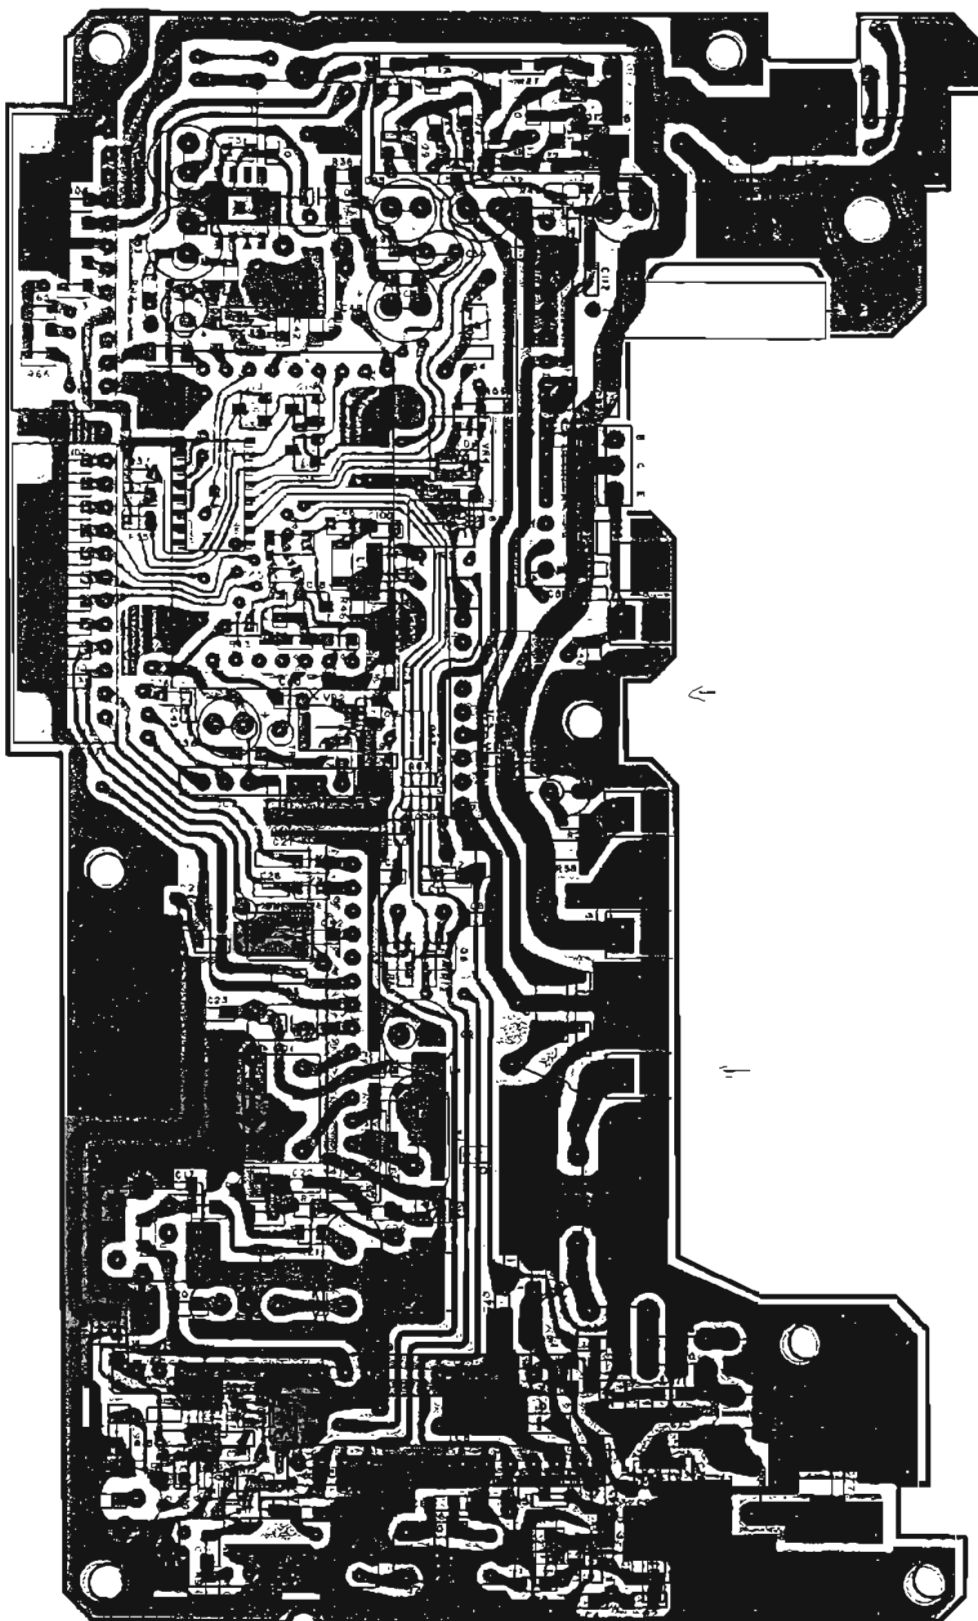

○ : Component side pattern ■ : Foil side pattern

BOARD VIEW


430/440M TX-RX UNIT (X57-359X-XX)

0-12: 741A (K, P), UT-440S (K),

Foil side view

0-22: 741A (M, M2), 2-72: 741E (E)

IC1:KCD04 IC2:KCA04 IC3:BU4094BF IC4:LA5010M IC5:KCC04 IC6:KCB14 IC7:M57788M IC8:KCB12 IC9:KCB13 IC10:KCH07
Q1:33SK184IS Q2:2SK582 Q4:DTIC14EK Q5:2SC2714(Y) Q6:7FMA6 Q8:2SA1362(Y) Q9:DTIC14WK Q10,11,17:2SC2712(Y) Q12:2SB1119S Q13-15:DTIC14EK
Q16:2SD1757(K) Q18:2SC3123 Q19:F-MGT Q20:2SD1760(C) Q21:2SJ106(GH)
D1:HSK27 D2:SV128 D3:ISS184 D4,15:MA867 D5:ISS181 D6,7,13:ISS184 D8:M1407 D9:M308 D10,11,14:MA716 D12:DSA3A1

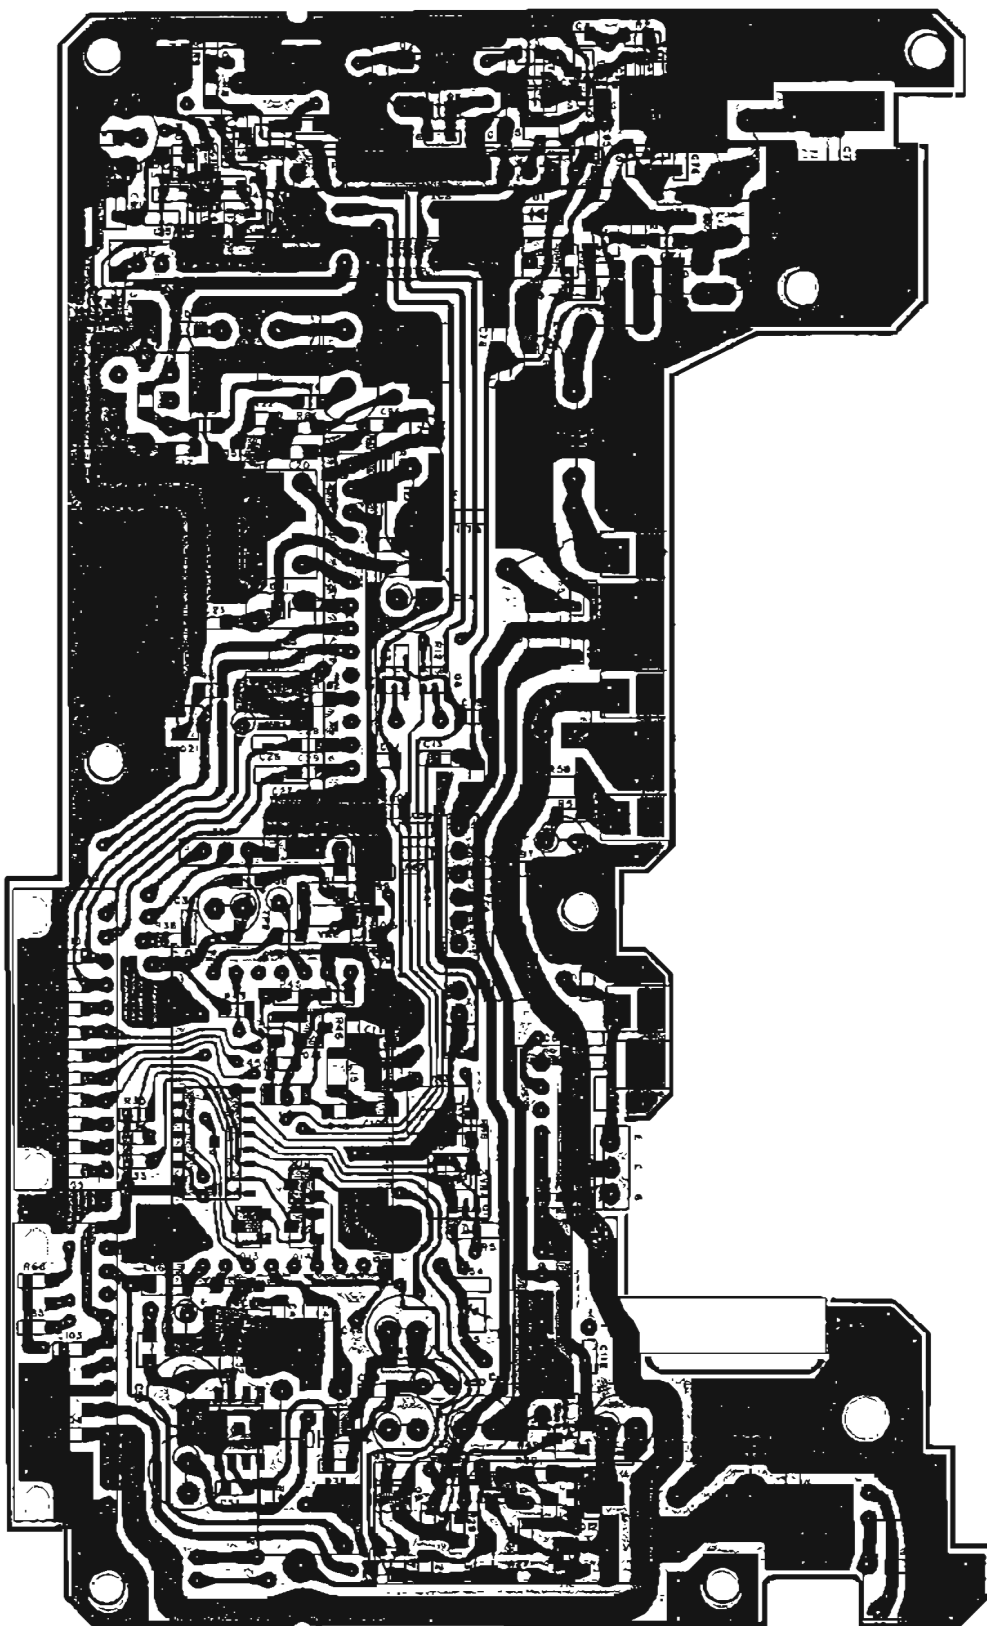

: Component side pattern




: Foil side pattern

SCHEMATIC DIA

430/440M TX-RX UNIT (X57-359X-XX) 0-12:741A (K, P), UT-440S(K), 0-22:741A (M)


— Signal line — Control line — Common DC line

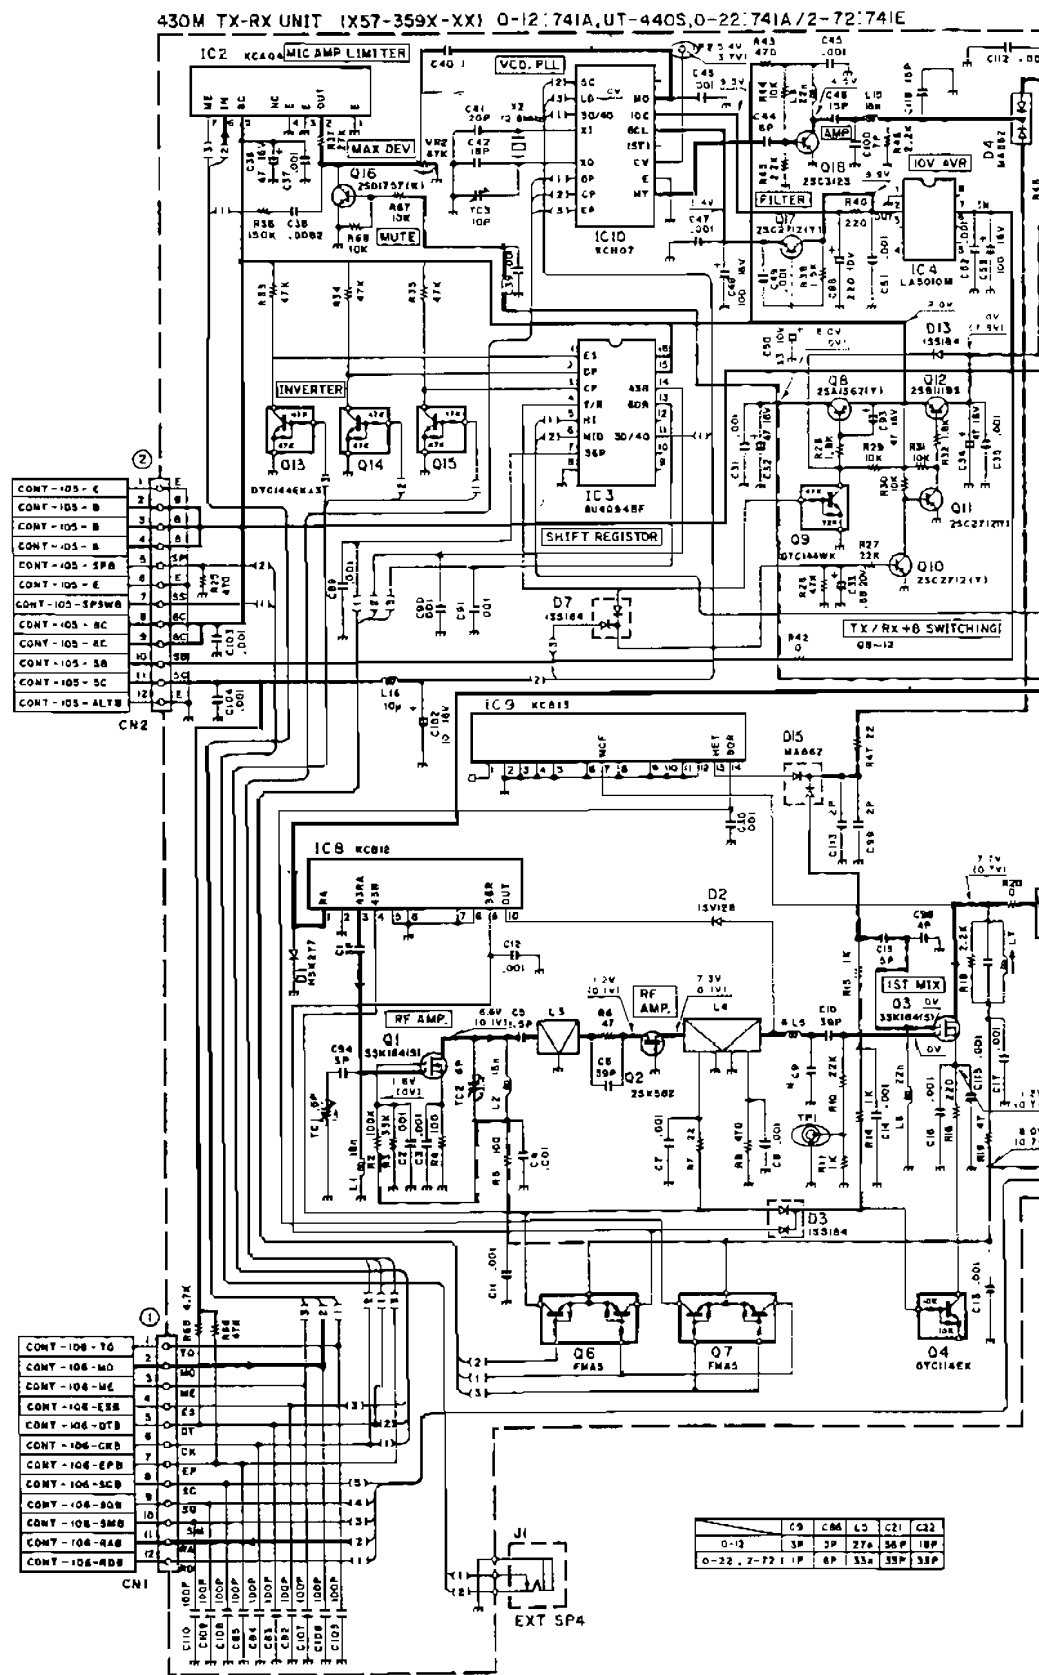

1200M TX-RX UNIT (X57-3600-11) :UT-1200 (M)

Component side view

IC2:KCD04 IC3:KCA03 IC4:KCA04 IC5:BUA948F IC6:LA5009M IC7:KCB09 IC8:KCB10 IC9:KCC04 IC10:M6771 IC11:KCH03 IC12:NUM78L05UA
 Q1:MGT1802 Q2:2SC4095(R47.6) Q3:3SK184(S) Q6:2SC3356 Q7:2SC3120 Q8:19:2SA1362(Y) Q9:2SB1302S Q10:DTIC144VW
 Q11:FMM1 Q12, 13, 23:2SC712(Y) Q15-17:DTIC144EU Q18:2SD1757(K) Q20:STC124EK Q21, 22:2SC4226(R23, 24)
 Q24:2SD1760(I) Q25:FMG1 Q26:2SJ106(GRI) Q28:OTC114EK
 D1:MA862 D3:MA716 D4, 6:1SS193 D5:Q2C26 2(X) Y1 D7, 18:1SS187 D8:Q2C212(X) Y1 D9:HSK151 D10-13:M1808 D14:DSA3A1 D15:Q2C23.6(Y,Z)
 D17:DAP202U D19:M1808

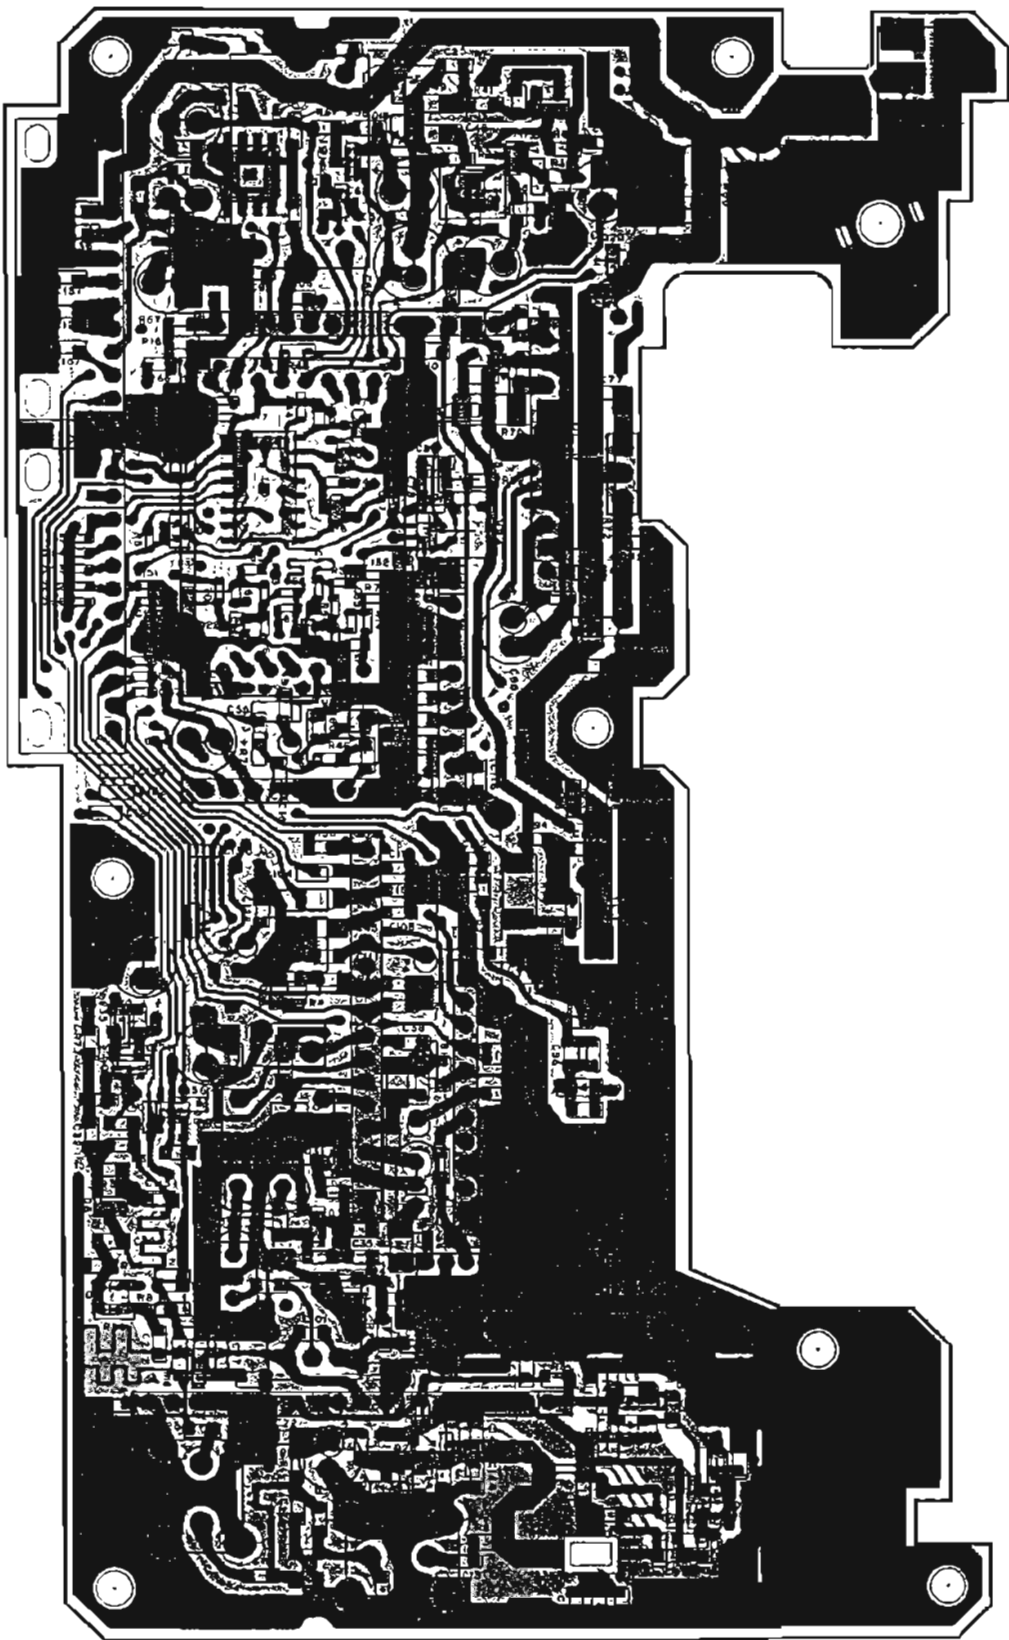


⬜ : Component side pattern ⬛ : Foil side pattern

BOARD VIEW

1200M TX-RX UNIT (X57-3600-11) :UT-1200 (M)


Foil side view

IC2:KCD04 IC3:KXCX03 IC4:KCA04 IC5:BUA0948F IC6:LA6009M IC7:KCB09 IC8:KCB10 IC9:KCC04 IC10:MA6711 IC11:KCH03 IC12:NUUM78L05UA
D1:MGF1602 Q2:2SC4095(R47.6) Q3:3SK184(S) Q6:2SC3356 Q7:2SC3120 Q8:192SA1362(V) Q9:2SB1302S Q10:DTCA14WK
Q11:FMW1 Q12, 13, 23:2SC712(V) Q15-17:DTCA14EU Q18:2SD1757(K) Q20:STC124EK Q21, 22:2SC4226(R23, 24)
Q24:2SD1760(Q) Q26:FMG1 Q28:2SJ106(GR) Q28:DTCA14EK
D1:MA662 D3:MA716 Q4, 6:1SS193 Q5:02CZ62(X, Y) D7, 18:1SS187 D8:02CZ12(X, Y) D9:HSK151 D10-13:M1808 D14:DSAA1 D15:02CZ3, 6(Y, Z)
D17:DAP202U D19:M1808

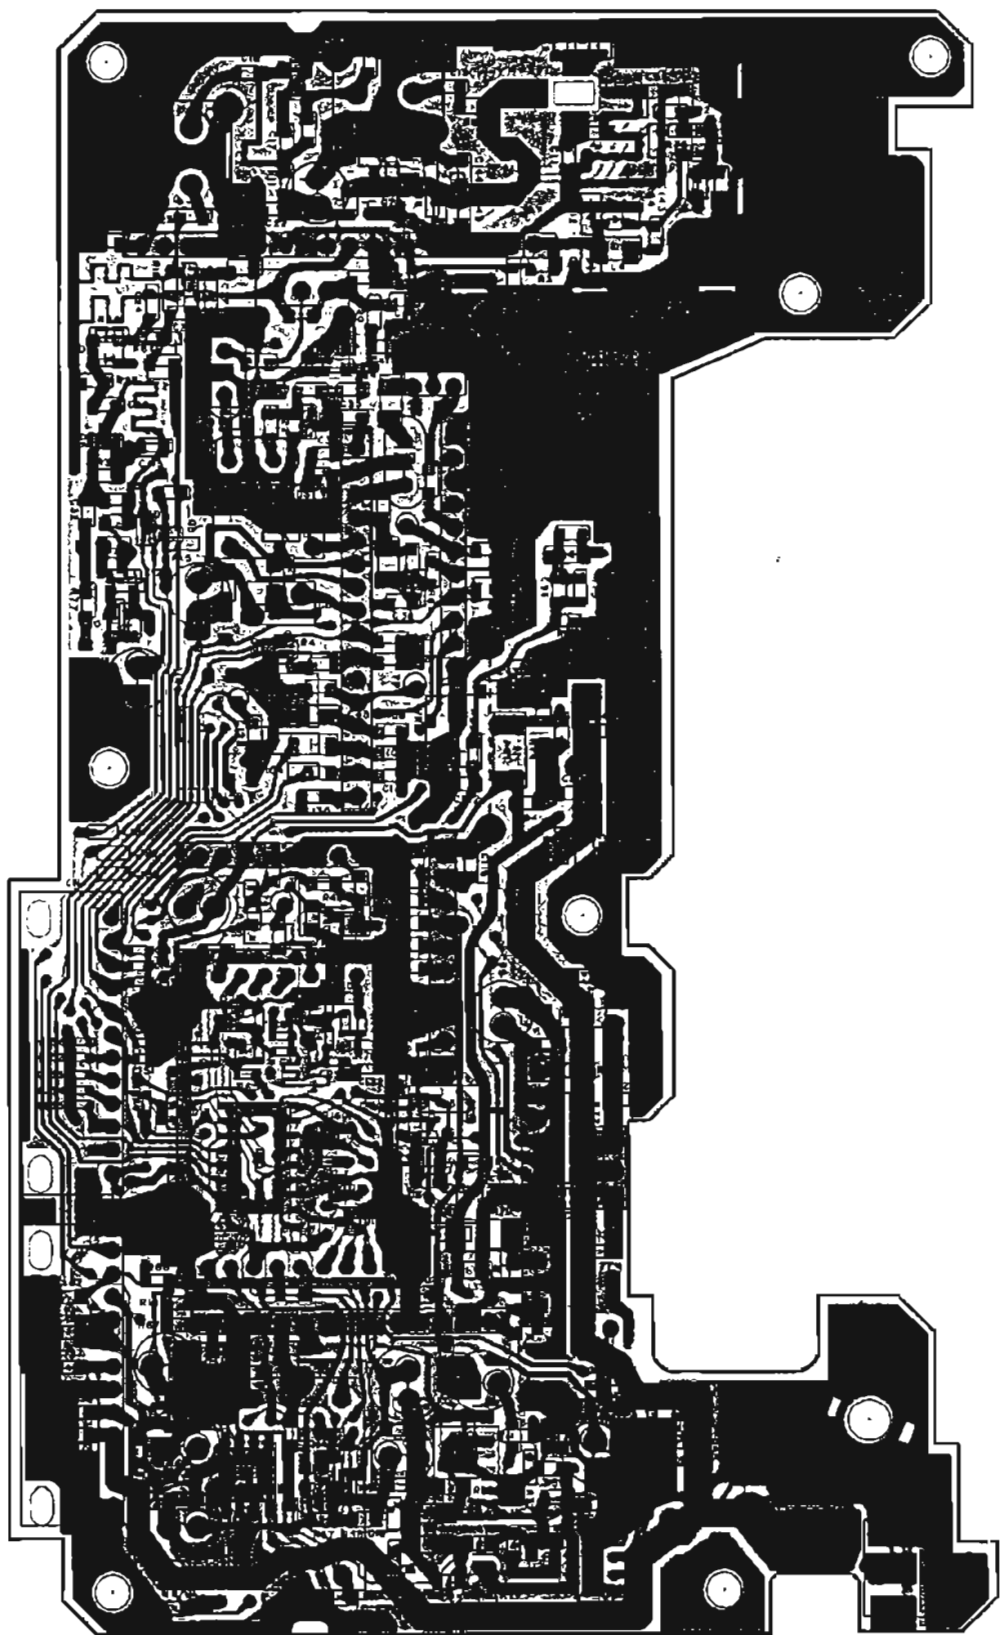


Component side pattern : Foil side pattern

TM-641A

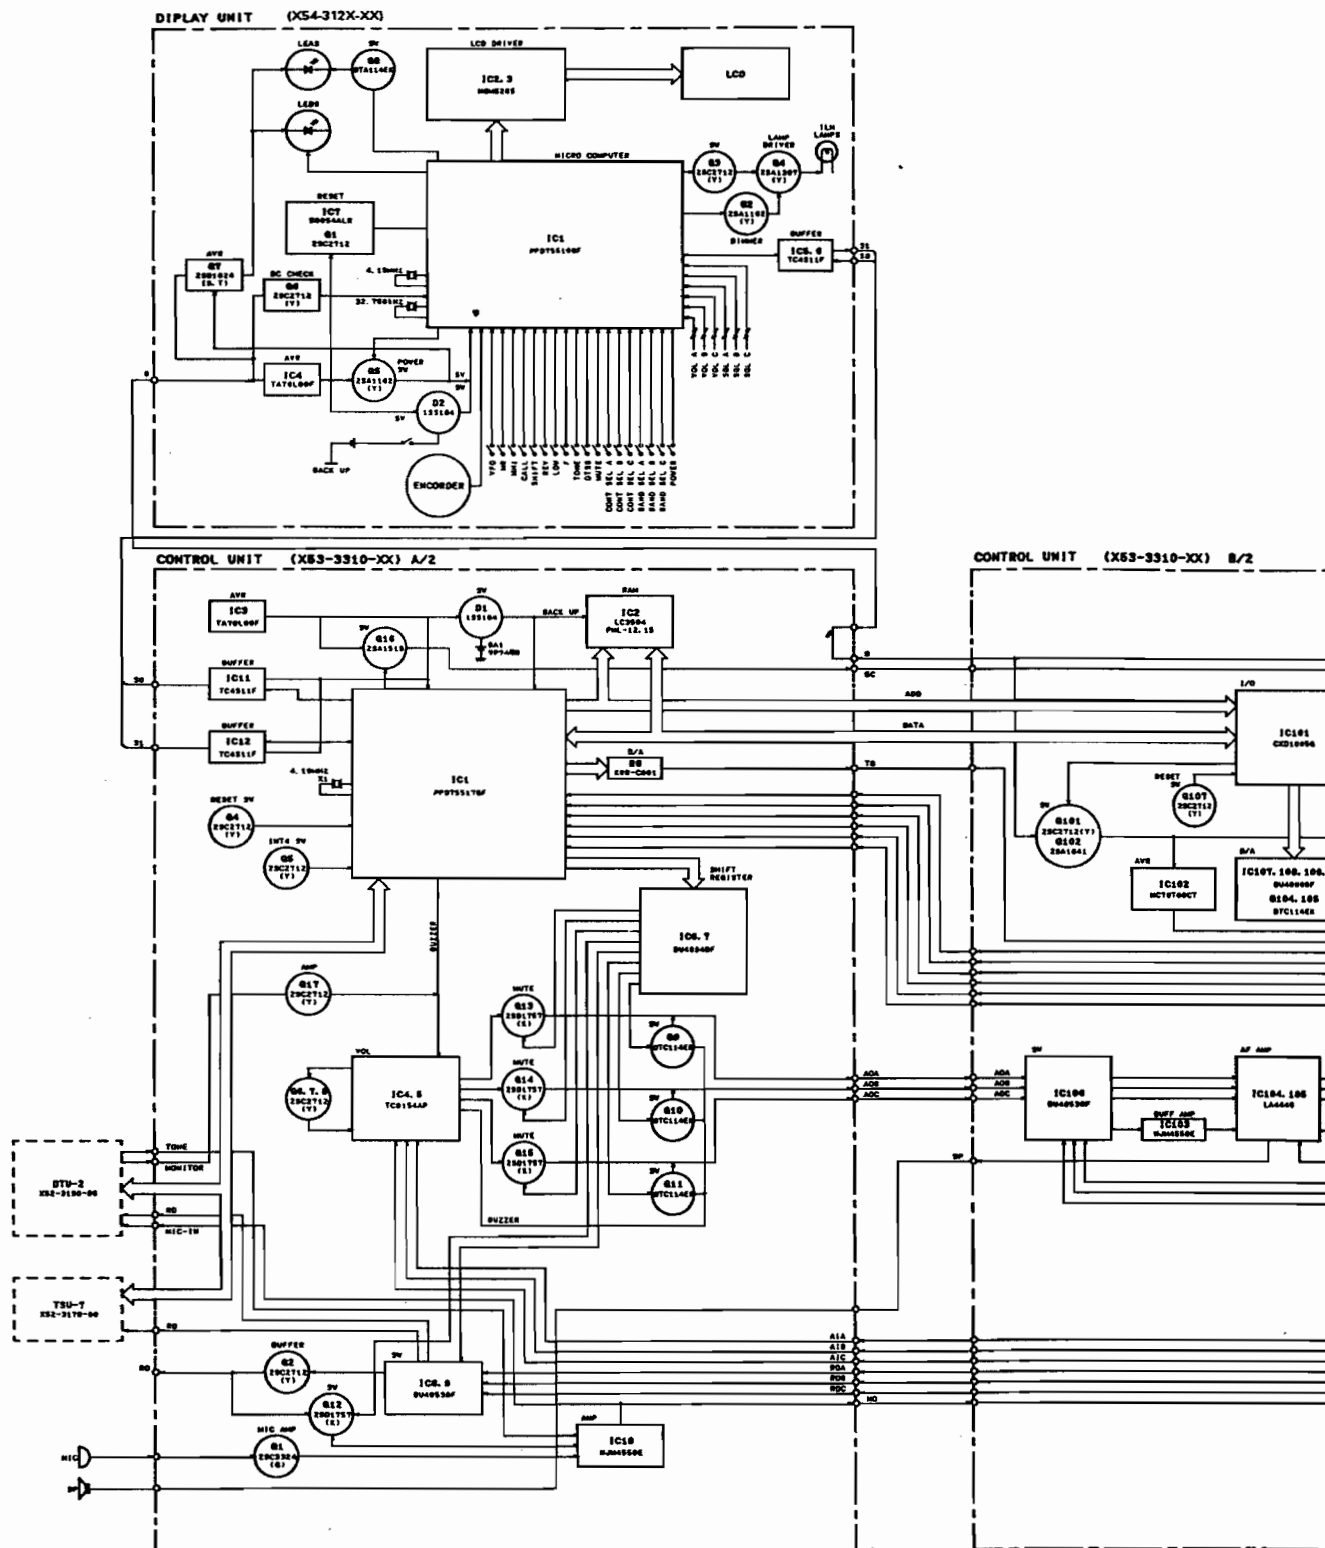


LOCK DIAGRAM

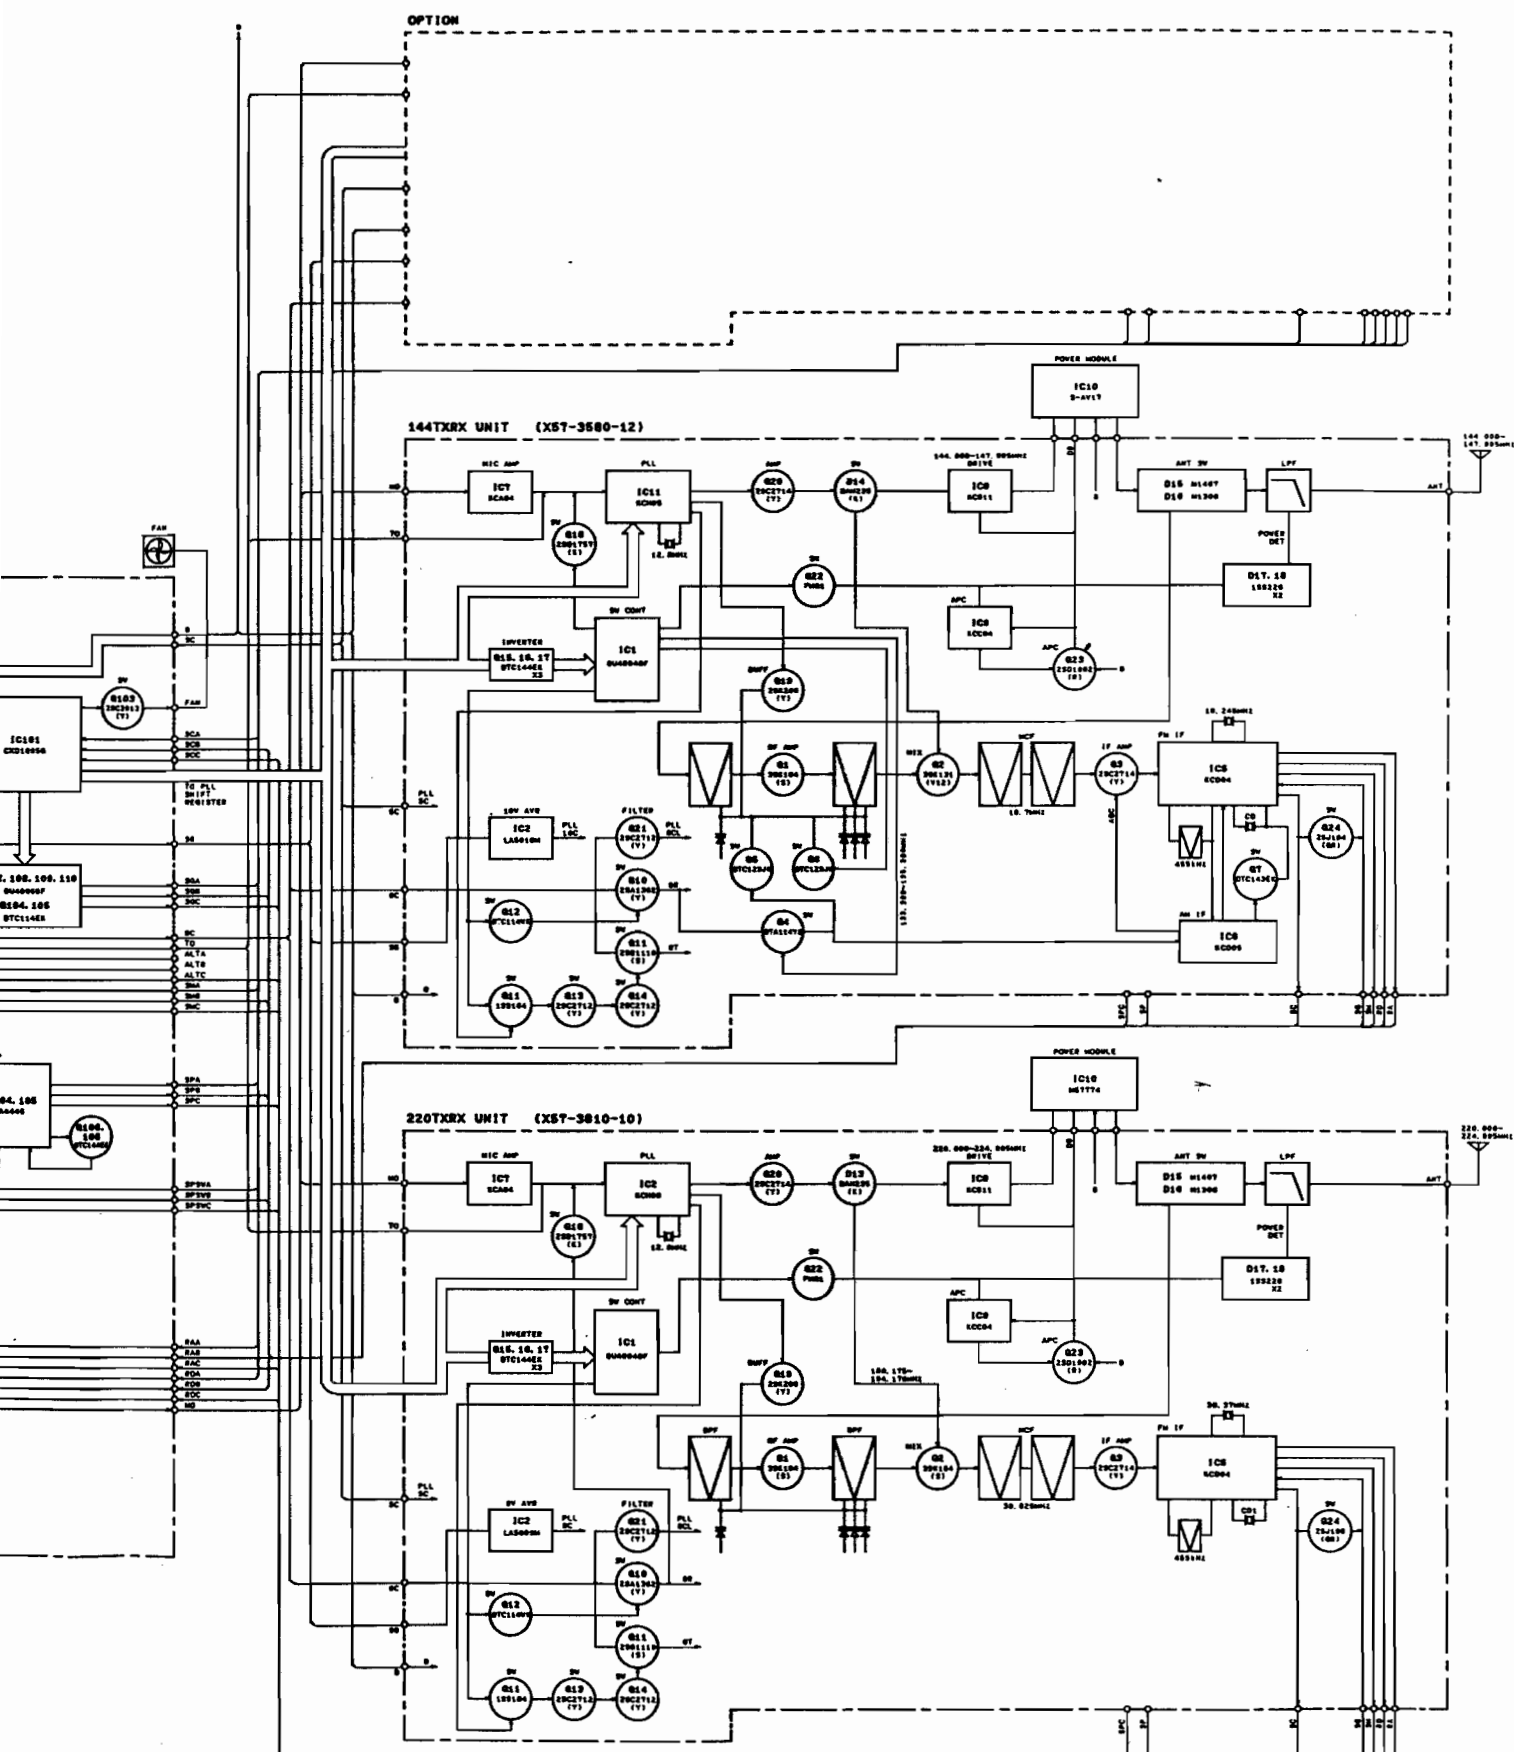


TM-741A/E

DISPLAY UNIT (X54-312X-XX)

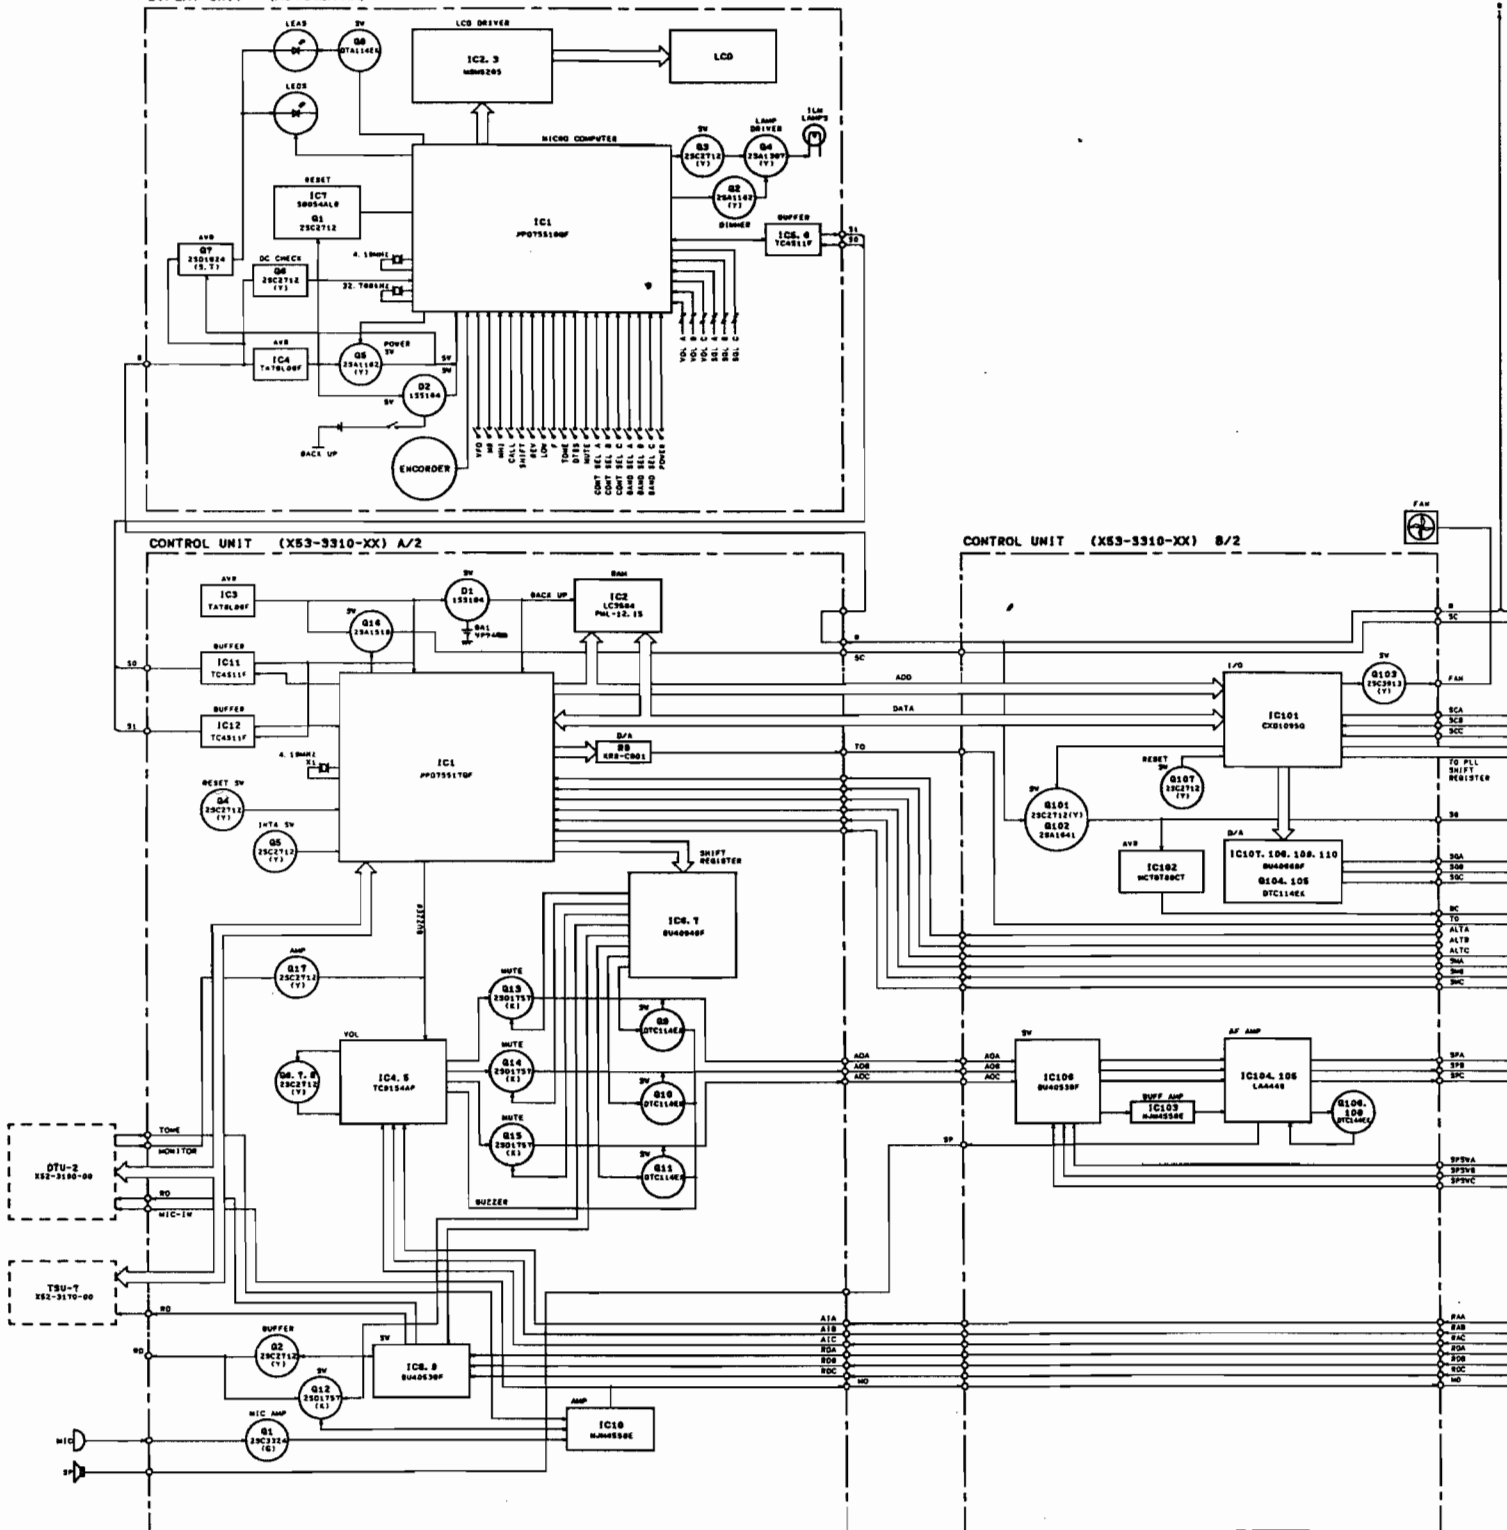




28M TX-RX UNIT (X57-3790-01): UT-28S(M)

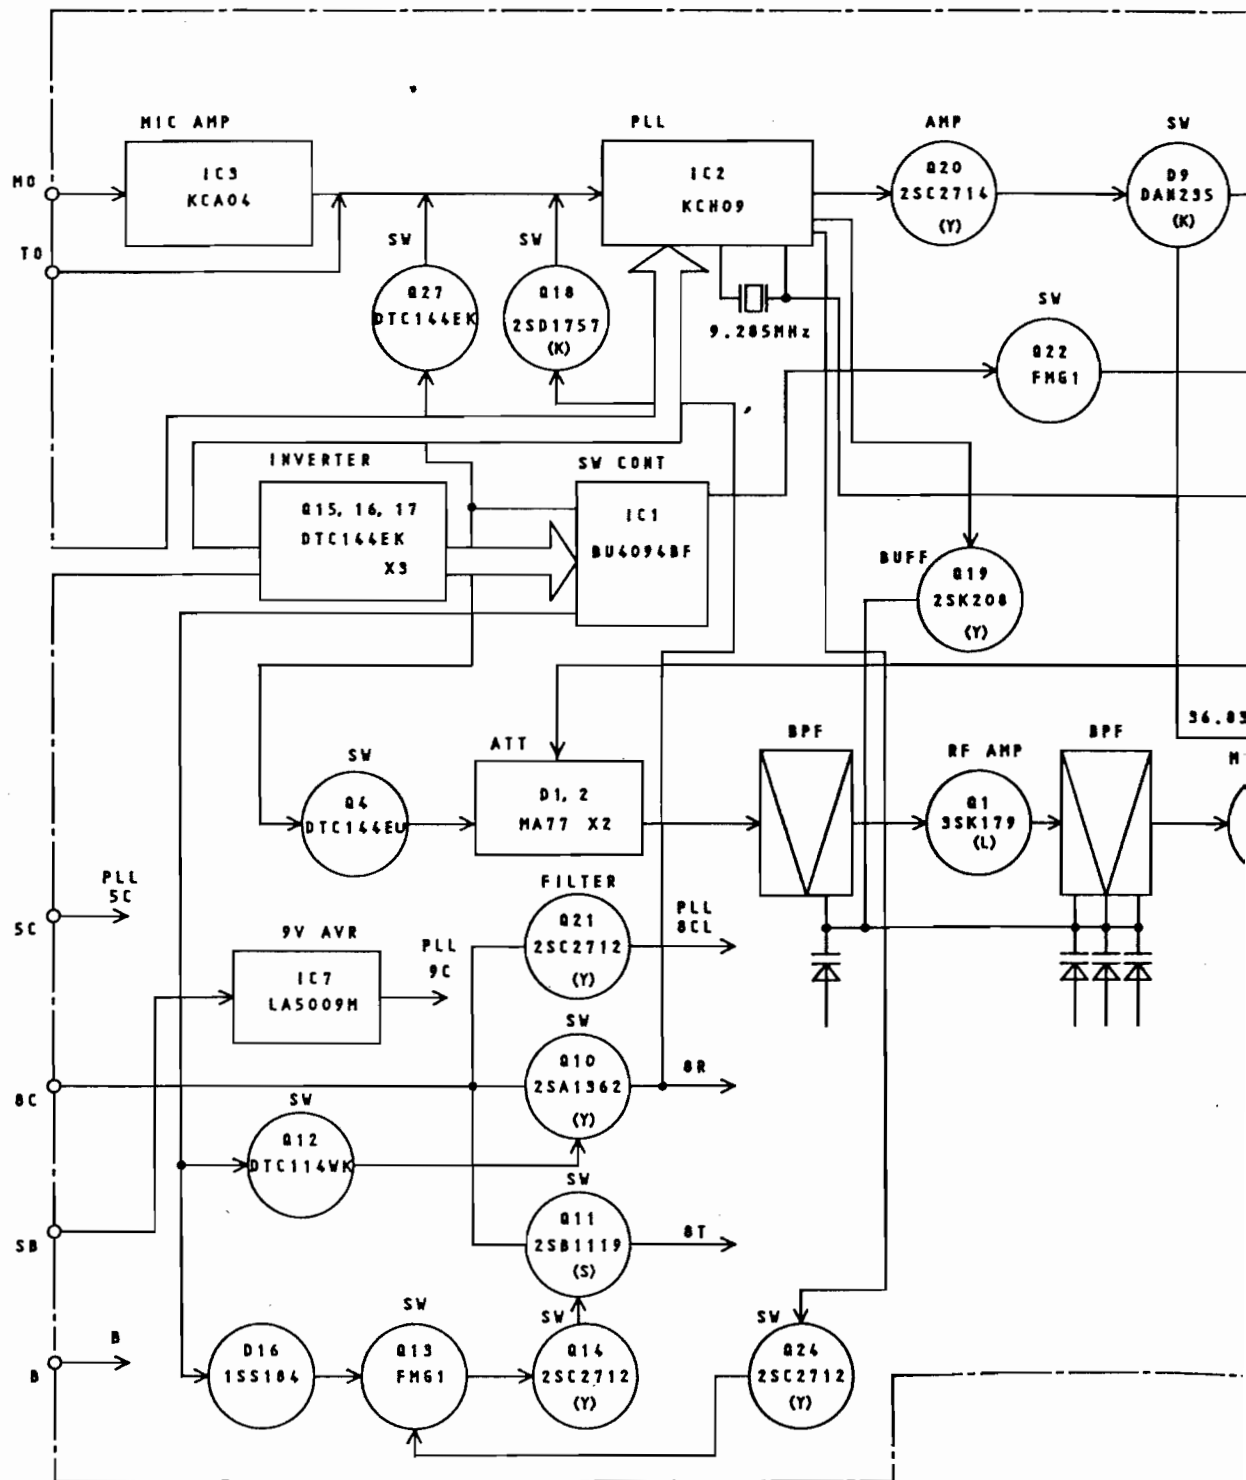


BLOCK DIAGRAM

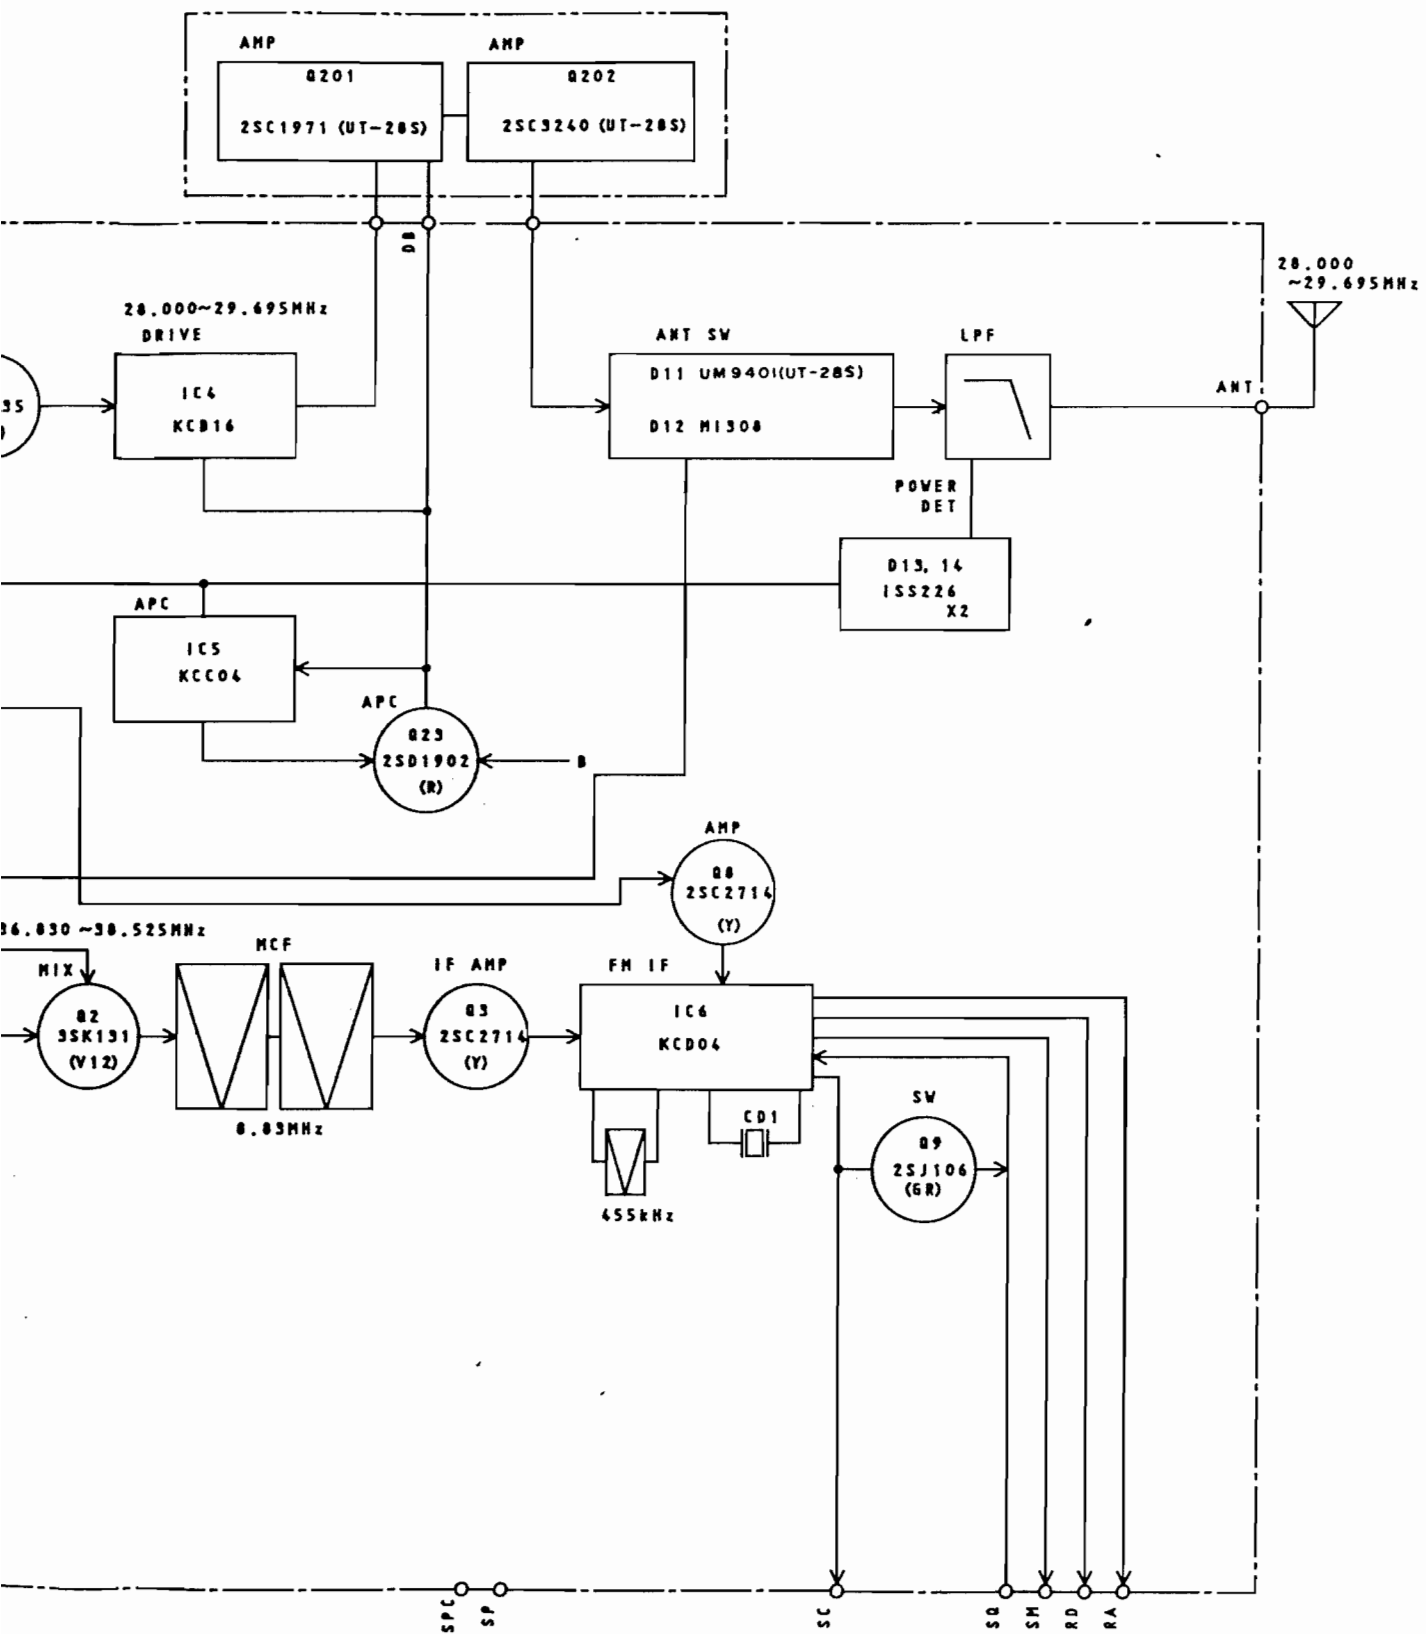

The schematic diagram illustrates the internal circuitry of a radio receiver, organized into several functional blocks:


- MIC AMP:** IC3 (KCA04) for microphone amplification.
- PLL:** IC2 (KCH10) for Phase-Locked Loop control, receiving a 11.05MHz reference.
- AMP:** Q20 (2SC2714 (Y)) for audio amplification.
- SW:** Q22 (FMG1) for switching.
- 50.000~53. DRIVE:** IC4 (KCB18) for the 50.000~53.000 MHz drive stage.
- INVERTER:** Q15, 16, 17 (DTC144EK X3) for signal inversion.
- SW CONT:** IC1 (BU4094BF) for switch control.
- APC:** IC5 (KCC04) for Automatic Power Control.
- PLC SC:** PLL SC input.
- 9V AVR:** IC7 (LA5009H) for 9V automatic volume regulation.
- SW:** Q4 (DTC144EU) for switching.
- ATT:** D1, 2 (MA77 X2) for attenuation.
- FILTER:** Q21 (2SC2712 (Y)) for filtering.
- PLL 9C:** PLL 9C input.
- SW:** Q10 (2SA1362 (Y)) for switching.
- SW:** Q11 (2SB1119 (S)) for switching.
- SW:** Q12 (DTC114WK) for switching.
- SW:** Q13 (FMG1) for switching.
- SW:** Q14 (2SC2712 (Y)) for switching.
- SW:** Q24 (2SC2712 (Y)) for switching.
- BPF:** Bandpass Filter (BPF) for signal filtering.
- RF AMP:** Q1 (3SK184 (S)) for RF amplification.
- MIX:** Q2 (3SK131 (V12)) for mixing.
- 60.595~64.590MHz:** Frequency range for the mixer stage.
- 10.:** Output frequency range.

RAM

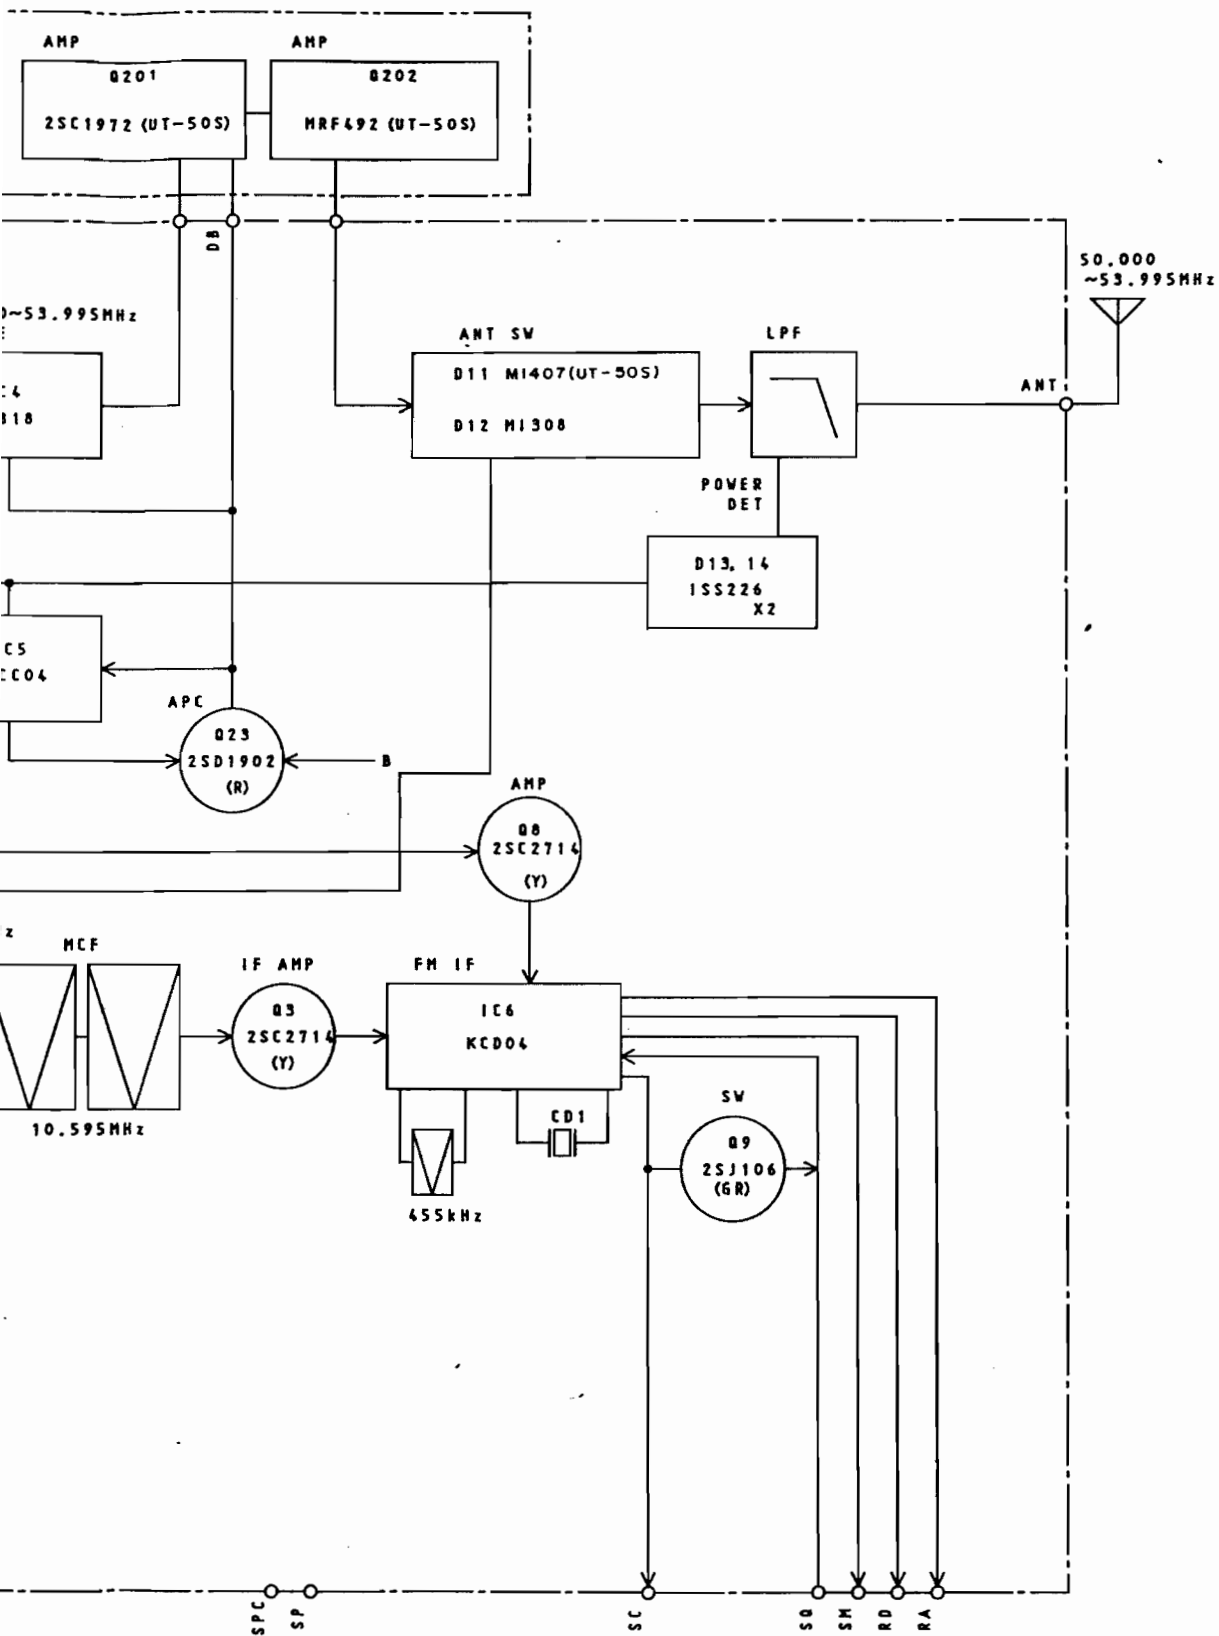


The schematic diagram illustrates a radio receiver circuit, divided into seven modules. The input is a MIC (Microphone) signal, which is processed through a series of stages. The first module, X53-331X-XX, includes a MIC AMP (IC7) and a PLL (IC11). The second module, X57-3580-12, includes a DRIVE (IC8). The third module, X57-359X-XX, includes a MIC AMP (IC2), a PLL (IC10), and a DRIVE (IC6). The fourth module, X57-3600-11, includes a MIC AMP (IC4), a PLL (IC11), and a PRE-DRIVE (IC7). The fifth module, X57-3790-01, includes a MIC AMP (IC3), a PLL (IC2), and a DRIVE (IC4). The sixth module, X57-3800-01, includes a MIC AMP (IC3), a PLL (IC2), and a DRIVE (IC4). The seventh module, X57-3810-10, includes a MIC AMP (IC7), a PLL (IC11), and a DRIVE (IC8). The circuit also includes AF VTVM and RF VTVM sections. Various components are labeled with their values, such as 2.5mV, 9.2mV, 23mV, 0.12V, 0.91V, 0.5V, 1.3V, 1.2V, 0.19V, 0.44V, 0.85V, 0.48V, 7.6mV, 0.32V, 0.42V, 0.34V, 0.12V, 0.28V, 1.7V, 0.31V, 0.16V, 0.49V, 2.5V, 0.76V, 0.15V, 0.38V, 0.79V, and 0.36V. Transistors are labeled Q1, Q10, Q20, Q21, and Q22. Variable resistors are labeled VR2 and VR3.

LEVEL DIAGRAM

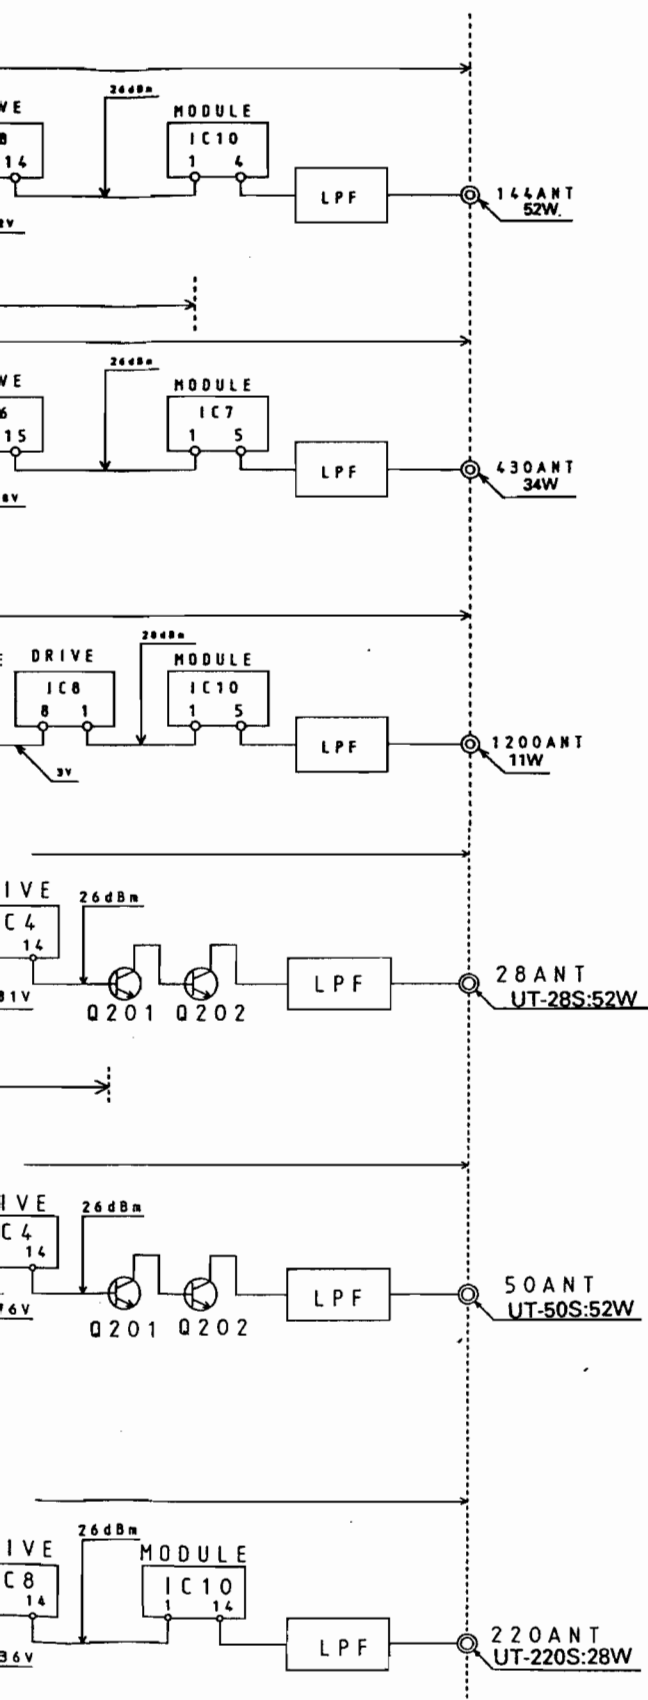


1. SG input level for which a 12dB SINAD are obtained. Measured by connecting the SG to each point via a 0.01μF capacitor.
2. AF level obtained when the AF output level is adjusted for 0.63V/8Ω with the front panel AF VOL control. Measure with AF voltmeter connected to the speaker jack, receiving a 40dB EMF SSG signal modulated at 1KHz, DEV 3KHz.

Transmitter section

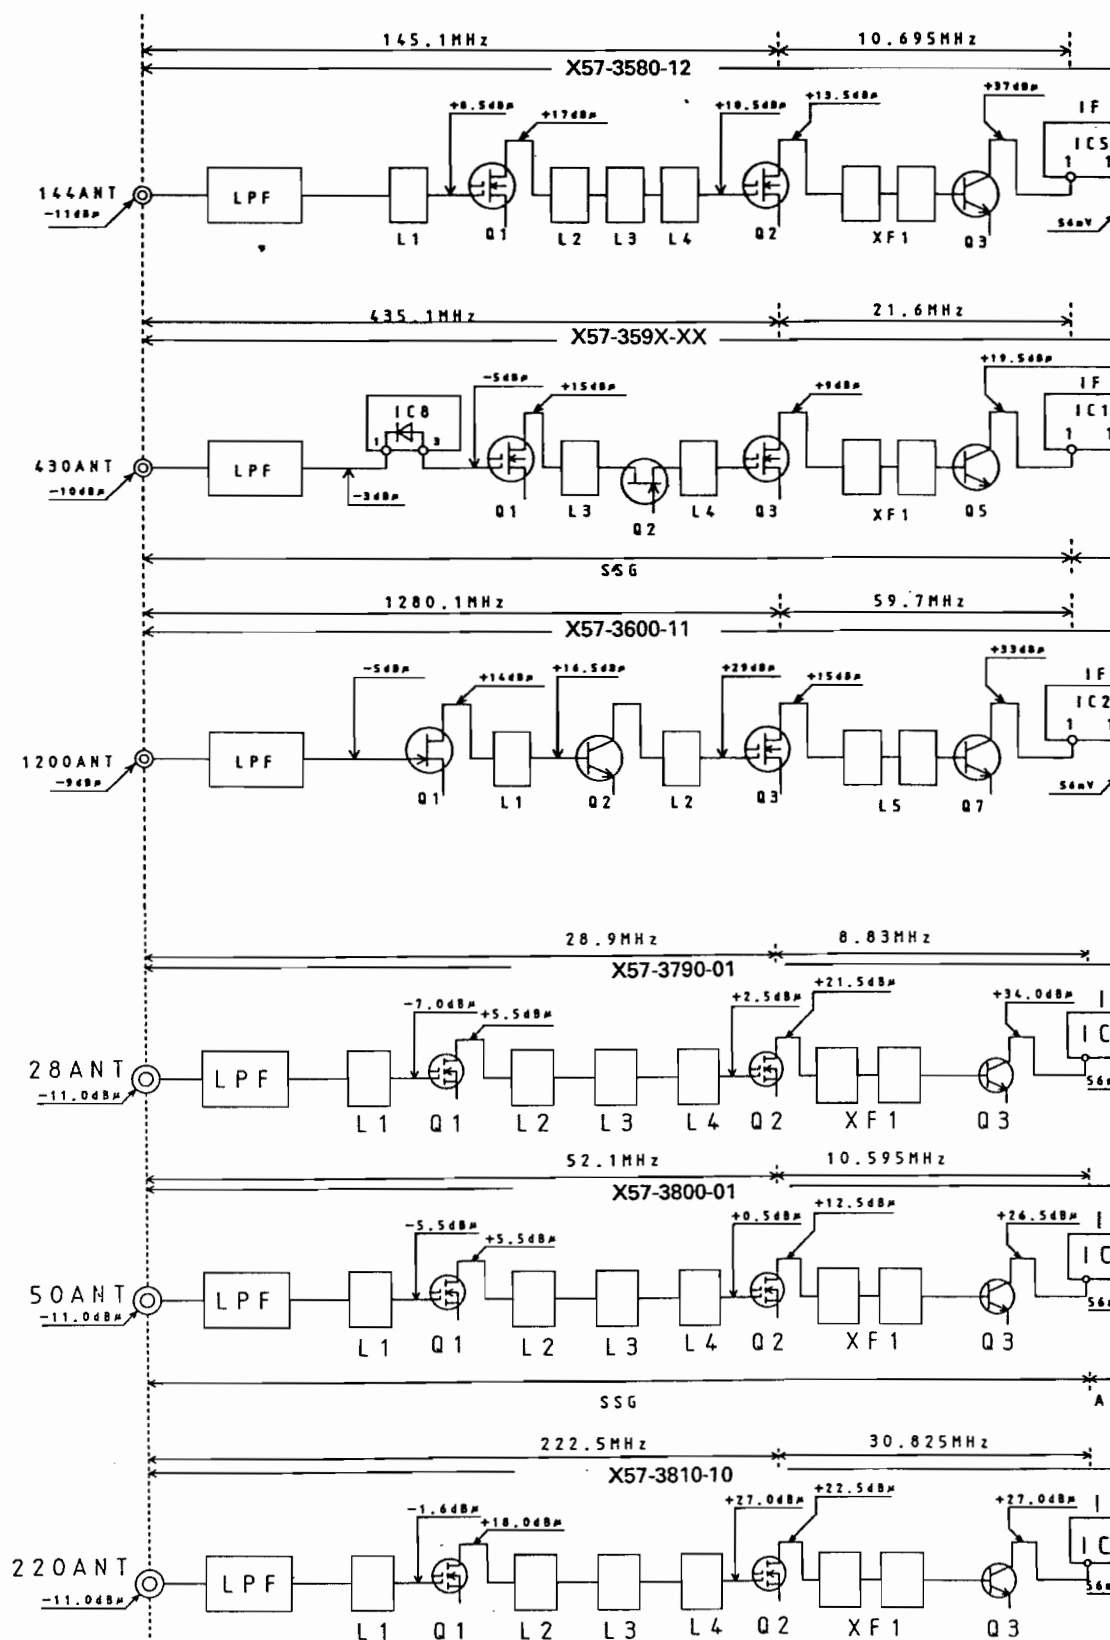


RAM

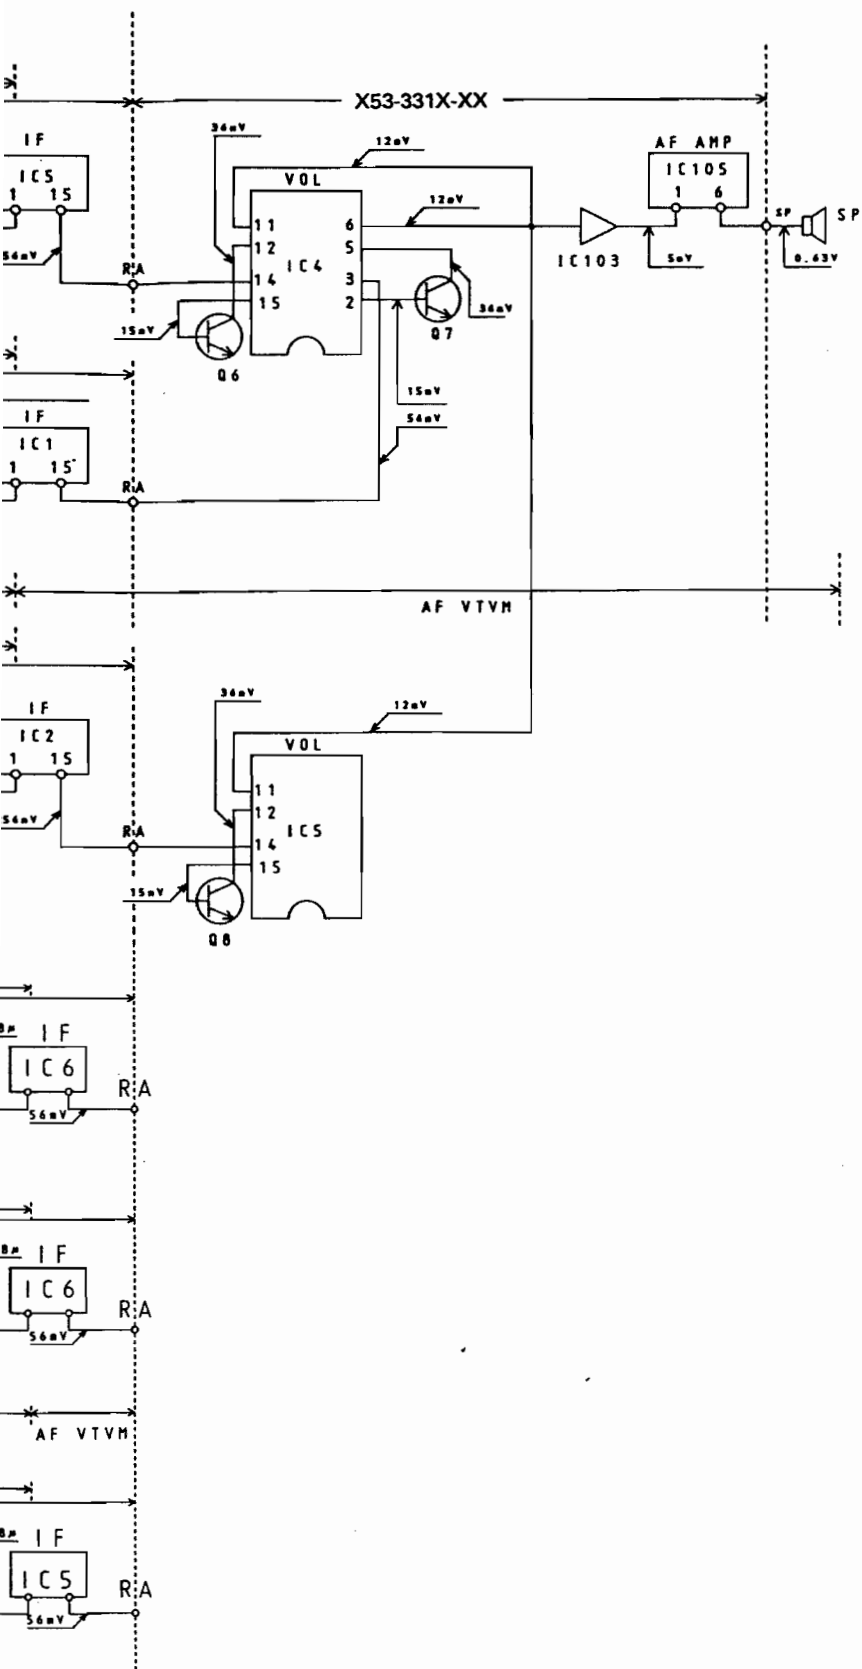

1. AG is set so taht MIC input becomes 3kHz DEV at 1kHz MOD.
2. Transmitting frequency; 145.0MHz, 435.0MHz, 1280MHz, 28.0MHz, 50.0MHz, 220.0MHz.
3. HI/MID/LOW SW: HI
4. APC SW: OFF

DTU-2 EXTERNAL VIEW

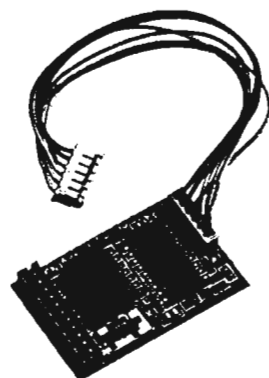

DTU-2 PARTS LIST


* NEW PARTS

Ref. No.	New parts	Parts No.	Description
C1		CK73FB1E104K	Chip C 0.1μF K
C2		CC73GCH1H100D	Chip C 10pF D
C3, 4		CC73GCH1H330J	Chip C 33pF J
C5~8, 10		CK73GB1E103K	Chip C 0.01μF K
C13~16		CK73GB1E103K	Chip C 0.01μF K
C9		CK73GB1E822K	Chip C 0.0082μF K
C10		CK73GB1E322K	Chip C 0.0033μF K
C11		CC73GSL1H101J	Chip C 100pF J
		E37-0033-05	Connecting cable (6P)
		E40-5188-05	Pin ass'y socket (11P)
X1		L78-0061-05	CERAMIC RESONATOR (3.58MHz)
R1~14		RK73GB1JxxxJ	Chip R
Q1		DTC114EU	Digital transistor
Q2, 3		2SC4116 (Y)	Digital transistor
IC1		TP5088WM	IC
IC2		LC7385M	IC
IC3		BU4066BF	IC


U-2 (DTMF UNIT)

DTU-2 PC BOARD VIEWS

Component side view

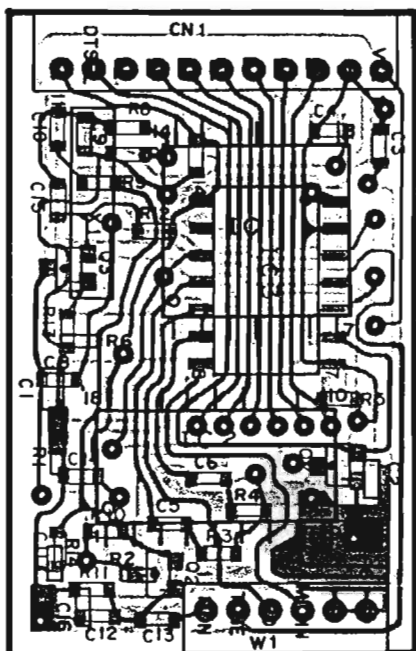


Foil side view

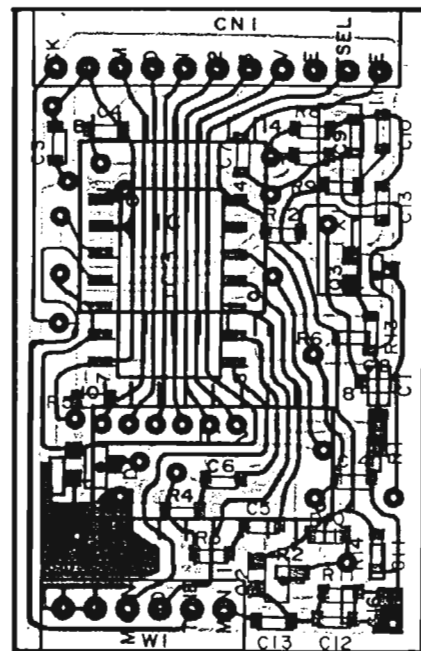


 : Component side
 : Foil side

DTU-2 CIRCUIT DIAGRAM

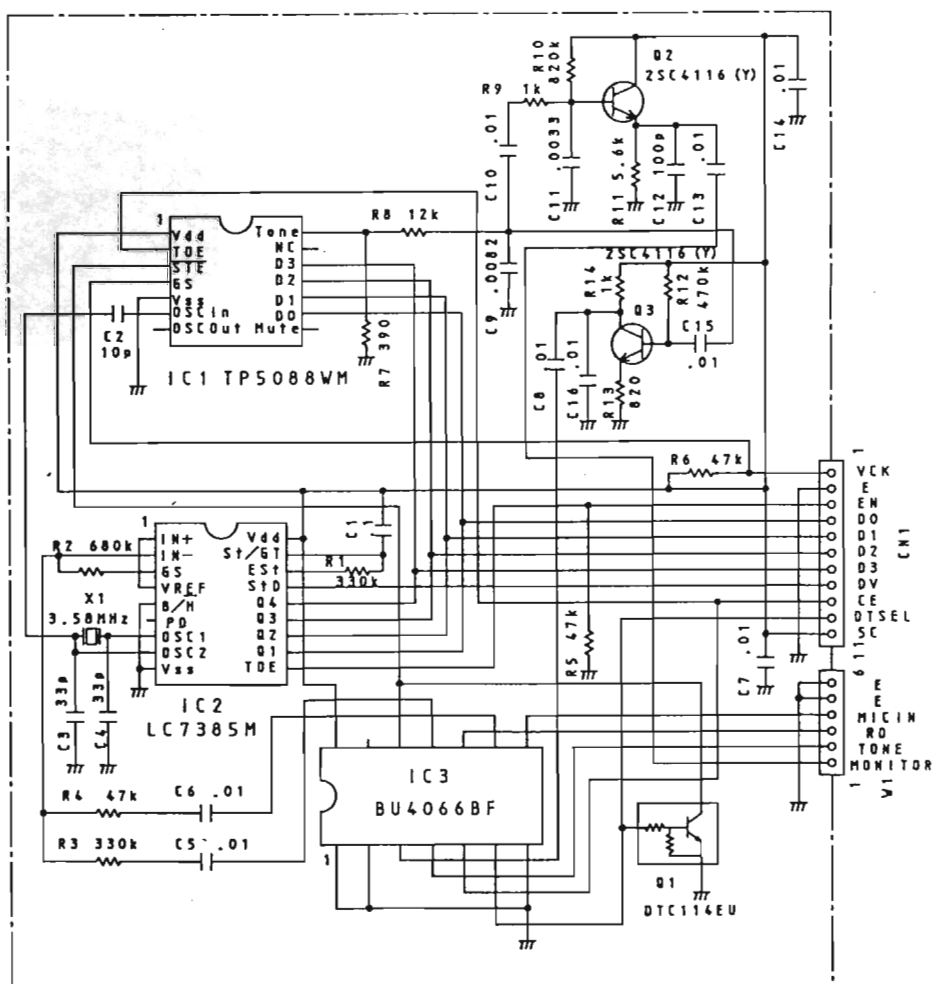

TSU-7 EXTERNAL VIEW

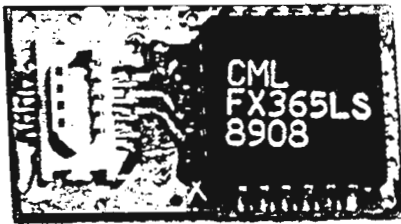


TSU-7 PARTS LIST

Ref. No	Address	New Parts	Parts No.	Description	Desti- nation	Re- marks
TSU-7 (X52-3170-00)						
X1			G10-0692-04	CUTTON		
IC1			H21-0704-04	CUTTON		
D1			L78-0062-05	STAL (1MHz)		
CN1			FX365LS	IC		
VR1			DAN202U	DIODE		
R1			E40-5341-05	TRIM. POT. (47K)		
R2			R12-6526-05			
R4			RK73BG1J274J	CHIP R J 270K		
R5			RK73BG1J824J	CHIP R J 820K		
R6			RK73BF1J103J	CHIP R J 10K		
C1			RK73BG1J105J	CHIP R J 1M		
C2			RK73BG1J473J	CHIP R J 47K		
C4-6			CK73GB1H471K	CHIP C K 470pF		
C7			C92-0521-05	CHIP TAN 20WV		
C8.9			CK73FB1E104K	CHIP C K 0.1UF		
			CK73GB1H471K	CHIP C K 470pF		
			CC73GCH1H221J	CHIP C J 220pF		


S UNIT)

TSU-7 PC BOARD VIEWS

[Component side view]

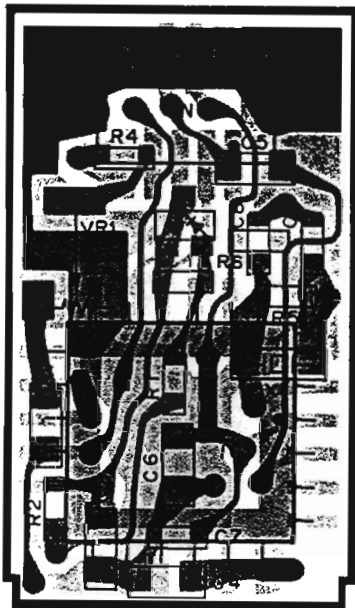


[Foil side view]

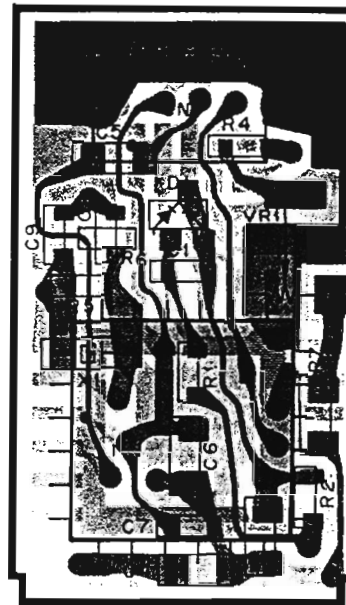

: Component side pattern ■: Foil side pattern

TSU-7 CIRCUIT DIAGRAM

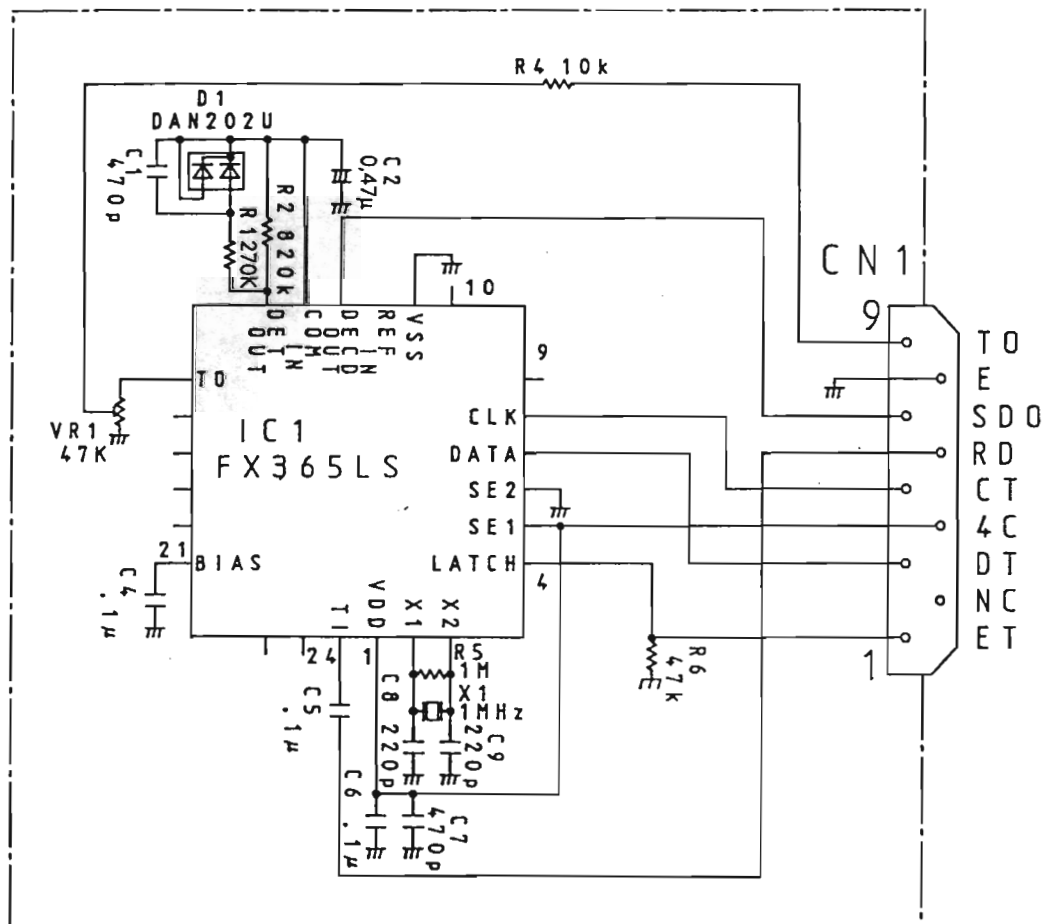

TM-641A/741A/741E

MC-45 (MULTI FUNCTION MICROPHONE)


EXTERNAL VIEW



PARTS LIST

Ref. No.	Address	New Parts	Parts No.	Description	Destination	Remarks
			A02-0896-08	CASE (FRONT)		
			A02-0900-08	CASE (REAR)		
			E30-3006-08	CURL CORD ASSY		
			G13-0933-08	CUSHION (UP,DWN)		
			K29-3165-08	KNOB PTT		
			K29-3168-08	KNOB UP		
			K29-3169-08	KNOB DWN		
			K29-3170-08	KNOB CALL, VFO, MR, PF		
S3-6			S59-1409-28	SWITCH ASSY UP,DWN		
S7, 8			S40-1431-08	TACT SWITCH CALL, VFO, MR, PF		
SW1			S40-1437-08	TACT SWITCH UP,DWN		
SW2			S50-1431-08	MICRO SWITCH LOCK		
			S31-1422-08	SLIDE SWITCH LOCK		
			T91-0383-08	MICROPHONE ELEMENT		

SCHEMATIC DIAGRAM

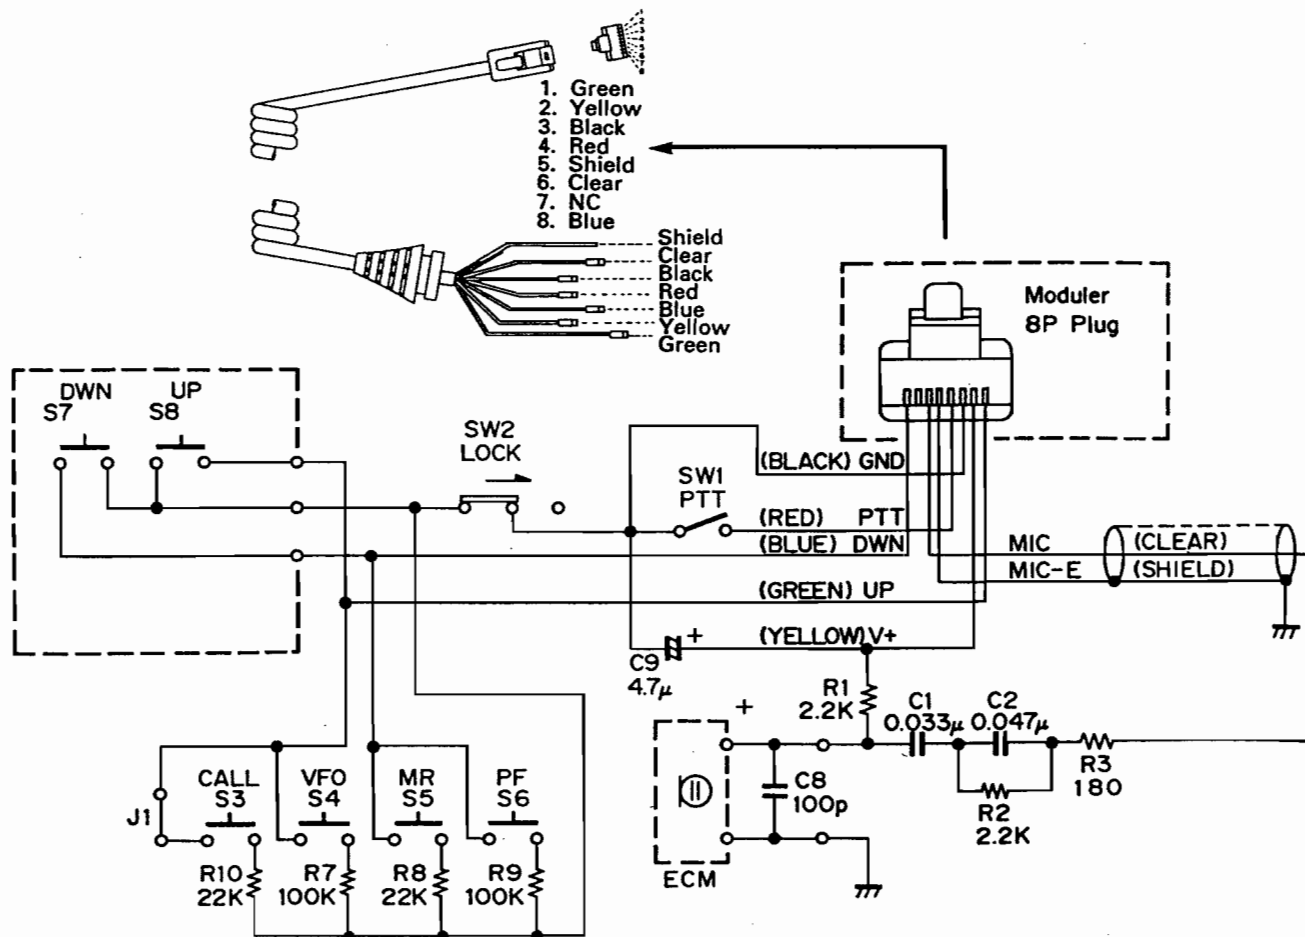

MC-45DM (MULTI FUNCTION MICROPHONE WITH AUTOPATCH)


EXTERNAL VIEW



PARTS LIST


Ref. No.	Address	New Parts	Parts No.	Description	Destination	Remarks
			A02-0898-08	CASE (FRONT)		
			A02-0901-08	CASE, (REAR)		
			E30-3006-08	CURL CORD ASSY		
			G13-0933-08	CUSHION (UP,DWN)		
			K29-3165-08	KNOB PTT		
			K29-3167-08	KEY TOP DTMF		
			K29-3168-18	KNOB UP		
			K29-3169-18	KNOB DOWN		
S7, 8			S59-1409-28	SWITCH ASSY UP,DWN		
SW1			S40-1437-08	TACT SWITCH UP,DWN		
SW2			S50-1431-08	MICRO SWITCH PTT		
			S31-1422-08	SLIDE SWITCH LOCK		
			T91-0393-08	MICROPHONE ELEMENT		

SCHEMATIC DIAGRAM

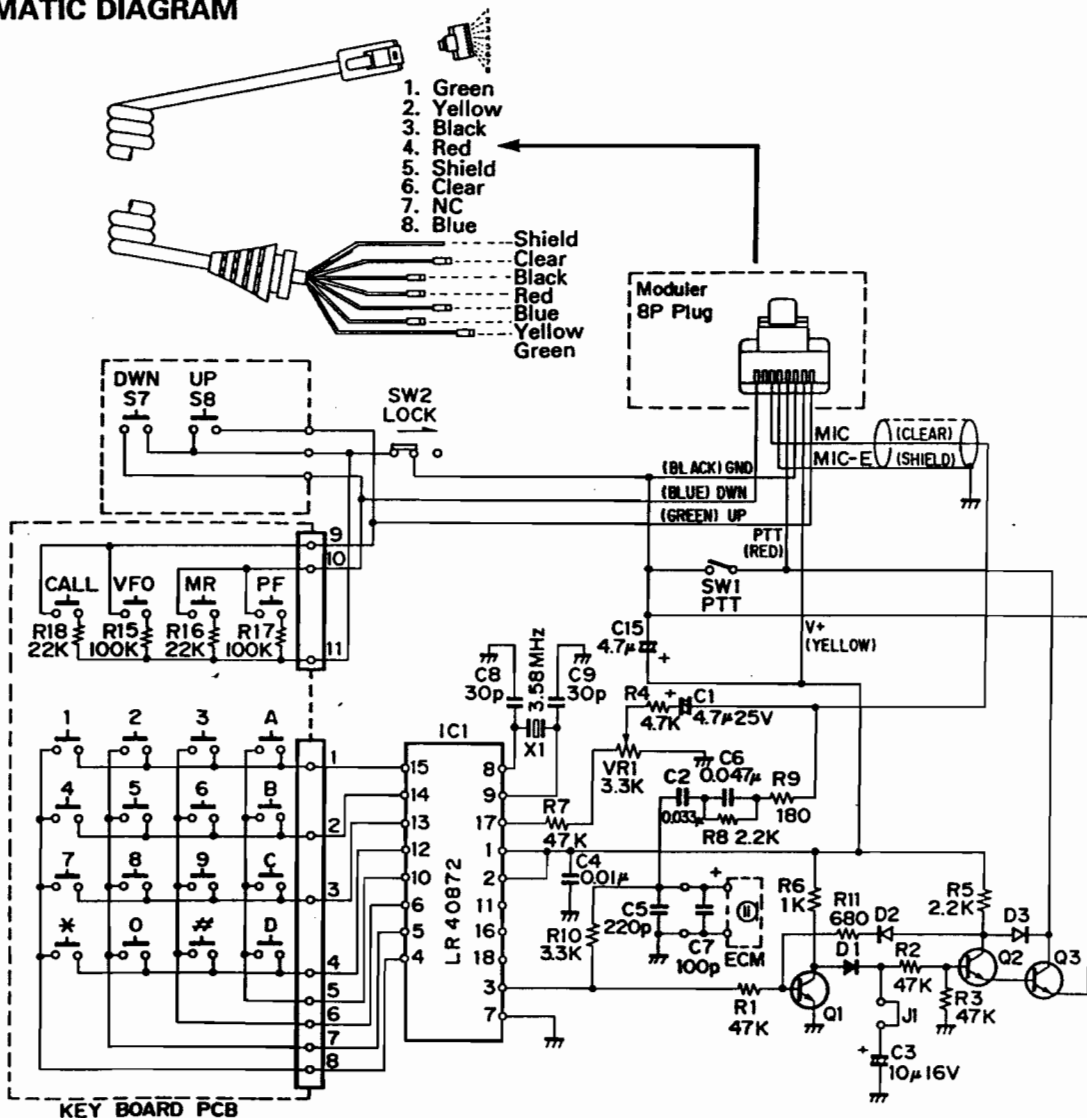


PG-4K/L (PANEL SEPARATE KIT K:4M, L:7M)

PG-4K EXTERNAL VIEW

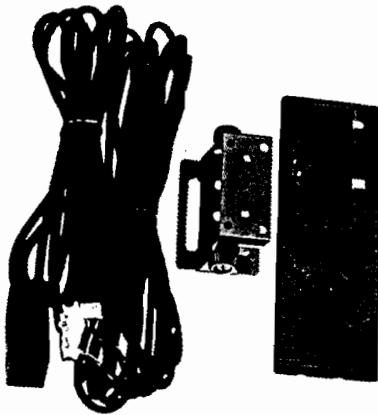


PG-4K MAIN EXTERNAL DIMENSIONS


Panel

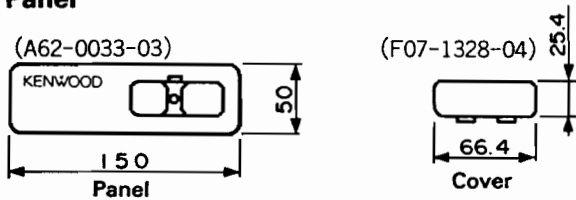

Panel cable (E30-3012-05)




Microphone cable (E30-3013-05)

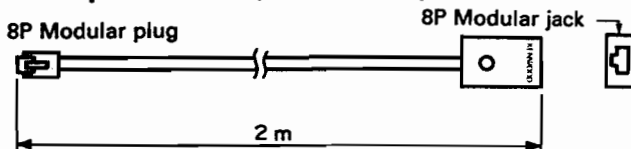


Screw set (N99-0347-05)

PG-4L EXTERNAL VIEW

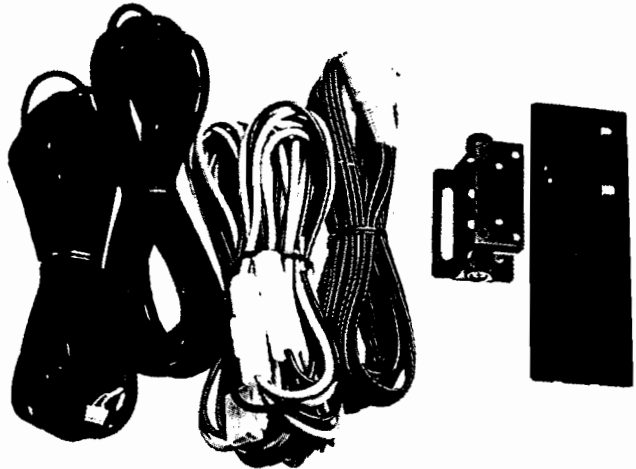


PG-4L MAIN EXTERNAL DIMENSIONS


Panel

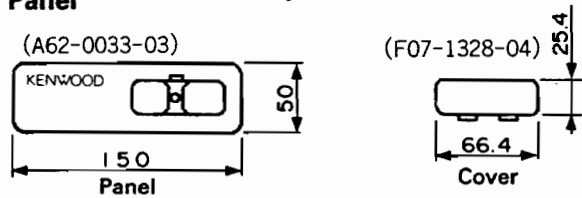


Panel cable (E30-3014-05)




Microphone cable (E30-3015-05)

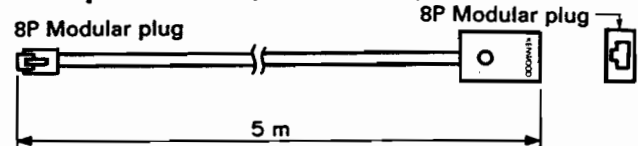

Speaker cable (E30-3016-05)

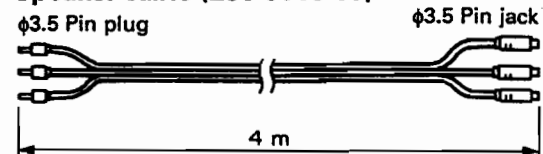

DC cord (E30-3032-05)

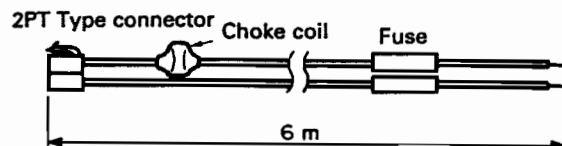

DC cord (N99-0347-05)

UT-28S/50S/1200 SPECIFICATION

		UT-28S	UT-50S	UT-1200
GENERAL	Frequency range (MHz)	28 ~ 29.7	50 ~ 54	1240 ~ 1300
	Mode	F3(FM)		
	Antenna impedance	50Ω		
	Operating temperature	-20°C ~+60°C		
	Power requirements	DC13.8V ±15% (11.7 ~ 15.8V)		
	Ground	Negative		
	Frequency stability	-Less than ±10ppm		Less than ±3ppm
	Current drain	Transmit mode	Less than 11.5A	
Receiver mode		Less than 1.2A		
TRANSMITTER	Output Power	HI	50W	10W
		MID	10W	-
		LOW	Approx. 5W	1W
	Modulation	Reactance modulation		
	Spurious radiation	Less than -60dB (※)		Less than -50dB
	Maximum frequency deviation	±5kHz		
	Audio distortion (at 60% modulation)	Less than 3%		
	Microphone impedance	600Ω		
RECEIVER	Circuitry	Double conversion superheterodyne		
	Intermediate frequency 1st/2nd	8.83MHz	10.595MHz	59.7MHz
		455kHz		
	Sensitivity (12 dB SINAD)	Less than 0.16μV(-16dBμ)		
	Selectivity -6 dB	More than 10kHz	More than 12kHz	
	Selectivity -60 dB	Less than 24kHz		Less than 36kHz
	Squelch sensitivity	Less than 0.1μV(-20dBμ)		
	Output (5% distortion)	More than 2W(8Ω load)		
External speaker impedance	8Ω			

Notes: 1. Circuit and ratings are subject to change without notice, due to advancements in technology.
2. Recommended duty cycle: 1 minute Transmit, 3 minutes Reception.

(※) Hi Power position: Less than -70dB

SPECIFICATIONS

	Frequency range MHz	U.S.A. and Canada	144 MHz Band	220 MHz Band	440/430 MHz Band
			144 ~ 148	220 ~ 225	438 ~ 450
GENERAL		Other market	144 ~ 148	-	430 ~ 440
		TM-74IE	144 ~ 146	-	430 ~ 440
	Mode		F3E(FM)		
	Antenna impedance		50Ω		
	Operating temperature		-20°C ~ + 60°C (-4°F ~ +140°F)		
	Power requirements		13.8VDC ± 15% (11.7 ~ 15.8V)		
	Ground		Negative		
	Current drain	Transmit mode	Less than 11.5 A	Less than 7.0 A	Less than 10.0 A
		Receiver mode	Less than 1.2 A		
	Frequency stability		± 10ppm		
TRANSMITTER	Dimensions (WxHxD)		150 x 50 x 175 mm		
	Weight		1.6kg		
	Output power	HI	50W	25W	35W
		MID	10W		
		LOW	Approx. 5W		
	Modulation		Reactance modulation		
	Spurious radiation		Less than -60dB		
	Maximum frequency deviation		±5kHz		
	Audio distortion (at 60% modulation)		Less than 3%		
	Microphone impedance		600Ω		
RECEIVER	Circuitry		Double conversion superheterodyne		
	Intermediate frequency 1st/2nd		10.7 MHz/455 kHz	30.825 MHz/455 kHz	21.6 MHz/455 kHz
	Sensitivity (12 dB SINAD)		Less than 0.16μV (-10 dBμ) ✕		
	Selectivity -6 dB		More than 12 kHz		
	Selectivity -60 dB		Less than 24 kHz		
	Squelch sensitivity		Less than 0.1 μV (-14 dBμ)		
	Output (5% distortion)		More than 2 W (8Ω load) (5% distortion)		
	External speaker impedance		8Ω		

Notes:

1. Circuit and ratings are subject to change without notice due to advancements in technology.
2. Recommended duty cycle: 1 minute Transmit, 3 minutes Reception.

KENWOOD CORPORATION

Shionogi Shibuya Building, 17-5, 2-chome Shibuya, Shibuya-ku, Tokyo 150, Japan

KENWOOD U.S.A. CORPORATION

COMMUNICATIONS & TEST EQUIPMENT GROUP

P.O. BOX 22745, 2201 East Dominguez St., Long Beach, CA 90801-5745, U.S.A.

KENWOOD ELECTRONICS DEUTSCHLAND GMBH

Rembrücker Str. 15, 6056 Heusenstamm, Germany

TRIO-KENWOOD U.K. LIMITED

KENWOOD House, Dwight Road, Watford, Herts., WD1 8EB United Kingdom

KENWOOD ELECTRONICS BENELUX N.V.

Mechelsesteenweg 418 B-1930 Zaventem, Belgium

TRIO-KENWOOD FRANCE S.A.

13, Boulevard Ney, 75018 Paris, France

KENWOOD LINEAR S.P.A.

20125, Milano-via Arbe, 50, Italy

KENWOOD ELECTRONICS AUSTRALIA PTY. LTD.

P.O. Box 504, 8 Figtree Drive, Australia Centre, Homebush, N.S.W. 2140, Australia

KENWOOD & LEE ELECTRONICS, LTD.

Wang Kee Building, 5th Floor, 34-37, Connaught Road, Central, Hong Kong

KENWOOD ELECTRONICS CANADA INC.

6070 Kestrel Road, Mississauga, Ontario, Canada L5T 1S8