

Noise-Canceling Microphone (with DTMF Keypad)


MH-53B7A Service Manual

©2001 VERTEX STANDARD CO., LTD. Printed in Japan.




VERTEX STANDARD CO., LTD.
4-8-8 Nakameguro, Meguro-Ku, Tokyo 153-8644, Japan
VERTEX STANDARD
US Headquarters
17210 Edwards Rd., Cerritos, CA 90703, U.S.A.
International Division
8350 N.W. 52nd Terrace, Suite 201, Miami, FL 33166, U.S.A.
YAESU EUROPE B.V.
P.O. Box 75525, 1118 ZN Schiphol, The Netherlands
YAESU UK LTD.
Unit 12, Sun Valley Business Park, Winnall Close
Winchester, Hampshire, SO23 0LB, U.K.
VERTEX STANDARD HK LTD.
Unit 5, 20/F., Seaview Centre, 139-141 Hoi Bun Road,
Kwun Tong, Kowloon, Hong Kong

The **MH-53B7A** is a Noise-Canceling Microphone with a DTMF Keypad for telephone-access or control use.

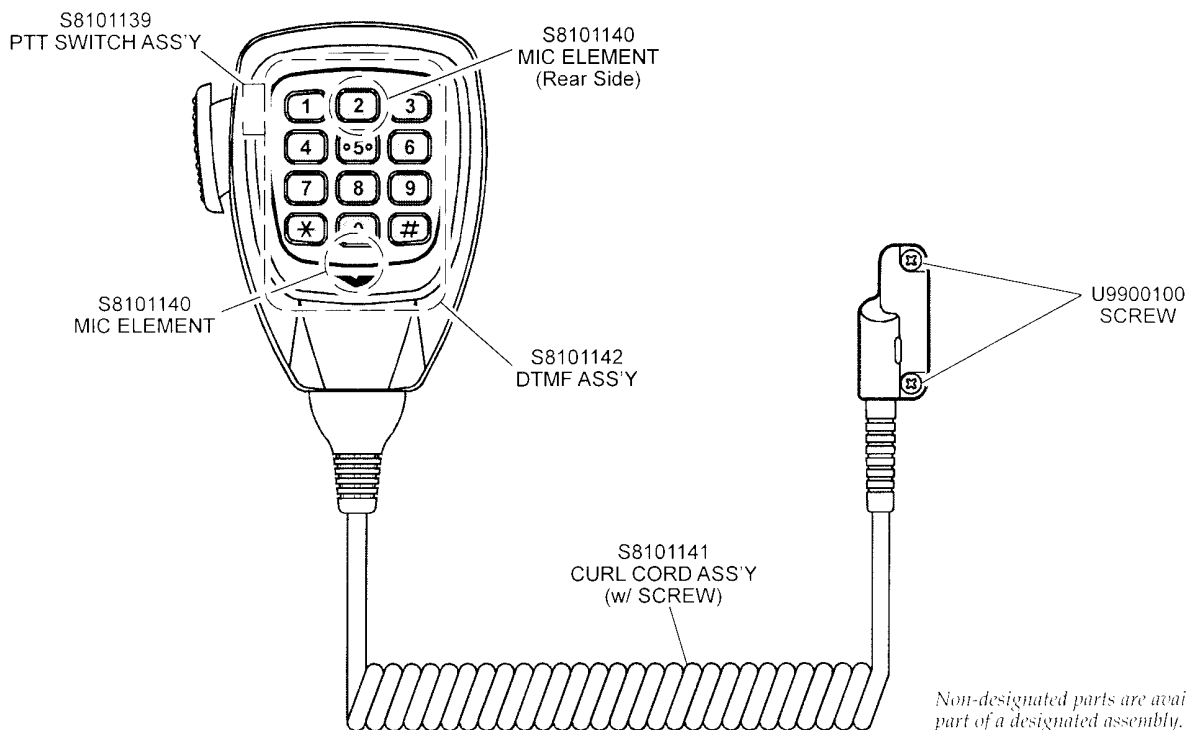

Non-designated parts are available only as part of a designated assembly.

Connector Pinout Diagram

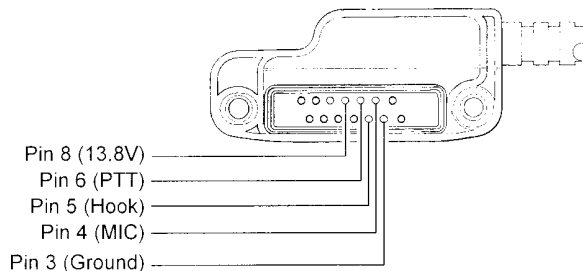

Specifications

Microphone Type: Dynamic

Microphone Impedance: 700-ohm \pm 30 % at 1 kHz

Microphone Sensitivity: -49.5 ± 4 dB at 1 kHz (0 dB = 1 V / microbar)

Operating Temperature: -10 °C to 50 °C

Weight: 317 g.