


TOLERANCES UNLESS OTHERWISE SPECIFIED: — 0 — 6" FRACT. = 1/64 DEC. = .005 6" — 24" FRACT. = 1/32 DEC. = .010

MODEL 229B 148-174 MHz
 MODEL 320 406-512 MHz
 MODEL 249 148-174 MHz

TIGHTENING TORQUES FOR NON-LUBRICATED BOLTS			
BOLT SIZE	TORQUE	BOLT SIZE	TORQUE
1/4-20 (STEEL)	5 FT. LB.	3/8-16 (STEEL)	20 FT. LB.
5/16-18 (STEEL)	11 FT. LB.	1/2-13 (STEEL)	40 FT. LB.
5/16-18 (BRASS)	10 FT. LB.	5/8-11 (STEEL)	85 FT. LB.
5/16-18 (ALUM)	7 FT. LB.	3/4-10 (STEEL)	110 FT. LB.


ISSUE	CHG NO
3	REMAN 1/76
4	CLAMP NOTE 3/77
5	NOTE
6	CONN

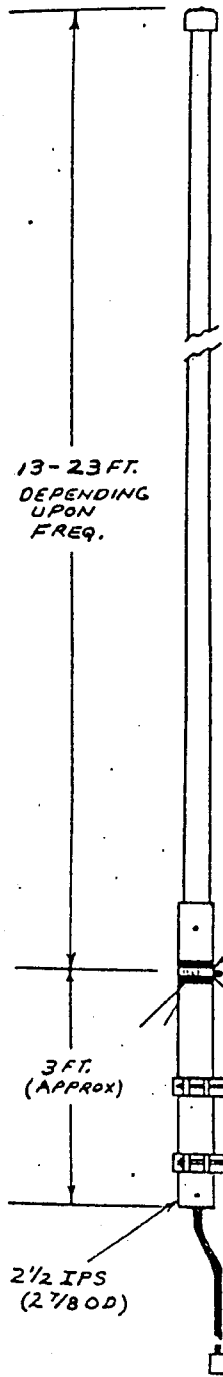

- NOTES:
1. CHECK ALL PACKED MATERIAL AGAINST THE PARTS LIST. IF DAMAGE IS EVIDENT, NOTIFY THE CARRIER IMMEDIATELY.
 2. OTHER SUITABLE MOUNTINGS ARE AVAILABLE ON REQUEST.
 3. CLAMPS MUST BE INSTALLED BELOW GROUND RODS.
 4. CLAMPS SHOWN ARE TYPICAL. 2 PC OF #5 CLAMPS ARE FURNISHED AS STANDARD FOR MOUNTING ANTENNA TO 1.33-3.00 CUSTOMER TOWER PIPE.

CAUTION:

NOTE: UNDER NO CIRCUMSTANCES MUST METAL MOUNTING CLAMPS BE ATTACHED TO THE RADOME SECTION ABOVE THE GROUND RODS. CONSULT SRL INC. FOR SPECIFIC INSTRUCTIONS IF THIS IS REQUIRED

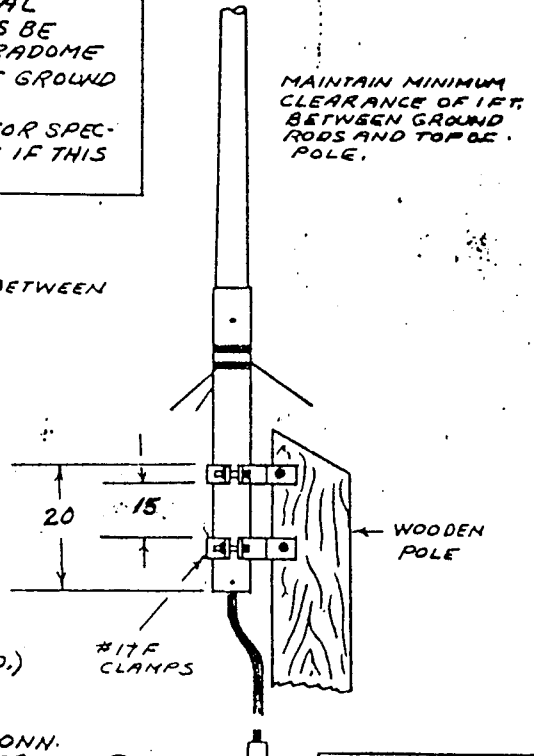

SINCLAIR RADIO LABORATORIES, INC. • P.O. BOX 23 • TONAWANDA, NEW YORK

DR.	DATE	TITLE	DWG. NO.	ISSUE	ASSY. NO.
ER	12/12/55	ANTENNA MOUNTING DETAIL			
CH.		MODEL 229B COLLINEAR OMNI	OD-A-112	6	229B
		MODEL 320 " "			320