
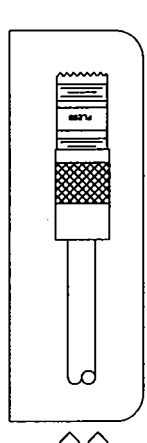
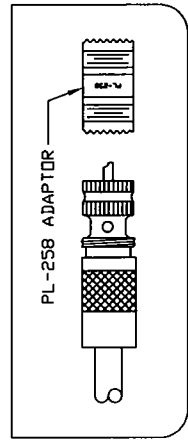
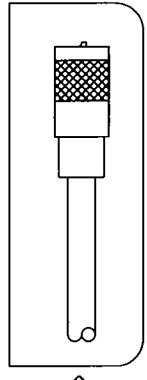
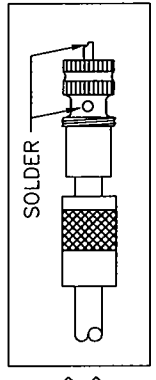
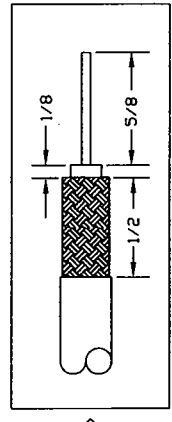


REV.	DESCRIPTION	DATE	APP.
A	ECR 3245 RELEASED DRAWING	11-17-99	BK M.V.

REVISIONS	
REV.	DESCRIPTION
A	ECR 3245 RELEASED DRAWING

- NOTES:
1. CHECK CABLE TYPE, LENGTH AND TRIM FOR CORRECTNESS.
 2. TWIST/SCREW THE CONNECTOR PLUG ON-TO THE CABLE SO THE BRAID IS VISIBLE THROUGH THE PLUG HOLES.
 3. SOLDER THE BRAID TO THE CONNECTOR PLUG THROUGH THE HOLES. FILL THE PLUG SHAFT WITH SOLDER.
 4. HY-POT TEST THE ASSEMBLY FOR SHORTS (SEE 090370-000). SCREW THE COUPLING RING TO THE PLUG ONCE THE SOLDERING IS COMPLETE.
 5. IF NEEDED, INSTALL AN ADAPTER AND/OR A T-ADAPTER ONTO THE PL-259 CONNECTOR, PL-258 ADAPTER SHOWN. THE T-ADAPTER IS ATTACHED DIRECTLY TO UHF OR THE PL-258 ADAPTER. IF THE ASSEMBLY REQUIRES A T-ADAPTER A PL-258 ADAPTER MUST BE USED BETWEEN THE 'T' AND THE UHF.
 6. PLACE THE ADAPTER ONTO THE PLUG AND SCREW THE CONNECTOR COUPLING RING ON THE ADAPTER, THEN TIGHTEN.
 7. SEE 090222-000 FOR SHRINK TUBE INSTALLATION.

PL-259

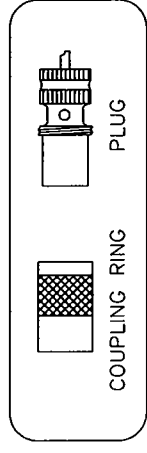

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE TO BE INTERPRETED AS PER ASME Y14.5M-1994		FINISH: N/A	
FRACTION: ± 1/32	DECIMAL: .005	DRAWN BY: B.K.	DATE: 11-17-99
ANGLE: ± .5°		CHKD.: J.E.	DATE: 11-18-99
		ELEC. ENG.: M.W.	DATE: 11-22-99
		MECH. ENG.: A.P.	DATE: 11-22-99
		MFG. ENG.: M.W.	DATE: 11-22-99
		RELEASED: P.P.	DATE: 11-22-99
SEE WHERE USED			
NEXT ASSEMBLY			
REMOVE ALL BURRS AND SHARP EDGES. PART SHALL CONFORM TO DB STANDARD PRACTICES.			
MATERIAL: N/A		DECIBEL PRODUCTS	
DRAWN BY: B.K.		8635 STEMMONS FRWY.	
CHKD.: J.E.		DALLAS, TEXAS 75358-9610	
ELEC. ENG.: M.W.		TITLE: UHF INSTALLATION	
MECH. ENG.: A.P.		DRAWING No. 090484-000	
MFG. ENG.: M.W.		SIZE A	
RELEASED: P.P.		DO NOT SCALE DRAWING	
		SHEET 1 OF 1	

This Document is Proprietary Information of Decibel Products, a division of the Allen Telecom Group. THE USE, REPRODUCTION OR DUPLICATION OF THIS DOCUMENT IS STRICTLY PROHIBITED WITHOUT WRITTEN PERMISSION OF DECIBEL PRODUCTS MANAGEMENT.