

GE MOBILE RADIO

CUSTOM MVP MAINTENANCE MANUAL

66-88 MHz, 25-WATT TRANSMITTER

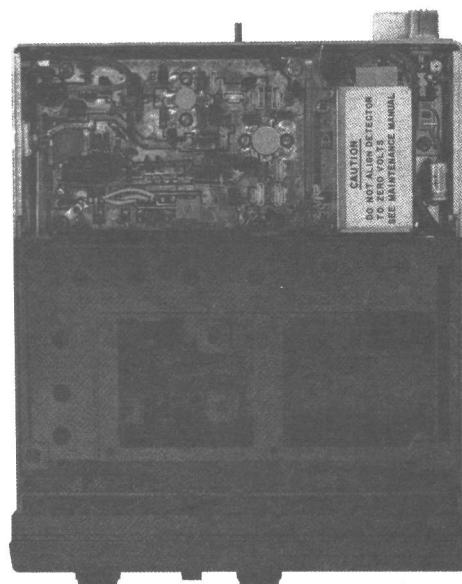
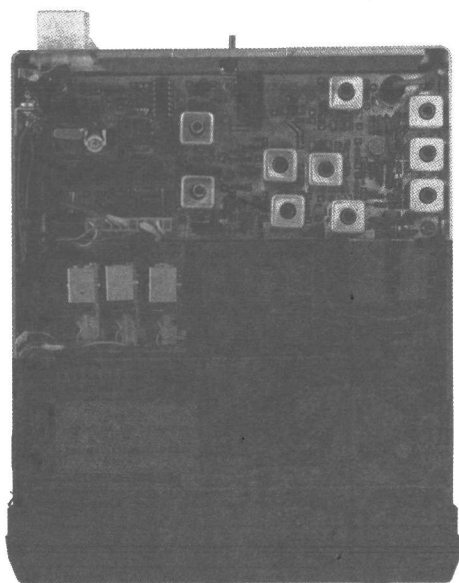


TABLE OF CONTENTS

SPECIFICATIONS	ii
DESCRIPTION AND MAINTENANCE	LBI30636 (DF3164)
EXCITER	LBI30549 (DF3165)
POWER AMPLIFIER	LBI30637 (DF3173)

SPECIFICATIONS*

POWER OUTPUT	Adjustable from 8 to 25 Watts	
CRYSTAL MULTIPLICATION FACTOR	6	
FREQUENCY STABILITY	$\pm 0.0005\%$	
SPURIOUS AND HARMONIC EMISSION (Per EIA RS-152-B, Par. 4)	75 dB (minimum)	
MODULATION	Adjustable from 0 to ± 5 kHz swing with instantaneous modulation limiting	
MODULATION SENSITIVITY Mobile	75 to 120 Millivolts	
AUDIO FREQUENCY CHARACTERISTICS	Within +1 to -3 dB of a 6-dB/octave pre-emphasis from 300 to 3000 Hz per EIA standards. Post limiter filter per FCC and EIA.	
DISTORTION	Less than 3% (1000 Hz) Less than 5% (300 to 3000 Hz)	
DEVIATION SYMMETRY	0.5 kHz maximum	
MAXIMUM FREQUENCY SPREAD:		
66-88 MHz	Full Specifications 1.0 MHz	1 dB Degradation 1.5 MHz
DUTY CYCLE	EIA 20% Intermittent	
RF OUTPUT IMPEDANCE	50 ohms	

* These specifications are intended primarily for the use of the serviceman. Refer to the appropriate Specification Sheet for the complete specifications.

WARNING

Although the highest DC voltage supplied to the transmitter is +12 VDC, high currents may be drawn under short circuit conditions. These currents can possibly heat metal objects such as tools, rings, watchbands, etc., enough to cause burns. Be careful when working near energized 12-Volt circuits!

High-level RF energy in the Transmitter Power Amplifier Assembly can cause RF burns upon contact. Keep away from these circuits when the transmitter is energized!