

INSTALLATION INSTRUCTIONS

SRL 110A 35.5-79.0 MHz ANTENNA

SD110-SFXPASNM(FXXX) ANTENNA

ITEM	SIZE	PART No.	DESCRIPTION	QTY.
1	B	350303-(*)	DIPOLE ASSEMBLY	1
2	B	351733-(*)	SUPPORT BRACE ASSEMBLY & HARDWARE	1
3	A	351752-(*)	DIPOLE SUPPORT BOOM & HARDWARE	1
4	-	8003298	CABLE STRAP	3
5	B	015768	WEATHERPROOFING KIT	1

REPLACE DRAWING NUMBER OR PART NUMBER SUFFIX (*) WITH FREQUENCY TO DETERMINE FREQUENCY DEPENDANT DIMENSIONS AND PART NUMBERS.

ANTENNA INSTALLATION GUIDELINES

Upon receipt of your antenna, please check the material against the parts list enclosed. If shortage or damage is apparent, notify the carrier immediately.

Inspect the antenna feed connector(s) to determine that it mates with the end of your transmission line. Do not remove any connector or cable from the antenna as they are all part of your antenna.

Verify that the frequency to which the antenna has been tuned is the frequency on which your radio system is to operate. This information is on the label which also shows the model and serial number of your antenna.

Assemble antenna including mounting clamps as shown on your assembly sheet. Tightening torques specified must be adhered to when assembling and installing your antenna. Drain holes in the mast base and/or radiating element must face downwards and remain unobstructed at all times.

Always protect the cable harness and radiating element from damage when moving, lifting or resting your antenna.

A check of the antenna VSWR is recommended prior to installation and measurements should be recorded for future reference.

After checking the VSWR of the antenna, mount the antenna to the tower and ensure that it is solidly mounted. Do not rely on the feed cable for ground return. Connect the station transmission line to the antenna being sure that the centre pin of both connectors are centred. Tighten both connectors firmly by hand. Do not use pliers. Carefully weatherproof the cable connection (Refer to Weatherproofing Instructions 005032, supplied with Weatherproofing Kit). Failure to weatherproof the cable connection will result in improper operation of your antenna. Properly secure the feed cable and antenna transmission line to the tower in the best position to avoid damage.

A careful visual check is recommended to insure that:

- a) All mechanical connections are securely made.
- b) The antenna is mounted on the proper ledge of the tower with sufficient physical clearance.
- c) All connections have been carefully wrapped with weatherproofing material to prevent moisture problems.


"W" = SUFFICIENT MOUNTING
TO MOUNT ACROSS TOWER
FACE UP TO 30" WIDE

MOUNT BOOM (ITEM 3) BETWEEN
YELLOW BANDS ON DIPOLE (ITEM 1).
USE U-BOLTS, LOCKWASHERS &
HEX NUTS SUPPLIED WITH ITEM
3. SECURE CABLE TO BOOM
USING STRAPS (ITEM 4).

MOUNT BRACE (ITEM 2) ON
DIPOLE AS SHOWN. USE U-BOLTS
LOCKWASHERS & HEX NUTS
SUPPLIED WITH ITEM 2

MOUNT ANTENNA TO TOWER.

SUGGESTED MOUNTING:
MOUNT ANTENNA ACROSS
FACE OF TOWER
UTILIZING 2 TOWER LEGS.
MOUNTING CLAMPS
NOT SUPPLIED.

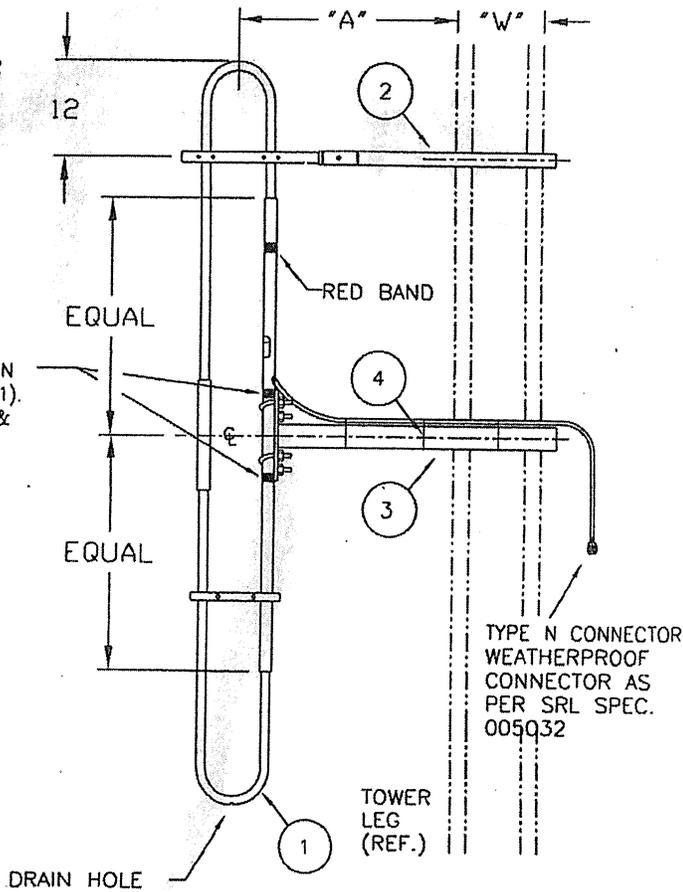

TYPE N CONNECTOR
WEATHERPROOF
CONNECTOR AS
PER SRL SPEC.
005032

Q. -(MHz)	DIM. "A"
35.50	41.58"
36.00	41.00"
36.50	40.44"
37.00	39.89"
37.50	39.36"
38.00	38.84"
38.50	38.34"
39.00	37.85"
39.50	37.37"
40.00	36.90"
40.50	36.44"
41.00	36.00"
41.50	35.57"
42.00	35.14"
42.50	34.73"
43.00	34.33"
43.50	33.93"
44.00	33.55"
44.50	33.17"
45.00	32.80"
45.50	32.44"

FREQ. -(MHz)	DIM. "A"
46.00	32.09"
46.50	31.74"
47.00	31.40"
47.50	31.07"
48.00	30.75"
48.50	30.43"
49.00	30.12"
49.50	29.82"
50.00	29.52"
50.50	29.23"
51.00	28.94"
51.50	28.66"
52.00	28.39"
52.50	28.11"
53.00	27.85"
53.50	27.59"
54.00	27.33"
54.50	27.08"
55.00	26.84"
55.50	26.60"
56.00	26.36"

FREQ. -(MHz)	DIM. "A"
56.50	26.12"
57.00	25.90"
57.50	25.67"
58.00	25.45"
58.50	25.23"
59.00	25.02"
59.50	24.81"
60.00	24.60"
60.50	24.40"
61.00	24.20"
61.50	24.00"
62.00	23.81"
62.50	23.62"
63.00	23.43"
63.50	23.24"
64.00	23.06"
64.50	22.88"
65.00	22.71"
65.50	22.53"
66.00	22.36"
66.50	22.20"

FREQ. -(MHz)	DIM. "A"
67.00	22.03"
67.50	21.87"
68.00	21.71"
68.50	21.55"
69.00	21.39"
69.50	21.24"
70.00	21.09"
70.50	20.94"
71.00	20.79"
71.50	20.64"
72.00	20.50"
72.50	20.36"
73.00	20.22"
73.50	20.08"
74.00	19.95"
74.50	19.81"
75.00	19.68"
75.50	19.55"
76.00	19.42"
79.00	18.69"