


INSTALLATION OF **MASTR[®] II**

TWO-WAY FM RADIO STATION COMBINATIONS


CABINETS

Three cabinet styles (Desk-Mate, Pole-Mount and Floor-Mount) are available to meet different system requirements.




DESK MATE STATION

Desk-Mate — The Desk-Mate station cabinet can be conveniently located on either side of a desk to provide additional working area or in some other suitable location as required.



POLE MOUNT STATION

Pole-Mount — The Pole-Mount station cabinet is a weatherproof cabinet designed for outdoor use. The cabinet can be mounted on a pole, wall or a pedestal.



FLOOR MOUNT STATION

Floor-Mount — The Floor-Mount station cabinet can be located in the building adjacent to the antenna installation or in some other convenient area as required.


UNPACKING AND CHECKING EQUIPMENT

As you unpack the station combination, carefully inspect each item. If any damage has occurred to the equipment during shipment, file a claim with the freight carrier immediately.

Antennas, transmission lines and towers are ordered separately from the station combination. The installer will normally provide any miscellaneous hardware as part of his installation "package". The user must provide the AC power service of adequate capacity and regulation as well as any telephone lines that may be required for "Remote Control" operation.

DESK MATE CABINET INSTALLATION

Two Desk-Mate cabinets are available: the 30-inch cabinet contains 14 EIA rack units of space (24-1/2 inches); the 44-inch cabinet contains 22 EIA rack units of space (38-1/2 inches).

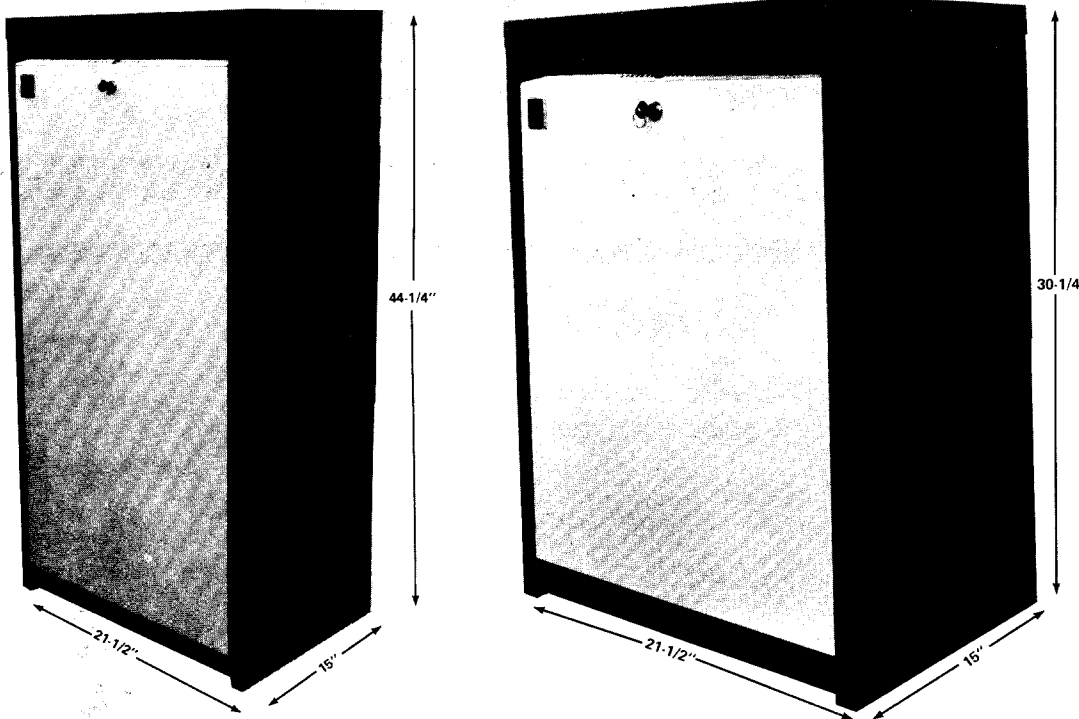


The Desk Mate cabinet can be placed adjacent to either side of a desk. The front and rear of the station should be kept clear of obstructions so that the serviceman can easily gain access to the transmitter, receiver and power supply components and to avoid obstructing the front and rear vents.

The cabinets have removable front and rear doors secured with individual locks. 3/4-inch holes are provided on the front and rear for cable entry.

POLE MOUNT CABINET INSTALLATION

Make certain the selected mount for the Pole-Mount cabinet will bear the weight of the station.

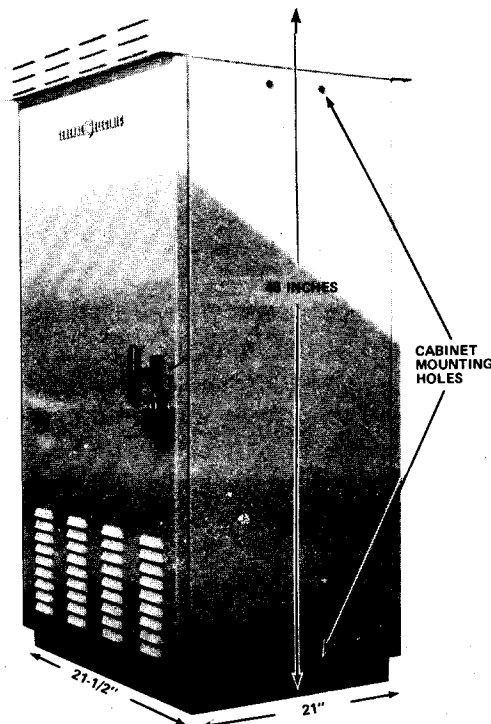

The brackets (19C320924P1) supplied with the cabinet permit mounting on the crossarm between two poles, on a wall (inside or outside) or some other vertical surface. The cabinet may also be mounted on a pedestal or platform.

Optional brackets (19B225279P1) are available for mounting the cabinet to a pole. The front and rear doors may be locked by a customer supplied padlock. The cabinet contains 22 EIA rack units of space (38-1/2 inches).


MOUNTING CABINET TO POLE

Determine which side of cabinet is to mount to pole. Minimum pole diameter is 12 inches. Remove four plastic plugs from cabinet mounting holes.

1. MOUNT THE TOP 19B226279P1 BRACKET TO THE POLE. BRACKET WILL ACCEPT 1/2-INCH HARDWARE.
2. SCREW TWO 3/8 - 16 x 7/8 INCH LONG BOLTS AND LOCKWASHERS (PART OF 19A130145G1 KIT) PART WAY INTO TOP MOUNTING HOLES.
3. MOUNT THE BOTTOM 19B225279P1 BRACKET TO THE BOTTOM MOUNTING HOLES IN THE CABINET USING TWO 3/8 - 16 x 7/8 INCH LONG BOLTS AND LOCK WASHERS. INSTALL SO THAT CABINET WILL BE SUPPORTED BY BRACKET.
4. MOUNT CABINET TO POLE BY PASSING HEAD OF 3/8 - 16 BOLT THROUGH HOLE IN TOP BRACKET.
5. TIGHTEN 3/8 - 16 BOLTS IN TOP BRACKET. INSTALL LAG SCREWS IN BOTTOM BRACKET AND SECURE TO POLE.

POLE MOUNT BRACKET (19B226279P1) (OPTIONAL)


FRONT VIEW OF CABINET

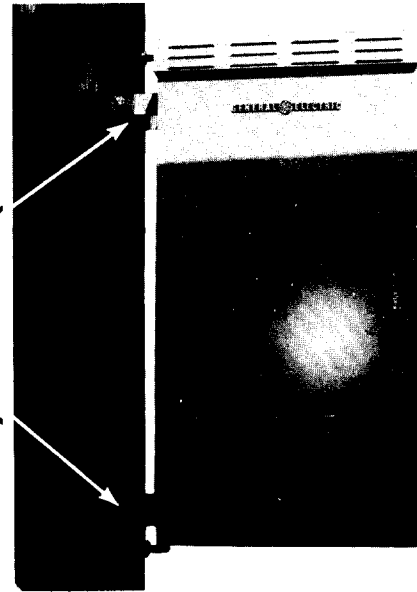


MOUNTING CABINET TO CROSSARMS

Determine which side of cabinet is to mount to crossarms. Remove four plastic plugs from cabinet mounting holes. 19C320924P1 brackets are supplied with cabinet.

1. ATTACH TWO 19C320924P1 MOUNTING BRACKETS TO CABINET USING 4-3/8-16 x 7/8 INCH LONG BOLTS AND LOCKWASHERS SUPPLIED IN 19A130145G1 HARDWARE KIT. INSTALL BRACKETS AS SHOWN AT RIGHT.



2. INSTALL CROSSARMS WITH VERTICAL SPACING AS SHOWN BELOW. DIMENSIONS GIVEN WILL ALLOW MOUNTING LAG SCREW TO BE APPROXIMATELY CENTERED IN CROSSARMS IF STANDARD CROSSARM (3-4/16 x 4-7/8 INCHES, FINISHED SIZE) IS USED.

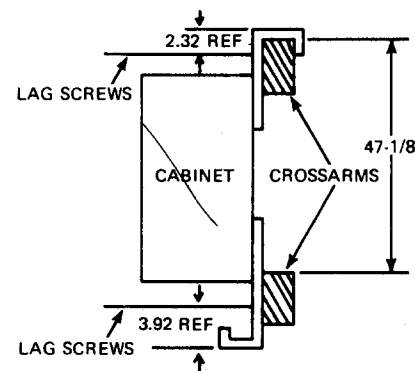


3. MOUNT CABINET OVER TOP CROSSARM AND INSTALL TWO LAG SCREWS IN EACH BRACKET IN LOCATION SHOWN. USE 3/8-INCH DIAMETER SCREWS. CENTER LINE OF LAG SCREWS IS 47.51 INCHES. CAUTION MUST BE USED IF CROSSARM SIZE IS LARGER THAN 4-7/8 INCHES BECAUSE OPENING OF CABINET DOOR MAY BE BLOCKED.


MOUNTING CABINET TO PLATFORM OR PEDESTAL

Remove four plastic plugs from bottom of cabinet, two from each side.

1. ATTACH TWO 19C320942P1 MOUNTING BRACKETS TO CABINET USING 4-3/8-16 x 7/8 LONG BOLTS AND LOCK WASHERS (SUPPLIED IN HARDWARE KIT 19A130145G1) AS SHOWN BELOW.




2. LAYOUT MOUNTING HOLES FOR BRACKETS BY PLACING CABINET IN POSITION AND MARKING HOLES. 3/8-INCH HARDWARE IS USED IN BRACKETS. PLACE CABINET IN POSITION AND BOLT DOWN.




MOUNTING CABINET TO WALL

Determine which side of cabinet is to mount to wall. Remove four plastic plugs from cabinet mounting holes.

1. ATTACH TWO 19C320942P1 MOUNTING BRACKETS TO CABINET USING 4-3/8- 16 x 7/8 LONG BOLTS AND LOCKWASHERS (SUPPLIED IN HARDWARE KIT 19A130145G1) AS SHOWN AT RIGHT.



2. LAYOUT THE FOLLOWING HOLE PATTERN ON THE WALL.

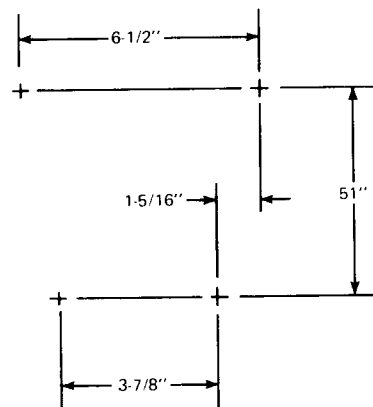


3. DRILL AND INSTALL ANCHORS IF REQUIRED. BRACKETS WILL ACCEPT 3/8 INCH BOLTS OR SCREWS. INSTALL BOLTS AND WASHERS IN TOP MOUNTING HOLES. ALLOW 3/8-INCH TO 1/2 INCH TO PROTRUDE FROM WALL.

4. MOUNT CABINET TO WALL. TOP BRACKET SCREWS WILL ACCEPT SLOTS IN TOP BRACKET. INSTALL SCREWS AND WASHERS IN WALL TO SECURE LOWER BRACKET. LARGE HOLES IN BRACKET FACILITATE ASSEMBLY. TIGHTEN ALL WALL MOUNTINGS.

FLOOR MOUNT CABINET INSTALLATION

STANDARD FLOOR MOUNT CABINET

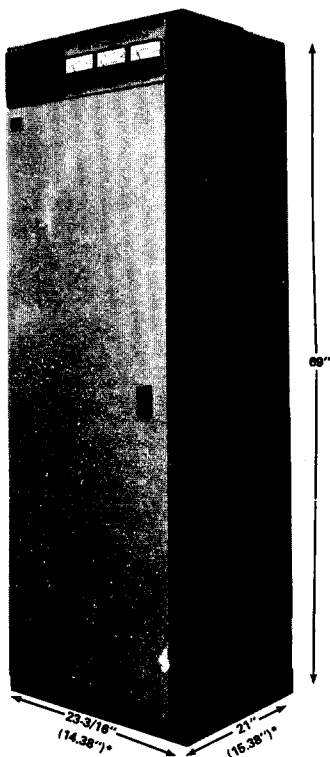


Be sure to allow sufficient space in front of—and behind—the cabinet to permit front and rear doors to open completely. Either door may be removed or inverted and hinged on the opposite side if desired.

Three knockouts are located along the rear bottom edge of the cabinet for cable entry. If it is desirable to bring the cables up through the floor, the cabinet can be situated over the power receptacle or cable hole on the floor. Conduit may be extended into the cabinet through one of the two 7-inch by 17-inch base-plate openings in the cabinet bottom. A cable entry hole (2" x 1") is located in the top rear of the cabinet to bring in the antenna cables or conduit from above the station. The front and back sides of the station must always be accessible for the serviceman.

Holes are located on the bottom for bolting the cabinet securely to the floor with 1/2" bolts. An FCC license holder (19A130126G1) is provided with the Floor Mount cabinet. This holder may be attached to the cabinet where desired using the adhesive backing on the holder.

HIGH POWER FLOOR MOUNT CABINET

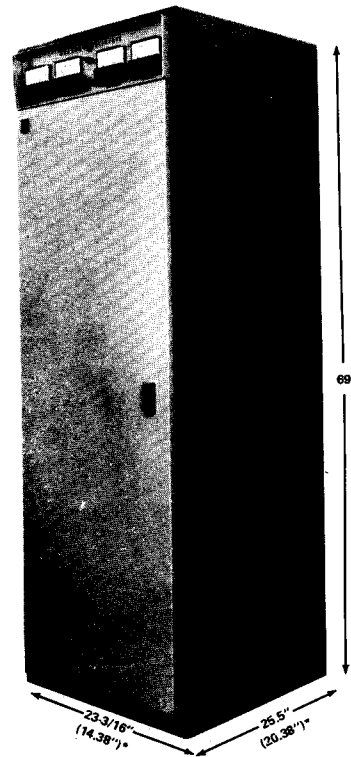

* Location of base mounting holes, center-to-center. (Holes are inset 1.31-inches from each corner.) Hole size is .625 inches.

STATION CABLE CONNECTIONS

POWER AND GROUND CONNECTIONS

A separate 15 or 20 Ampere, 121 VAC, 60 Hertz electrical circuit should be provided for the station. The 15-foot power cable supplied with the station is equipped with a standard 3-prong plug. One of the prongs grounds the station to protect personnel. Check the electrical code to be sure the power outlet complies with local ordinances.

If a 242 VAC source is to be used for the station, jumper connections located on the hinged power supply front panel must be changed. Refer to the Power Supply MAINTENANCE MANUAL. The plug on the power cable must also be changed to mate with the 242 VAC outlet.

NOTE: The 50 Hertz power supply is supplied without a power cable and plug.

The station should be connected to a good earth ground using No. 14 or larger wire. A ground stud is provided on all cabinets for a separate cabinet ground. Use No. 14 or larger wire for connecting the cabinet to building ground.

NOTE: After the ground lead from the power cable is connected to the building ground, check for continuity between building ground and the cabinet.


POLE-MOUNT POWER & GROUND CONNECTIONS

121-VAC Remove AC duplex receptacle cover and connect a No. 12 three-wire AC cable to its terminals. Connect black (hot) wire to copper terminal, the white wire to white terminal, and the ground wire to green terminal.

Connect AC plug from chassis into AC duplex receptacle.

242-VAC Make modifications and connections as shown on the power supply Schematic Diagram in the station Maintenance Manual. Do not connect 242-VAC to the duplex receptacle. Check for continuity between building ground and cabinet.

REMOTE/LOCAL STATIONS

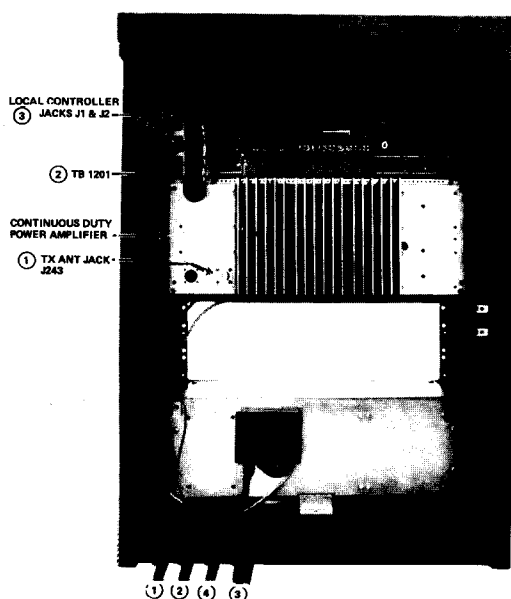


- ① Route the Antenna transmission line through hole in cabinet and connect to J243.
- ② Route telephone pair from remote unit through hole in cabinet and make connections to TB1201 as shown in the Remote Control MAINTENANCE MANUAL.
- ③ Route MASTR Local Controller cable through oval hole (in Desk-Mate and Floor-Mount cabinets) and connect P1102 to J1 and P1101 to J2. An oval hole is not provided in the Pole-Mount cabinet. The cable can be disconnected from the Controller and routed through one of the knock-out holes provided.
- ④ Connect power cable to the power source.

REPEATER STATIONS



- ① Route the Receiver Antenna transmission line through hole in cabinet and connect to RX ANT jack J945.
- ② Route the Transmit Antenna transmission line through hole in cabinet and connect to TX ANT jack J243.
- ③ Connect the power cable to the power source.


LOCAL CONTROL INTERMITTENT DUTY STATION

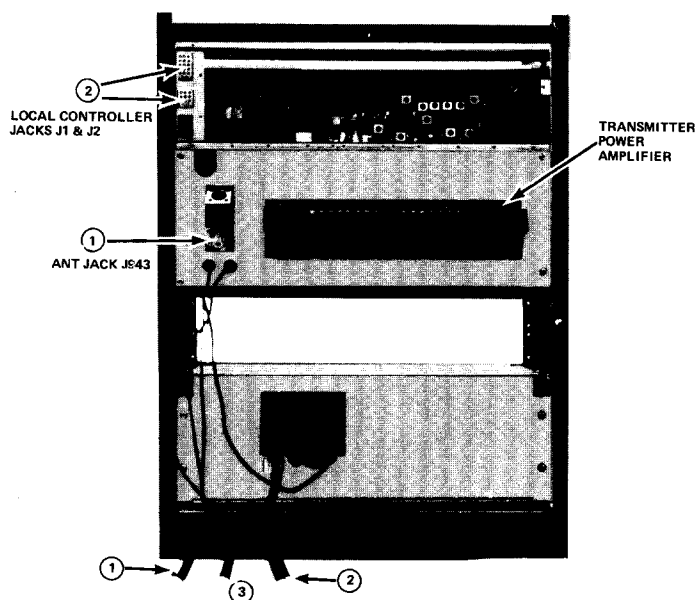

- ① Route antenna transmission line through hole in cabinet and connect to ANT jack 943.
- ② Route MASTR Local Controller cable through oval hole (in Desk-Mate and Floor Mount Cabinets) and connect P1102 to J1 and P1101 to J2. An oval hole is not provided in the Pole Mount cabinet for the MASTR Local Controller cable. The cable can be disconnected from the Controller and fed through one of the round knockout holes provided in the Pole Mount Cabinet.
- ③ Connect the power cable to the power source.


HIGH POWER STATION CABLE CONNECTIONS

LOCAL/REMOTE STATIONS

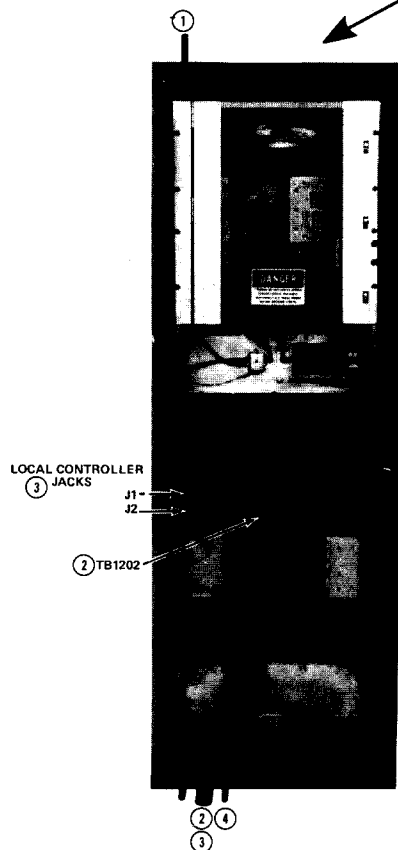

- ① Route the Antenna coaxial cable through the hole in the top of the cabinet to the socket on the Antenna relay of the RF Power Amplifier.
- ② Route the telephone pair from remote unit through the oval hole in the rear of the cabinet and make connections to TB1201 as shown in the Remote Control Maintenance Manual.
- ③ Route the MASTR Local Controller cable through the oval hole in the rear of the cabinet and connect P1102 to J1 and P1101 to J2.
- ④ Connect the power cable to the power source.

REPEATER STATIONS

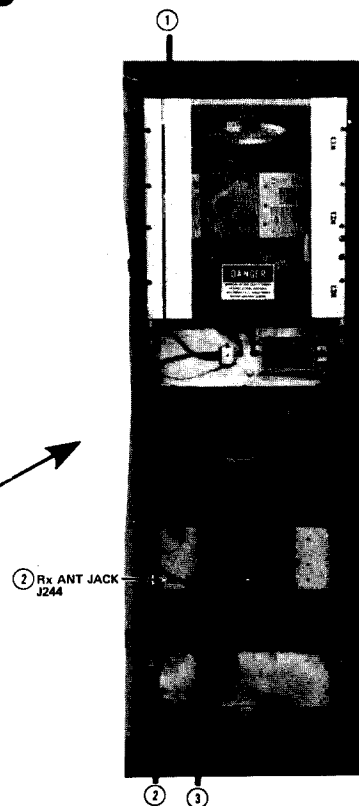


- ① Route the Transmitter (Tx) coaxial cable through the hole in the top of the cabinet to the top socket on the Antenna relay of the RF Power Amplifier.
- ② Route the Receiver (Rx) coaxial cable through the hole at the bottom of the cabinet and connect to Rx Antenna Jack J244.
- ③ Connect the power cable to the power source.

NOTE


Converting the high power station from 121 VAC input to 242 VAC input requires a special step-down transformer (OPTION 9578). This transformer has taps for 205 and 235 VAC operation. The transformer must be mounted external to the cabinet. The modification for 242 VAC operation outlined for the low power Power Supply *should not be performed* in high power applications.

806-870 MHz SOLID STATE STATION COMBINATIONS

90-WATT

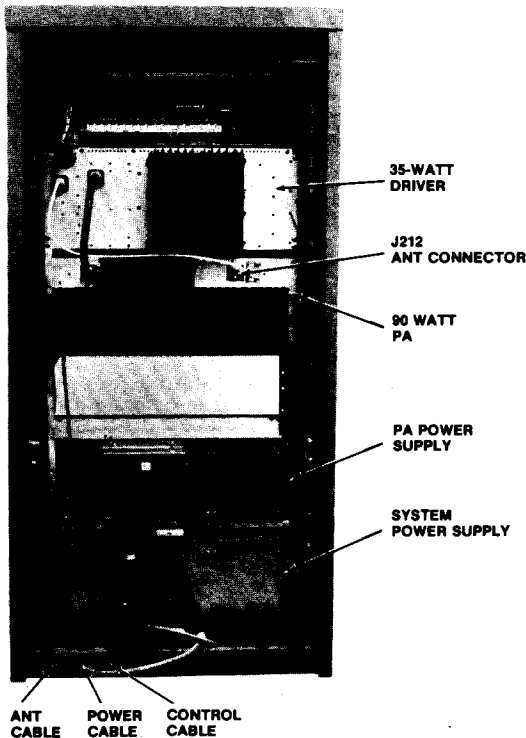


35-WATT

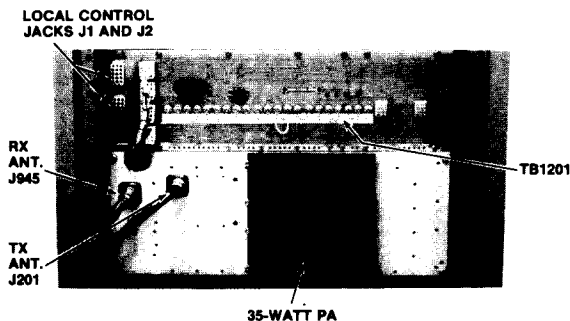

Route the antenna transmission line(s) through hole in cabinet and connect to ANT connectors or Duplexer (if used). Route the telephone pair from remote unit or local control cable through oval hole in base of cabinet. Connect remote cable to TB1201 as shown in Remote Control Manual. Connect local control cable P1102 to J1 and P1101 to J2. Connect power cable to the power source.

806-870 MHz TUBED STATION COMBINATION

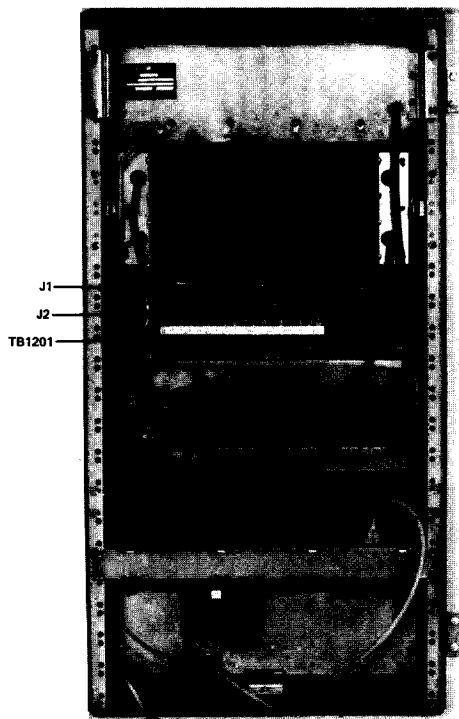


Route the antenna transmission line through hole in cabinet and connect to ANT connector in PA assembly.

Route telephone pair from remote unit through hole in cabinet and make connections to TB1201 as shown in the Remote Control MAINTENANCE MANUAL.

Route MASTR Local Controller cable through oval hole (in Desk-Mate and Floor-Mount cabinets) and connect P1102 to J1 and P1101 to J2. An oval hole is not provided in the Pole-Mount cabinet. The cable can be disconnected from the Controller and routed through one of the knock-out holes provided.


Connect power cable to the power source.

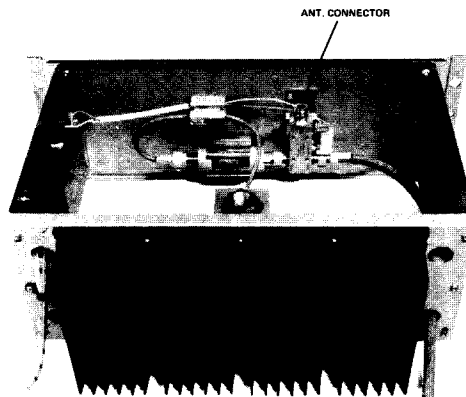

Glow Jet

ANTENNA SYSTEM REQUIREMENTS

To supplement the manufacturer's instructions, the following hints will be valuable to you when installing your antenna.

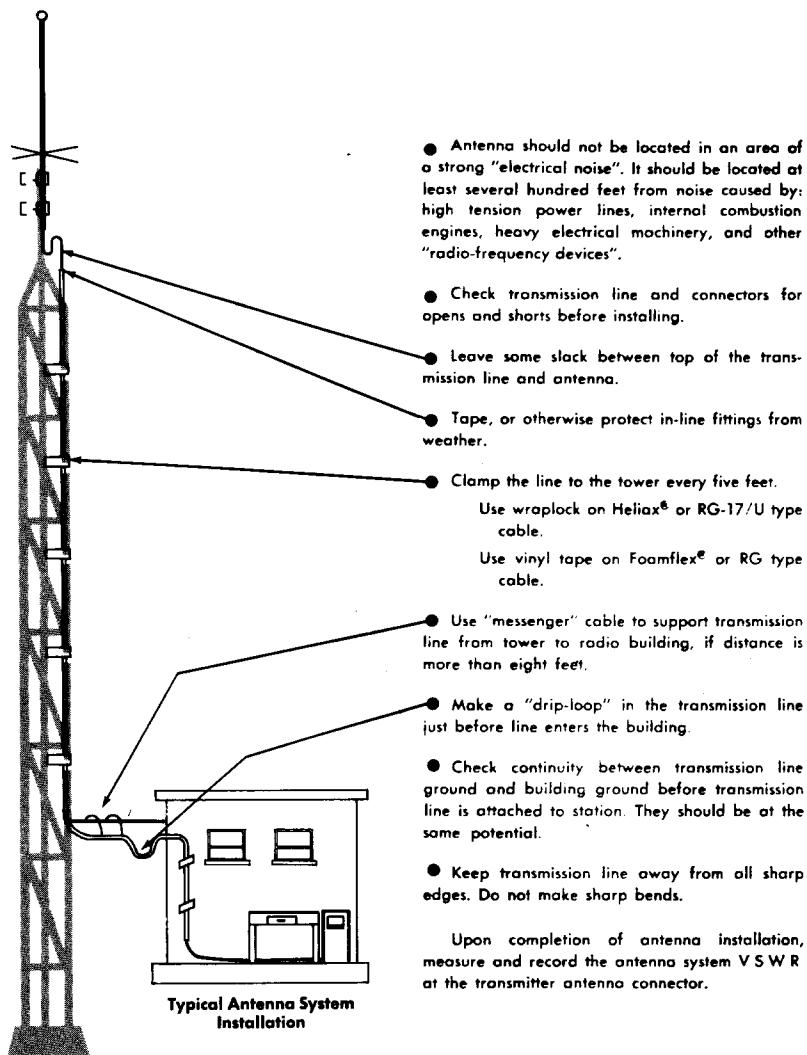

CAUTION

The use of any ferromagnetic material, such as nickel-plating, stainless steel, Invar or Kovar, must be avoided in multi-carrier systems. The presence of several high-power signals will produce fifth-order intermodulation products that lie in the base receiver band. All connectors and filters connected in the transmitter combiner-antenna path must be examined to preclude the use of ferromagnetic material. Silver-plated brass is the preferred material.

Installations utilizing a single transmit/receive antenna should have all ferromagnetic material replaced with silver-plated brass components.

FINAL CHECKS BEFORE PLACING YOUR STATION IN OPERATION

After completing the installation of your station, the following final operations should be performed:

- Final adjustment should be made to the receiver and transmitter. Transmitter adjustments must be made by a 1st or 2nd Class Radiotelephone or Radiotelegraph licensed electronic technician. Instructions for making these adjustments are included in the station Maintenance Manual. The adjustments include:

- Transmitter
- final tuning and loading
 - deviation and frequency checks
 - plate power input

Transmitter measurements should be entered in the permanent station records along with the signature and license number of the technician.

- Receiver
- Matching to antenna.

Instructions for making these adjustments are included in the Maintenance Manual for the Two-Way Radio.

Be sure that a RADIO TRANSMITTER IDENTIFICATION form (FCC 452-C or General Electric Form NP270303) is filled out and attached to the transmitter.

GENERAL ELECTRIC COMPANY • MOBILE COMMUNICATIONS DIVISION
WORLD HEADQUARTERS • LYNCHBURG, VIRGINIA 24502 U.S.A.

GENERAL  ELECTRIC®
U.S.A.

• Trademark of General Electric Company U.S.A.
Printed in U.S.A.