


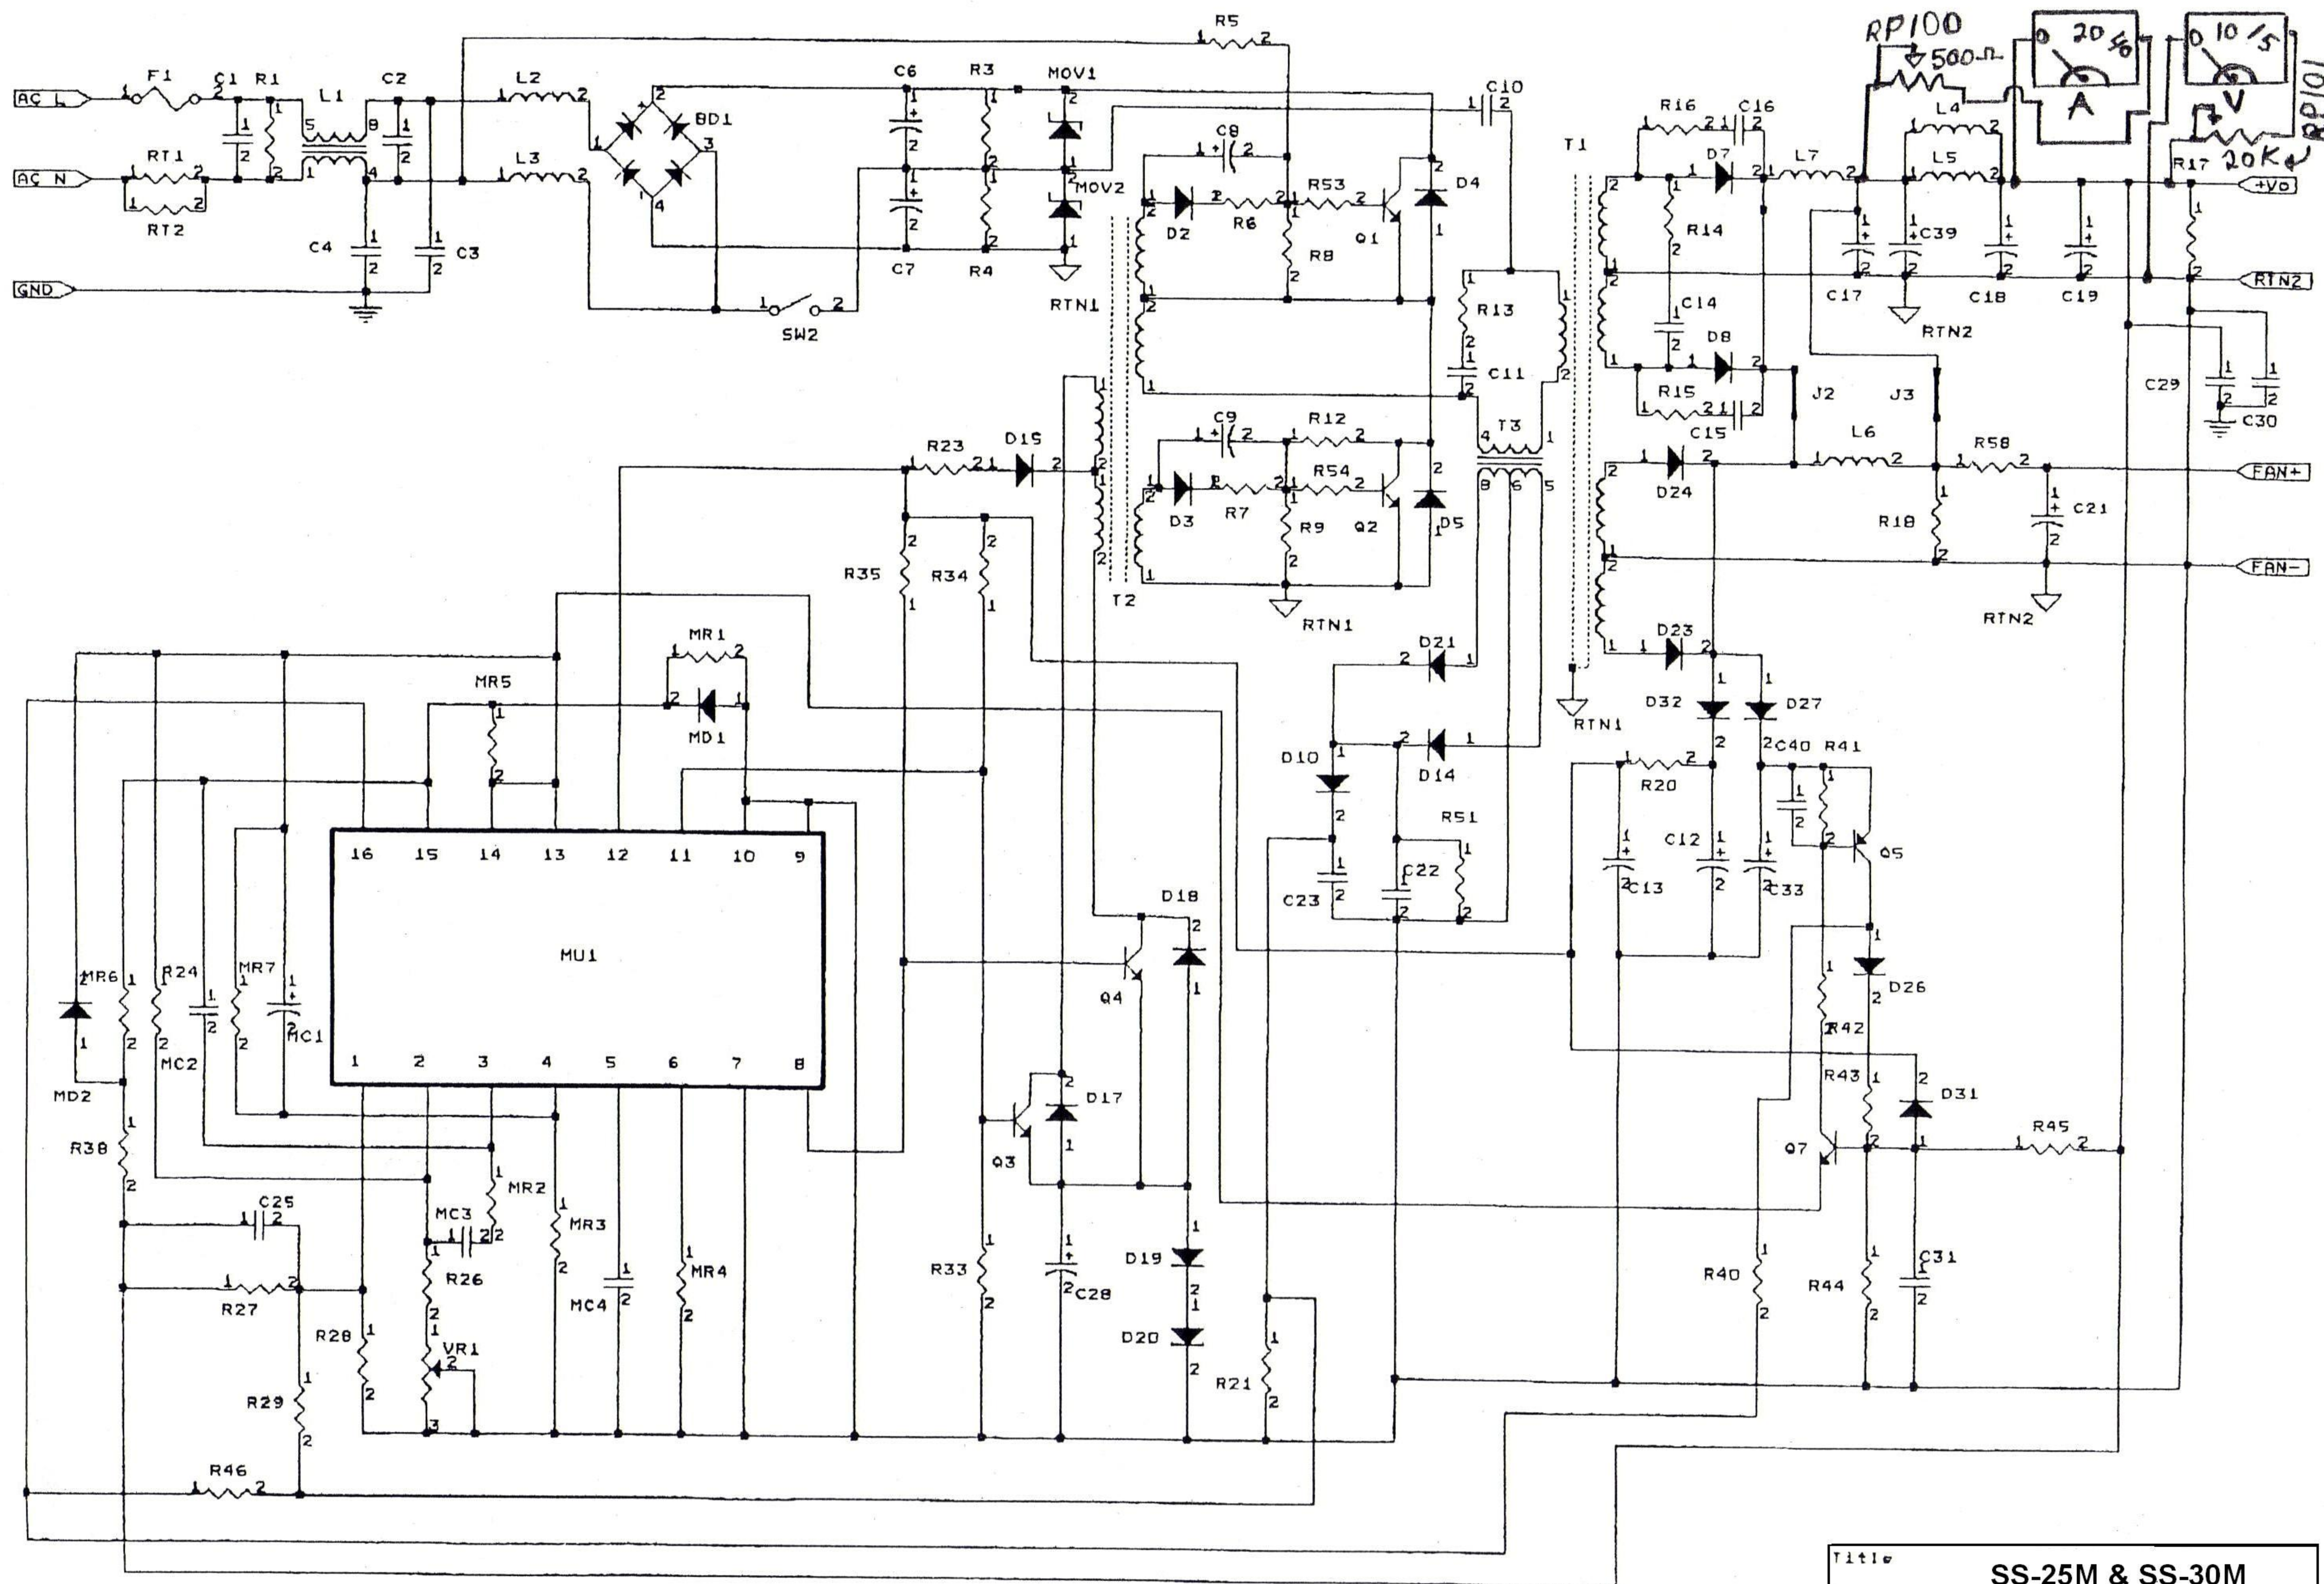

SS-30 PARTS LIST

LOCATION	QTY	DESCRIPTION				
R1	1	RES CFLM	1/2 W	330K		5%
R26,33	2	RES CFLM	1/8 W	1K		5%
R42,43,44	3	RES CFLM	1/8 W	5.1K		5%
R24	1	RES CFLM	1/8 W	1.5K		5%
R28	1	RES CFLM	1/8 W	1.6K		5%
R27	1	RES CFLM	1/8 W	7.5K		5%
R21,40,41,46	4	RES CFLM	1/8 W	10K		5%
R34,35	2	RES CFLM	1/8 W	3K		5%
R3,4	2	RES CFLM	1/2 W	100K		5%
R5	1	RES CFLM	1/2 W	470K		5%
R51	1	RES CFLM	1/4 W	30		5%
R8,9	2	RES CFLM	1/4 W	2.7K		5%
R12	1	RES CFLM	1/4 W	200K		5%
R20	1	RES CFLM	1/4 W	10		5%
R6,7	2	RES CFLM	1/4 W	10		5%
R23	1	RES CFLM	1/4 W	1.5K		5%
R53,54	2	RES CFLM	1/4 W	3.3		5%
R29	1	RES CFLM	1/8 W	160K		5%
R38	1	RES CFLM	1/8 W	91K		5%
R45	1	RES CFLM	1/8 W	9.1K		5%
R15,16,58	3	RES METOX	4W	10		5%
R17	1	RES METOX	2W	220		5%
R13	1	RES METOX	3W	100		5%
R14	1	RES METOX	1W	22		5%
VR1	1	RES VAR CER		1K		20%
RT1,2	2	THERMISTOR	4A			5-15%
C1	1	CAP MY RDL	250 VAC	0.47UF		20%
C2	1	CAP MY RDL	250V	1UF		10%
C3,4	2	CAP MY RDL	400V	0.01UF		20%
C10	1	CAP MP2 RDL	250V	1UF		10%
C22	1	CAP CER RDL	50V	1000PF		10%
C14,15,16,29,30	5	CAP CER RDL	1KV	0.01UF		10%
C11	1	CAP CER RDL	1KV	1000PF		20%
C23,31	2	CAP CER X7R	50V	0.1UF		20%
C40	1	CAP CER X7R	50V	0.01UF		10%
C25	1	CAP CER X7R	50V	0.033UF		10%
C21	1	CAP ELE RDL	25V	100UF		20%
C8,9,28	3	CAP ELE RDL	50V	1UF		20%
C12	1	CAP ELE RDL	50V	46UF		20%
C13	1	CAP ELE RDL	50V	10UF		15%
C33	1	CAP ELE RDL	50V	100UF		20%
C6,7	2	CAP ELE RDL	200V	680UF		20%
C17,18,19,39	4	CAP ELE RDL	16V	3300UF		20%
MOV1,2	2	MOV	MDC2151			
Q3,4,7	3	XSTER NPN	T092	MPS222A		
Q5	1	XSTER PNP	T092	MPS2907A		
Q1,2	2	XSTER NPN	T03P	2SC2625		
D27,32	2	DIODE	1A 200V	1N4935		
D4,5	2	DIODE	1A 400V	1N4936-52T		
D7,8	2	DIODE	30A 200V	MUR3020WT		
D2,3,10,14,15,17	6	DIODE	200MA 75V	1N4148-TR		
D18-21,26,31	6	DIODE	200MA 75V	1N4148-TR		
BD1	1	DIODE	6A 600V	PBU606		
T2	1	XFMR	DRIVER			
T3	1	XFMR	CURRENT			
T1	1	XFMR	OUTPUT			
L1	1	IND. COMMON	MODE			
L2,3	2	IND. DIFF.	MODE			
L7	1	IND.				
L4,5	2	IND.				
O/P ASSY	1	CORE TOROID				
F1	1	FUSE	10A 125V			
CN1	1	HEADER				
CN2	1	TERM CAT				
		SWITCH	SELECT			
SW3	1	THERMOSTAT	N/O			

SW1	1	THERMOSTAT	N/C		
PCB1	1	PCB			
AC I/P	1	PCB			
SW1 ASSY	1	CABLE ASSY			
SW2 ASSY	1	CABLE ASSY			
+VO	1	CABLE ASSY			
RTN	1	CABLE ASSY			
SW3 ASSY	1	CABLE ASSY			
HSK ASSY	1				
HSK1	1	HEAT SINK FOR			
HSK2	1	HEAT SINK FOR			
	2	FUSE CLIP			
HSK ASSY	4	SCREW WR WASHER			
HSK ASSY	4	NUT			
	3	CABLE TIE			
CTL CARD	1	PCB SUB ASSY			
MR3	1	RES CFLM	1/8W	20K	5%
MR1	1	RES CFLM	1/8W	10K	5%
MR4	1	RES CFLM	1/8W	15K	5%
MR5	1	RES CFLM	1/8W	150K	5%
MR2	1	RES CFLM	1/8W	8.2K	5%
PCB2	1	PCB CTL			
MR6,MJ1,2,3,4	5	WIRE JUMPER			
MC4	1	CAP MY RDL	50V	1000PF	5%
MC2	1	CAP CER X7R	50V	0.1UF	20%
MC3	1	CAP CER X7R	50V	.022UF	10%
MC1	1	CAP ELE RDL	50V	10UF	20%
MU1	1	IC LIN	TL494CN		
MCON1	1	HEADER			