




## OUTLINE DIAGRAM

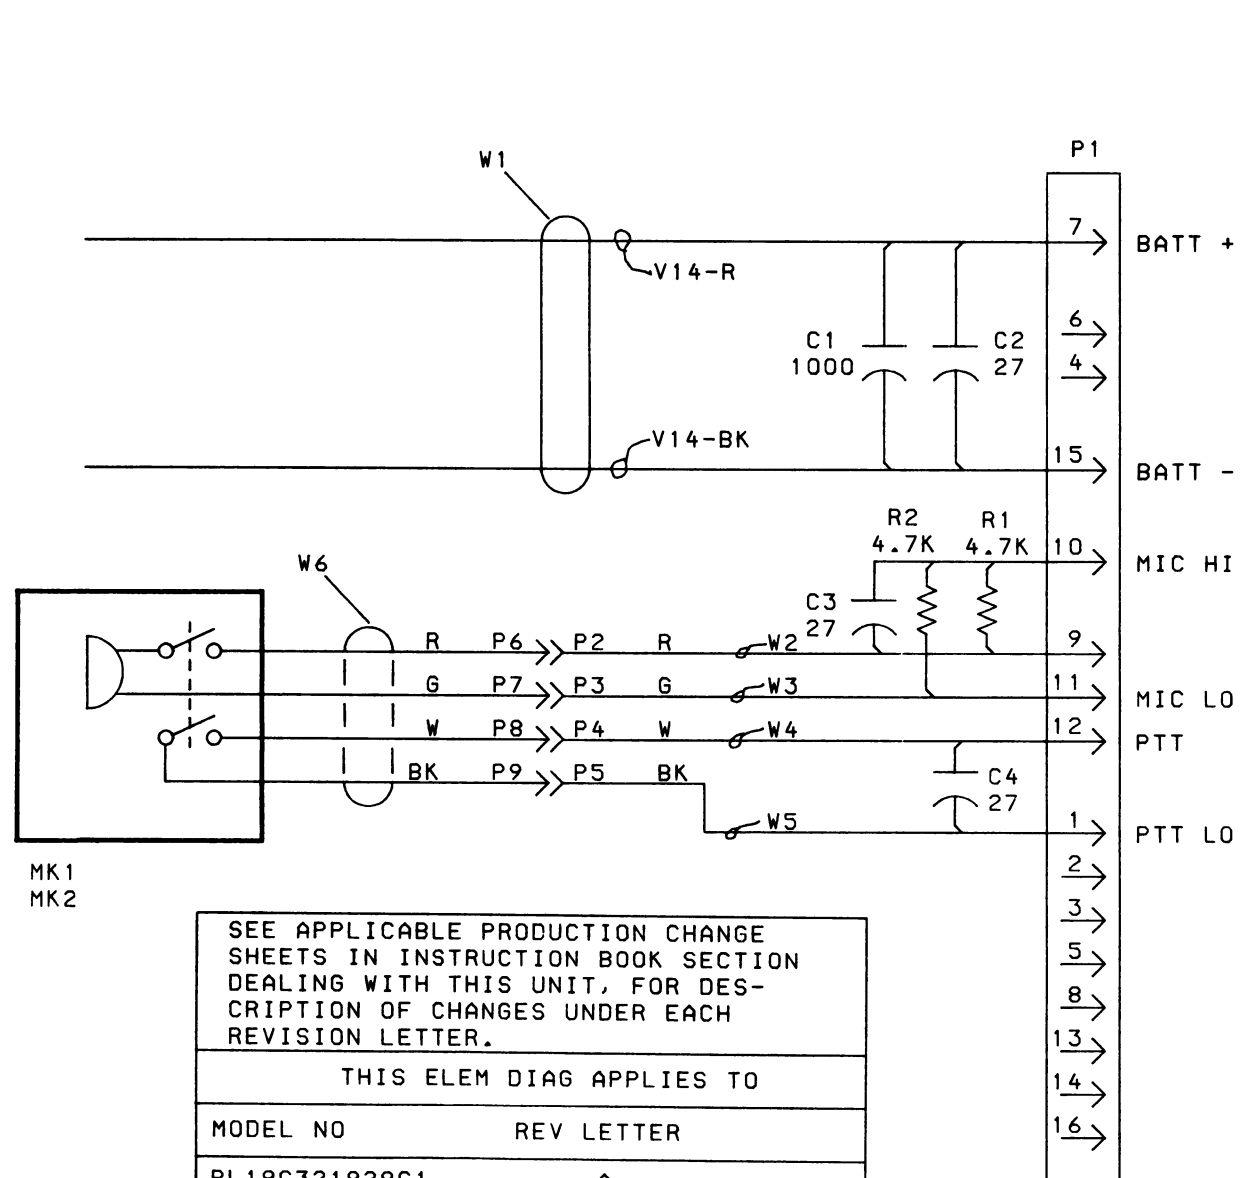

(19C321952, Sh. 1, Rev. 3)

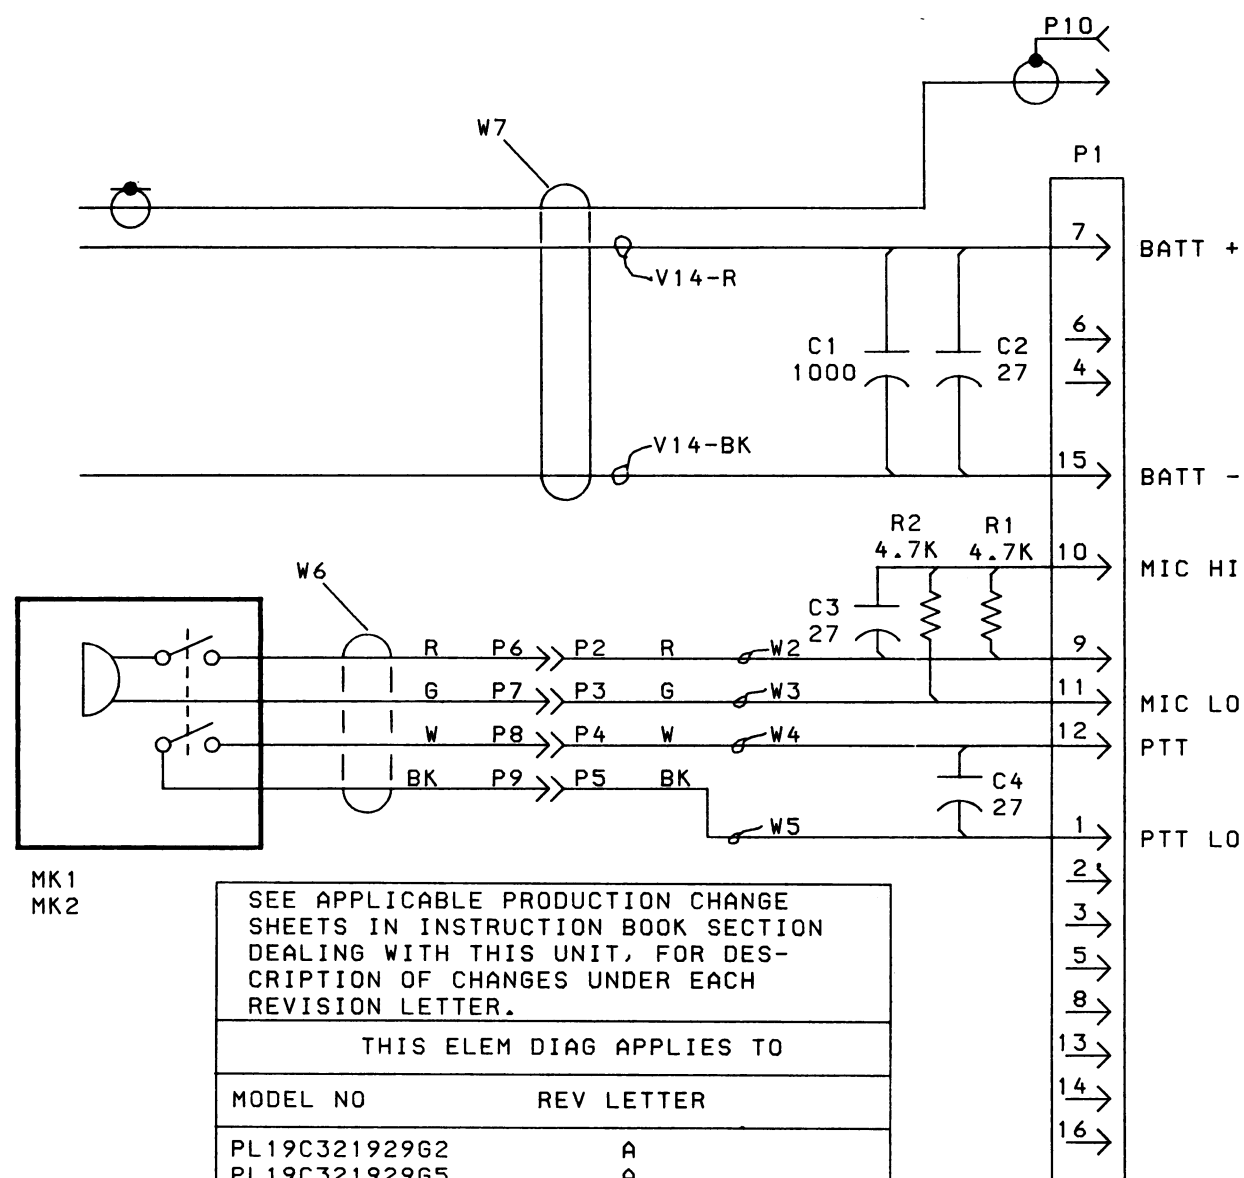

(19C327154, Sh. 1, Rev. 3)

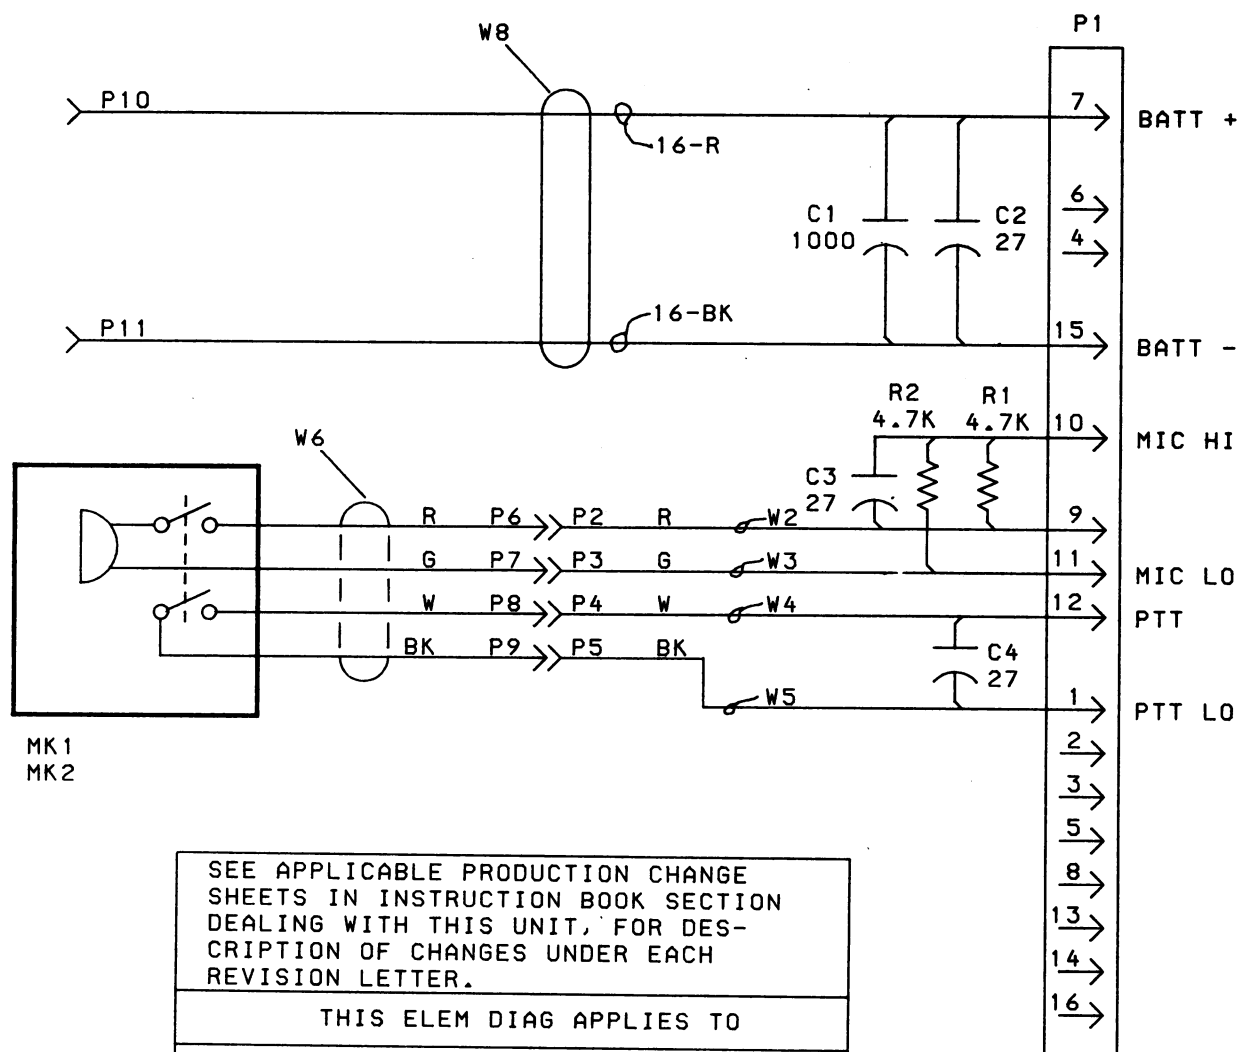

(19C327155, Sh. 1, Rev. 3)

ALL RESISTORS ARE 1/2 WATT UNLESS OTHERWISE SPECIFIED AND RESISTOR VALUES IN OHMS UNLESS FOLLOWED BY K=1000 OHMS OR MEG=1,000,000 OHMS. CAPACITOR VALUES IN PICO FARADS (EQUAL TO MICROMICROFARADS) UNLESS FOLLOWED BY UF=MICROFARADS. INDUCTANCE VALUES IN MICROHENRYS UNLESS FOLLOWED BY MH=MILLIHENRYS OR H=HENRYS.


IN ORDER TO RETAIN RATED EQUIPMENT PERFORMANCE, REPLACEMENT OF ANY SERVICE PART SHOULD BE MADE ONLY WITH A COMPONENT HAVING THE SPECIFICATIONS SHOWN ON THE PARTS LIST FOR THAT PART.

## PARTS LIST

POWER CABLE AND NOISE CANCELLING MICROPHONE  
19C321929G4 MOTORCYCLE  
19C321929G5 MOTORCYCLE REAR MOUNT  
19C321929G6 MOBILE

| SYMBOL     | GE PART NO.     | DESCRIPTION                                                                             |
|------------|-----------------|-----------------------------------------------------------------------------------------|
|            |                 | ----- CAPACITORS -----                                                                  |
| C1         | 5494481P11      | Ceramic disc: 1000 pf $\pm 20\%$ , 1000 VDCW; sim to RMC Type JF Discap.                |
| C2 thru C4 | 19A116114P10044 | Ceramic: 27 pf $\pm 5\%$ , 100 VDCW; temp coef -3300 PPM.                               |
|            |                 | ----- MICROPHONES -----                                                                 |
| MK1        | 19C320477G10    | Microphone, dynamic. Includes P6-P9.                                                    |
|            |                 | ----- PLUGS -----                                                                       |
| P1         | 19C321269G2     | Connector: 16 contacts.                                                                 |
| P2         | 7147199P2       | Contact, electrical: female; sim to Winchester Electronics 21804. (Part of W2).         |
| P3         | 7147199P2       | Contact, electrical: female; sim to Winchester Electronics 21804. (Part of W3).         |
| P4         | 7147199P2       | Contact, electrical: female; sim to Winchester Electronics 21804. (Part of W4).         |
| P5         | 7147199P2       | Contact, electrical: female; sim to Winchester Electronics 21804. (Part of W5).         |
| P6 thru P9 | 7147199P1       | Contact, electrical: male; sim to Winchester Electronics 21737.                         |
|            |                 | ----- RESISTORS -----                                                                   |
| R1 and R2  | 3R77P472K       | Composition: 4.7K ohms $\pm 10\%$ , 1/2 w.                                              |
|            |                 | ----- CABLES -----                                                                      |
| W1         | 19A134268P1     | Conduit, nonmetallic: approx 8 feet long; sim to Co-Operative Ind. C-11000-18.          |
| W2         | 19B227262G1     | Cable: approx 3 inches long. (Includes P2).                                             |
| W3         | 19B227262G2     | Cable: approx 3 inches long. (Includes P3).                                             |
| W4         | 19B227262G3     | Cable: approx 3 inches long. (Includes P4).                                             |
| W5         | 19B227262G4     | Cable: approx 3 inches long. (Includes P5).                                             |
| W6         | 19C321016G4     | Cable assembly with (4) 7147199P1 contacts.                                             |
| W7         | 19B227391G1     | Cable assembly.                                                                         |
| W8         | 19A134268P1     | Conduit, nonmetallic: approx 1 feet long; sim to Co-Operative Ind. C-11000-18.          |
|            |                 | MECHANICAL PARTS<br>(SEE RC3684)                                                        |
| 1          | RP148           | Switch with switch pushbutton.                                                          |
| 2          | 19A116773P106   | Tap screw, Phillips POZIDRIV®: No. 7-19 x 3/8.                                          |
| 3          | 19D417745P1     | Cover.                                                                                  |
| 4          | 7488373P2       | Cable clamp. 5/16 inch loop; sim to Thomas Associates TA717-SS5. (FRONT MOUNT ANTENNA). |
| 5          | 7488373P4       | Cable clamp. 7/16 inch loop; sim to Thomas Associates TA717-SS7. (REAR MOUNT ANTENNA).  |
| 6          | N80P21006C6     | Machine screw: No. 1/4-20 x 3/8.                                                        |
| 7          | N405P41C6       | Lockwasher, spring type: 1/4 inch.                                                      |
| 8          | 19A130903P1     | Support.                                                                                |
| 9          | 19A130080P1     | Cable clip.                                                                             |
| 10         | 19B219749P1     | Flex relief.                                                                            |
| 11         | RP147           | Cartridge with shield ring.                                                             |
| 12         | RP145           | Case set with internal hardware.                                                        |

| SYMBOL | GE PART NO.   | DESCRIPTION                                                                     |
|--------|---------------|---------------------------------------------------------------------------------|
| 13     | N22P21022C6   | Cap screw: size No. 1/4.                                                        |
| 14     | 19A134297P1   | Lockwasher, steel: sim to Shakeproof 3079-14-00.                                |
| 15     | 4037064P21    | Washer, non metallic: .281 ID.                                                  |
| 16     | 19A134268P1   | Conduit, non metallic; sim to Co-Operative Ind. Inc. C-11000-18. (See W1 & W8). |
| 17     | 19A130897P1   | Strain relief.                                                                  |
| 18     | 19B226586P1   | Seal.                                                                           |
| 19     | 19A116773P105 | Tap screw, Phillips POZIDRIV®: No. 7-19 x 5/16.                                 |

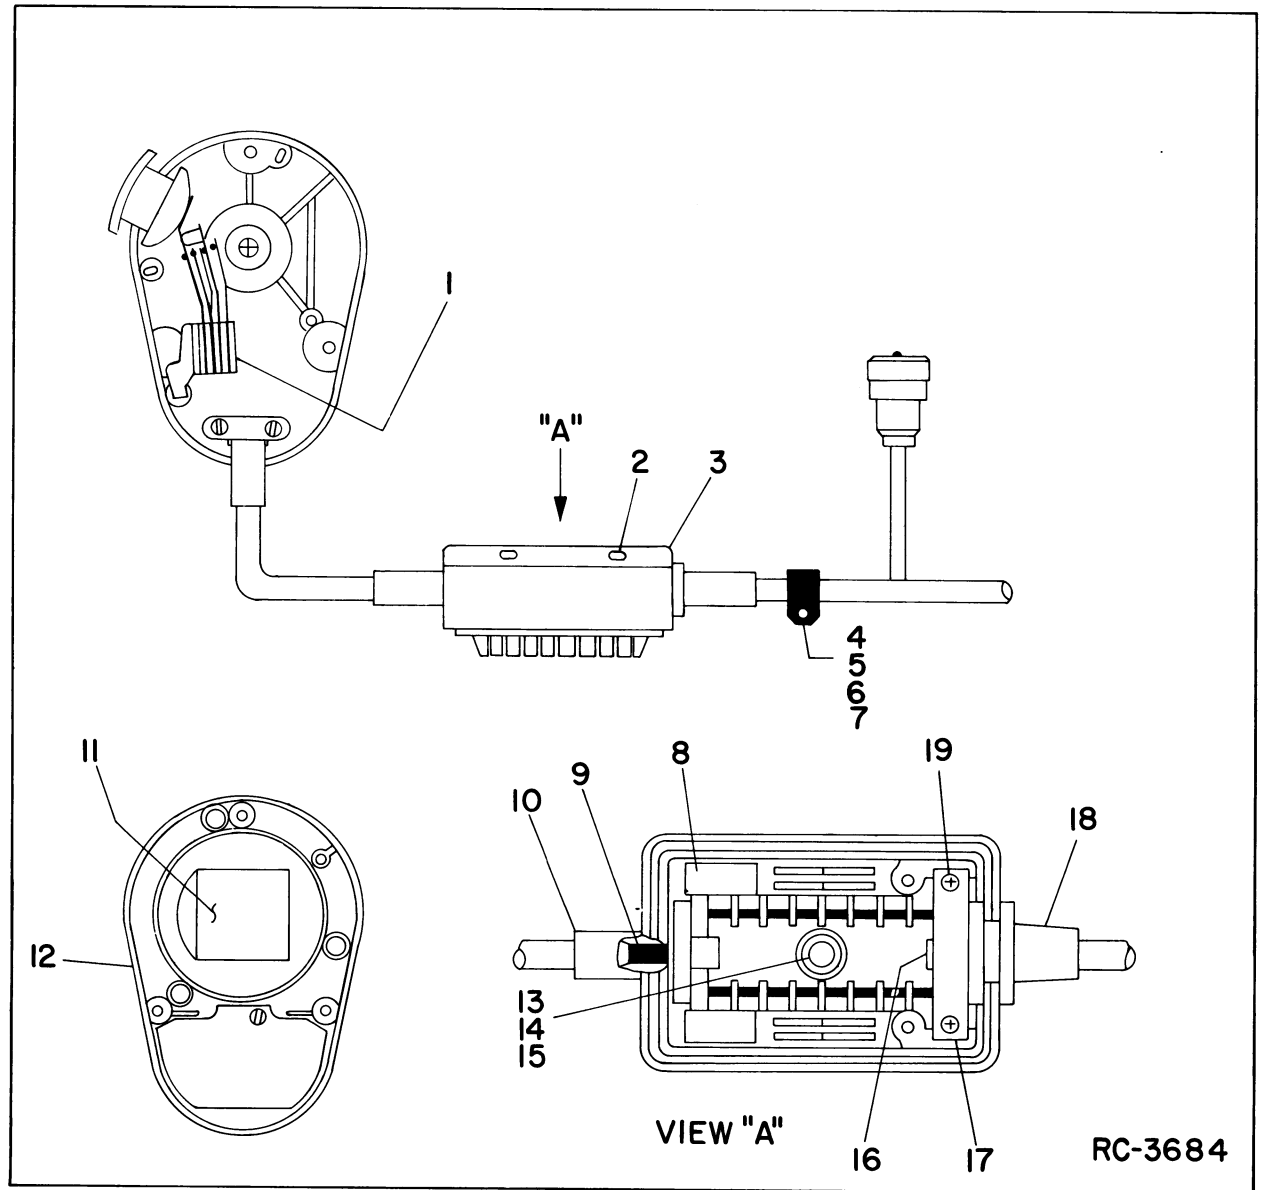

\*COMPONENTS ADDED, DELETED OR CHANGED BY PRODUCTION CHANGES.

