

INSTALLATION INSTRUCTIONS **FOR** **MLS** **OPTIONAL CONTROL PANELS**

These instructions cover the procedure for changing the front control panel on the MLS Mobile Radio.

There are 4 different interchangeable control panels available for upgrading a standard two channel radio to an eight or sixteen channel radio. The 4 control panels are listed below:

8 CHANNEL WITHOUT SCAN	
(OPTION MK02)	19A704991P101
8 CHANNEL WITH SCAN	
(OPTION MK03)	19A704991P102
16 CHANNEL WITHOUT SCAN	
(OPTION MK04)	19A704991P103
16 CHANNEL WITH SCAN	
(OPTION MK05)	19A704991P104

The only tools required to change the control panel is a Phillips head screwdriver.

NOTE

When a radio is upgraded it must be reprogrammed using the General Electric Universal Radio Programmer. Instructions for reprogramming the radio are covered in LBI-31717.

INSTALLATION PROCEDURE

1. Remove the top and bottom cover from the radio by removing the four screws at A in Figure 1.
2. Remove the FRONT PANEL by removing the four screws at B in Figure 1.

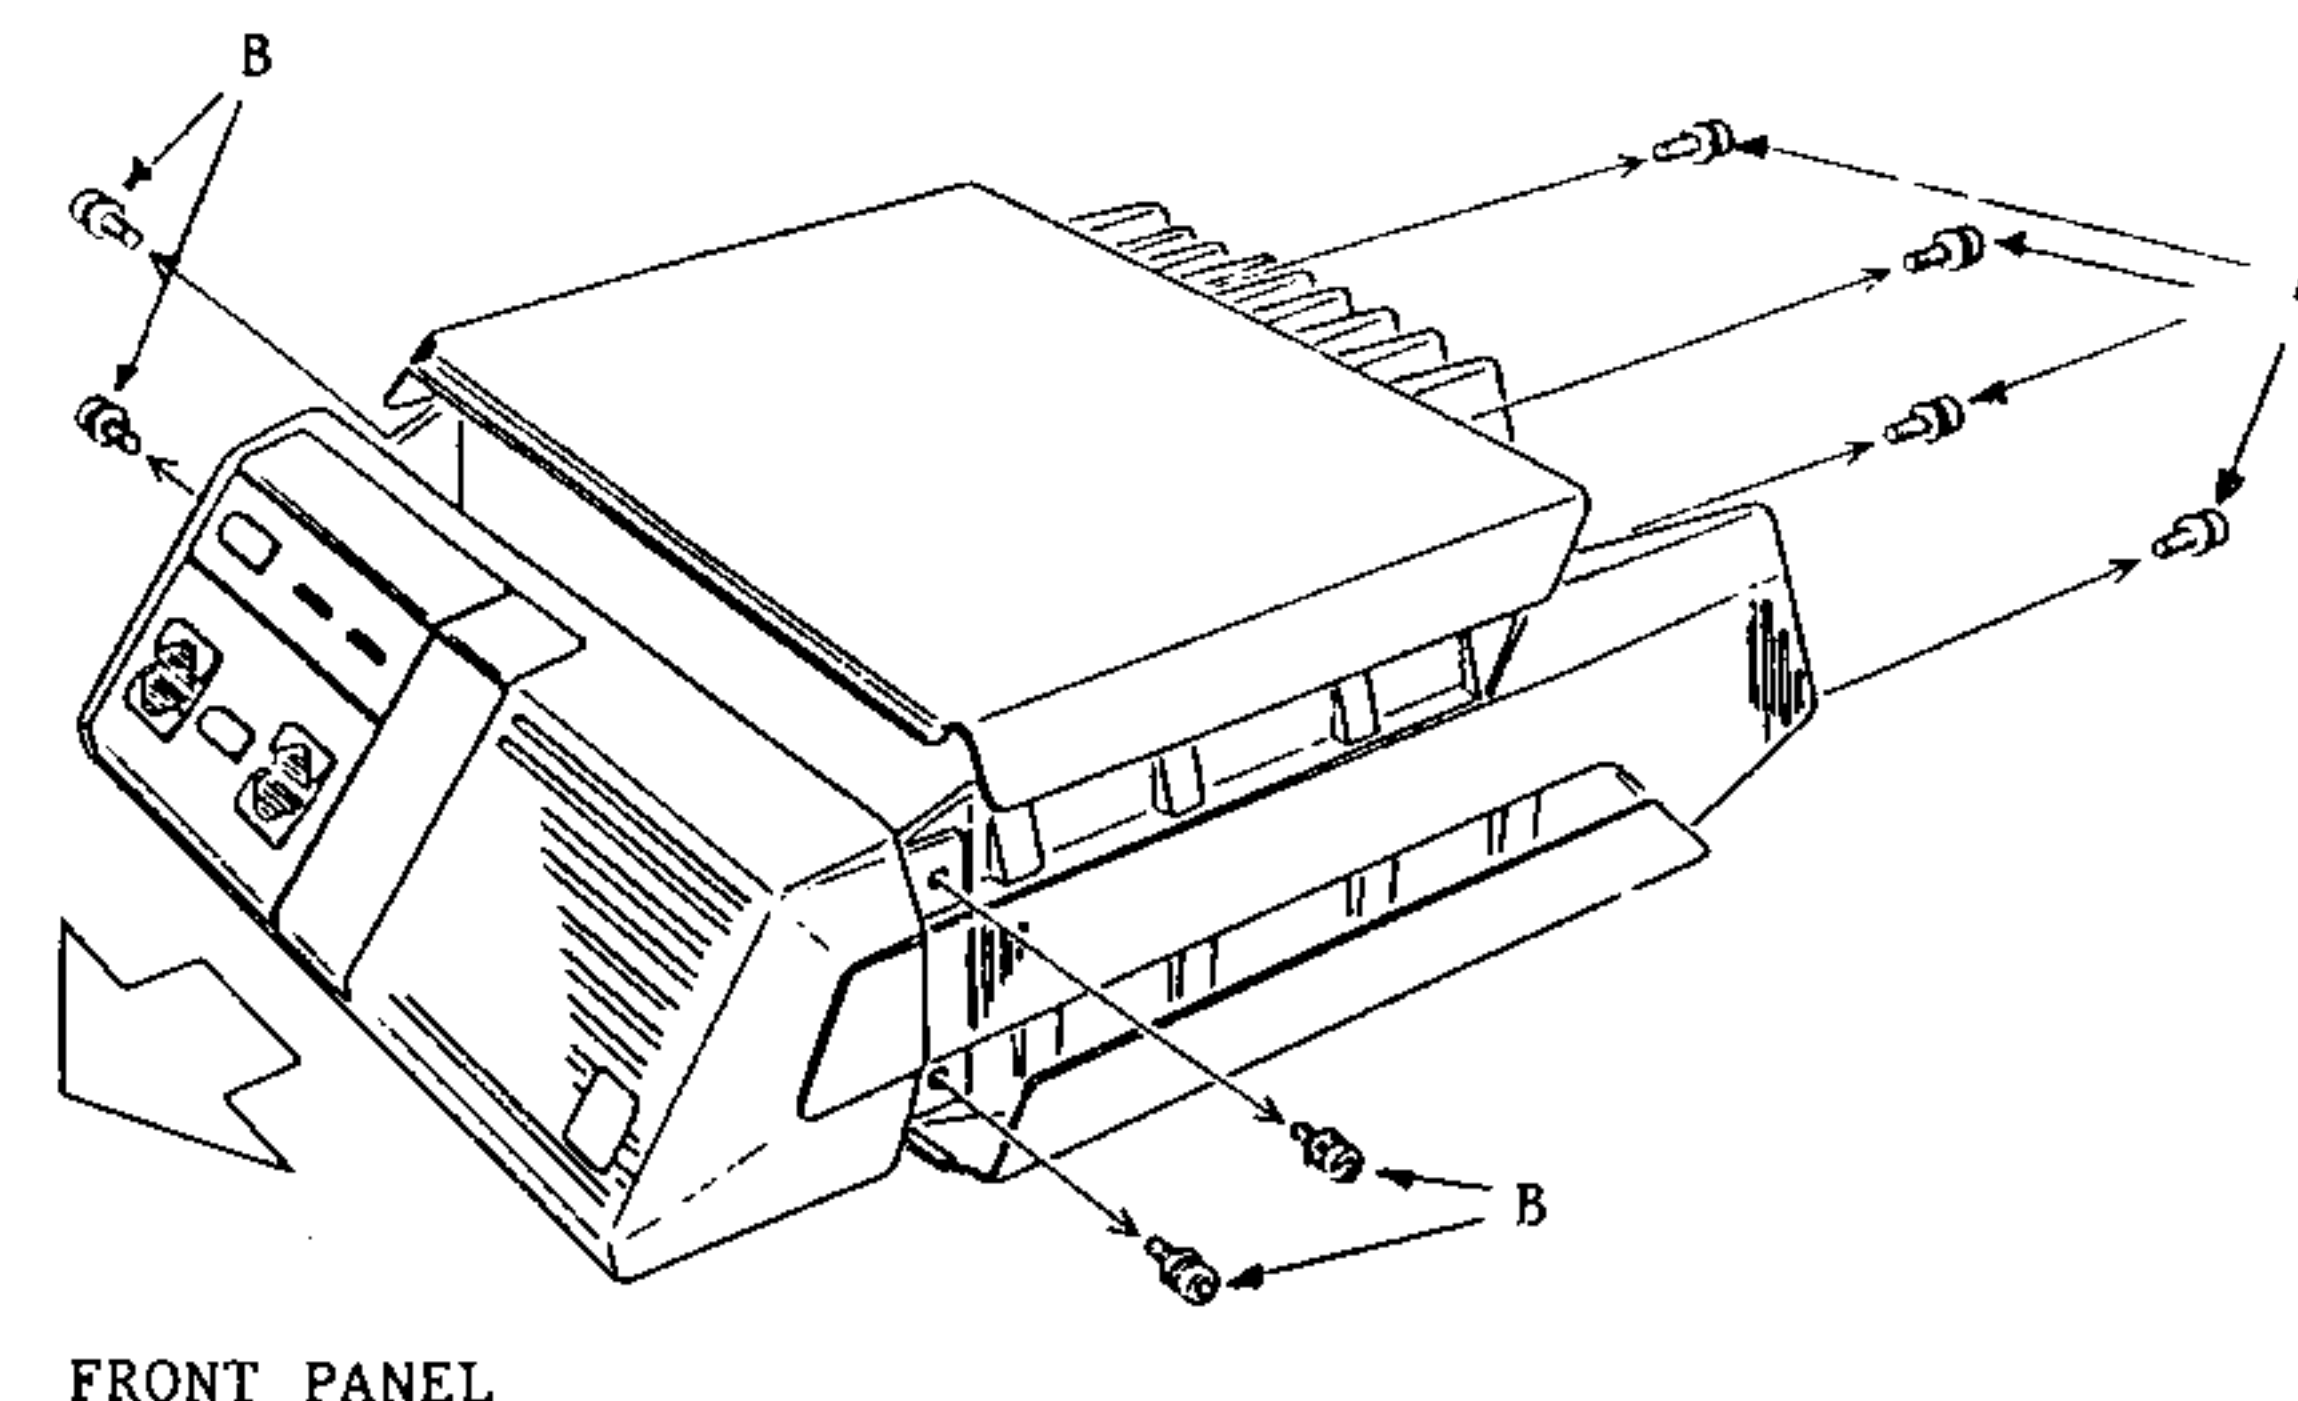


Figure 1

GENERAL ELECTRIC

Copyright® October 1986, General Electric Company

3. Carefully pull out the flat cable from the connector on the rear of the CONTROL PANEL. See C in Figure 2.

4. Remove the two screws located at D.

5. While pushing the lock tabs at E, remove the CONTROL PANEL - TOWARDS FRONT.

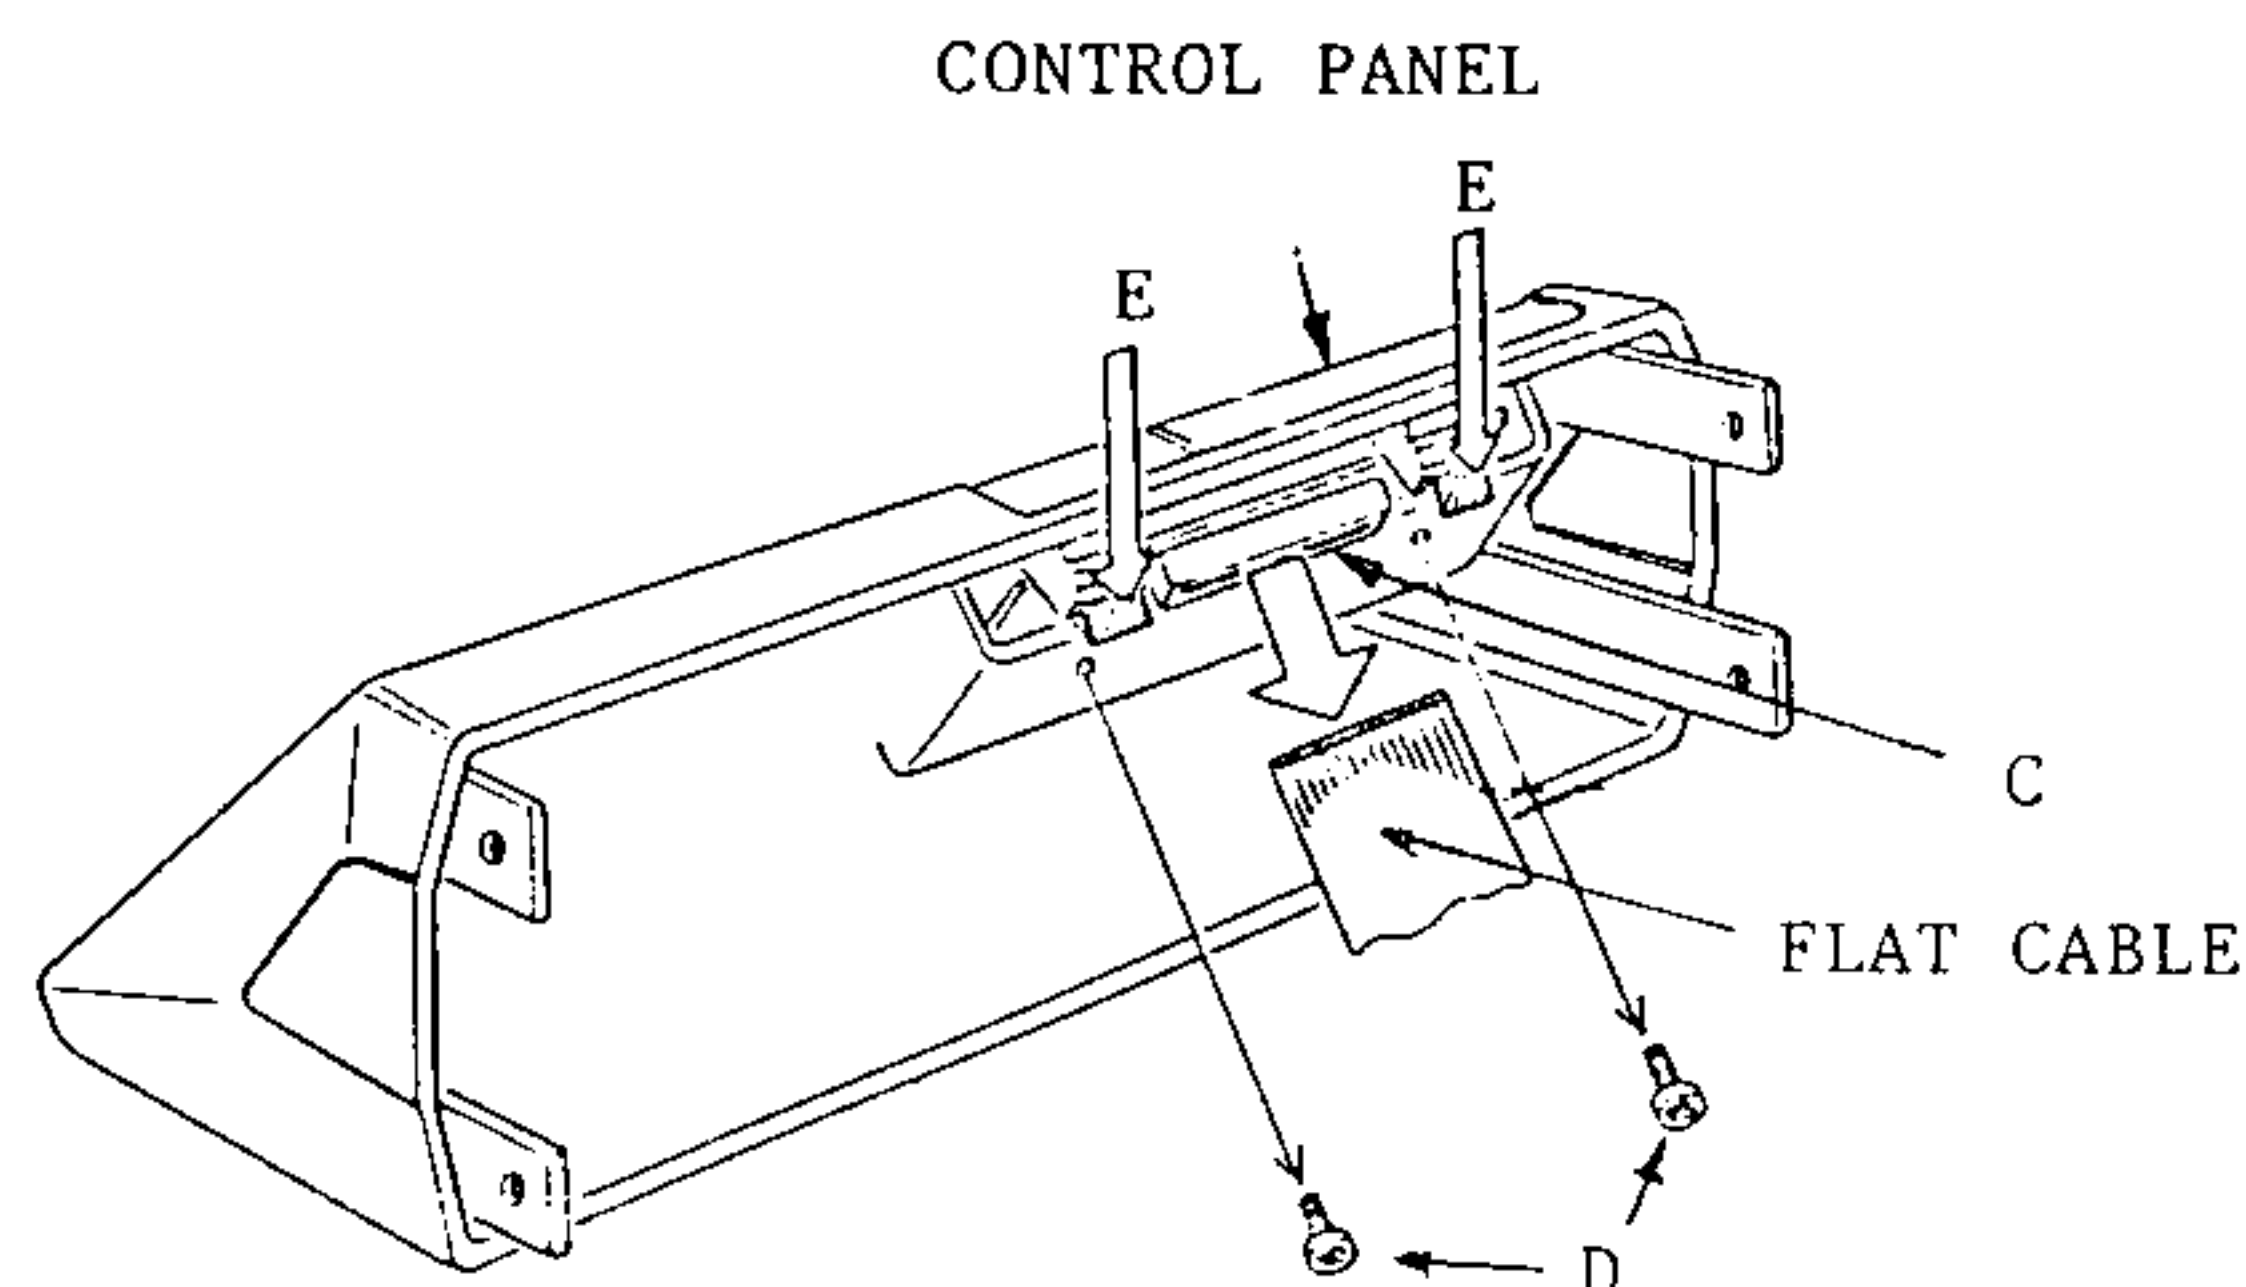


Figure 2

6. Install the new optional CONTROL PANEL and reassemble the FRONT PANEL.

7. Insert the two screws and reconnect the Flat Cable to Connector C.

8. Replace the FRONT PANEL and the top and bottom cover.

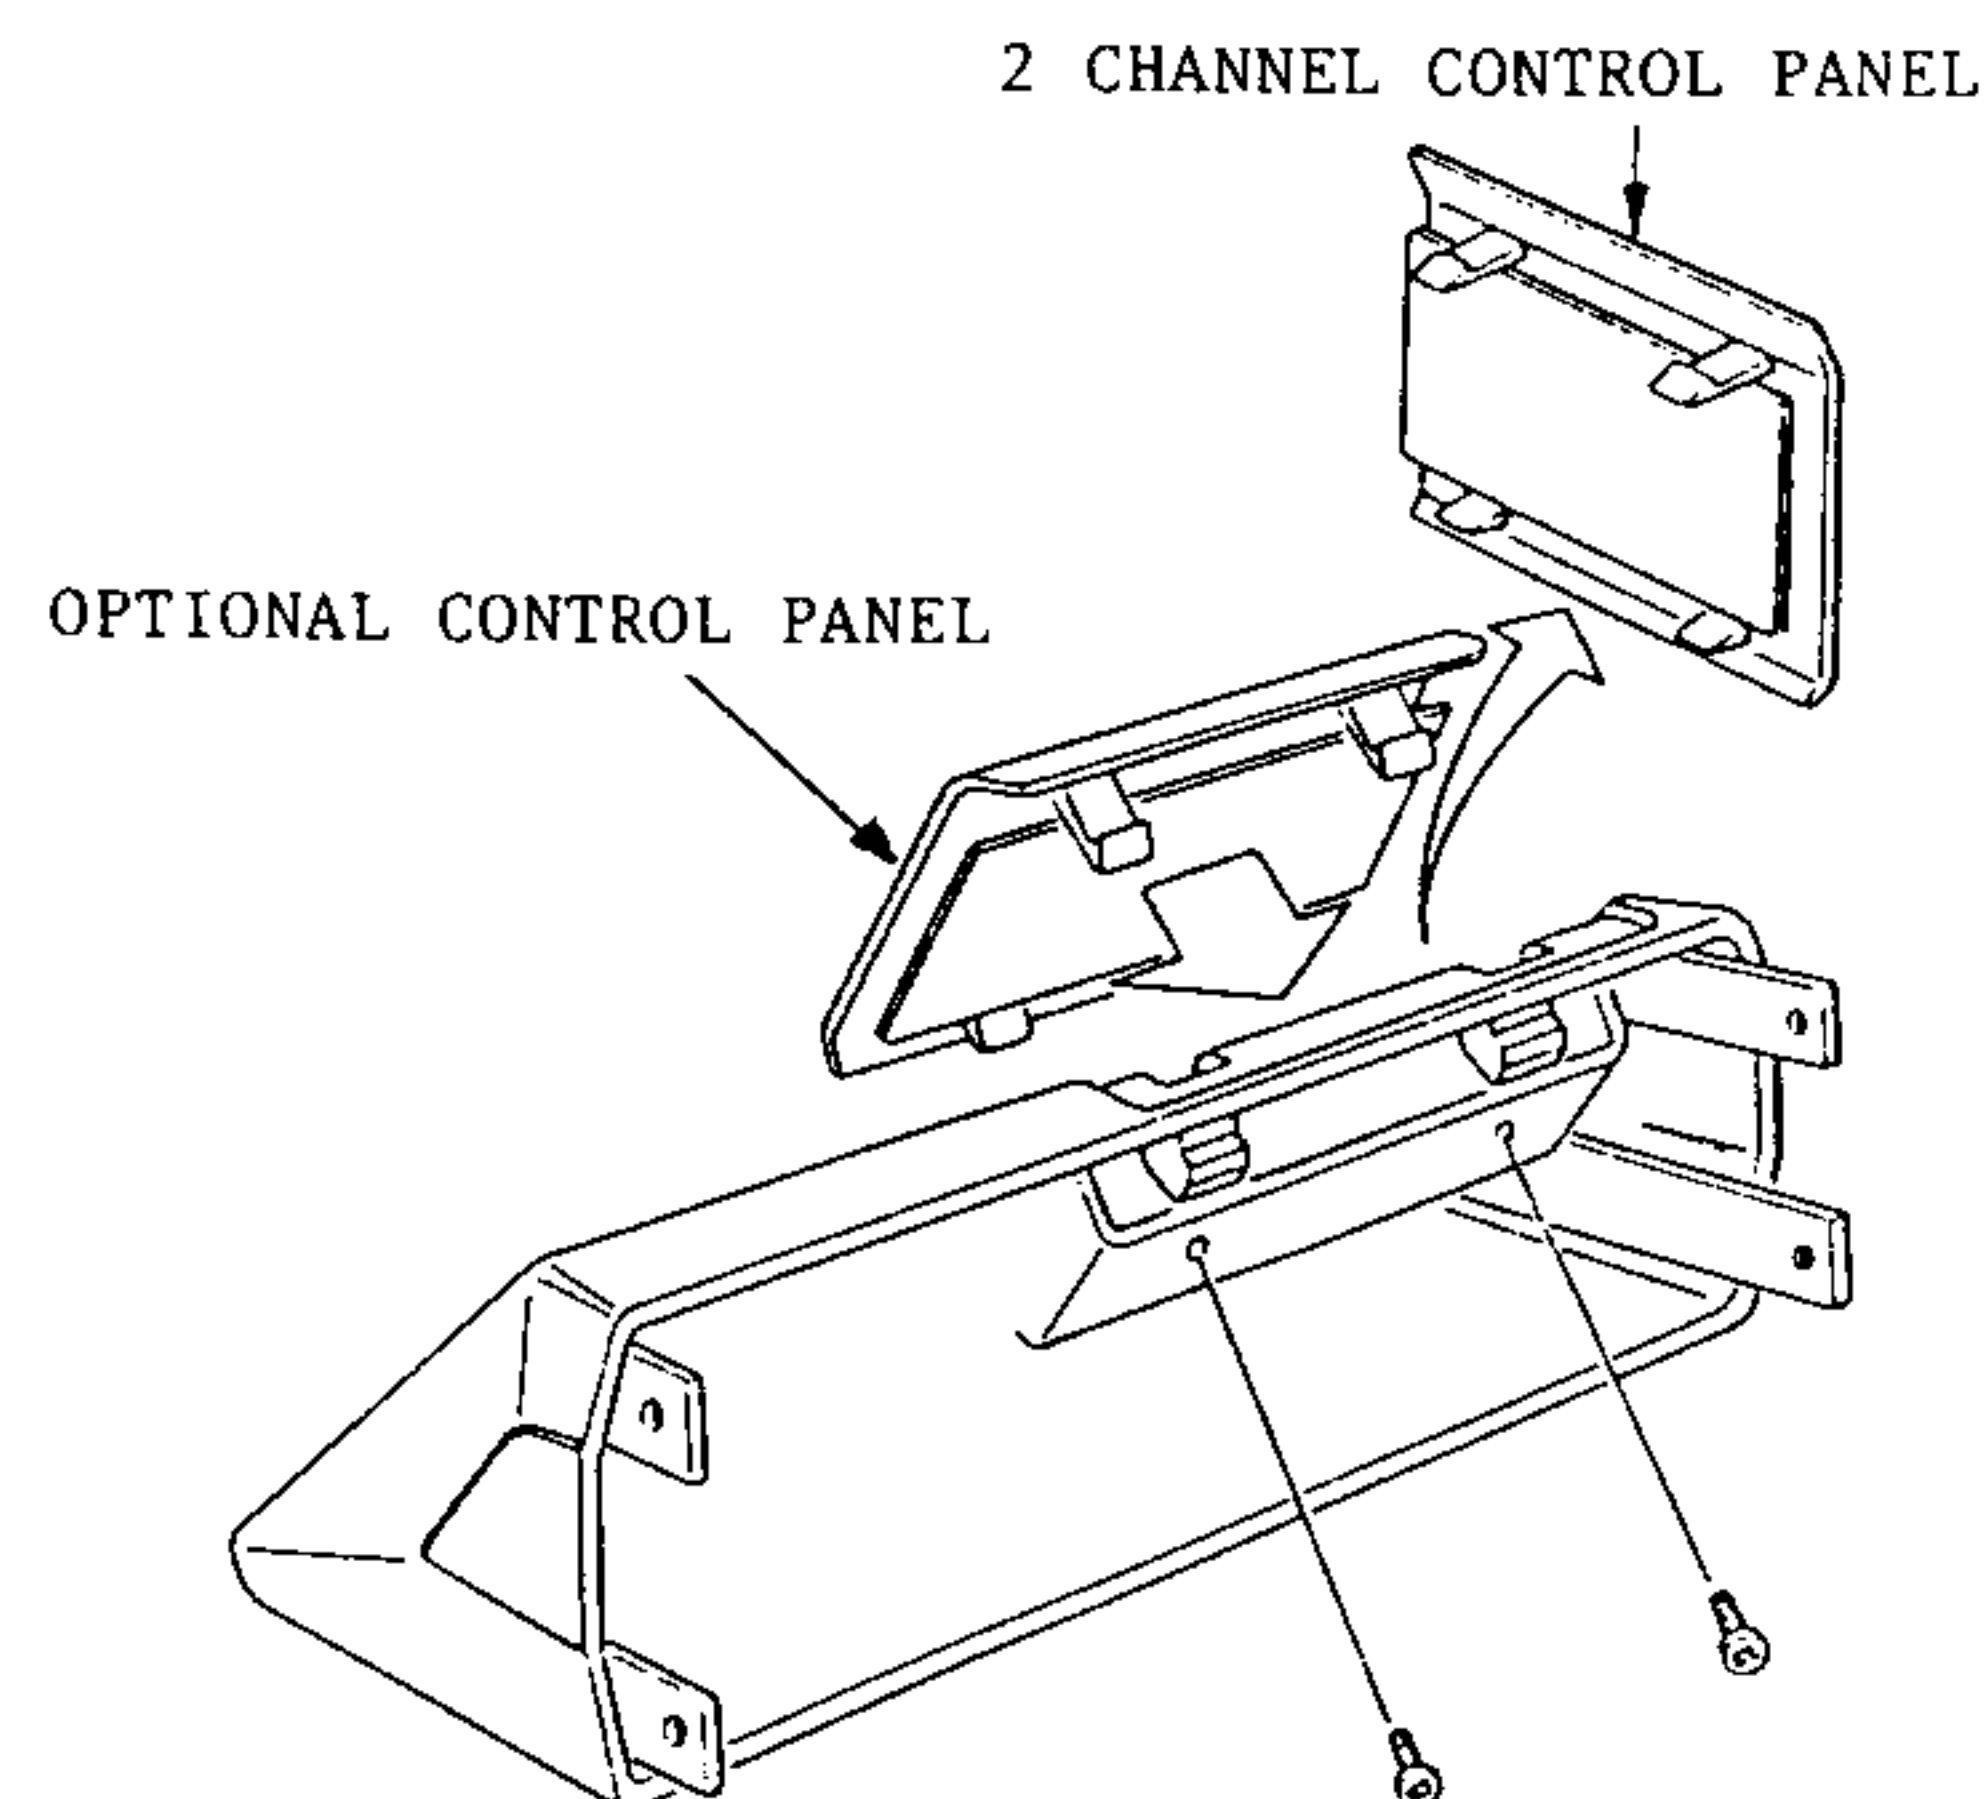


Figure 3

GENERAL ELECTRIC COMPANY • MOBILE COMMUNICATIONS DIVISION
WORLD HEADQUARTERS • LYNCHBURG, VIRGINIA 24502 U.S.A.

GENERAL ELECTRIC
U.S.A.

* Trademark of General Electric Company U.S.A.
Printed in TAIWAN