

**INSTALLATION INSTRUCTIONS
FOR
MOUNTING FRAME SUPPORT KIT 19A121884G2
(OPTION 9130)**

Mounting Frame Support Option 9130 provides spacer supports to raise the trunk mounted MASTR®II Mobile 1.25 inches above the mounting surface.

The 1.25 inches allows clearance if it is desirable to route the control cables underneath the mobile unit.

PARTS LIST


**MOUNTING FRAME SUPPORT KIT
19A121884G2**

SYMBOL	GE PART NO.	DESCRIPTION
	19A121883P2 N130P2432C6	Support. Tap screw, hex head, slotted: No. 1/4-14 x 2.

***COMPONENTS ADDED, DELETED OR CHANGED BY PRODUCTION CHANGES.**


MOBILE RADIO DEPARTMENT
GENERAL ELECTRIC COMPANY • LYNCHBURG, VIRGINIA 24502

GENERAL  **ELECTRIC**

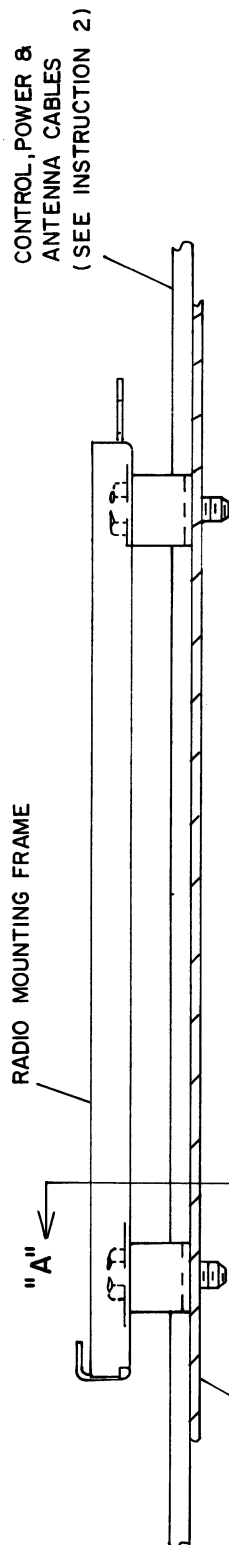

INSTRUCTIONS:

1. USE MOUNTING FRAME AS TEMPLATE TO DRILL FOUR .191 DIA MOUNTING HOLES (DRILL SIZE # 11 OR 3/16" FRACTIONAL SIZE).
2. ROUTE CABLES BETWEEN MOUNTING HOLES IF DESIRED TO FEED CABLES UNDER MOUNTING FRAME. (THIS STEP IS OPTIONAL).
3. POSITION SPACER SUPPORTS OVER MOUNTING HOLES & PLACE MOUNTING FRAME ON SPACERS.
4. FASTEN MOUNTING FRAME SECURELY IN PLACE WITH FOUR # 14 X 2" LONG THREAD FORMING SCREWS.

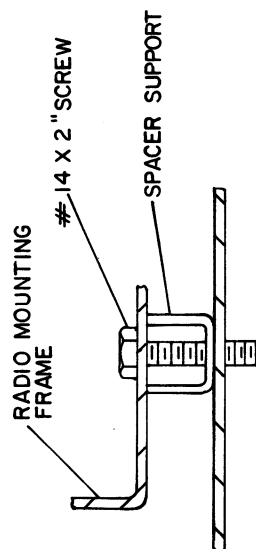

SECTION "A-A"
(PARTIAL)

(19E232252, Rev. 1)

INSTALLATION INSTRUCTIONS

MOUNTING FRAME SUPPORT KIT
19A121884G2