


# MASTR<sup>®</sup> *Executive II* MAINTENANCE MANUAL

454.025-454.650 MHz RCC & IMTS  
SYNTHESIZED RECEIVER

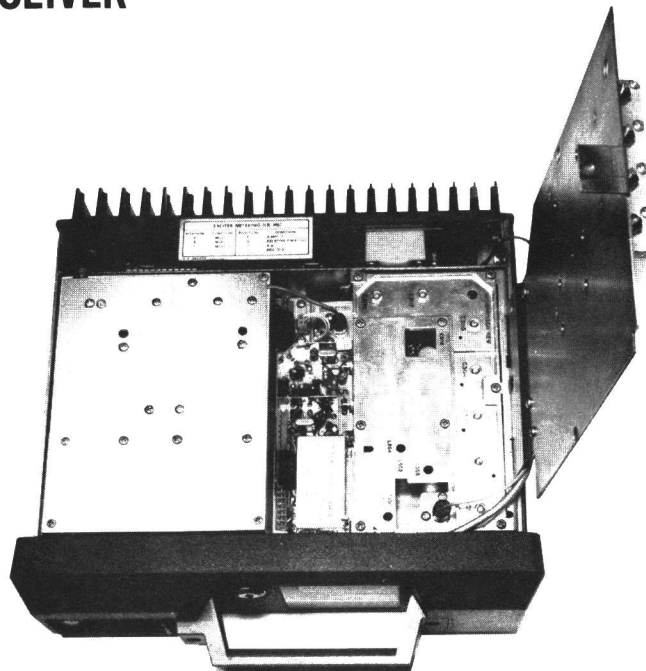

## TABLE OF CONTENTS

SPECIFICATIONS .....	ii
DESCRIPTION AND MAINTENANCE .....	LBI30806 (DF1112)
RF ASSEMBLY AND IF FILTER BOARD .....	LBI30032 (DF1107)
IF DETECTOR .....	LBI30049 (DF1105)

## SPECIFICATIONS\*

Sensitivity	
EIA 12 dB SINAD	0.5 $\mu$ V
20 dB Quieting	0.63 $\mu$ V
Selectivity - EIA	-85 dB
Intermodulation - EIA	-80 dB
Modulation Acceptance	+/- 7 kHz
Spurious Response	-85 dB
Audio Response (300-3000)	+1, -3 dB
Frequency Stability	
Standard	+/-0.0005%
Optional	+/-0.00025%
FCC Model Number	ER-113-A

\* These specifications are intended primarily for the use of the serviceman. Refer to the appropriate Specification Sheet for the complete specifications.

## WARNING

Although the highest DC voltage in MASTR Executive II Mobile Equipment is +12 VDC, high currents may be drawn under short circuit conditions. These currents can possibly heat metal objects such as tools, rings, watchbands, etc., enough to cause burns. Be careful when working near energized circuits!

High-level RF energy in the transmitter Power Amplifier Assembly can cause RF burns upon contact. Keep away from these circuits when the transmitter is energized!

GENERAL ELECTRIC COMPANY • MOBILE COMMUNICATIONS DIVISION  
WORLD HEADQUARTERS • LYNCHBURG, VIRGINIA 24502 U.S.A.

**GENERAL  ELECTRIC\***  
U.S.A.