




INSTALLATION MANUAL FOR MASTR[®] DELTA/ DELTA-S MOBILE COMBINATIONS

Mobile Combinations feature ruggedly constructed Two-Way Mobile Radios with unusually flexible mounting possibilities. The Two-Way Radio locks into a steel mounting frame to provide an exceptionally stable mobile installation. Safety Release mounting brackets for the Control Unit and Speaker are provided for the safety of the occupants.


15131031D

MEDIUM/HIGH POWER

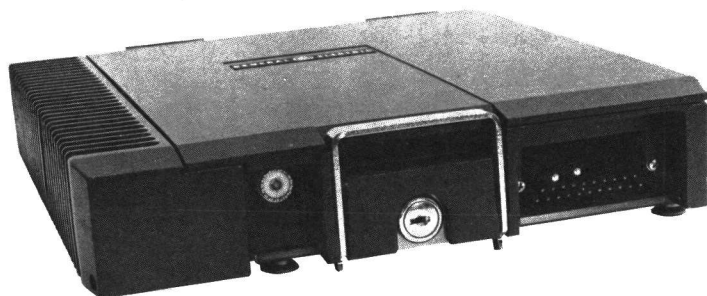


TWO-WAY RADIO


LOW POWER

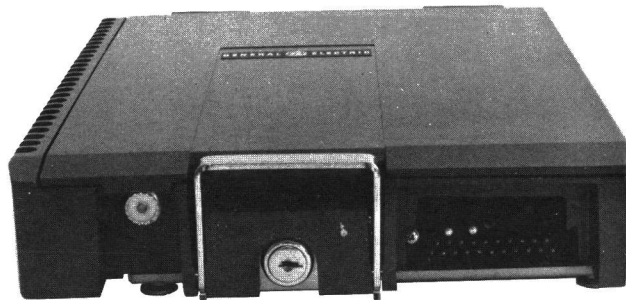

MOUNTING HARDWARE



FRAME MOUNTING
SCREWS



CABLE STRAPS &
6 x 1/2" MOUNTING SCREWS

RETAINING STRAP




GROMMET



SPACERS & 1/4" WASHERS

ACCESSORIES




FUSE
ASSEMBLY




POWER/CONTROL CABLE



EXTRACTION
TOOL



IGNITION SWITCH ASSEMBLY



CONTROL UNIT



SPEAKER



MICROPHONE



HANDSET &
HOOKSWITCH



138-512 MHz

ANTENNA

UNPACKING AND CHECKING EQUIPMENT

The Two-Way Radio is packed to permit performance tests without being removed from the packing case. Refer to the Maintenance Manual for instructions. When ready for installation, carefully unpack the radio. It is recommended that you identify the items in the packing case and check them off in the appropriate column below before discarding the packing material. If any damage has occurred to the equipment during shipment, file a claim with the carrier immediately.

RADIO

- Two-Way Radio ☐
- Tuning Tool 19B800762P2 ☐
- Key 19B800004P3 ☐
- Mounting Plate 19D900139P1 ☐
- Mounting Hardware 19A129374G1 ☐
- Spacer Kit 19A121884G2 ☐
- Fuse Assembly (12-Volt) ☐
 - High Power (30 Amp Fuse)
(66 to 110 Watts)
19B216021G3
 - Medium Power (25 Amp Fuse)
(41 to 65 Watts)
19B216021G2
 - Low Power (20 Amp Fuse)
(1 to 40 Watts)
19B216021G6

CONTROL UNIT & ACCESSORIES

- Control Unit ☐
- Mounting Hardware ☐
- Ignition Switch Cable Assembly ☐
- Power/Control Cable ☐
- Speaker ☐
- Microphone/Microphone Hanger or ☐
- Handset/Handset Hookswitch ☐
- Antenna, Cable and RF Connector ☐
- Extractor Tool Kit 19B227456G1

PLANNING THE INSTALLATION

The accompanying photographs of typical installations should help you in planning your installation. Suggestions for locating and installing the units are given with the following installation instructions.

Before starting, plan your installation carefully—so that it will be:

- Safe for the operator and passengers in the vehicle
- Convenient for the operator to use
- Neat
- Protected from damage from water
- Easy for the serviceman to service
- Out of the way of auto mechanics
- Out of the way of passengers
- Positioned to protect the front connector

It is suggested that you take advantage of the experiences of one of the many authorized General Electric Service Stations located throughout the United States by having them install your Two-Way Radio and make the final adjustments.

WARNING

Interference with Vehicular Electronics — *Electronic fuel injection systems, electronic anti-skid braking systems, electronic cruise control systems, etc., are typical of the types of electronic devices which may be prone to malfunction due to the lack of protection from radio frequency energy present when transmitting. If the vehicle contains such equipment, consult the dealer for the make of vehicle and elist his aid in determining if such electronic circuits will perform normally when the radio is transmitting.*

TYPICAL INSTALLATION

The mobile combinations are designed so that the Two-Way Radio can be mounted up to 6 meters from the operator (3 or 9 meters with option cables), such as in the trunk compartment or under the seat of a vehicle. The position of the front connector should always be a consideration. When the radio is mounted in the trunk of the automobile it should be located in one corner and positioned with the front connector facing a vertical edge. This will provide maximum protection for the radio cable connections. Allow enough room to unlock and move the handle freely. The Control Unit mounts on the instrument panel (or the transmission hump) of the vehicle, along with the microphone and speaker.

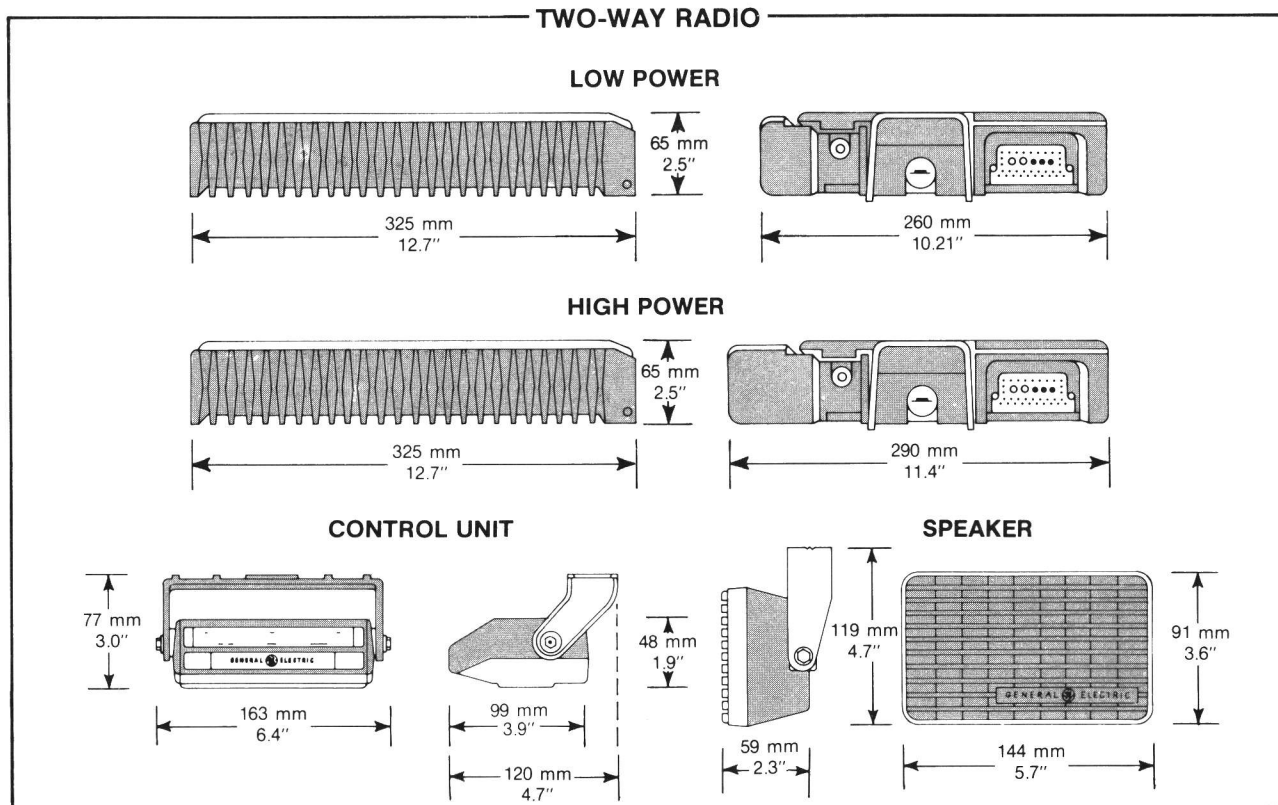


Figure 1. Mounting Dimensions

EQUIPMENT REQUIRED

The equipment for installing the Two-Way Radio is:

Electric drill for drilling mounting holes.

Drills and circle cutters (see sizes in box at right)

Soldering iron for 138 to 512 MHz antenna

Phillips and flat-blade screwdrivers, 1/4-inch and 5/16-inch hex-head drivers for mounting screws.

DRILL SIZES

- No. 36 (7/64-inch) Drill for No. 6 Self-Tapping Screws
- No. 31 (1/8-inch) Drill for No. 8 Self-Tapping Screws
- No. 27 (9/64-inch) Drill for No. 10 Self-Tapping Screws
- No. 9 (3/16-inch) Drill for 1/4-inch or No. 14 Self-Tapping Screws
- 3/4-inch Drill for High-Band and UHF Antenna
- 1-1/8-inch Circle Cutter, Holesaw or Socket Punch for Rubber Grommet

RUNNING CABLES

To assure the feasibility of the cable routings you plan to use, it is suggested that you run the cables before mounting the Two-Way Radio. Be sure to leave some slack in each cable going to the Control Unit and Two-Way Radio so that they may be pulled out for servicing with the power applied.

Try to route the cables away from locations where they will be exposed to heat (exhaust pipes, mufflers, tailpipes, etc.), battery acid, sharp edges, or mechanical damage or where they will be a nuisance to automobile mechanics, the driver, or passengers. Keep wiring away from ignition circuits to help prevent noise pickup in the radio equipment.

In addition, try to utilize existing holes in the firewall and trunk wall and the channels above or beneath the doors. You may also use the channels through door and window columns, where they are convenient for running cables, unless you plan to install rigid or flexible conduit in which to run the cables.

If an existing hole is not conveniently located for the passage of the Power Cable through the firewall, drill a 1-1/8-inch hole and insert the rubber grommet provided. Leave at least 18 inches of slack in the plug end of the cables at the location for the Two-Way Radio. Refer to the Cable Routing Diagram (Figure 2) for additional information.

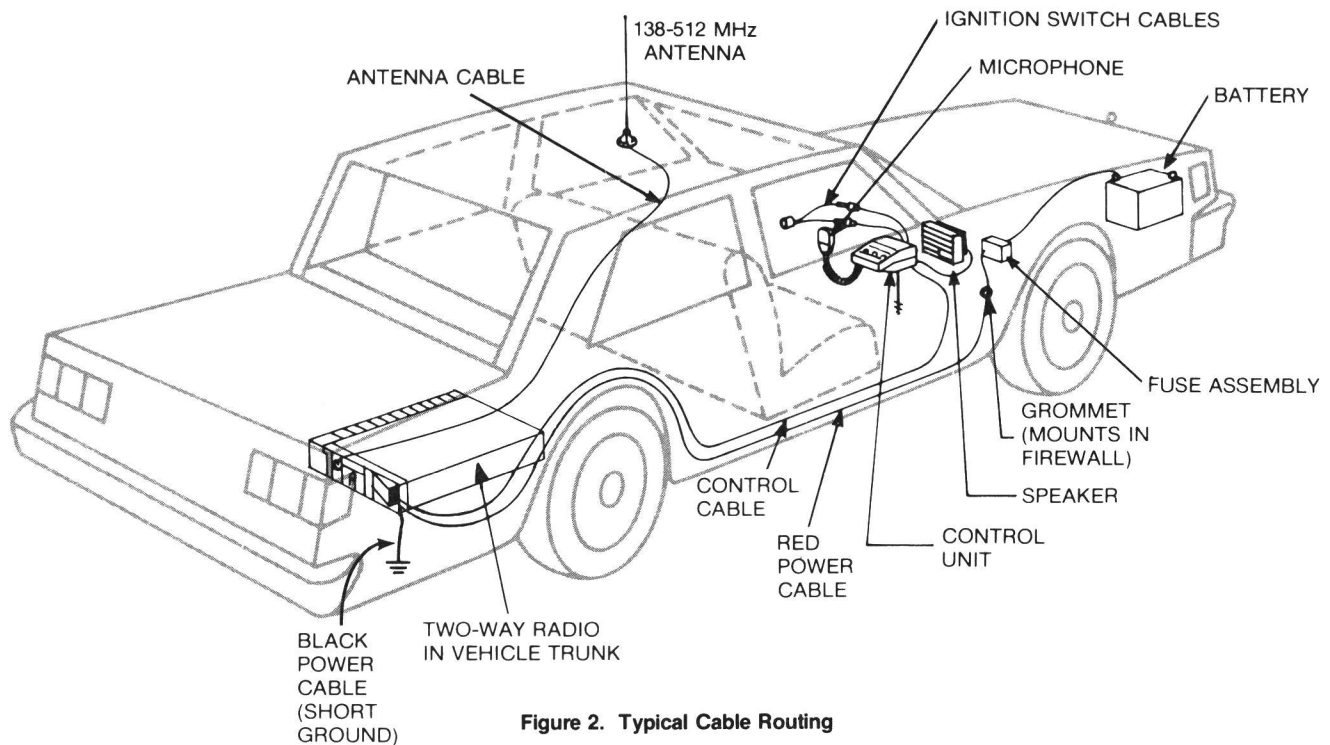


Figure 2. Typical Cable Routing

POWER AND CONTROL CABLES

NOTE

A terminal (19A115799P15) is available for use with batteries that have side terminals. To use the terminal, trim off 1/2 inch of the ridge on the plastic corrosion shield on the battery to allow the terminal to lie flat. Remove the screw in the battery terminal and slide the power cable terminal on the screw. Then replace the screw. **Do not** strap the power cable within one foot of the battery terminal.

NEGATIVE GROUND SYSTEMS

The Power/Control Cable plug assembly is supplied connected for negative ground systems. Starting with the plug end of the Power/Control Cable, run the black control cable to the control unit location and the red power cable to the vicinity of the battery. Drill a No. 9 (3/16-inch) pilot hole and connect the short black power cable to a good vehicle ground with the 1/4 x 5/8-inch hex-head self-tapping screw and the two external tooth lock washers. The external tooth lock washers are placed on each side of the black power cable ring terminal. Refer to the Cabling Routing Diagram (Figure 2).

POSITIVE GROUND SYSTEMS

For positive ground systems, the red and the black power cable terminals must be reversed at the Power/Control Cable plug assembly. Refer to the connector housing and Terminal Identification Diagram (Figure 3) and proceed as follows:

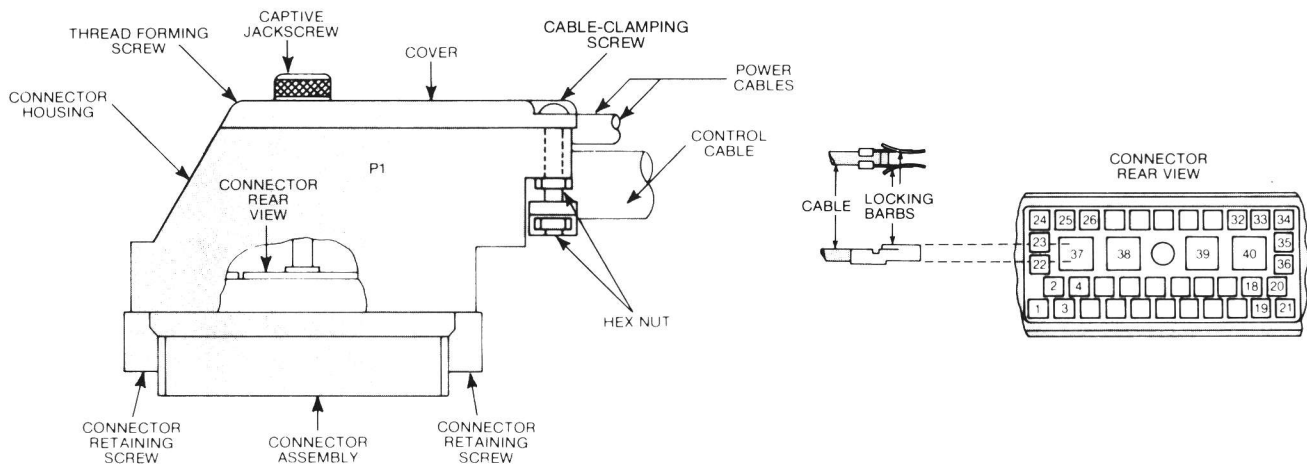


Figure 3. Connector Housing & Terminal Identification

- A. Remove the four hex nuts, the thread-forming screw and two cable-clamping screws from the connector cover.
- B. Remove the two connector retaining screws and slide the housing back on cable.
- C. Insert the terminal extractor tool (19B233320G2) in the front of terminal cavity 37 and remove the red power cable terminal from the rear of the connector. Remove the black power cable terminal in terminal cavity 38 in the same manner.
- D. Insert the red power cable terminal in the rear of terminal cavity 38 and the black power cable terminal in terminal cavity 37. Make sure the terminals are fully seated and locked into the terminal cavity.
- E. Dress the cables into the proper exit locations; close the housing, and replace the five housing screws and two hex nuts.

3. After the terminals are reversed for positive ground systems, run the cables in the same manner as for negative ground systems.

Tape the plug(s) and retaining hook and run the Control Cable to the vicinity of the Control Unit. If it is necessary to disassemble the 19-pin plug(s) to run the cable, use the extractor tool as shown in Figure 4. Mark the plugs for identification, and write down the wire colors and hole numbers as the wires are removed from the plug(s).

4. Use the 3-inch cable straps and No. 6 self-tapping screws provided in the Basic Mounting Hardware to secure the cables neatly in place (See Figure 5).

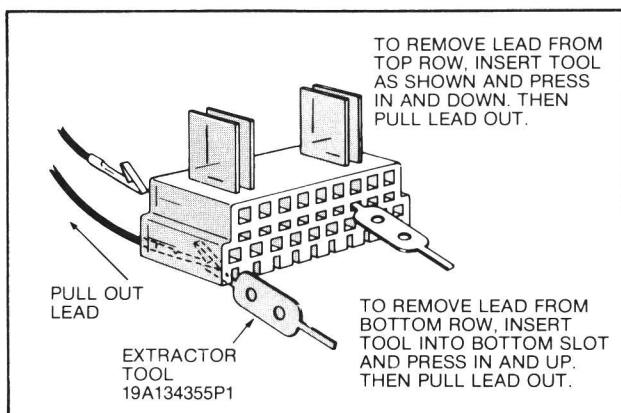


Figure 4. Using Extraction Tool

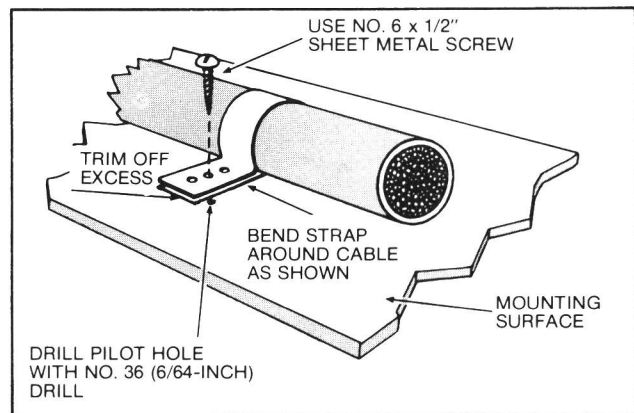


Figure 5. Installing Cable Straps

FUSE ASSEMBLY

Mount the fuse assembly near the battery (See Figure 6). Cut the red power cable and connect to the fuse assembly with the ring terminals and lockwashers provided. Assemble one lockwasher between each terminal and head of each screw. Refer to the Power Cable Connection to Fuse Assembly Diagram (Figure 7).

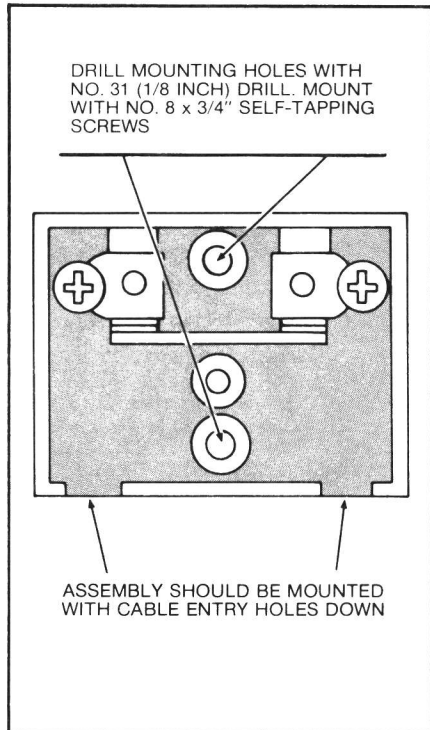


Figure 6. Installation of 12-Volt Fuse Assembly

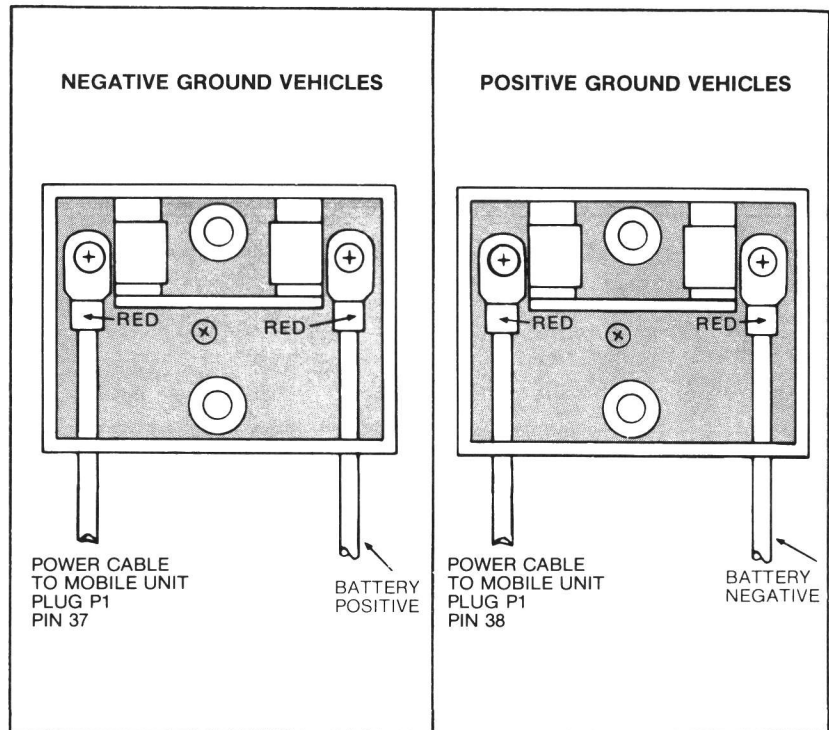


Figure 7. Power Cable Connections to Fuse Assembly

IGNITION SWITCH CABLE ASSEMBLIES

Two optional cable assemblies are available - a two-wire assembly for systems without ignition switch standby, and a three-wire assembly for systems with ignition switch standby. Refer to pages eight and nine for the two-wire installation. Refer to pages 10 and 11 for the three-wire installation.

TWO WIRE CABLE ASSEMBLY

The two-wire Ignition Switch Assembly consists of a Yellow "Y" fused lead, a black "Y" lead, and a 19-pin Vehicle System Plug. In-line connectors are provided for shortening the fused leads, if desired. If the in-line connectors are used, install the connectors between the fuse and the Vehicle Systems Plug.

NOTE

The speaker connections and other option connections (hookswitches, etc.) are also made to the Systems Plug. Do not connect the Systems Plug to the Control Unit until all connections have been made.

12-VOLT NEGATIVE GROUND SYSTEMS

The Ignition Switch Assembly is shipped from the factory connected for negative ground systems as shown in Figure 8.

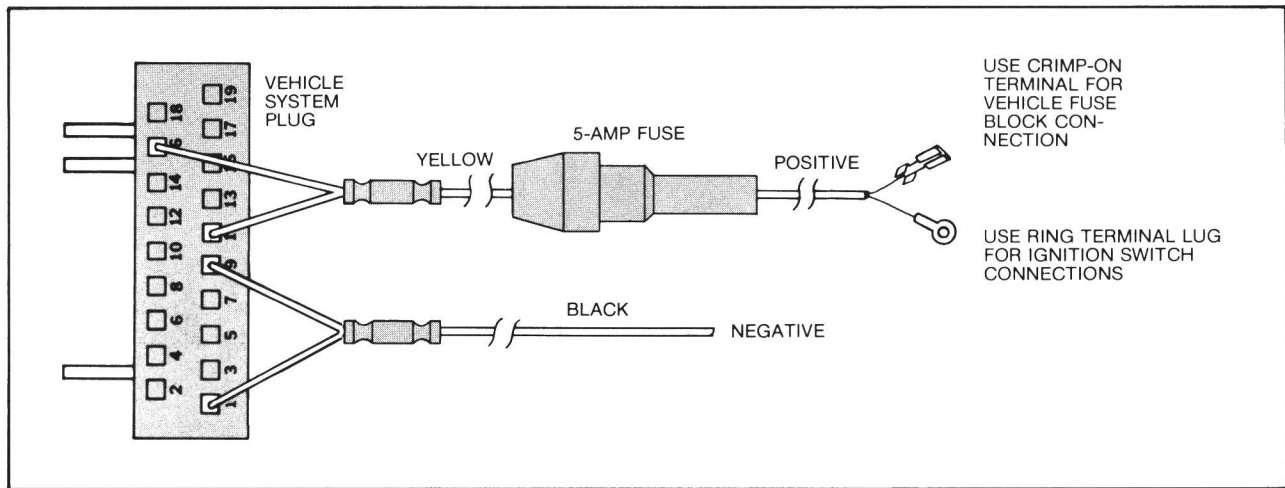


Figure 8. 12-Volt, Negative Ground Connections

12-VOLT POSITIVE GROUND SYSTEMS

For 12-volt, positive ground systems, the connections to the Vehicle Systems Plug must be changed as shown in Figure 9. Use the extractor tool for changing the connections.

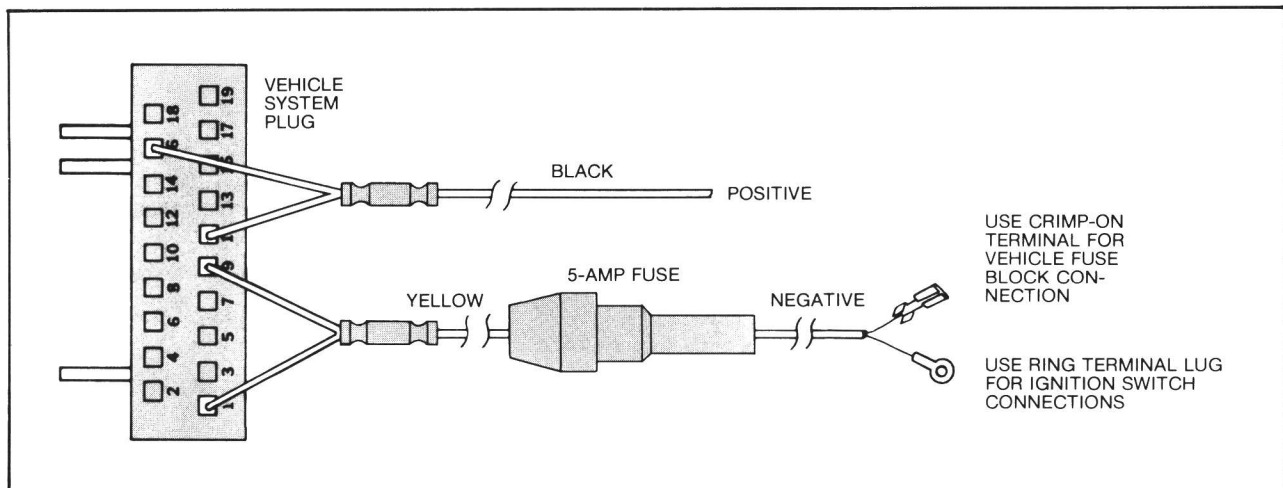



Figure 9. 12-Volt, Positive Ground Connections

Power to the radio can be controlled by one of two methods shown here. Select the type of control desired, and connect the Ignition Switch cables as directed.

1

IGNITION SWITCH CONTROL

Transmitter and receiver will operate only with ignition switch in ACCESSORY or ON position. Turning ignition switch OFF removes all power to the radio.

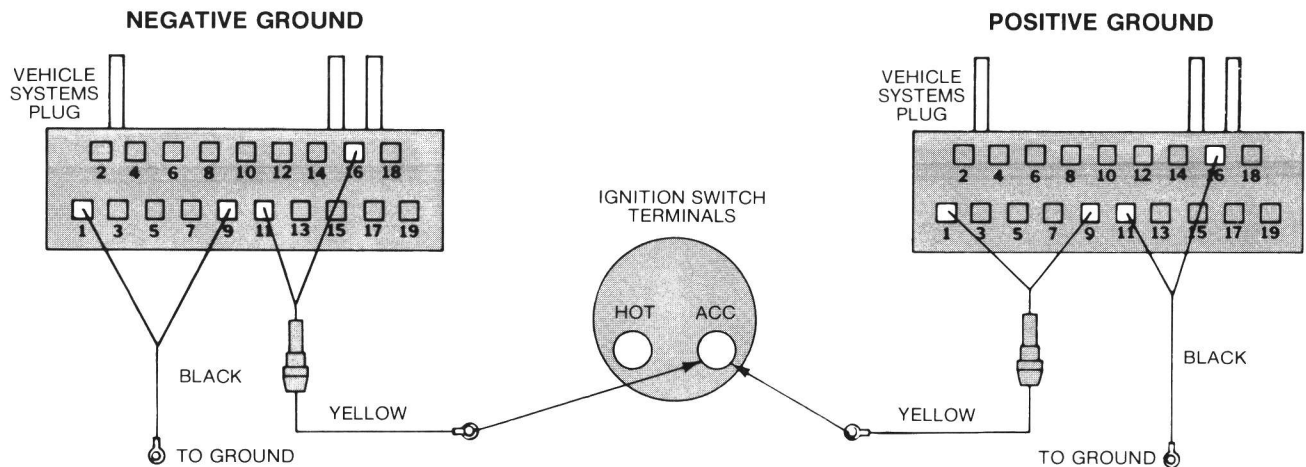

2

IGNITION SWITCH BYPASS

Transmitter and receiver operate independently of ignition switch. Unit can be turned ON and OFF only by Control Unit switch.

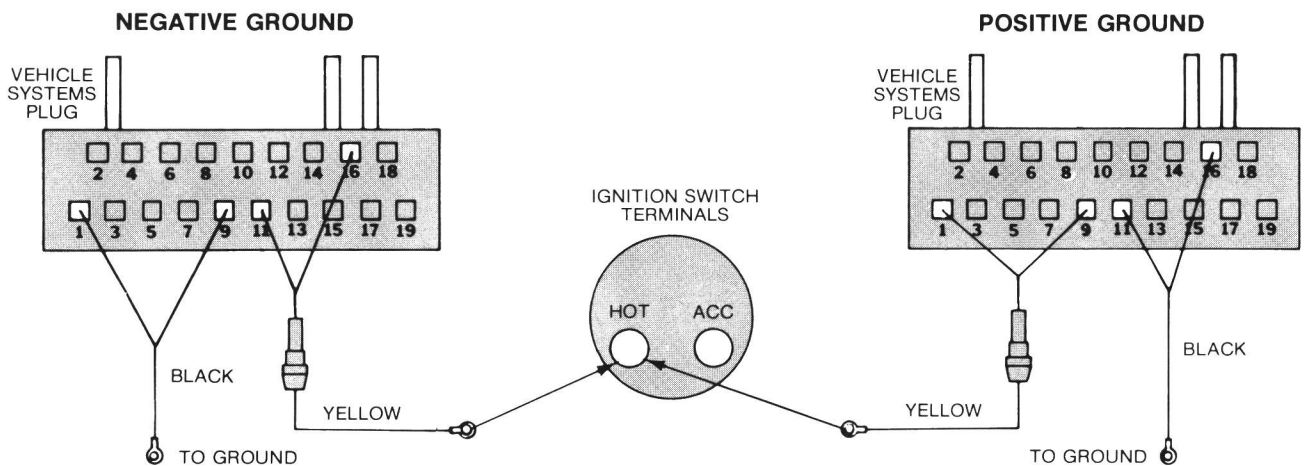


Figure 10. Connections for 12-Volt Ignition Switch Cables

3-WIRE CABLE ASSEMBLY

The Three-Wire Ignition Switch Assembly consists of a Red and a Yellow fused lead, a “Y” black ground lead, and a 19-pin Vehicle Systems Plug. For ignition switch connections, refer to Figure 13.

12-VOLT NEGATIVE GROUND SYSTEMS

The Ignition Switch Assembly is shipped from the factory connected for negative ground systems as shown in Figure 11. In-line connectors are provided for shortening the fused leads, if desired. If the in-line connectors are used, install the connectors between the fuse and the Vehicle Systems Plug.

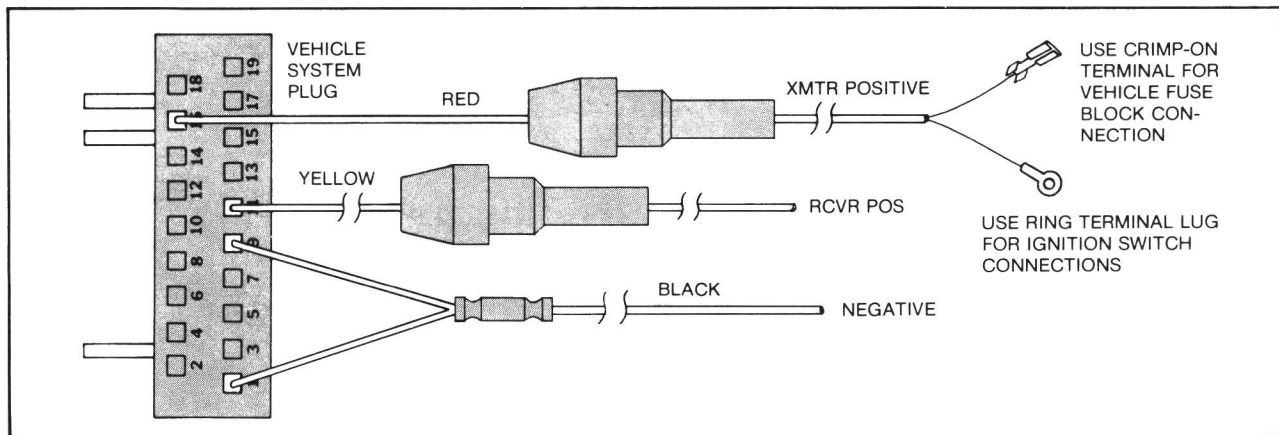


Figure 11. 12-Volt, Negative Ground Connections

12-VOLT POSITIVE GROUND SYSTEMS

For 12-volt, positive ground systems, the connections to the vehicle Systems Plug must be changed as shown in Figure 12. Use the extractor tool for changing the connections. In-line connectors are provided for shortening the fused leads, if desired. If the in-line connectors are used, install the connectors between the fuse and the Vehicle Systems Plug.

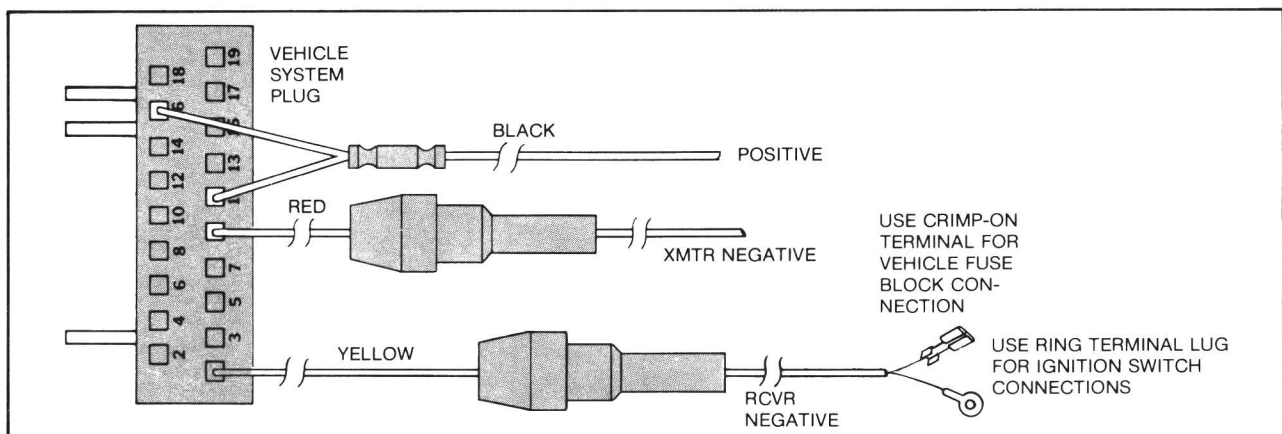



Figure 12. 12-Volt, Positive Ground Connections

Power to the radio can be controlled by one of the three methods described below. Select the type of control desired, and connect the Ignition Switch cables as directed.

1

IGNITION SWITCH STANDBY


Receiver will operate independently of ignition switch. Transmitter will operate only with ignition switch in ACCESSORY or ON position.

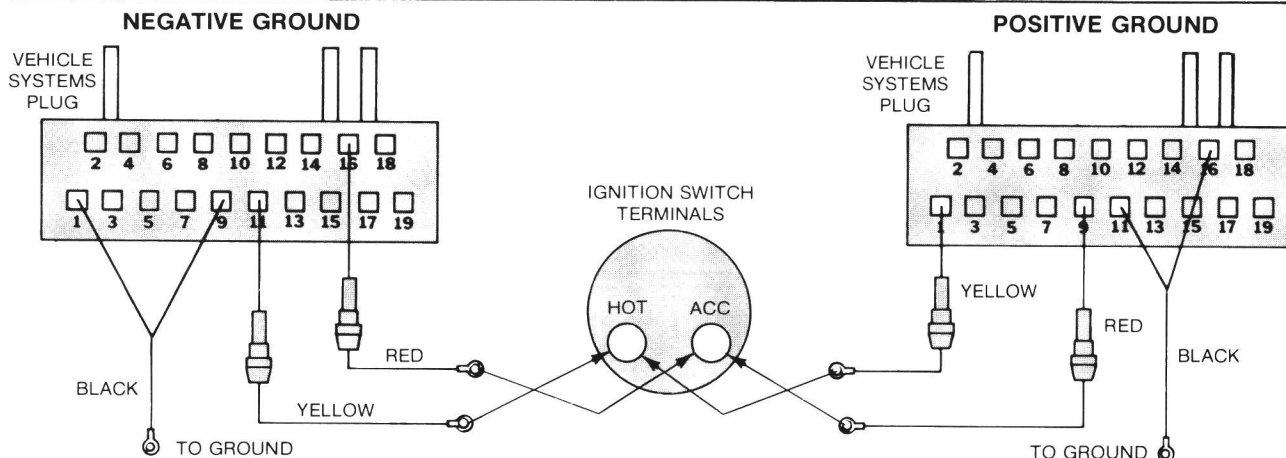

2

IGNITION SWITCH CONTROL

Transmitter and receiver will operate only with ignition switch in ACCESSORY or ON position. Turning ignition switch OFF removes all power to the radio.

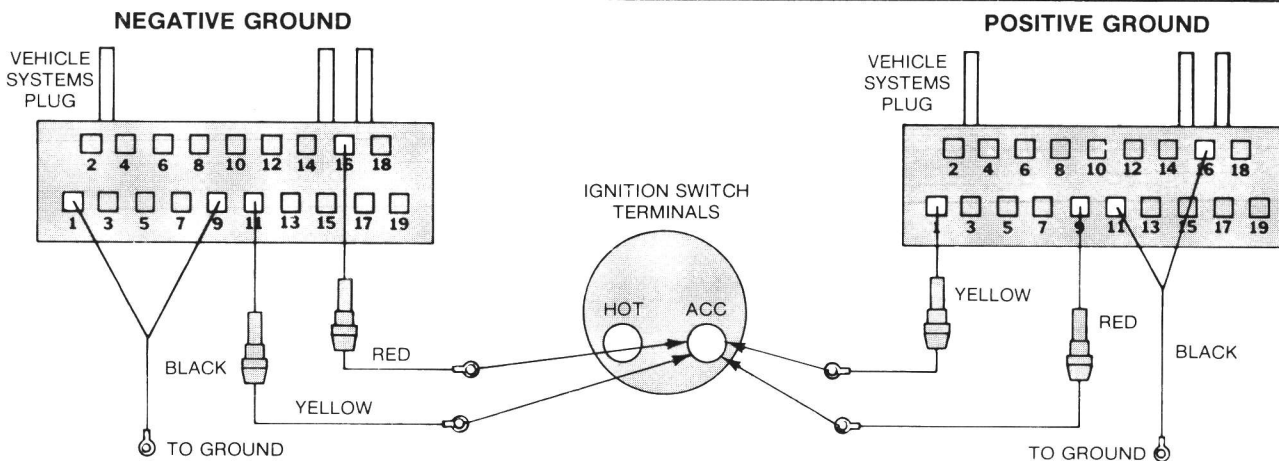

3

IGNITION SWITCH BYPASS

Transmitter and receiver operate independently of ignition switch. Unit can be turned ON and OFF only by Control Unit switch.

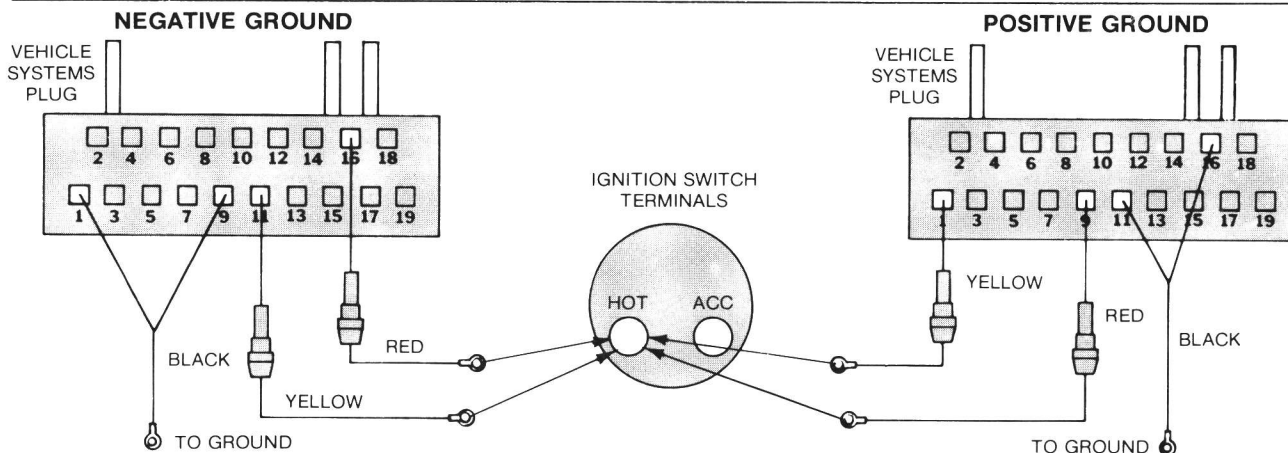



Figure 13. Connections for 12-Volt Ignition Switch Cables

TWO-WAY RADIO

The Two-Way Radio may be mounted horizontally, vertically or on its side (fins up). Select a mounting location with sufficient room for the radio to be pulled out of the mounting frame for servicing. Mount the Two-Way Radios as shown in Figure 14.

WARNING


For passenger safety, mount the radio securely so that the unit will not break loose in the event of a collision. This is especially important in station wagons, vans and similar type installations where a loose radio could be extremely dangerous to the vehicle occupants.

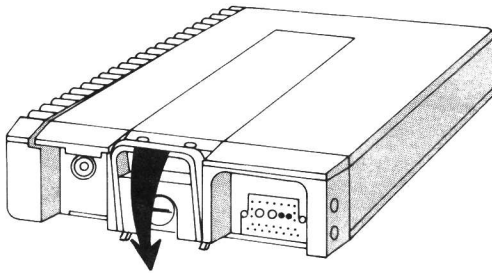

- ① TO REMOVE RADIO FROM MOUNTING FRAME, UNLOCK RADIO AND PULL HANDLE DOWN AS SHOWN. THEN PULL RADIO FORWARD OUT OF FRAME

CAUTION

Be careful to avoid damaging some vital part of the vehicle when drilling mounting holes. Always check to see how far the mounting screws will extend below the mounting surface before installing.

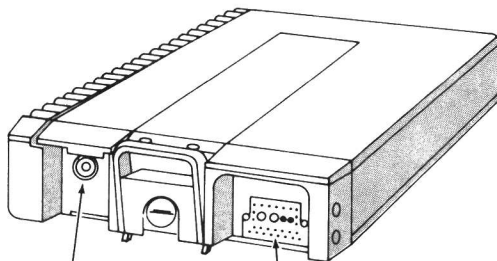


ANTENNA JACK

POWER/CONTROL JACK

- ② INSTALL MOUNTING FRAME WITH NO. 14 x 1/8-INCH HEX HEAD SELF-TAPPING SCREWS. (USE 1-INCH SCREWS IF NEEDED).

USE 1/4-INCH FLAT WASHERS (AND SPACER WASHERS IF REQUIRED) TO LEVEL RADIO. WHEN NECESSARY, USE SPACER WASHERS TO PREVENT MOUNTING SCREWS FROM PENETRATING GAS TANK, GAS LINES, ETC..

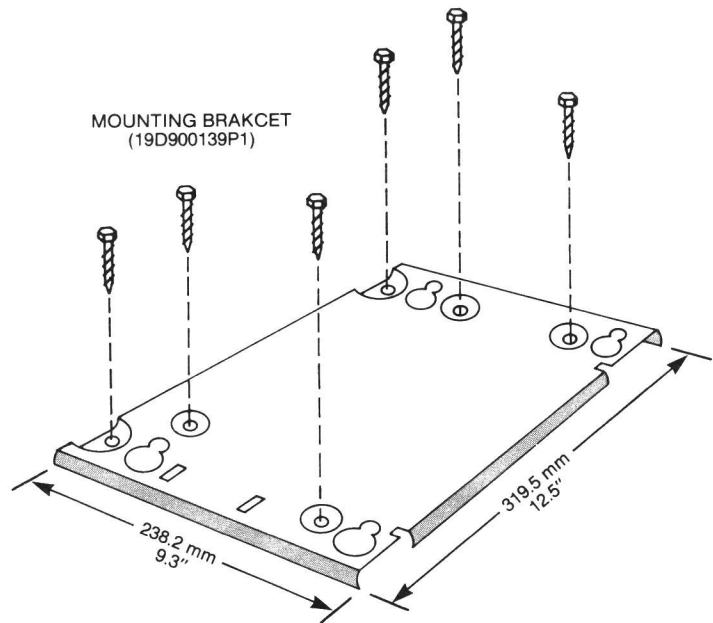

- ③ REPLACE RADIO IN MOUNTING BRACKET. PUSH UP HANDLE TO SECURE IN FRAME AND LOCK RADIO.

- ④ CONNECT THE POWER/CONTROL CABLE AND ANTENNA CABLE TO THE JACKS

Figure 14. Installing the Two-Way Radio

CONTROL UNIT

The Control Unit should be mounted within convenient reach of the operator, and where it will not interfere with the safe operation of the vehicle or provide a hazard to the vehicle passengers in case of an accident. *Use the Safety Release mounting brackets for passenger safety whenever the mounting location requires, or where the swivel action is desired.*

Use the mounting bracket as a template for locating the mounting holes, and mount the Control Unit as shown in Figure 15. After mounting the unit, connect the control cable plug(s). Do not attach the Vehicle Systems Plug until the speaker connections and other optional connections (hookswitches, etc.) have been made.

After making all connections to the Vehicle Systems Plug, connect the Control Cable and the Vehicle Systems Plug to the control unit as shown in Figure 16. Attach the retaining strap as shown to provide strain relief for connections to the Vehicle Systems Plug.

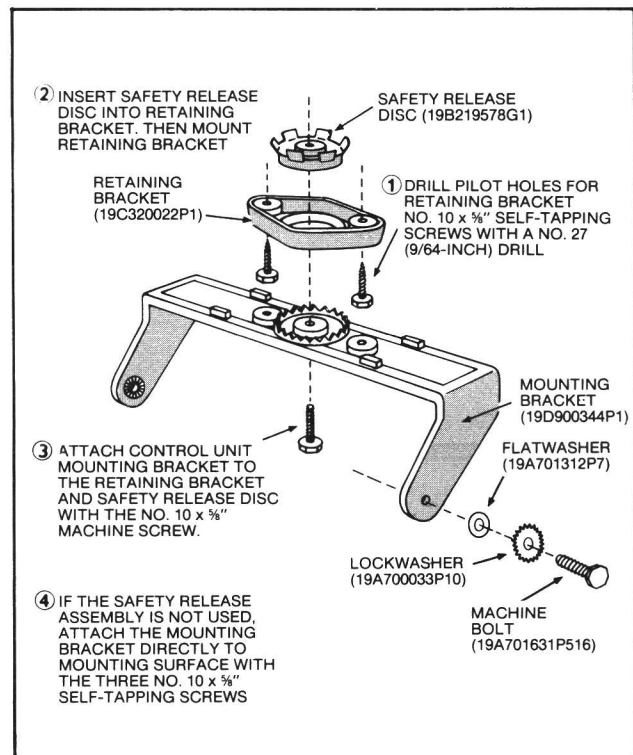


Figure 15. Mounting the Control Unit

NOTE

Refer to the appropriate control unit installation manual for detailed procedures.

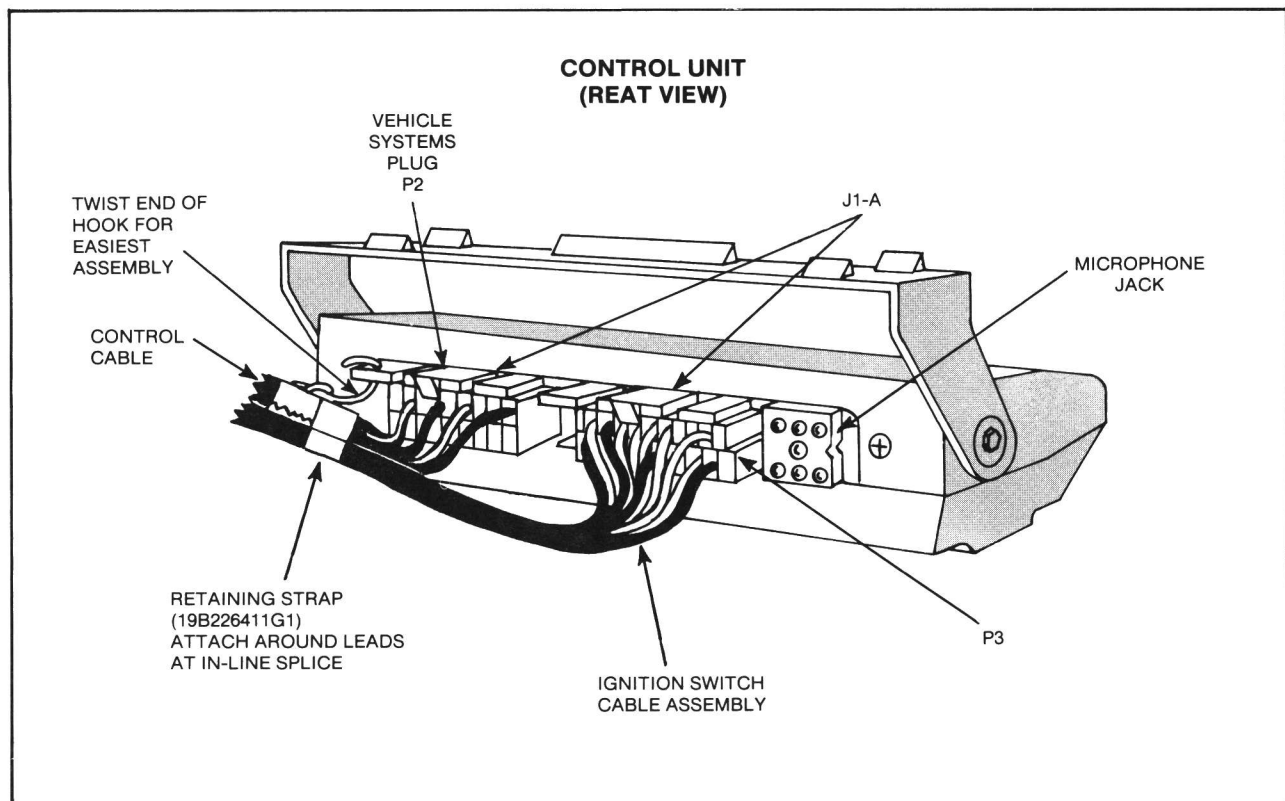


Figure 16. Installing Retaining Strap (S500-S600 Typical)

MICROPHONE

Mount the microphone where it will be within easy reach of the operator, but will not interfere with safe operation of the vehicle. After the microphone bracket is mounted, connect the microphone plug into the microphone jack on the back of the Control Unit, and tighten the retaining screw in the plug. Refer to Figure 17 for mounting instructions.

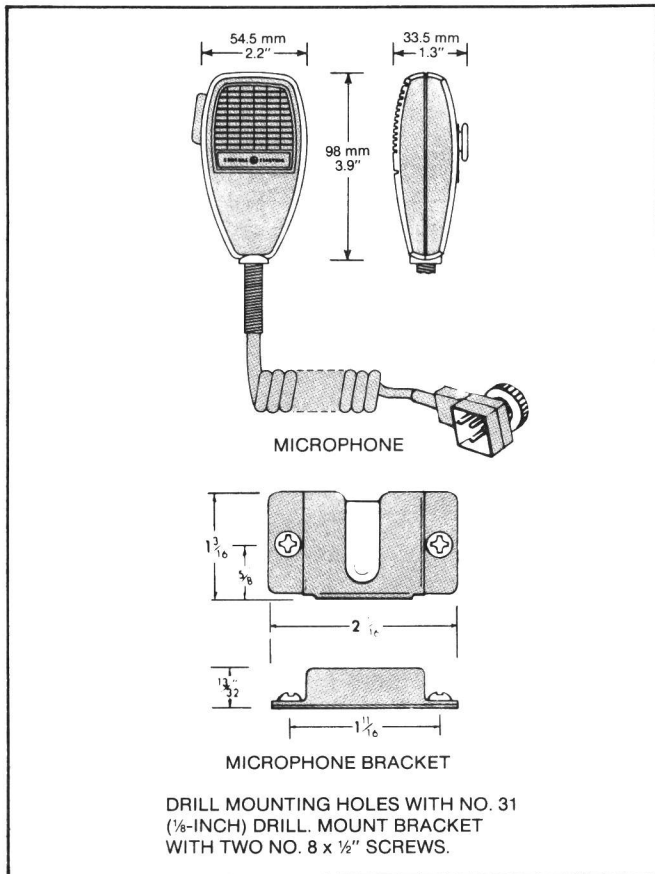


Figure 17. Microphone Bracket Mounting

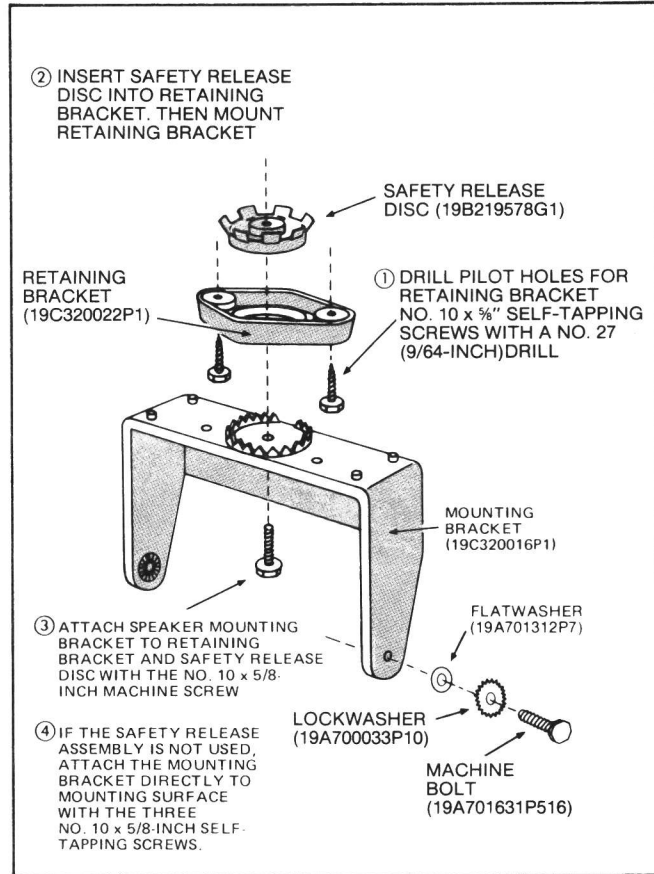


Figure 18. Mounting the Speaker

SPEAKER

The speaker should be mounted where it will direct sound to the operator, but not interfere with his vision or provide a hazard to passengers in case of an accident. *Use the Safety Release mounting brackets for passenger safety whenever the mounting location requires, or where the swivel action is desired.*

The speaker may be mounted on the lower edge of the instrument plane, on the firewall, above the windshield in some trucks, or behind the built-in speaker grille in some vehicles. Use the mounting bracket as a template for locating the mounting holes, and mount the speaker as shown in Figure 18. If the speaker has been disconnected, connect the two pins to holes 4 and 17 on the Vehicle Systems Plug.

CHANNEL GUARD HOOKSWITCH

For Channel Guard with Automatic Monitoring applications, a hookswitch is used in place of the microphone bracket. Mount the hookswitch as shown in Figure 19. After mounting the hookswitch, connect the two pins to holes 10 on Vehicle Systems Plug P3 and to hole 1* on P3.

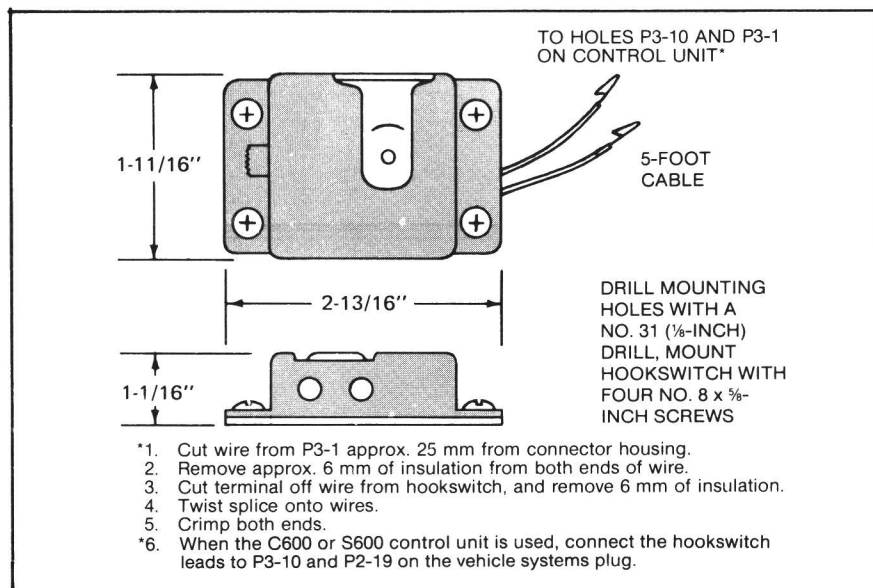


Figure 19. Hookswitch Mounting

HANDSET AND HANDSET HOOKSWITCH (OPTIONAL)

Mount the handset hookswitch as shown in Figure 20. After mounting the handset hookswitch, connect the handset plug to microphone jack on the bottom of the Control Unit. If the hookswitch has been disconnected, connect the hookswitch cable to the Vehicle Systems Plug as shown in Figure 20.

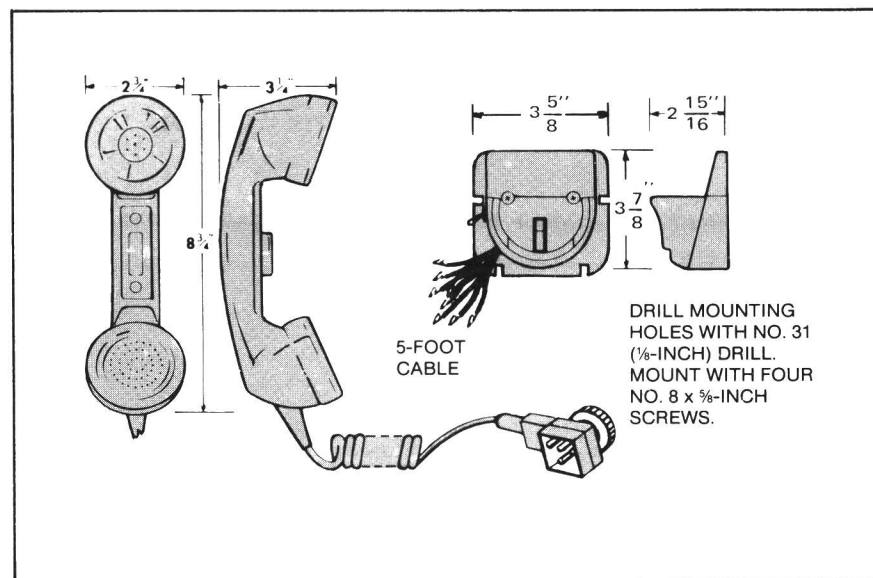


Figure 20. Handset Hookswitch Mounting

WIRE COLOR	CONNECT TO SYSTEMS PLUG
Black	P2-19
Green	P3-2
Red	P3-10
Orange	P3-13
Blue	P3-12
Brown	P3-18

Figure 21.
Connections for Handset Hookswitch

ANTENNA

Installation instructions for the antenna are packaged with the antenna. The antenna must be installed in accordance with good engineering practice for optimum results.

For the 138—512 MHz antenna, the most effective mounting position is usually in the center of the roof of the vehicle. The antenna cable will normally run from the front of the Two-Way Radio, behind sections of the interior trim to a door or window post, and then up between the roof and headliner in the passenger compartment to the antenna base.

Try to route the cable away from locations where it will be exposed to heat, sharp edges or mechanical damage, and where it will be out of the way of the driver, passengers or vehicles mechanics. Wherever possible, existing holes in the trunk wall, and the channels above or beneath doors and window columns should be utilized.

PLACING THE TWO-WAY RADIO IN OPERATION

After completing the installation of the Two-Way Radio, the following final operations should be performed:

Have a certified electronics technician make the final adjustments.

These include:

Transmitter: Measure Forward and Reflected Power and adjust antenna length for optimum ratio. Set transmitter to rated power output (or to the specific output or input that may be required by the FCC station authorization). Measure the frequency and modulation and enter these measurements on the FCC-required Station Records.

Vehicle: Check to see if any electrical noise suppression is needed.

Instructions for making these adjustments are included in the Maintenance Manual for the Two-Way Radio. Give the alignment tools (packed with the unit) to the technician.

Fill out and mail the "ON ARRIVAL" Information Card.

Give the Operator's Manual for the Two-Way Radio to the person who is going to operate it, or place the Manual in the vehicle where he will find it.

GENERAL ELECTRIC COMPANY • MOBILE COMMUNICATIONS DIVISION
WORLD HEADQUARTERS • LYNCHBURG, VIRGINIA 24502 U.S.A.

