

Maintenance Manual

ORION™
136-174 MHz (Dual Bandwidth)
SCAN AND SYSTEM
MOBILE RADIO

TABLE OF CONTENTS

Synthesizer/Receiver/Exciter LBI-39173
Power Amplifier LBI-39002
PA Interface LBI-38994
Control Logic/IF Board LBI-39174
Control Units LBI-38992
Assemblies LBI-38909
Service Section LBI-39175

TABLE OF CONTENTS

	Page
SPECIFICATIONS	1
DESCRIPTION	2
SYNTHESIZER/INTERFACE	2
PROGRAMMING	2
TRANSMITTER	2
RECEIVER	2
LOGIC FUNCTION	2
OPERATION	2
MAINTENANCE	2
SYSTEM INTERCONNECTION DIAGRAMS:	
U.S.A. LOW POWER	3
U.S.A. HIGH POWER	4
EUROPEAN	5

ILLUSTRATION

Figure 1 - ORION Mobile Radio	2
---	---

NOTICE!

This manual covers Ericsson and General Electric products manufactured and sold by Ericsson Inc.

NOTICE!

The software contained in this device is copyrighted by Ericsson Inc. Unpublished rights are reserved under the copyright laws of the United States.

NOTICE!

Repairs to this equipment should be made only by an authorized service technician or facility designated by the supplier. any repairs, alterations or substitution of recommended parts made by the user to this equipment not approved by the manufacturer could void the user’s authority to operate the equipment in addition to the manufacturer’s warranty.

This manual is published by **Ericsson Inc.**, without any warranty. Improvements and changes to this manual necessitated by typographical errors, inaccuracies of current information, or improvements to programs and/or equipment, may be made by **Ericsson Inc.**, at any time and without notice. Such changes will be incorporated into new editions of this manual. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, for any purpose, without the express written permission of **Ericsson Inc.**

SPECIFICATIONS*

Frequency Range:	136-153 MHz 150-174 MHz
Battery Drain:	
Receiver	Squelched Unsquelched
	1.1 Amperes at 13.8 Volts 3.0 Amperes at 13.8 Volts (15 Watts Output)
Transmitter	25 Watts 50 Watts 110 Watts
	12 Amperes at 13.2 Volts 14 Amperes at 13.6 Volts 28 Amperes at 13.4 Volts
Frequency Stability:	0.0002% depending on model
Temperature Range:	-30° C (-22° F) to +60° C (+140° F)
Duty Cycle:	100% Receive, 20% Transmit
<u>Transmitter</u>	
Transmit Output Power:	25W/50W/110W
Conducted Spurious:	-85 dB
Modulation:	±5 kHz (30 kHz channel spacing) ±2.5 kHz (12.5 kHz channel spacing)
Audio Sensitivity:	55 to 110 millivolts
Audio Frequency Characteristics:	Within +1 dB to -3 dB of a 6 dB/octave pre-emphasis 300 Hz and within +1 dB to -4.5 dB (+1 to -3 dB for Euro) of a 6 dB/octave pre-emphasis 3000 Hz per EIA standards. Post-limiter filter per FCC and EIA.
Distortion:	Less than 2% (1000 Hz)
Deviation Symmetry:	0.3 kHz maximum (30 kHz channel spacing) ±0.15 kHz (12.5 kHz channel spacing)
Maximum Frequency Separation:	136-153 MHz, 17 MHz 150-174 MHz 24 MHz
Microphone Load Impedance:	600 Ohms
Power Adjust Range:	100% to 50% of rated power (U.S.A. Models) 100% to 24% of rated power (Euro Models)
RF Output Impedance:	50 Ohms
FM Noise:	50 dB (30 kHz channel spacing) 45 dB (12.5 kHz channel spacing)
<u>Receiver</u>	
Audio Output:	15 Watts with less than 3% distortion
(To 4.0 ohm speaker)	
Sensitivity:	0.35 µV (STD)
12 dB SINAD (IEIA method)	
Selectivity:	
EIA Two-Signal Method	
(30 kHz Channels)	-90 dB (STD)
(12.5 kHz Channels)	-70 dB (STD)

Continued

SPECIFICATIONS* - Cont.

<u>Receiver - Cont.</u>	
Spurious Response:	-100 dB (STD)
Intermodulation 30 kHz:	
(30 kHz Channels)	-80 dB (STD)
(12.5 kHz Channels)	-70 dB (STD)
Maximum Frequency Separation:	136-153 MHz 17 MHz 150-174 MHz 24 MHz
Frequency Response:	
(30 kHz Channels)	Within +1, -3 dB of 6 dB/octave de-emphasis from 300 to 3000 Hz (1000 Hz reference)
(12.5 kHz Channels)	Within +1, -3 dB of 6 dB/octave de-emphasis from 300 to 2500 Hz (1000 Hz reference)
RF Input Impedance:	50 Ohms
Hum/Noise ratio:	
Unsquelled	-50 dB
Squelled	-70 dB
Channel Spacing:	30/12.5 kHz

The following equipment authorized numbers have been granted:	
<u>COUNTRY</u>	<u>REGULATORY APPROVAL</u>
UNITED STATES	FCC AXATR - 340-A2 (30/50W) AXATR - 341-A2 (110W)
CANADA	DOC TR - 340 (30/50W)

* These specifications are intended primarily for use of the service technician. Refer to the appropriate Specifications Sheet for the complete specifications.

DESCRIPTION

The synthesized **ORION** mobile radio combinations are completely solid-state, utilizing microcomputer technology and integrated circuits to provide high-quality, high-reliability radios. Standard combinations may be equipped with:

- Microcomputer Controlled Frequency Synthesizer
- Up to 16 Channels
- 0.0002% Frequency Stability
- Other Structured Options

The basic radio consists of three printed wiring boards mounted in a cast aluminum frame. The three boards are:

1. The Control Logic/IF board,
2. The Frequency Synthesizer/Receiver/Exciter board,
3. The Power Amplifier board.

The radio is of double-layer construction with tuning adjustments easily accessible from the top of the radio.

The Control Logic/IF Board located on the top of the radio, while the Power Amplifier and the Synthesizer/Receiver/Exciter boards are located on the bottom.

SYNTHESIZER/INTERCONNECT

The synthesizer consists of a microcomputer, Electrically Erasable Programmable Read Only Memory (**EEPROM**), a frequency synthesizer IC, transmit and receive Voltage Controlled Oscillator's (**VCO**) and associated circuitry. The frequency synthesizer under control of the microcomputer generates all transmit and receive **Radio Frequencies (RF)**.

The EEPROM stores binary data for all radio frequencies, Channel Guard tones/digital codes and the timing function of the **Carrier Control Timer (CCT)**. The microcomputer accesses the EEPROM and provides the correct **WALSH** bits to the Channel Guard circuitry to generate the correct Channel Guard tone or digital code on a per-channel basis.

PROGRAMMING

The EEPROM allows the radio to be programmed or reprogrammed as needed to adapt to changing system requirements. Radio Frequencies, Channel Guard tone and digital codes and the CCT function can be reprogrammed.

The EEPROM can be reprogrammed through the radio front connector using a personal computer. This programmer allows all information to be loaded simultaneously.

Programming instructions are provided in the respective Programmer Maintenance Manuals.

TRANSMITTER

The transmitter consists of the exciter, frequency synthesizer, transmitter VCO and a **Power Amplifier (PA)** assembly. The PA assembly consists of a PA board mounted on a heat sink assembly. The PA board also contains an antenna switching diode and a low-pass filter.

Audio and Channel Guard circuitry for the transmitter is located on the Logic Board.

RECEIVER

The receiver consists of the frequency synthesizer, RX VCO, injection amplifiers, front end, IF and limiter detector.

Audio, squelch and Channel Guard circuitry for the receiver is located on the Logic Board.

LOGIC FUNCTION

A microprocessor on the Control Logic/IF board controls the frequency synthesizer, the TX ON/OFF, the decoding of CTCSS tones, the generation of CTCSS tones,... etc. The audio processor circuitry of the transmitter and the receiver are located on the Control Logic/IF Board. Squelch circuitry and a connection to the digital AEGIS circuit is also located on the Control Logic/IF Board.

OPERATION

Complete operating instructions for the ORION Two-Way Radio are provided in Operator's Manual **LBI-38888** for the control unit used.


MAINTENANCE


The Service Section in maintenance manual **LBI-39175** contains the maintenance information to service this radio. The Service Section includes:


- Disassembly Procedures
- Replacement of IC's, chip capacitors and resistors
- Alignment procedures for the transmitter and receiver
- Troubleshooting Procedures and wave forms



Figure 1 - ORION Mobile Radio

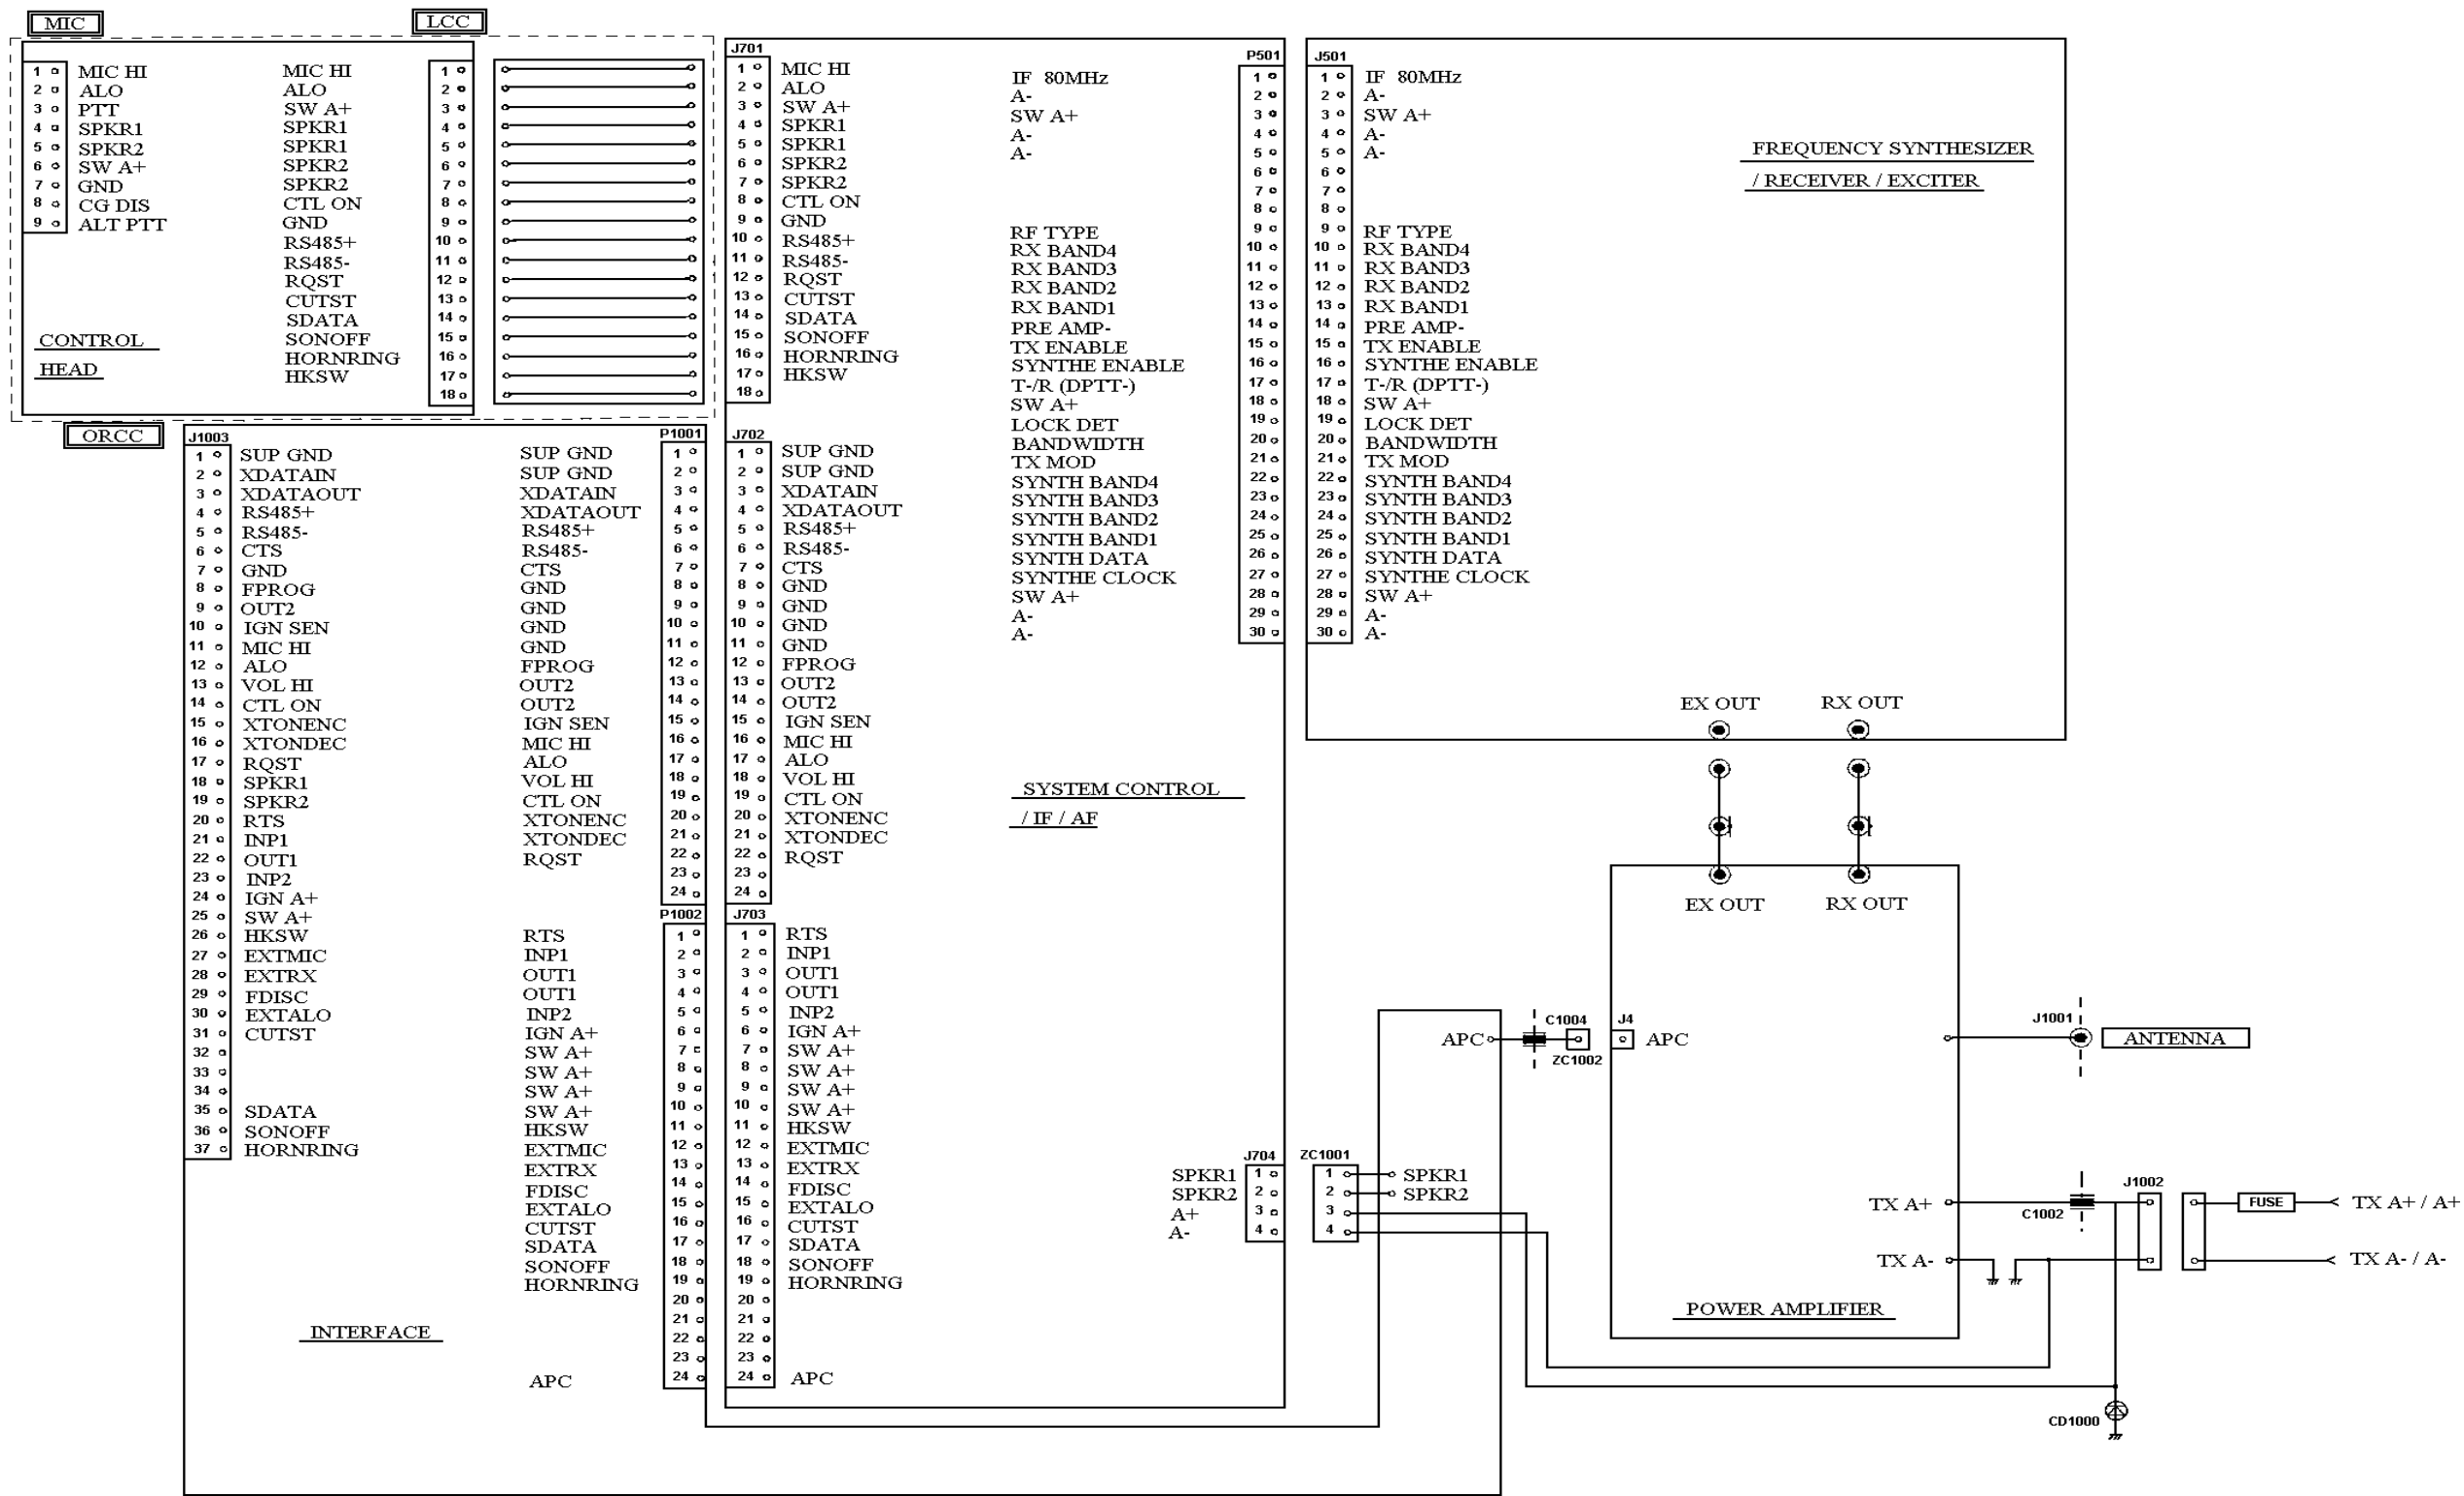

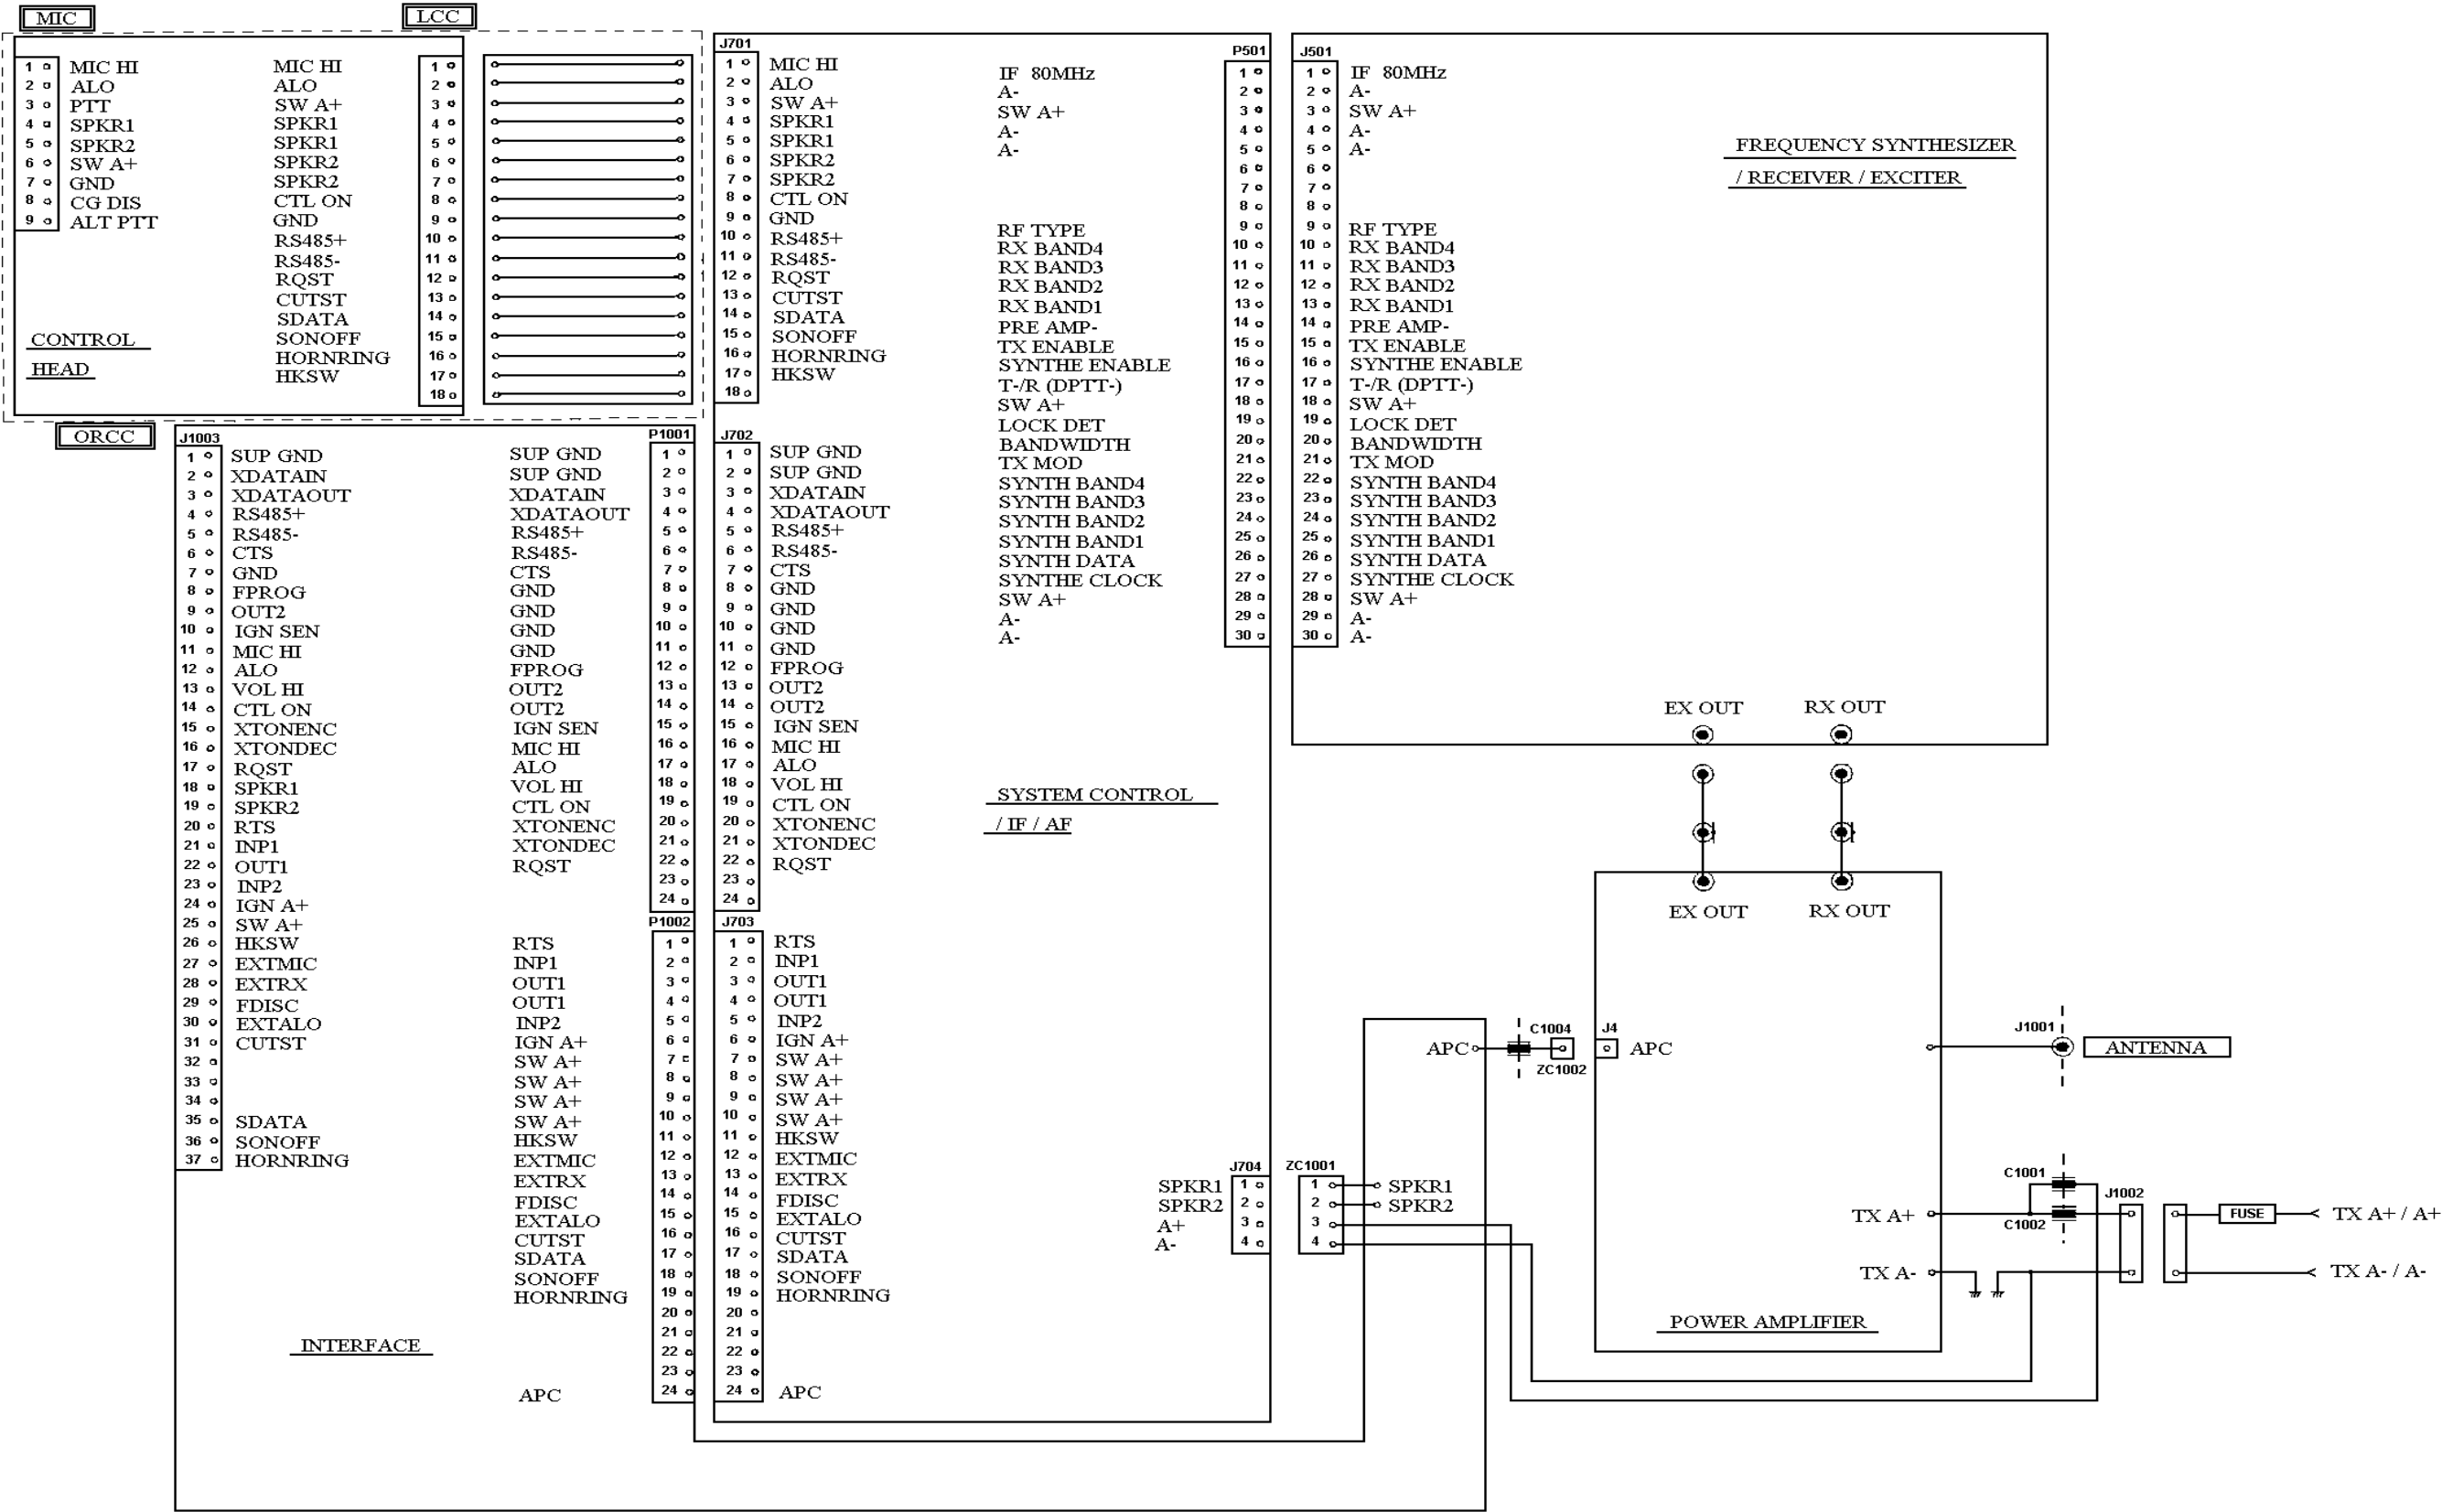

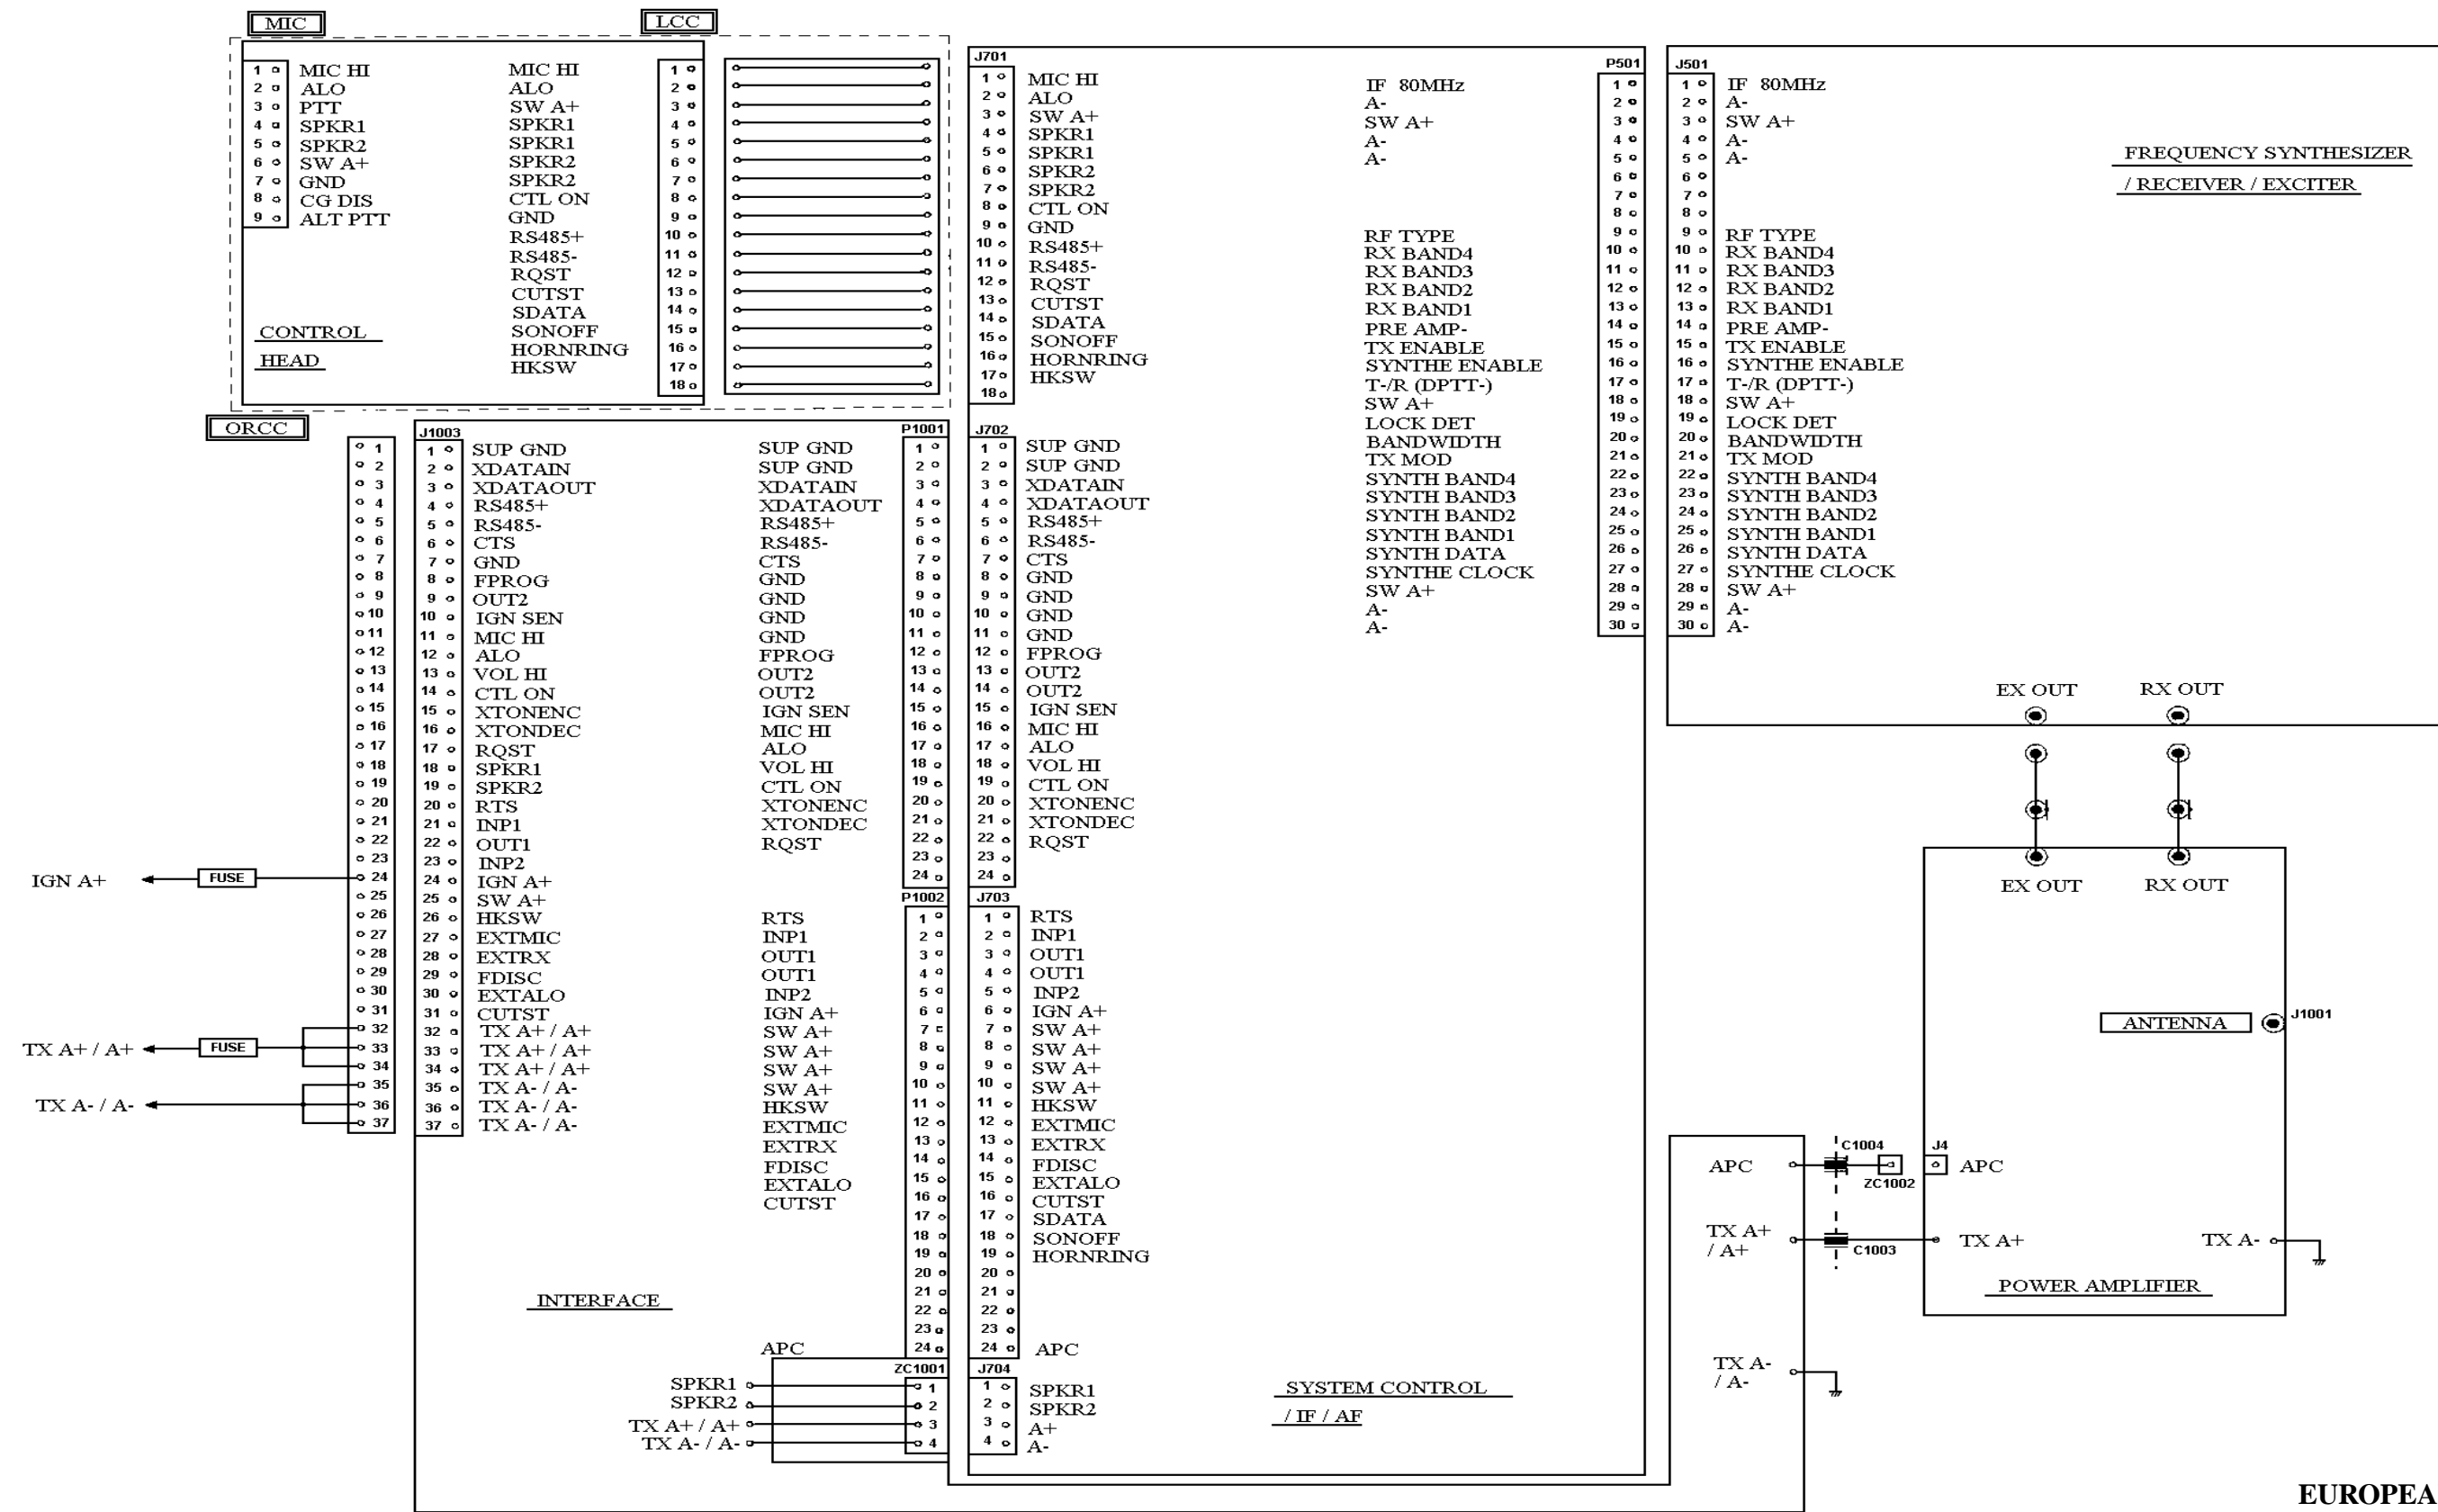

EUROPEAN