

INSTALLATION INSTRUCTIONS **FOR** **CHANNEL GUARD HOOKSWITCH KIT 19C303571G3**

(For MASTR[®] Executive & MASTR[®] Executive II Mobile Combinations)

CONTENTS	
Installation	1
Figure 1 - Schematic	2
Figure 2 - Outline	2
Parts List	2

Channel Guard Hookswitch Kit 19C303571G3 contains the necessary parts to provide hookswitch operation for MASTR[®] Executive and MASTR[®] Executive II Mobile Combination with Channel Guard.


With the mike on hook, the Channel Guard is enabled. Removing the mike from the hookswitch will disable the Channel Guard and allow the receiver to monitor the frequency.

INSTALLATION

(19A122637, Rev. 0)

1. Remove and discard the 8-32 hardware used to hold the switch assembly together during shipment
2. Using the hookswitch as a template, mark and drill two 1/8 (#32 drill) holes where the hookswitch is to be mounted.....
3. Mount the hookswitch using the #8 - 32x1/2 self-tapping screws provided
4. Route the hookswitch cable to the control head
5. Disconnect the speaker plug from J702 on the back of the control head of a trunk mount unit or from the cable on the side of a front mount unit
6. Insert the male plug (P1) of the hookswitch cable into the speaker jack (J702).....
7. Plug the speaker into the female jack (J1) of the hookswitch cable

✓

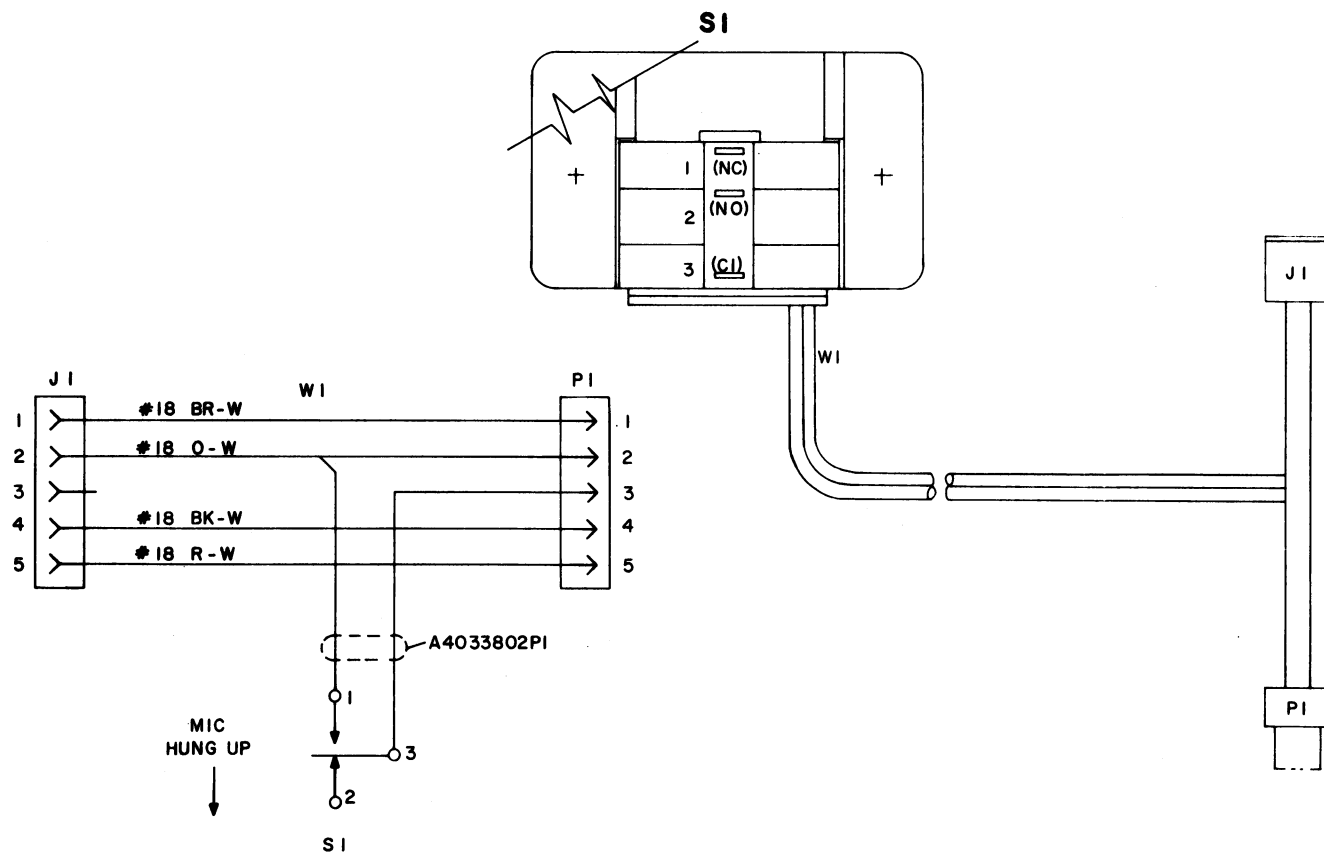

(19A122640 (Rev. 1))

Figure 1 - Schematic Diagram

(19B219748, Rev. 0)

Figure 2 - Outline Diagram

PARTS LIST

CHANNEL GUARD HOOKSWITCH

19C303571G3

SYMBOL	GE PART NO.	DESCRIPTION
S1	19B209099P1	Switch
W1	19B205695G1	Cable

*COMPONENTS ADDED, DELETED OR CHANGED BY PRODUCTION CHANGES.

MOBILE RADIO DEPARTMENT
 GENERAL ELECTRIC COMPANY
 LYNCHBURG, VIRGINIA 24502