

**MAINTENANCE MANUAL  
RECEIVER BOARD  
CMA-258A/B  
FOR  
MLSU140 & MLSU240  
TWO-WAY MOBILE RADIO COMBINATIONS**

TABLE OF CONTENTS

|                         | <u>Page</u> |
|-------------------------|-------------|
| DESCRIPTION .....       | 1           |
| CIRCUIT ANALYSIS .....  | 1           |
| OUTLINE DIAGRAM .....   | 5           |
| SCHEMATIC DIAGRAM ..... | 6           |
| PARTS LIST .....        | 7           |
| IC DATA .....           | 8           |

**DESCRIPTION**

The MLS FM dual conversion, super-heterodyne receiver board (CMA-285A/B) is designed for operation in the 403 to 420 MHz and 450 to 470 MHz frequency ranges and mounts in the front and bottom of the radio frame assembly as shown in Figure 1- Receiver Board Location. The CMA-285A operates in the 403 to 420 MHz frequency range and CMA-285B operates in the 450 to 470 MHz frequency range.

A regulated 9.0 volts is provided to operate all receiver stages except the audio PA IC, which operates from the switched A+ (13.6 volts) supply.

The receiver has intermediated frequencies of 82.2 MHz and 455 KHz. Adjacent channel selectivity is obtained by using two band-pass filters: an 82.2 MHz crystal filter and a 455 KHz ceramic filter.

All of the receiver circuitry except the synthesizer, audio preamp, and audio PA are mounted on the receiver (RX) board (refer to Figure 2 - Block Diagram). The receiver consists of:

- a Front End and Mixer
- an 82.2 MHz First IF, a 455 MHz Second IF and a FM Detector
- Audio PA
- Squelch

**CIRCUIT ANALYSIS**

Receiver Front End

An RF signal from the antenna is coupled through the low-pass filter,

ANTENNA SWITCH relay K1 and RF band-pass Filter FL401 to the input of RF amplifier HC401. The output of HC401 is coupled through RF band-pass filter FL402 to the input of first mixer HC402. Front end selectivity is provided by the RF band-pass filters.


Receiver Injection

The receiver board RF injection frequency (320.8 to 337.8/367.8 to 387.8 MHz) from the synthesizer VCO is applied to amplifier HC403 through RX INJECTION connector J402. The input level at J402 will be between 0.5 and 1.0 milliwatts, 0.5 milliwatts minimum. The output of amplifier HC403 is filtered by an injection filter (FL403). This filter is tuned to pass frequencies in the 320.8 to 337.8/367.8 to 387.8 MHz band-pass range.

First Mixer

The first mixer (HC402) is a double-balanced diode mixer that converts a signal in the 403-470 MHz frequency range to the 82.2 Mhz first IF frequency.

In the mixer stage, RF from the front end RF filter is applied to an

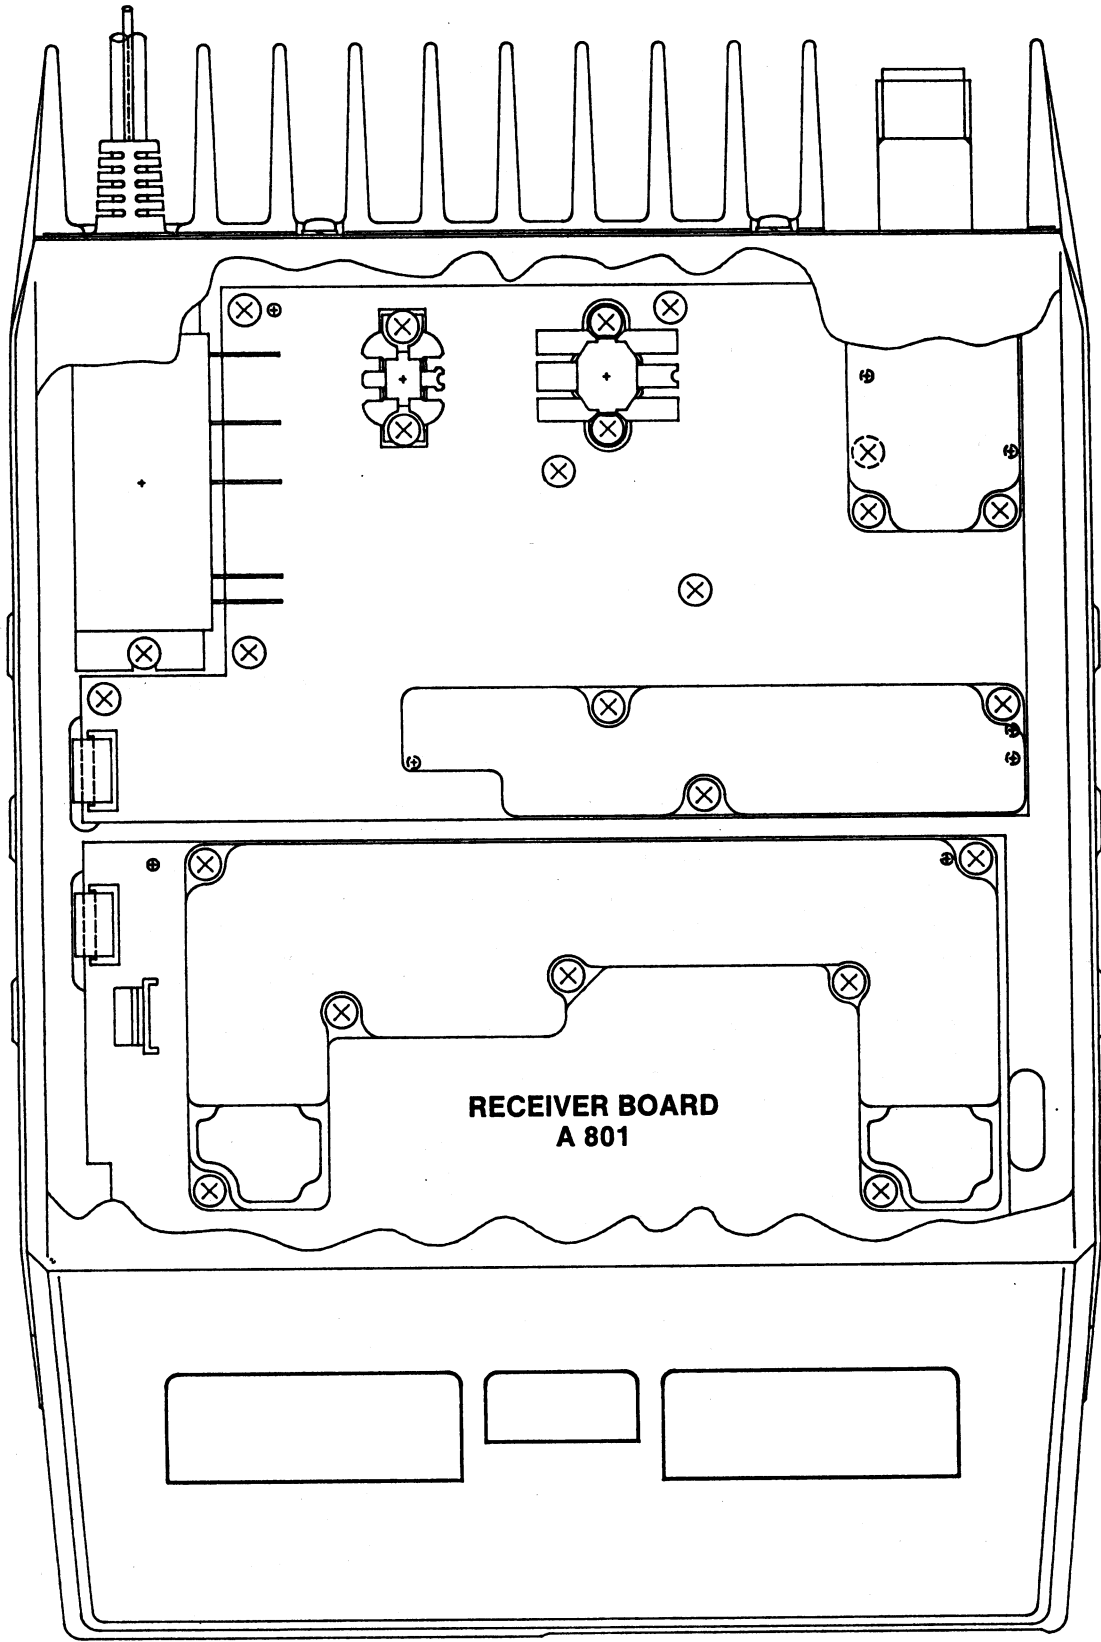

RC-5420

Figure 1 - Receiver Location (Bottom View)

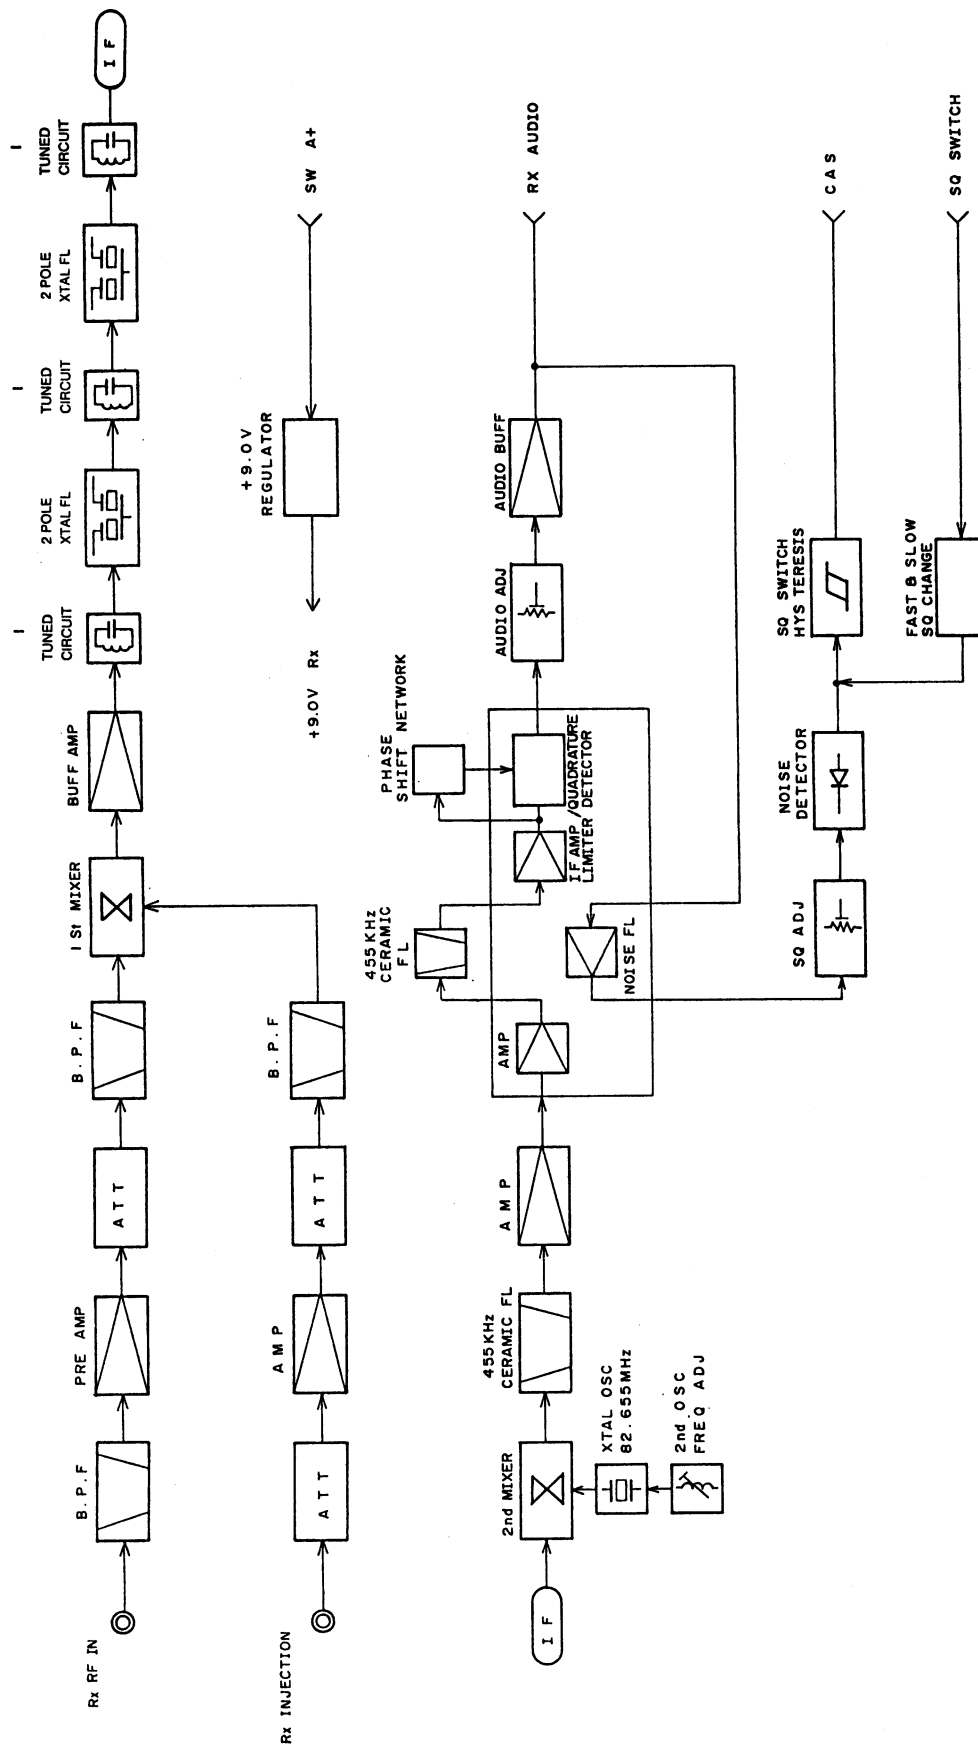


Figure 2 - Block Diagram

RC-5422

input of the mixer (Pin 8). Injection voltage from the amplifier stages is applied to an input of the mixer (Pin 1). The 82.2 MHz mixer first IF output signal is coupled from the output of HC402 (Pin 5) through an impedance matching network (TR501 and L503) to a 4-pole crystal filter consisting of FL501-1 and FL501-2.

#### First IF

The highly-selective crystal filters FL501-1 and FL501-2 provide the first portion of the receiver IF selectivity. The output to the filters is coupled through an impedance matching network consisting of capacitors C505 and C506 and resistor R504 to the second mixer HC501.

#### Second Mixer

Second mixer HC501 and associated circuitry provide the second oscillator and second mixer.

The 82.2 MHz IF input is applied to Pin 7 and mixed with an 82.655 MHz frequency supplied by crystal oscillator X501. Inductor L506 sets the frequency of X501.

#### Second IF and Detector

The output of the second mixer is coupled to the 4-pole ceramic filter FL502, which provides the 455 KHz selectivity. The output of the ceramic filter is coupled to the base of IF amplifier transistor TR502. This transistor provides limiting for the 455 KHz IF signal (1.4 Vp-p) to prevent high level overloading of IC502 (Limited/FM Detector, Noise Amplifier).

IC502 and associated circuitry provide an IF amplifier and FM detector. The 455 KHz IF input is applied to Pin 18.

The 455 KHz IF signal is amplified and applied to 4-pole ceramic filter FL503, which provides the 455 KHz selectivity. The output of the 455 KHz filter is re-applied to IC502-5. The second IF signal is amplified and limited. Inductor L508 shifts the IF signal to the internal IF signal to recover the audio

modulation. The audio output of IC502 is applied to the System Control and Frequency Synthesizer board (A801) through the base of audio buffer transistor TR503.

#### Squelch Circuit

The squelch circuit senses the noise components contained in the FM detector audio output. The squelch input is applied to Pin 12 of IC502 from audio buffer transistor TR503. An internal circuit of IC502 provides filtering and applies received noise in the 6-8 KHz frequency band to potentiometer RV502 (Squelch Adjust). The output of the squelch adjust potentiometer is connected to the noise detector. The noise detector consists of resistor R528, capacitor C536 and diode CD501. As the noise increases in magnitude in a negative direction, negative spikes cause CD501 to conduct and charge C535 and C536 to a DC level proportional to the noise level. The output of the noise detector is applied to the input of a squelch trigger circuit consisting of transistors TR504 through TR507. The squelch trigger has approximately 3 dB of hysteresis to prevent sudden noise level changes from effecting the squelch threshold setting. Resistor R527 provides temperature compensation for the squelch circuit. The output of squelch trigger is the Carrier Activated Switch (CAS) signal. The CAS output is applied to the System Control and Frequency Synthesizer board.

#### Audio Circuits


Received audio (RX AUDIO) from the FM detector is applied to the input of audio pre-amplifier IC601-A on Frequency Synthesizer Board A801 (refer to Maintenance Manual LBI-31755). The audio is then applied through Tone Reject Filter HC601, audio gate IC604-C and pre-amplifier IC601-C to the Volume Control IC602. The audio output from the Volume Control IC is applied through audio pre-amplifier IC601-C to the de-emphasis network R628, R618, capacitor C609 and C605. This enables audio amplifier IC603 which provides up to 4 watts of audio output power input to a 4-ohm speaker.

GENERAL ELECTRIC COMPANY • MOBILE COMMUNICATIONS DIVISION  
WORLD HEADQUARTERS • LYNCHBURG, VIRGINIA 24502 U.S.A.



**GENERAL  ELECTRIC\***  
U.S.A.

\* Trademark of General Electric Company U.S.A.  
Printed in U.S.A.

COMPONENT SIDE

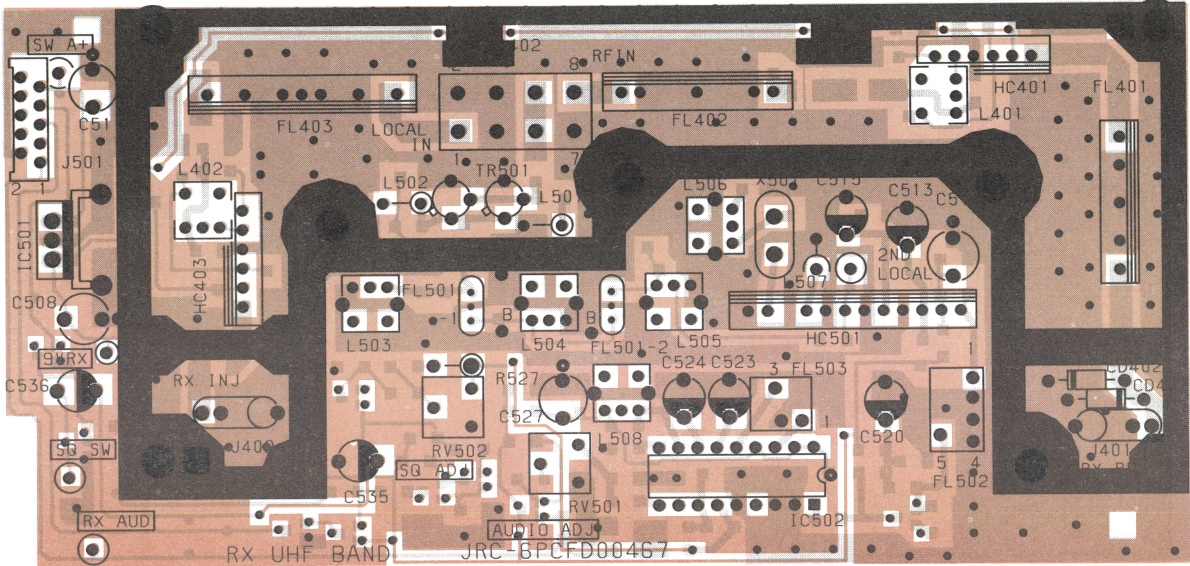


SOLDER SIDE

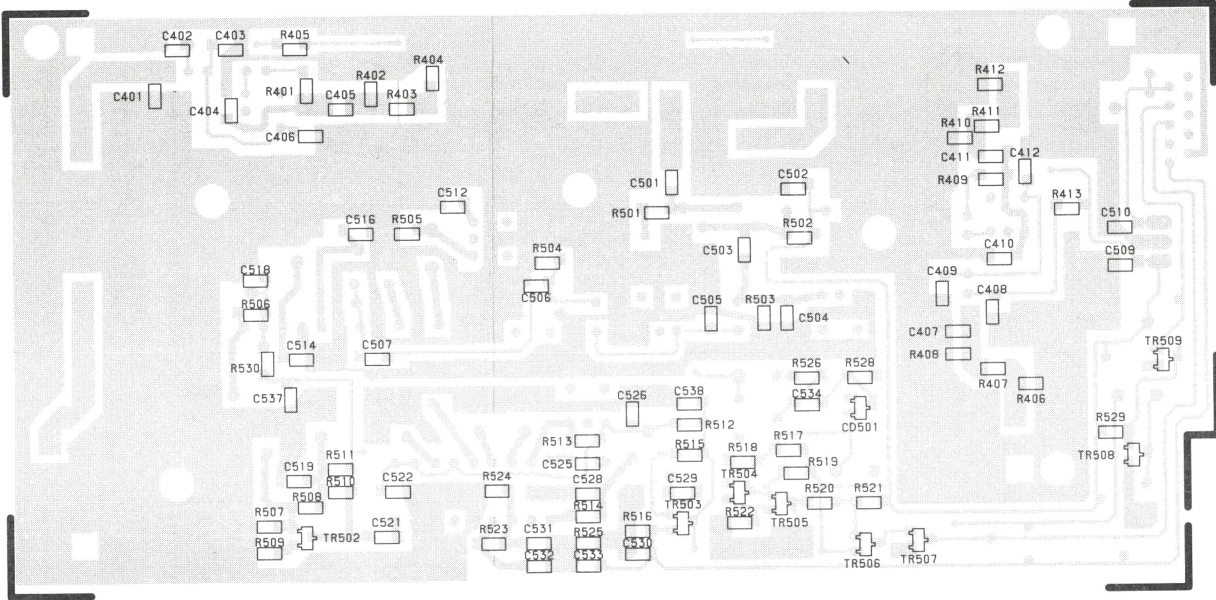

LEAD IDENTIFICATION  
FOR RV501  
(TOP VIEW)



RC-5442

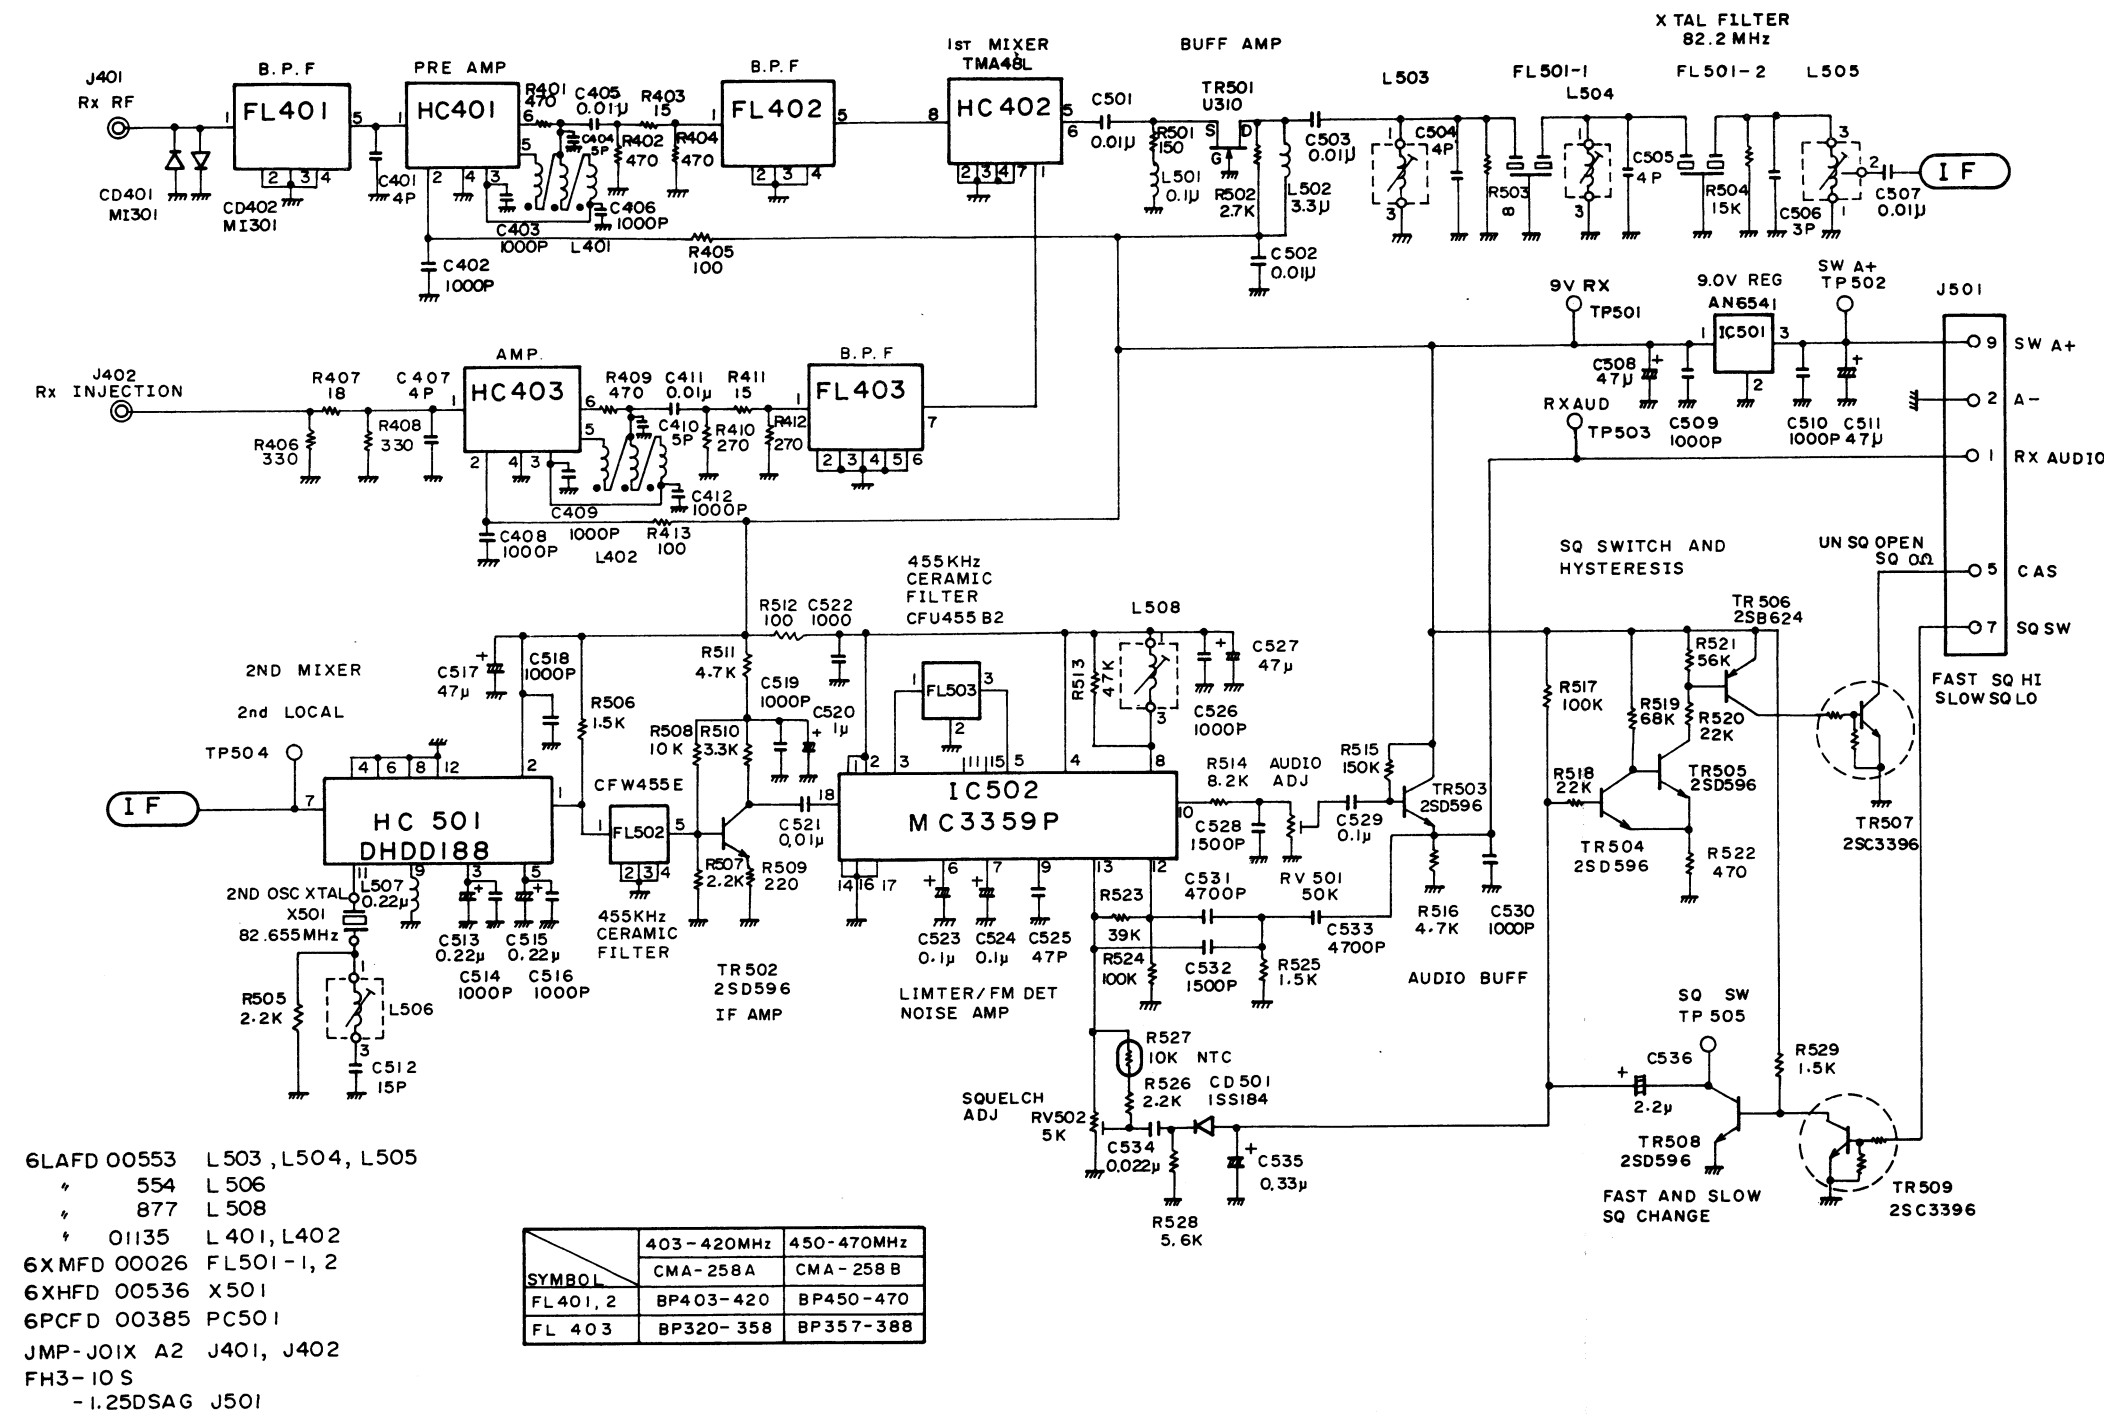

SCHEMATIC DIAGRAM

Receiver Board (A801)  
 CMA-258A/B

PARTS LIST

RECEIVER BOARD  
CMA-258A (403-420 MHz)  
CMA-258B (450-470 MHz)  
ISSUE 1

| SYMBOL         | PART NO.       | DESCRIPTION                                               |
|----------------|----------------|-----------------------------------------------------------|
|                |                | ----- CAPACITORS -----                                    |
| C401           | JRC/5CAAD00801 | Ceramic: 4 pF ±0.25 pF, 50 VDCW, temp coef 0 ±60 PPM.     |
| C402 and C403  | JRC/5CAAD00782 | Ceramic: 1000 pF ±5%, 50 VDCW, temp coef +350 -1000 PPM.  |
| C404           | JRC/5CAAD00800 | Ceramic: 5 pF ±0.25 pF, 50 VDCW, temp coef 0 ±60 PPM.     |
| C405           | JRC/5CAAD00789 | Ceramic: 0.01 uF ±10%, 50 VDCW, temp coef ±10%.           |
| C406           | JRC/5CAAD00782 | Ceramic: 1000 pF ±5%, 50 VDCW, temp coef +350 -1000 PPM.  |
| C407           | JRC/5CAAD00801 | Ceramic: 4 pF ±0.25 pF, 50 VDCW, temp coef 0 ±60 PPM.     |
| C408 and C409  | JRC/5CAAD00782 | Ceramic: 1000 pF ±5%, 50 VDCW, temp coef +350 -1000 PPM.  |
| C410           | JRC/5CAAD00800 | Ceramic: 5 pF ±0.25 pF, 50 VDCW, temp coef 0 ±60 PPM.     |
| C411           | JRC/5CAAD00789 | Ceramic: 0.01 uF ±10%, 50 VDCW, temp coef ±10%.           |
| C412           | JRC/5CAAD00782 | Ceramic: 1000 pF ±10%, 50 VDCW, temp coef +350 -1000 PPM. |
| C501 thru C503 | JRC/5CAAD00789 | Ceramic: 0.01 uF ±10%, 50 VDCW, temp coef ±10%.           |
| C504 and C505  | JRC/5CAAD00801 | Ceramic: 4 pF ±0.25 pF, 50 VDCW, temp coef 0 ±60 PPM.     |
| C506           | JRC/5CAAD00796 | Ceramic: 3 pF ±0.25 pF, 50 VDCW, temp coef 0 ±60 PPM.     |
| C507           | JRC/5CAAD00789 | Ceramic: 0.01 uF ±10%, 50 VDCW, temp coef ±10%.           |
| C508           | JRC/5CAAD00756 | Electrolytic: 47 uF ±20%, 16 VDCW.                        |
| C509 and C510  | JRC/5CAAD00782 | Ceramic: 1000 pF ±5%, 50 VDCW, temp coef +350 -1000 PPM.  |
| C511           | JRC/5CEAA01816 | Electrolytic: 47 uF, ±20%, 25V.                           |
| C512           | JRC/5CAAD00787 | Ceramic: 15 pF ±5%, 50 VDCW, temp coef 0 ±60 PPM.         |
| C513           | JRC/5CSAC00988 | Tantalum: 0.22 uF ±20%, 35 VDCW.                          |
| C514           | JRC/5CAAD00782 | Ceramic: 1000 pF ±5%, 50 VDCW, temp coef +350 -1000 PPM.  |
| C515           | JRC/5CSAC00988 | Tantalum: 0.22 uF ±20%, 35V.                              |
| C516           | JRC/5CAAD00782 | Ceramic: 1000 pF ±5%, 50 VDCW, temp coef +350 -1000 PPM.  |
| C517           | JRC/5CEAD00756 | Electrolytic: 47 uF, ±20%, 16V.                           |
| C518           | JRC/5CAAD00782 | Ceramic: 1000 pF ±10%, 50 VDCW, temp coef ±10%.           |
| C519           | JRC/5CAAD00789 | Ceramic: 0.01 uF ±10%, 50 VDCW, temp coef ±10%.           |
| C520           | JRC/5CSAC00982 | Tantalum: 1 uF ±20%, 35 VDCW.                             |
| C521 and C522  | JRC/5CAAD00789 | Ceramic: 0.01 uF ±10%, 50 VDCW, temp coef ±10%.           |
| C523 and C524  | JRC/5CSAC01068 | Tantalum: 0.1 uF ±20%, 35 VDCW.                           |
| C525           | JRC/5CAAD00864 | Ceramic: 47 pF ±5%, 50 VDCW, temp coef 0 ±60 PPM.         |
| C526           | JRC/5CAAD00782 | Ceramic: 1000 pF ±10%, 50 VDCW, temp coef ±10%.           |
| C527           | JRC/5CEAD00756 | Electrolytic: 47 uF ±20%, 25V.                            |
| C528           | JRC/5CAAD00791 | Ceramic: 1500 pF ±5%, 50 VDCW, temp coef +350 -1000 PPM.  |




| SYMBOL          | PART NO.       | DESCRIPTION                                                                 |
|-----------------|----------------|-----------------------------------------------------------------------------|
| C529            | JRC/5CAAD01056 | Ceramic: 0.1 uF +80% -20%, 50 VDCW temp coef +30 -80%.                      |
| C530            | JRC/5CAAD00782 | Ceramic: 1000 pF ±5%, 50 VDCW, temp coef +350 -1000 PPM.                    |
| C531            | JRC/5CAAD00783 | Ceramic: 4700 pF ±10%, 50 VDCW temp coef ±10%.                              |
| C532            | JRC/5CAAD00791 | Ceramic: 1500 pF ±10%, 50 VDCW temp coef ±10%.                              |
| C533            | JRC/5CAAD00783 | Ceramic: 4700 pF ±10%, 50 VDCW temp coef ±10%.                              |
| C534            | JRC/5CAAD01109 | Ceramic: 0.022 uF ±10%, 50 VDCW temp coef ±10%.                             |
| C535            | JRC/5CSAC01151 | Tantalum: 0.33 uF ±20%, 35 VDCW.                                            |
| C536            | JRC/5CSAC01089 | Tantalum: 2.2 uF ±20%, 35 VDCW.                                             |
| C537            | JRC/5CAAD00782 | Ceramic: 1000 pF ±10%, 50 VDCW, temp coef ±10%.                             |
| C538            | JRC/5CAAD00783 | Ceramic: 4700 pF ±10%, 50 VDCW, temp coef ±10%.                             |
|                 |                | ----- DIODES -----                                                          |
| CD401 and CD402 | JRC/5TXAR00004 | Silicon, RF Switching; sim to MITSUBISHI a MI301.                           |
| CD501           | JRC/5TXAD00290 | Silicon, fast recovery (2 diodes in cathode common): sim to TOSHIBA 1SS184. |
|                 |                | ----- FILTERS -----                                                         |
| FL401           | JRC/5NLAT00034 | Hybrid Circuit: sim to SOSHIN BP403-423A2 (Used in CMA-258A).               |
| FL401           | JRC/5NLAT00039 | Hybrid Circuit: sim to SOSHIN BP450-470A2 (Used in CMA-258B).               |
| FL402           | JRC/5DHBE00006 | Hybrid Circuit: sim to SOSHIN BP403-423A1 (Used in CMA-258A).               |
| FL402           | JRC/5NLAT00031 | Hybrid Circuit: sim to SOSHIN BP450-470A1 (Used in CMA-258B).               |
| FL403           | JRC/5DHBE00007 | Hybrid Circuit: sim to SOSHIN BP320-358A2 (Used in CMA-258A).               |
| FL403           | JRC/5NLAT00032 | Hybrid Circuit: sim to SOSHIN BP357-388A2 (Used in CMA-258B).               |
| FL501           | JRC/5XHAA00813 | Crystal Filter: fo=82.2 MHz; XPJ-13-2.                                      |
| FL502           | JRC/5NRAA00094 | Ceramic, filter: 455 KHz: sim to Murata CFW455E.                            |
| FL503           | JRC/5NRAA00041 | Ceramic, filter: 455 KHz: sim to Murata CFU455B2.                           |
|                 |                | ----- HYBRID CIRCUIT -----                                                  |
| HC401           | JRC/5DHBE00005 | Linear, RF Amplifier: sim to SOHIN AMP-2.                                   |
| HC402           | JRC/5DHAV00004 | Linear, DBM-Mixer: sim to TOKO TMA48L.                                      |
| HC403           | JRC/5DHBE00005 | Linear, RF Amplifier: sim to SOHIN AMP-2.                                   |
| HC501           | JRC/5DHDD00188 | Linear, 2'nd Mixer: sim to JRC DHDD188.                                     |
|                 |                | ----- INTEGRATED CIRCUITS -----                                             |
| IC501           | JRC/5DAAR00021 | Linear, Positive Voltage Regulator: sim to Matsushita AN6541.               |
| IC502           | JRC/5DDAS00074 | Linear, IF Amplifier & Detector: sim to Motorola MC3359P.                   |
|                 |                | ----- JACKS -----                                                           |
| J401 and J402   | JRC/5JWCL00045 | Connector, RF: sim to TAIKO a TMP-J01X-A2.                                  |
| J501            | JRC/5JWBS00178 | Connector, 10 pins: sim to HIROSE a PH3-10S-1.25DSA (G).                    |
|                 |                | ----- COILS -----                                                           |
| L401 and L402   | JRC/6LAFD01135 | Coil, RF: sim to MIDORI a 6LAFD01135.                                       |
| L501            | JRC/5LCAC00391 | Coil, RF: sim to TDK a TPO206-R10K.                                         |
| L502            | JRC/5LCAC00160 | Coil, RF: sim to TDK a SPO406-3R3K.                                         |
| L503 thru L505  | JRC/6LAFD00553 | Coil, RF: sim to MIDORI a 6LAFD00553.                                       |
| L506            | JRC/6LADD00554 | Coil, RF: sim to MIDORI a 6LAFD00554.                                       |

| SYMBOL           | PART NO.       | DESCRIPTION                                             |
|------------------|----------------|---------------------------------------------------------|
| L507             | JRC/5LCAC00165 | Coil, RF: sim to TDK a SPO408-R22M.                     |
| L508             | JRC/6LAFD00877 | Coil, RF: sim to TOKO a 6LAFD00877.                     |
|                  |                | ----- RESISTORS -----                                   |
| R401 and R402    | JRC/5RDAC02153 | Metal film: 470 ohms ±5%, 200 VDCW, 1/8 W.              |
| R403             | JRC/5RDAC02161 | Metal film: 15 ohms ±5%, 200 VDCW, 1/8 W.               |
| R404             | JRC/5RDAC02153 | Metal film: 470 ohms ±5%, 200 VDCW, 1/8 W.              |
| R405             | JRC/5RDAC02137 | Metal film: 100 ohms ±5%, 200 VDCW, 1/8 W.              |
| R406             | JRC/5RDAC02140 | Metal film: 330 ohms ±5%, 200 VDCW, 1/8 W.              |
| R407             | JRC/5RDAC02146 | Metal film: 18 ohms ±5%, 200 VDCW, 1/8 W.               |
| R408             | JRC/5RDAC02140 | Metal film: 330 ohms ±5%, 200 VDCW, 1/8 W.              |
| R409             | JRC/5RDAC02153 | Metal film: 470 ohms ±5%, 200 VDCW, 1/8 W.              |
| R410             | JRC/5RDAC02163 | Metal film: 270 ohms ±5%, 200 VDCW, 1/8 W.              |
| R411             | JRC/5RDAC02161 | Metal film: 15 ohms ±5%, 200 VDCW, 1/8 W.               |
| R412             | JRC/5RDAC02163 | Metal film: 270 ohms ±5%, 200 VDCW, 1/8 W.              |
| R413             | JRC/5RDAC01237 | Metal film: 100 ohms ±5%, 200 VDCW, 1/8 W.              |
| R501             | JRC/5RDAC02135 | Metal film: 150 ohms ±5%, 200 VDCW, 1/8 W.              |
| R502             | JRC/5RDAC02128 | Metal film: 2.7K ohms ±5%, 200 VDCW, 1/8 W.             |
| R504             | JRC/5RDAC02160 | Metal film: 15K ohms ±5%, 200 VDCW, 1/8 W.              |
| R505             | JRC/5RDAC02124 | Metal film: 2.2K ohms ±5%, 200 VDCW, 1/8 W.             |
| R506             | JRC/5RDAC02133 | Metal film: 1.5K ohms ±5%, 200 VDCW, 1/8 W.             |
| R507             | JRC/5RDAC02124 | Metal film: 2.2K ohms ±5%, 200 VDCW, 1/8 W.             |
| R508             | JRC/5RDAC02125 | Metal film: 10K ohms ±5%, 200 VDCW, 1/8 W.              |
| R509             | JRC/5RDAC02159 | Metal film: 220 ohms ±5%, 200 VDCW, 1/8 W.              |
| R510             | JRC/5RDAC02147 | Metal film: 3.3K ohms ±5%, 200 VDCW, 1/8 W.             |
| R511             | JRC/5RDAC02152 | Metal film: 4.7K ohms ±5%, 200 VDCW, 1/8 W.             |
| R512             | JRC/5RDAC02137 | Metal film: 100 ohms ±5%, 200 VDCW, 1/8 W.              |
| R513             | JRC/5RDAC02134 | Metal film: 47K ohms ±5%, 200 VDCW, 1/8 W.              |
| R514             | JRC/5RDAC02158 | Metal film: 8.2K ohms ±5%, 200 VDCW, 1/8 W.             |
| R515             | JRC/5RDAC02129 | Metal film: 150K ohms ±5%, 200 VDCW, 1/8 W.             |
| R516             | JRC/5RDAC02152 | Metal film: 4.7K ohms ±5%, 200 VDCW, 1/8 W.             |
| R517             | JRC/5RDAC02138 | Metal film: 100K ohms ±5%, 200 VDCW, 1/8 W.             |
| R518             | JRC/5RDAC02148 | Metal film: 22K ohms ±5%, 200 VDCW, 1/8 W.              |
| R519             | JRC/5RDAC02176 | Metal film: 68K ohms ±5%, 200 VDCW, 1/8 W.              |
| R520             | JRC/5RDAC02148 | Metal film: 22K ohms ±5%, 200 VDCW, 1/8 W.              |
| R521             | JRC/5RDAC02231 | Metal film: 56K ohms ±5%, 200 VDCW, 1/8 W.              |
| R522             | JRC/5RDAC02443 | Metal film: 390 ohms ±5%, 200 VDCW, 1/8 W.              |
| R523             | JRC/5RDAC02374 | Metal film: 39K ohms ±5%, 200 VDCW, 1/8 W.              |
| R524             | JRC/5RDAC02138 | Metal film: 100K ohms ±5%, 200 VDCW, 1/8 W.             |
| R525             | JRC/5RDAC02133 | Metal film: 1.5K ohms ±5%, 200 VDCW, 1/8 W.             |
| R526             | JRC/5RDAC02124 | Metal film: 2.2K ohms ±5%, 200 VDCW, 1/8 W.             |
| R527             | JRC/5RZBX00002 | Thermal: 10K ohms ±3%; sim to TDK a NTCDS40203HG 103JC. |
| R528             | JRC/5RDAC02154 | Metal film: 5.6K ohms ±5%, 200 VDCW, 1/8 W.             |
| R529             | JRC/5RDAC02133 | Metal film: 1.5K ohms ±5%, 200 VDCW, 1/8 W.             |
| R530             | JRC/5RDAC02137 | Metal film: 100 ohms ±5%, 200 VDCW, 1/8 W.              |
| RV501            | JRC/5RVAB00317 | Variable: 50K ohms ±30%, 0.1 W.                         |
| RV502            | JRC/5RVAB00277 | Variable: 5K ohms ±30%, 0.1 W.                          |
|                  |                | ----- TRANSISTORS -----                                 |
| TR501            | JRC/5TKAG00007 | Field effect (Single Gate): sim to Siliconix U310.      |
| TR502 thru TR505 | JRC/5TDAB00054 | Silicon, NPN: sim to NEC 2SD596 (DV3).                  |

| SYMBOL              | PART NO.       | DESCRIPTION                                  |
|---------------------|----------------|----------------------------------------------|
| TR506               | JRC/5TBAB00055 | Silicon, PNP: sim to NEC 2SD624 (BV3).       |
| TR507               | JRC/5TCAZ00007 | Silicon, NPN: sim to Sanyo 2SC3396.          |
| TR508               | JRC/5TDAB00054 | Silicon, NPN: sim to NEC 2SD596 (DV3).       |
| TR509               | JRC/5TCAZ00007 | Silicon, NPN: sim to Sanyo 2SC3396.          |
|                     |                | ----- CRYSTALS -----                         |
| X501                | JRC/5XHAA00812 | Quartz crystal: 82.655 MHz; XPJ-13-3.        |
|                     |                | ----- SOCKETS -----                          |
| XS501-A and XS501-B | JRC/5ZJDF00001 | Crystal Socket; sim to HAKUTO and 75315-001. |




\*COMPONENTS ADDED, DELETED OR CHANGED BY PRODUCTION CHANGES

OSCILLATORS

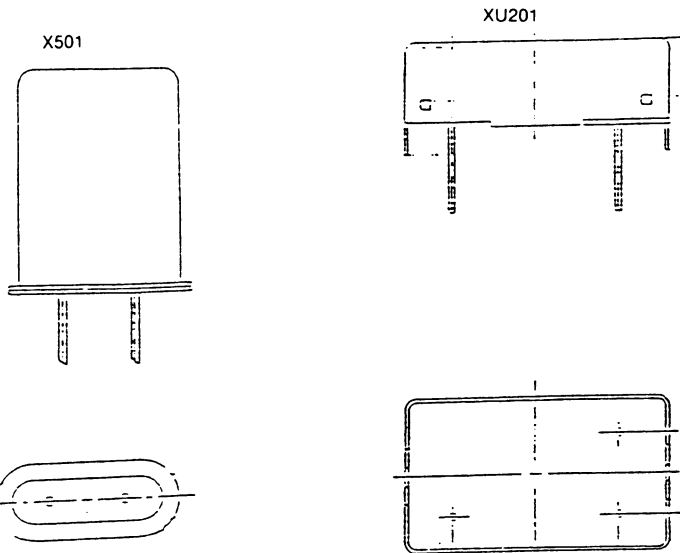


IC DATA

FILTERS




Input  
Gnd  
Output

FL401-FL403



9-VOLT REGULATOR

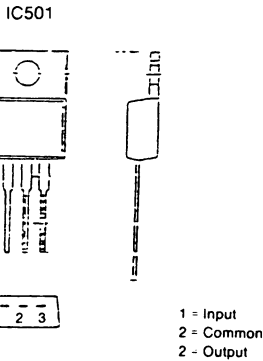

1 - Input  
2 - Common  
3 - Output

RC-5421