

MASTR II MAINTENANCE MANUAL

138-174 MHz, 35-WATT TRANSMITTER - MOBILE AND STATION

Maintenance Manual LBI-4601D
(Supersedes LBI-4735)

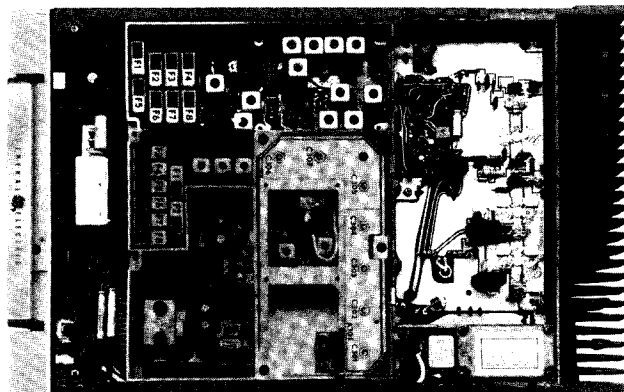


TABLE OF CONTENTS

SPECIFICATIONS	ii
DESCRIPTION AND MAINTENANCE	LBI-30428
EXCITER	LBI-30422
POWER AMPLIFIER	LBI-30423

**138-174 MHz EXCITER 19D416859G1-4
INTERMITTENT DUTY 35 WATT PA ASSEMBLY 19C320414G1
CONTINUOUS DUTY 35 WATT PA ASSEMBLY 19D417535G1**

SPECIFICATIONS*

Power Output	35 Watts (Adjustable from 10 to 35 Watts)	
Crystal Multiplication Factor	12	
Frequency Stability		
5C-ICOM with EC-ICOM	$\pm 0.0005\%$ (-40°C to $+70^{\circ}\text{C}$)	
5C-ICOM or EC-ICOM	$\pm 0.0002\%$ (0°C to $+55^{\circ}\text{C}$)	
2C-ICOMS	$\pm 0.0002\%$ (-40°C to $+70^{\circ}\text{C}$)	
Spurious and Harmonic Emission	At least 85 dB below full rated power output.	
Modulation	Adjustable from 0 to ± 5 kHz swing with instantaneous modulation limiting.	
Modulation Sensitivity	75 to 120 Millivolts	
Audio Frequency Characteristics	Within $+1$ to -3 dB of a 6-dB/ octave pre-emphasis from 300 to 3000 Hz per EIA standards. Post limiter filter per FCC and EIA.	
Distortion	Less than 2% (1000 Hz) Less than 3% (300 to 3000 Hz)	
Deviation Symmetry	0.5 kHz maximum	
Maximum Frequency Spread: (2 to 8 channels)	Full Specifications	1 dB Degradation
138-155 MHz	1.8 MHz	2.75 MHz
150.8-174 MHz	2.0 MHz	3.0 MHz
Duty Cycle	EIA 20% Intermittent (Mobile and Stations) Continuous (Stations)	
RF Output Impedance	50 ohms	

These specifications are intended primarily for the use of the serviceman. Refer to the appropriate Specification Sheet for the complete specifications.

WARNING

Although the highest DC voltage supplied to the MASTR™ II transmitter is 12 VDC, high currents may be drawn under short circuit conditions. These currents can possibly heat metal objects such as tools, rings, watchbands, etc., enough to cause burns. Be careful when working near energized circuits!

High-level RF energy in the transmitter Power Amplifier assembly can cause RF burns upon contact. Keep away from these circuits when the transmitter is energized!