

LTS 2000 PORTABLE

800 MHz/900 MHz

The LTS 2000™ has been specifically designed for radio users who need an economical radio solution that offers the flexibility of local and select wide area coverage capabilities. It was developed along with the companion LCS 2000™ mobile, which permits easy transfer of operational knowledge as users alternate between mobiles and portables.

FEATURES/ADVANTAGES

Each portable radio comes standard with the following features:

Companion Product to LCS 2000 Mobile

- ▶ *Permits easy transfer of operational knowledge as users alternate between mobiles and portables.*

821-824 MHz Features

- ▶ *Offers the flexibility of both Mutual Aid (NPSPAC) conventional channels and trunking within 821-824 MHz.*

8 Character Display with Backlighting

- ▶ *To allow for the easy identification of talkgroup, system and ID information.*

4 x 4 Keypad

- ▶ *Allows users to take full advantage of the telephone interconnect and private call capabilities.*

APCO 16 Compliant Trunking

- ▶ *Offers SMARTNET features for advanced functionality.*

SMARTNET Plus or SmartZone Capability

- ▶ *Offers user the choice of system software, depending on requirements.*


SMARTNET Plus Features (available in 800/900 MHz)

- ▶ *Roaming features for wide area coverage.*
- ▶ *Telephone Interconnect.*
- ▶ *Enhanced Private Call/Call Alert.*
- ▶ *Scan/Dual Mode Scan*
- ▶ *Emergency Cal/Alarm*
- ▶ *10 system/8 talkgroup/10 Conventional Channel Capability*

SmartZone Features (available in 800 MHz and 900 MHz)

(includes all SMARTNET Plus Features and . . .

- ▶ *16 system/16 talkgroup/10 Conventional Channel Capability).*
- ▶ *SmartZone RSSI Operation.*
- ▶ *SmartZone Preferred Site.*
- ▶ *SmartZone Forced Site Search.*
- ▶ *SmartZone Talkgroup/Priority Talkgroup Scan.*
- ▶ *SmartZone Busy Override.*

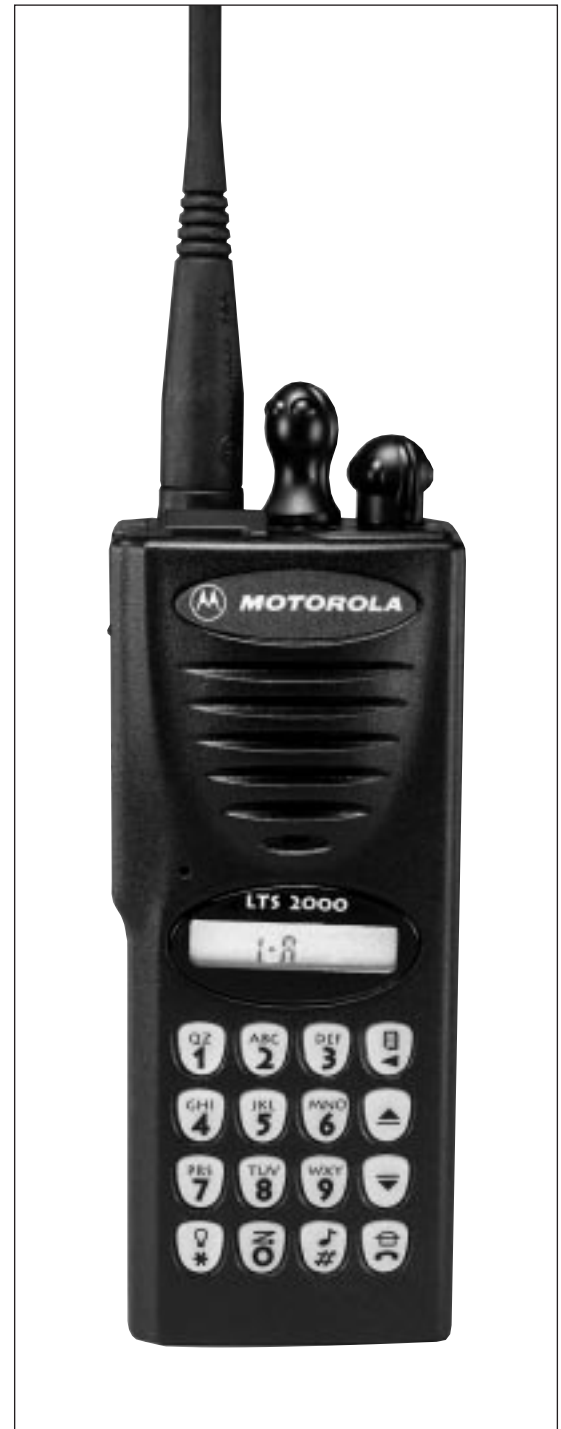

MOTOROLA

LTS 2000 PORTABLE

SPECIFICATIONS

GENERAL SPECIFICATIONS

Power Supply		Nickel-Cadmium Battery (Standard)	FM APPROVAL INFORMATION
Battery Voltage:	Nominal:	7.5 volts	INTRINSICALLY SAFE: Class I, II, III, Division 1, Groups C, D, E, F, G. Batteries HNN9701A (high capacity), HNN9808B (low capacity). NON-INCENDIVE: Class I, Division 2, Groups A, B, C, D. Batteries HNN9701A (high capacity), HNN9808B (low capacity).
	Range:	6 to 9 volts	
Temperature Range:	Operating [†] :	-30 to +60° C	
	Storage:	-40 to +85° C	
Physical Characteristics:		Battery Part Numbers	FM Battery Part Numbers
H x W x D*:	5.5" x 2.34" x 1.49" 140mm x 59mm x 45mm	HNN9628A (Standard)	HNN9701 (Optional)
Weight:	18.8 oz. 540 g		
Display:	8 character		
Keypad:	4 x 4 Button		

* with standard high capacity battery † display is not guaranteed to function at temperatures below -20° C

TRANSMITTER

800 MHz Band 806-870 MHz	900 MHz Band 896-941 MHz
Model Numbers: H10UCH6DC5_N (25 kHz)	H10WCH4DC5_N (12.5 kHz)
Frequencies: 806-825 MHz 851-870 MHz	896-902 MHz T/A Freqs: 935-941 MHz
Channel Spacing: 25 kHz (12.5 kHz 821-824 MHz)	12.5 kHz
Freq. Stability: (-30° C to 60° C, +25° Ref.)	806-821, 825-870 MHz ±2.5 ppm 821-824 MHz ±1.5 ppm
Power: 3 W	2.5 W
Modulation Limiting:	±5 kHz @ 806-821/ ±4 kHz @ 821-824
FM Hum & Noise:	-40 dB
Conducted/Radiated Emission:	-13 dBm Per FCC
Audio Response: (300-3000 Hz)	+1 to -3 dB
Audio Distortion:	≤5%

RECEIVER

800 MHz Band 806-870 MHz	900 MHz Band 896-941 MHz
Model Numbers: H10UCH6DC5_N (25 kHz)	H10WCH4DC5_N (12.5 kHz)
Frequencies: 851-870 MHz	935-941 MHz
Channel Spacing: 25 kHz (12.5 kHz 821-824 MHz)	12.5 kHz
Freq. Stability: (-30° C to 60° C, +25° Ref.)	851-866 ±2.5 ppm/866-870 ±1.5 ppm
Sensitivity:	.35 µV (12 dB SINAD)
Intermodulation:	-65 dB
Adjacent Channel Selectivity:	-65 dB
Spurious Rejection:	-65 dB
Rated Audio:	.5W
Audio Distortion @ Rated Audio:	≤5%
Hum and Noise:	-40 dB
Audio Response: (300 - 3000 Hz)	+1 to -3 dB
Conducted Spurious Emission:	FCC Part 15

U.S. MILITARY STANDARDS 810C, D & E

	MI 810C		MIL 810D		MIL 810E	
	Method	Procedure	Method	Procedure	Method	Procedure
Low Pressure:	500.1	I	500.2	I	500.3	I
Storage-High Temp.:	501.1	I	501.2	I	501.3	I
Storage-Low Temp.:	502.1	I	502.2	I	502.3	I
Operating-High Temp.:	501.1	II	501.2	II	501.3	II
Operating-Low Temp.:	502.1	II	502.2	II	502.3	II
Thermal Shock:	503.1	I	503.2	I	503.3	I
Blowing Dust:	510.1	I	510.2	I	510.3	I
Shock-Functional:	516.2	I	516.3	I	516.4	I

Specifications subject to change without notice.



Support Services

Wherever Motorola sells, our product is backed by service. Our products are serviced throughout the world by a wide network of company or authorized independent distributor service organizations.



MOTOROLA

Motorola U.S.A.
1301 E. Algonquin Road
Schaumburg, Illinois 60196
In the U.S. call: 1-800-247-2346

Motorola Canada Limited
3900 Victoria Park Avenue
North York, Ontario M2H 3H7
In Canada call: 1-800-268-5758

Outside the U.S. and Canada call: (847) 538-6602

© Motorola, LTS 2000 and LCS 2000 are trademarks of Motorola.

■ ©1997 by Motorola Inc. ■ Printed in U.S.A. ■ (9709) Merit ■ Produced by Customer Communications.

Motorola is an Equal Employment Opportunity/Affirmative Action Employer