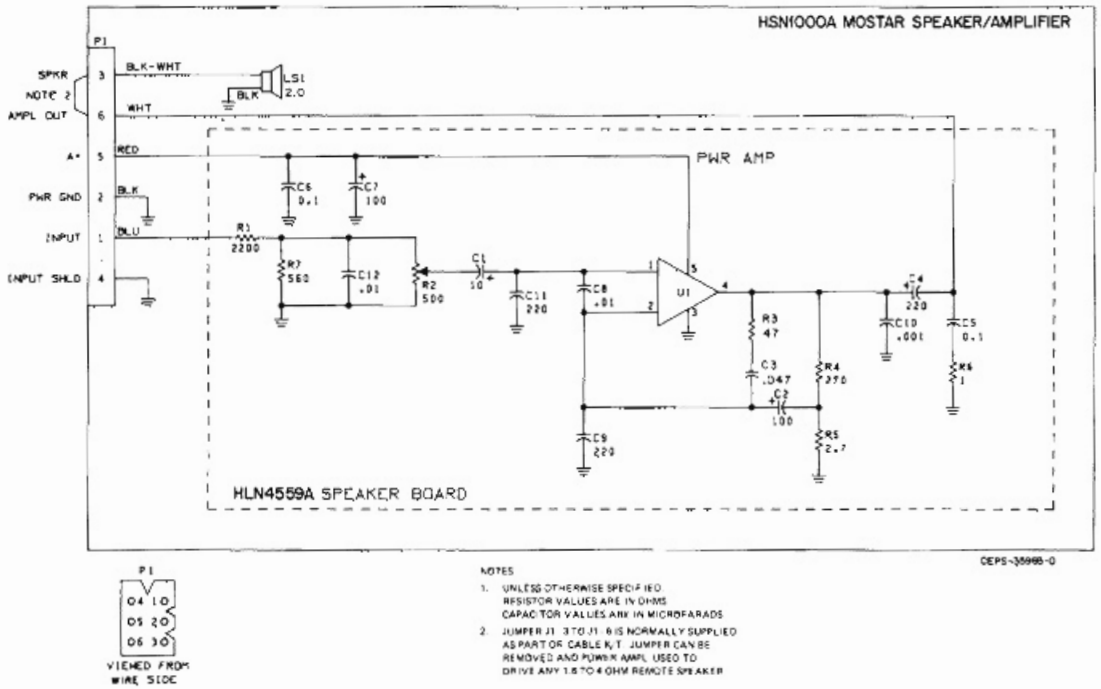

NOTES
1. UNLESS OTHERWISE SPECIFIED
RESISTOR VALUES ARE IN OHMS
CAPACITOR VALUES ARE IN MICROFARADS
2. JUMPER J1-3 TO J1-6 IS NORMALLY SUPPLIED AS PART OF CABLE K,T. JUMPER CAN BE REMOVED AND POWER AMPL USED TO DRIVE ANY 1.6 TO 4 OHM REMOTE SPEAKER

FUNCTION

The speaker/amplifier consists of a 6-watt integrated circuit amplifier and a 2.0 ohm speaker mounted in a rugged weather resistant housing.