

DESCRIPTION AND MAINTENANCE

450—512 MHz, 5-WATT CUSTOM MVP TRANSMITTER

TABLE OF CONTENTS

	Page
DESCRIPTION	1
MAINTENANCE	1
Disassembly	1
PA Transistor Replacement	2
Troubleshooting	3
Alignment Procedure	5
Test Procedures	6
Troubleshooting Procedures	7
ILLUSTRATIONS	
Figure 1 - Block Diagram	2
Figure 2 - PA Transistor Q202 Lead Identification and Mounting	3
Figure 3 - ICOM Frequency Offset Chart	4
Figure 4 - Crystal Module Frequency Offset Chart	5
Figure 5 - Power Output Setting Chart	5

DESCRIPTION

Custom MVP transmitters are crystal controlled, phase modulated transmitters designed for one frequency operation in the 450-512 MHz frequency bands. This solid state, high reliability transmitter uses one integrated circuit and discrete components to provide 5 Watts of transmitted RF power. The transmitter consists of:

- Exciter Board; with oscillator, audio, modulator, amplifier and multiplier stages.
- Power Amplifier Assembly; with amplifier, PA final, power adjust circuit and low pass filter assembly.

Figure 1 is a block diagram of the 450-512 MHz Custom MVP transmitter, showing the exciter boards.

The exciter contains the oscillator, audio IC, modulator and multipliers to provide 200 milliwatts of modulated RF power to the power amplifier.

The power amplifier assembly includes two transistor stages (an amplifier and power amplifier to provide 5 Watts of output power), a low pass filter and a power adjust circuit to adjust the output power to the desired level from 1.5 to 5 Watts.

MAINTENANCE

DISASSEMBLY

To service the transmitter, remove the wing nut at the rear of the radio and pull the radio out of the case assembly.

To remove exciter board:

1. Unplug cables W201 (exciter output).
2. Remove the six screws holding the exciter board to the mounting frame and gently lift exciter board out of radio.

NOTE

When replacing the PA board it is necessary to first remove the exciter board to allow installation of the PA transistor mounting hardware.

To remove PA Board:

1. Unplug the exciter/PA cable from J1. Then unsolder the center conductor of the PA/low pass filter cable W202 from H30 and ground on the PA board.
2. Unsolder power lead W203 at E1 and at C203, and remove the retaining screw from power adjust transistor Q215. Be careful not to damage the mica insulator between the transistor and the chassis.

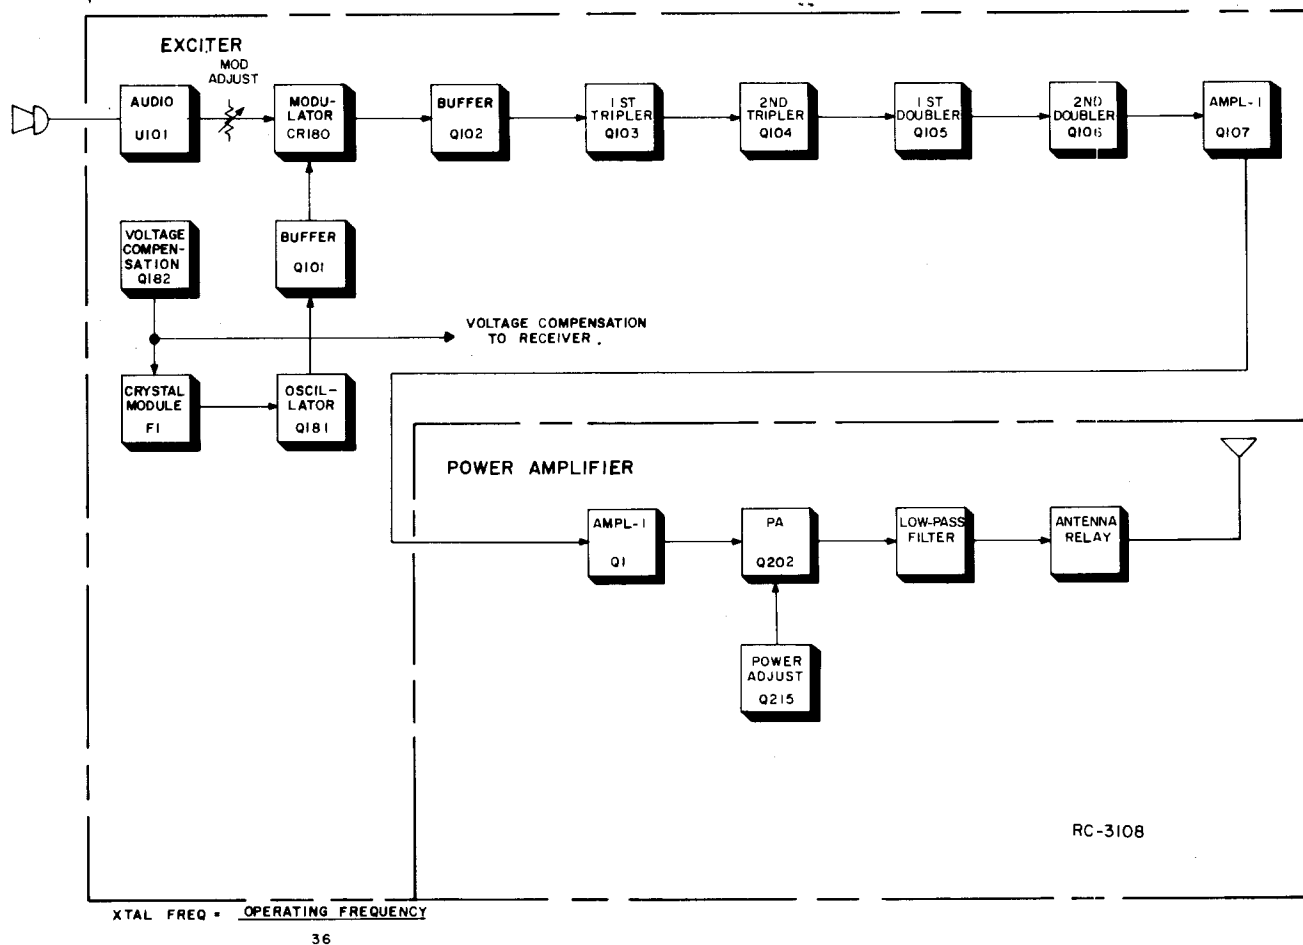


Figure 1 - Transmitter Block Diagram

3. Invert the chassis and remove the PA transistor (Q202) hold-down nut and spring washer on the rear of the PA assembly.
4. Remove the five PA board mounting screws, and lift the board out.

PA TRANSISTOR REPLACEMENT

WARNING

The stud mounted RF Power Transistor used in the transmitter contains Beryllium Oxide, a TOXIC substance. If the ceramic or other encapsulation is opened, crushed, broken or abraded, the dust may be hazardous if inhaled. Use care in replacing transistors of this type.

To remove PA transistor Q202:

1. Remove exciter and PA boards.
2. Unsolder one lead at a time with a 50-watt soldering iron. Use a scribe or X-acto® knife to hold the lead away from the printed circuit board until the solder cools.

3. Lift out the transistor, and remove the old solder from the printed circuit board with a de-soldering tool such as a SOLDA PULLT®. Special care should be taken to prevent damage to the printed circuit board runs because part of the matching network is included in the base and collector runs.

To replace PA RF transistor Q202:

1. Trim the new transistor leads (if required) to the lead length of the removed transistor. The letter "C" on the top of the transistor also indicates the collector (see Figure 2 for transistor lead identification).
2. Apply a coat of silicon grease between the mounting surfaces of the spacer and to both sides of the insulator of Q202 and between the mounting surfaces of the spacer and the heat sink. Be sure that no grease is applied to the mounting stud.

Replace the PA board and loosely insert the five hold-down screws. Place the transistor in the mounting hole. Align the leads as shown in the Outline Dia-

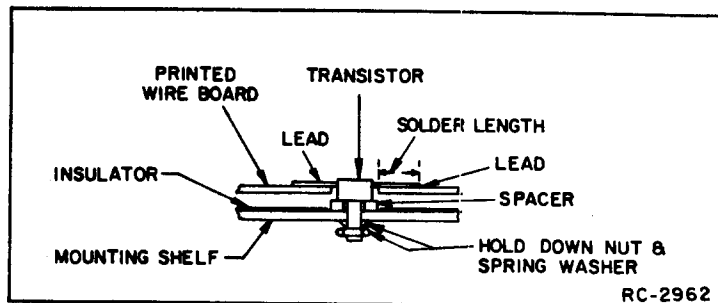
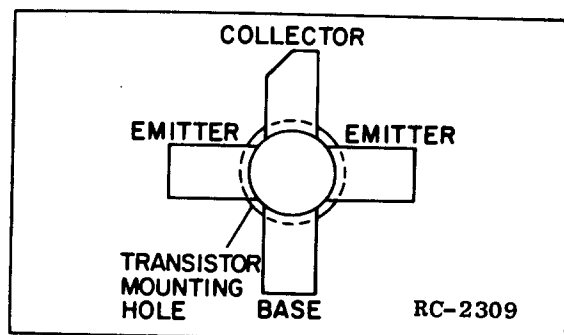


Figure 2 - PA Transistor Q202 Lead Identification and Mounting

gram. Then hold the body of the transistor and replace the transistor mounting hardware, using moderate torque (6-inch pounds). A torque wrench must be used since transistor damage can result if too little or too much torque is used. Tighten the PA board hold-down screws.

3. Solder the leads to the printed circuit pattern. Start at the inner edge of mounting hole and solder the remaining length of transistor lead to the board. Use care not to use excessive heat that causes the printed wire board runs to lift up from the board. Check for shorts and solder bridges before applying power.

CAUTION

Failure to solder the transistor leads as directed may result in the generation of RF loops that could damage the transistor or may cause low power output.

TROUBLESHOOTING

A Troubleshooting Procedure, including QUICK CHECKS, permits rapid fault location in the exciter and power amplifier.

GENERAL ELECTRIC COMPANY • MOBILE COMMUNICATIONS DIVISION
WORLD HEADQUARTERS • LYNCHBURG, VIRGINIA 24502 U.S.A.

GENERAL  ELECTRIC*
U.S.A.

ICOM FREQUENCY ADJUSTMENT

First, check the frequency to determine if any adjustment is required. The frequency should be set with a frequency meter or counter with an absolute accuracy that is 5 to 10 times better than the tolerance to be maintained, and with the entire radio as near as possible to an ambient temperature of 26.5°C (79.8°F).

The ICOM should be reset only when the frequency shows deviation in excess of the following limits:

- A. ± 0.5 PPM, when the radio is at 26.5°C (79.8°F).
- B. ± 2 PPM at any other temperature within the range of -5°C to +55°C (+23°F to +131°F).
- C. The specification limit (± 2 PPM) or ± 5 PPM at any temperature within the ranges of -40°C to -5°C (-40°F to +23°F) or +55°C to +70°C (+131°F to +158°F).


If an adjustment is required, pry up the cover on the top of the ICOM to expose the trimmer, and use one of the following procedures:

If the radio is at an ambient temperature of 26.5°C (79.8°F), set the oscillator for the correct operating frequency.

If the radio is not at an ambient temperature of 26.5°C, setting errors can be minimized to hold setting error to ± 0.35 PPM (which is considered reasonable for 2 PPM ICOMs) by maintaining the unit at 26.5°C ($\pm 5^\circ\text{C}$) and offsetting the oscillator, as a function of actual temperature, by the amount shown in Figure 4.

For example: Assume the ambient temperature of the radio is 18.5°C (65.4°F). At that temperature, the curve shows a correction factor of 0.3 PPM. (At 406 MHz, 1 PPM is 406 Hz. At 512 MHz, 1 PPM is 512 Hz).

With an operating frequency of 450 MHz, set the oscillator for a reading of 135 Hz (0.3×450 Hz) higher than the licensed operating frequency. If a negative correction factor is obtained (at temperatures above 26.5°C), set the oscillator for the indicated PPM lower than the licensed operating frequency.

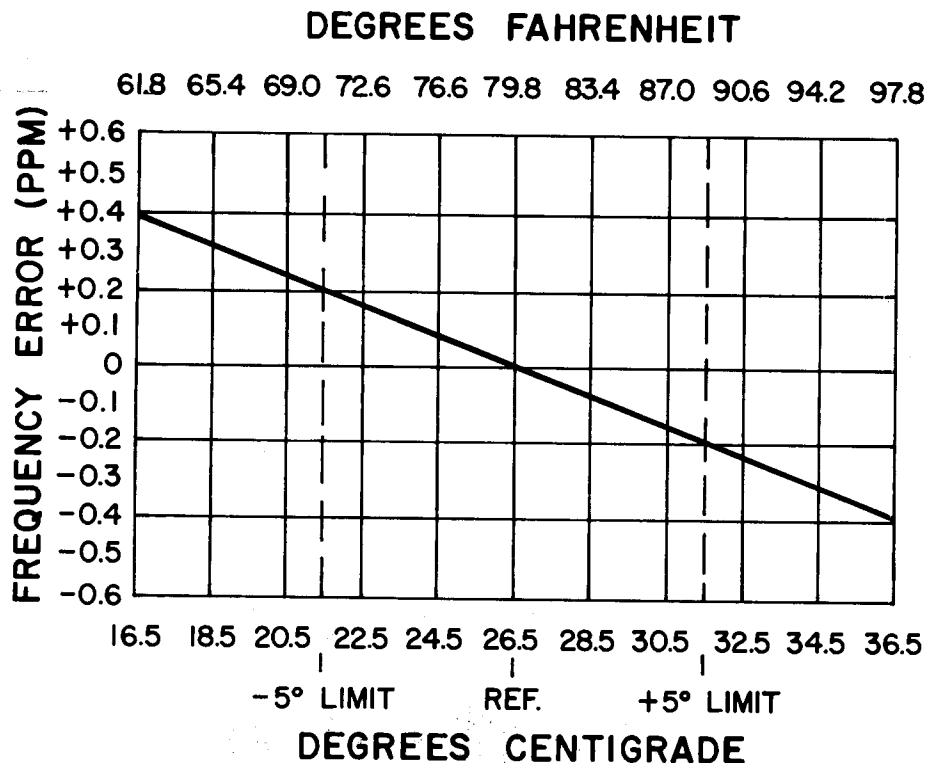

RC-2453

MODULATION LEVEL ADJUSTMENT

MOD ADJUST CONTROL R104 was adjusted to the proper setting before shipment and should not normally require readjustment. This setting permits approximately 75% modulation for the average voice level. The audio peaks which would cause overmodulation are clipped by the modulation limiter. The limiter, in conjunction with the de-emphasis network instantaneously limits the slope of the audio wave to the modulator, thereby preventing overmodulation while preserving intelligibility.

TEST EQUIPMENT

- 1. An audio oscillator
- 2. A frequency modulation monitor.
- 3. An output meter or a Voltmeter.
- 4. GE Test Set Model 4EX3A11 or 4EX8K12.

PROCEDURE

- 1. Connect the audio oscillator and the meter across audio input terminals J10 (Green-Hi) and J11 (Black-Lo) on GE Test Set, or across P902-4 (Mike High) through a 0.5 microfarad (or larger) DC blocking capacitor, and P902-5 (Mike Low) on the Exciter Board.
- 2. Adjust the audio oscillator for 1-Volt RMS at 1000 Hz.
- 3. For transmitters without Channel Guard, set MOD ADJUST R104 for a 4.5 kHz swing using the deviation polarity that provides the highest reading on the frequency modulation monitor.
- 4. For transmitters with Channel Guard, set Channel Guard MOD ADJUST (on Channel Guard board) for zero tone deviation. Next, with the 1-Volt signal at 1000 Hz applied, set MOD ADJUST R104 for 3.75 kHz deviation. Then remove the signal from the audio oscillator and set Channel Guard MOD ADJUST for 0.75 kHz tone deviation.
- 5. For multi-frequency transmitters, set the deviation as described in Steps 3 and 4 on the channel producing the largest amount of deviation.

PA POWER INPUT

For FCC purposes, the PA power input can be determined by measuring the PA supply voltage and PA current using the following formula:

P_i = PA voltage x PA current

where:

P_i is the power input in watts,

PA voltage is measured with Test Set Model 4EX3A11 in Position C and Test 1 (read as 15 Volts full scale), and with the polarity switch in the (+) position. With Test Set Model 4EX8K12, use Position C and the 1-Volt range (read as 15 Volts full scale).

PA current is measured with the Test Set in Position F in the Test 1 position, and with the HIGH SENSITIVITY button pressed (read as 1 ampere full scale).

Example:

P_i = 12.6 Volts x 0.7 amperes = 8.8 Watts

CRYSTAL MODULE FREQUENCY ADJUSTMENT

First, check the frequency to determine if any adjustment is required. The frequency should be set using a frequency meter or counter with an absolute accuracy that is 5 to 10 times better than the tolerance to be maintained, and with the entire radio as near as possible to an ambient temperature of 30°C (86°F).

The oscillator should be reset only when the frequency shows deviation in excess of the following limits:

- A. ±0.6 PPM, when the radio is at 30°C (86°F).
- B. ±5 PPM at any other temperature within the range of -30°C to +75°C (-22°F to +167°F).

If an adjustment is required, proceed as follows:

If the radio is at an ambient temperature of 30°C (86°F), set the oscillator for correct operating frequency.

If the radio is not at an ambient temperature of 30°C, setting errors can be minimized as follows:

- 1. Maintain the radio at 30°C and set the oscillator to desired frequency, or
- 2. Maintain the radio at 30°C (+5°C, -15°C) offset the operating frequency as a function of actual temperature, by the amount shown in Figure 4.

For example: Assume the ambient temperature of the radio is 20°C (68°F). At that temperature, the curve shows a correction factor of 225 Hz.

Set C3 on the selected crystal module for a reading of 225 Hz higher than the licensed operating frequency. If a negative correction factor is obtained (at temperatures above 30°C), set the oscillator for the indicated frequency lower than the licensed operating frequency.



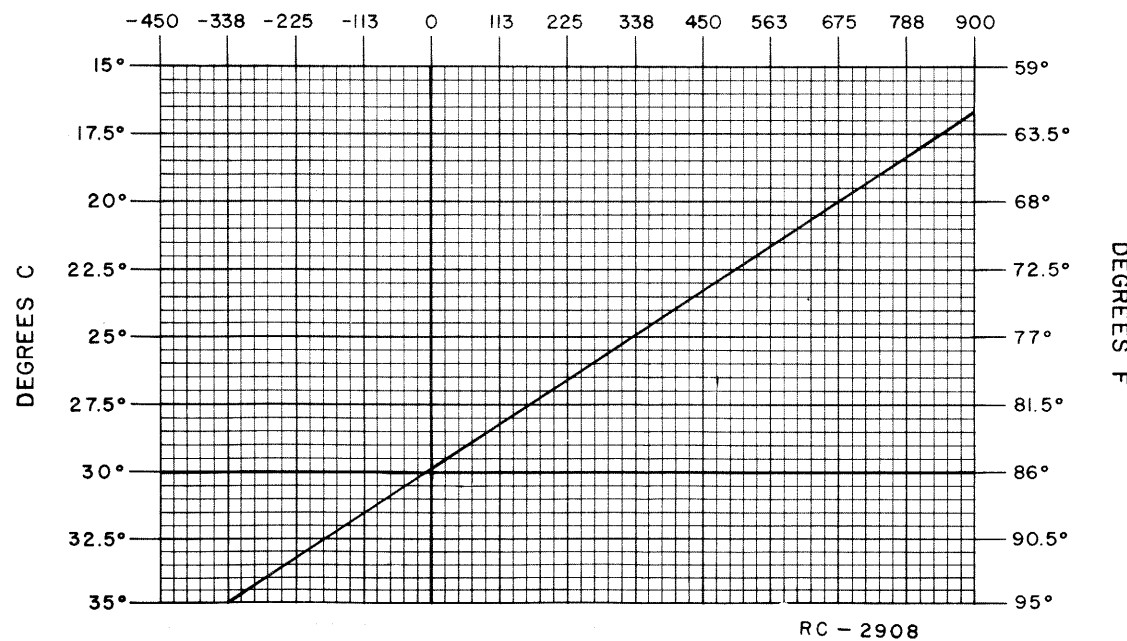


Figure 4 - Frequency Offset Chart

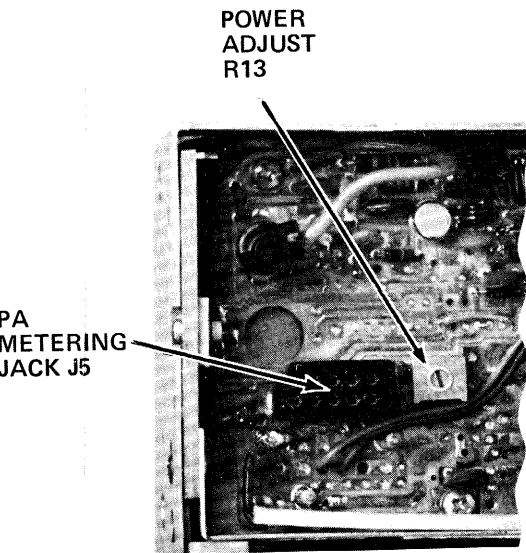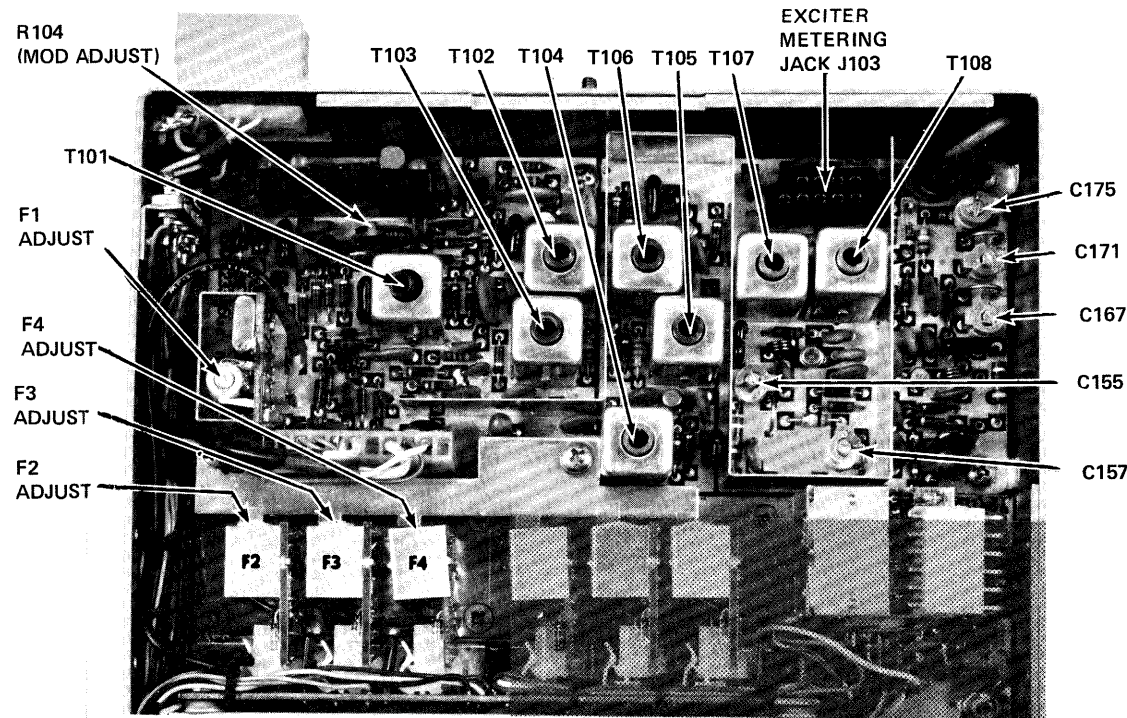

TRANSMITTER ALIGNMENT

EQUIPMENT

- 1. GE Test Set Model 4EX3A11 or Test Kit 4EX8K12.
- 2. A 50-ohm wattmeter connected to antenna jack J3.
- 3. A frequency counter.
- 4. Deviation Monitor.

PRELIMINARY CHECKS AND ADJUSTMENTS

- 1. Place crystal module for F1 on Exciter Board (crystal frequency = operating frequency - 36).
- 2. For a large change in frequency or a badly mis-aligned transmitter, preset all slugs to the top of the coil form.
- 3. Set output impedance matching capacitor C175 to 1/4 mesh.
- 4. Set all other air variable capacitors to minimum capacity (not meshed).
- 5. Connect the black plug to the Exciter metering jack. Set the polarity to +, and set the range to the Test 1 position (1-Volt position for 4EX8K12) for all adjustments.
- 6. All adjustments are made with the transmitter keyed. Unkey the transmitter between steps to avoid unnecessary heating.

NOTE

When the need for minor adjustments to the transmitter are indicated, perform steps 13 through 17 for a quick transmitter tune-up.

ALIGNMENT PROCEDURE

STEP	METER POSITION	TUNING CONTROL	METER READING	PROCEDURE
				NOTE When aligning transmitter, proceed as instructed below. DO NOT retune a previously tuned control unless specifically directed to do so.
1.	B (MULT-1)	T101, T102 & T103	See Procedure	Tune T101 for maximum meter reading. Then tune T102 for a dip (small) in meter reading and tune T103 for maximum meter reading.
2.	C (MULT-2)	T104 and T105	See Procedure	Tune T104 for maximum meter reading, then tune T105 for a dip (small) in meter reading.
3.	D (MULT-3)	T106 and T107	See Procedure	Tune T106 for maximum meter reading and then tune T107 for a dip in meter reading.
4.	F (MULT-4)	T108 and C155	See Procedure	Tune T108 for maximum meter reading and then tune C155 for a dip in meter reading.
5.	G (AMPL-1)	C157 and C167	See Procedure	Tune C157 for maximum meter reading, and then tune C167 for a dip in meter reading.
6.	A (Rel. Power Out)	C171 and C175	Maximum	Tune C171 and then C175 for maximum meter reading.
7.	B (MULT-1)	T101	Maximum	Tune T101 for maximum meter reading.
8.	C (MULT-2)	T102, T103 & T104	Maximum	In order, tune T102, T103 and T104 for maximum meter reading.
9.	D (MULT-3)	T105 and T106	Maximum	Tune T105 and then T106 for maximum meter reading.
10.	F (MULT-4)	T107 and T108	Maximum	Tune T107 and then T108 for maximum meter reading.
11.	G (AMPL-1)	C155 and C157	Maximum	Tune C155 and then C157 for maximum meter reading.
12.	A (Rel. Power Out)	C167, C171 & C175	Maximum	In order, tune C167, C171 and C175 for maximum meter reading.
				NOTE A quick transmitter tune-up procedure is provided by steps 13 thru 17.
13.	C (MULT-2)	T102, T103 and T104	Maximum	Alternately tune T102, T103 and T104 for maximum meter reading.
14.	D (MULT-3)	T105 and T106	Maximum	Alternately tune T105 and T106 for maximum meter reading.
15.	F (MULT-4)	T107 and T108	Maximum	Alternately tune T107 and T108 for maximum meter reading.
16.	G (AMPL-1)	C155 and C157	Maximum	Alternately tune C155 & C157 for maximum meter reading. For optimum operation repeat steps 13 through 16.
17.	A (Rel. Power Out)	C167, C171 and C175	Maximum	Alternately tune C167, C171 and C175 for maximum meter reading.
18.	Power Output	R13	See Procedure	With the battery voltage at 13.8 Volts or the PA collector voltage at 13.5 Volts, set Power Adjust potentiometer R13 on the PA board for the desired power output. If the battery voltage is not at 13.8 Volts or the collector voltage at 13.5 Volts and full rated output is desired (5 watts at 13.5 Volts). Set R13 for the output power according to the battery voltage or collector voltage shown in the Power Output Setting chart. NOTE The PA collector voltage is measured as described in the PA POWER INPUT section.

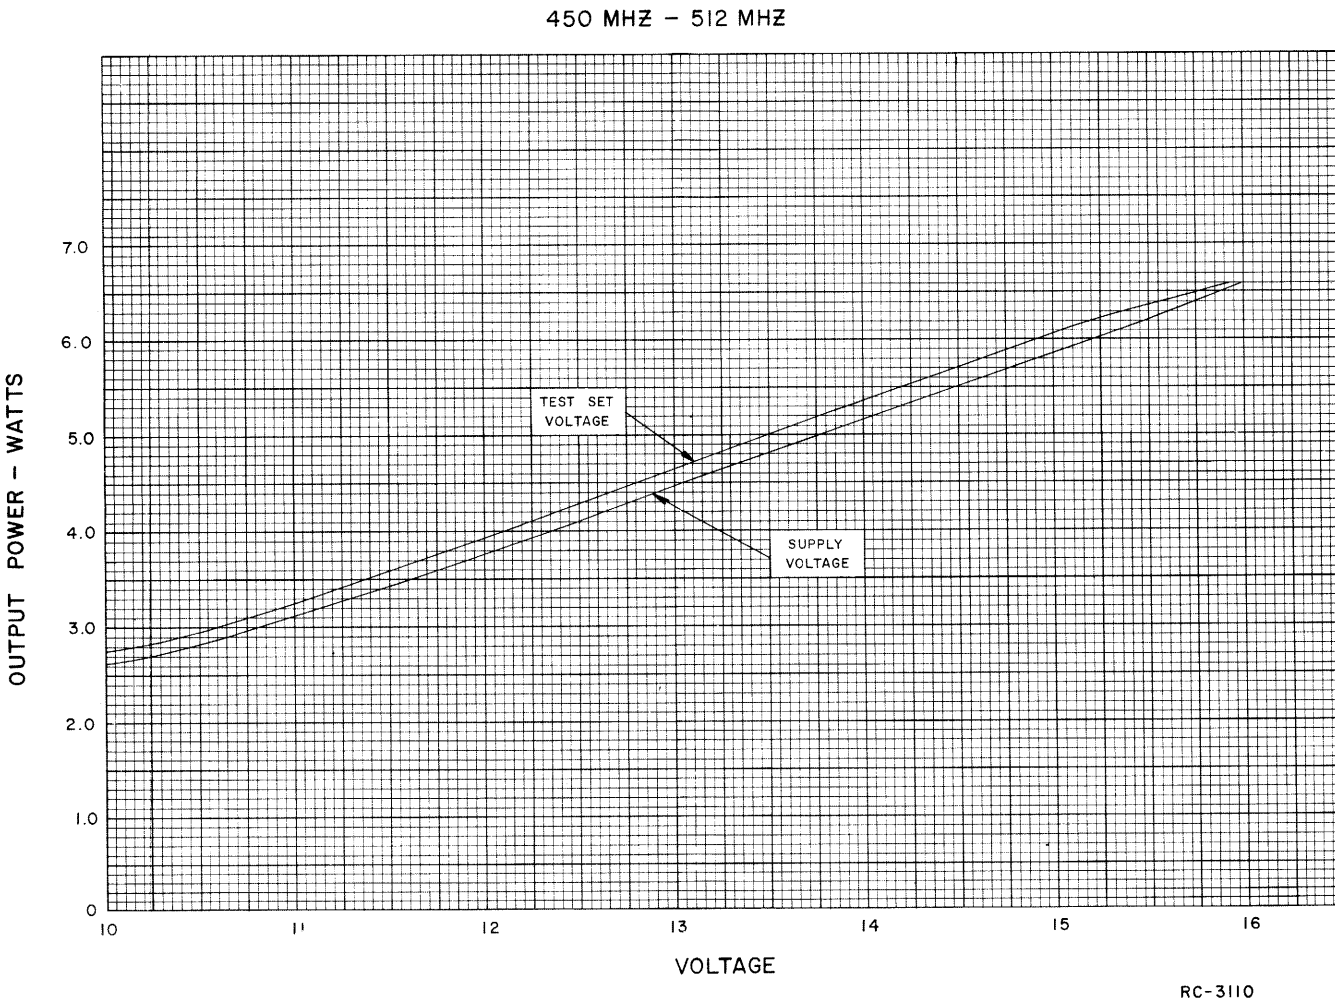


Figure 5 - 450-512 MHz Power Output Setting Chart

ALIGNMENT PROCEDURE

450—512 MHz,
5-WATT TRANSMITTER

TEST PROCEDURES

These Test Procedures are designed to assist you in servicing a transmitter that is operating--but not properly. Problems encountered could be low power output, tone and voice deviation, defective audio sensitivity, and modulator adjust control set too high. Once a defect is pin-pointed,

refer to the "Service Check" and the additional corrective measures included in the Transmitter Troubleshooting Procedure. Before starting with the Transmitter Test Procedures, be sure the transmitter is tuned and aligned to the proper operating frequency.

CAUTION

Before bench testing the Custom MVP Mobile Radio, be sure of the output voltage characteristics of your bench power supply.

To protect the transmitter power output transistors from possible instant destruction, the following input voltages must not be exceeded:

Transmitter unkeyed: 20 Volts
 Transmitter keyed (50 ohm resistive load): 18 Volts
 Transmitter keyed (no load or non-resistive load): 15.5 Volts

These voltages are specified at the normal vehicle battery terminals of the radio and take the voltage drop of standard cables into account. The voltage limit shown for a non-optimum load is for "worst case" conditions. For antenna mismatches likely to be encountered in practice, the actual limit will approach the 18 Volt figure.

Routine transmitter tests should be performed at EIA Standard Test Voltages (13.8 VDC for loads of 0 to 6 amperes). Input voltages must not exceed the limits shown, even for transient peaks of short duration.

Many commonly used bench power supplies cannot meet these requirements for load regulation and transient voltage suppression. Bench supplies which employ "brute force" regulation and filtering (such as Lapp Model 73) may be usable when operated in parallel with a 12-Volt automotive storage battery.

TEST EQUIPMENT REQUIRED

for test hookup as shown:

- | | | |
|--|---------------------|--------------------------------|
| 1. Wattmeter similar to: | 2. VTVM similar to: | 3. Audio Generator similar to: |
| Bird # 43 | Triplet # 850 | GE Model 4EX6A10 |
| Jones # 711N | Heath # IM-21 | |
| 4. Deviation Meter (with a .75 kHz scale) similar to: Measurements # 720 | | |

POWER MEASUREMENT

TEST PROCEDURE

1. Connect transmitter output from the antenna jack to the wattmeter through a 50-ohm coaxial cable. Make sure the wattmeter is terminated into a 50-ohm load.
2. Key the transmitter and check the wattmeter for the desired power output.

SERVICE CHECK

Check the setting of the Power Adjust Control (R13).

Refer to the QUICK CHECKS on the Transmitter Troubleshooting Procedure.


VOICE DEVIATION, SYMMETRY AND AUDIO SENSITIVITY

TEST PROCEDURE

1. Connect the test equipment to the transmitter as shown.
2. In radios equipped with Channel Guard set Channel Guard Mod Adjust for zero tone deviation.
3. Set the audio generator output to 1.0 VOLTS RMS and frequency to 1 kHz.
4. Key the transmitter and adjust deviation meter to carrier frequency.
5. Deviation reading should be 4.5 kHz in radios without Channel Guard, and ± 3.75 kHz with Channel Guard.
6. If necessary, adjust MOD ADJUST control R104 for the proper deviation on plus (+) or minus (-) deviation, whichever is greater.

NOTES: -- Custom MVP transmitters are adjusted for 4.5 kHz deviation at the factory. The factory adjustment will prevent the transmitter from deviating more than 5.0 kHz under the worst conditions of frequency, voltage and temperature.

7. If the deviation reading plus (+) or minus (-) differs by more than 0.5 kHz, recheck Step 1 as shown in the Transmitter Alignment Chart.
8. Check audio sensitivity by reducing generator output until deviation falls to 3.0 kHz for radios without Channel Guard, or 2.25 kHz for radios with Channel Guard. Voltage should be LESS than 120 millivolts. If not, refer to the Transmitter Troubleshooting Procedure.

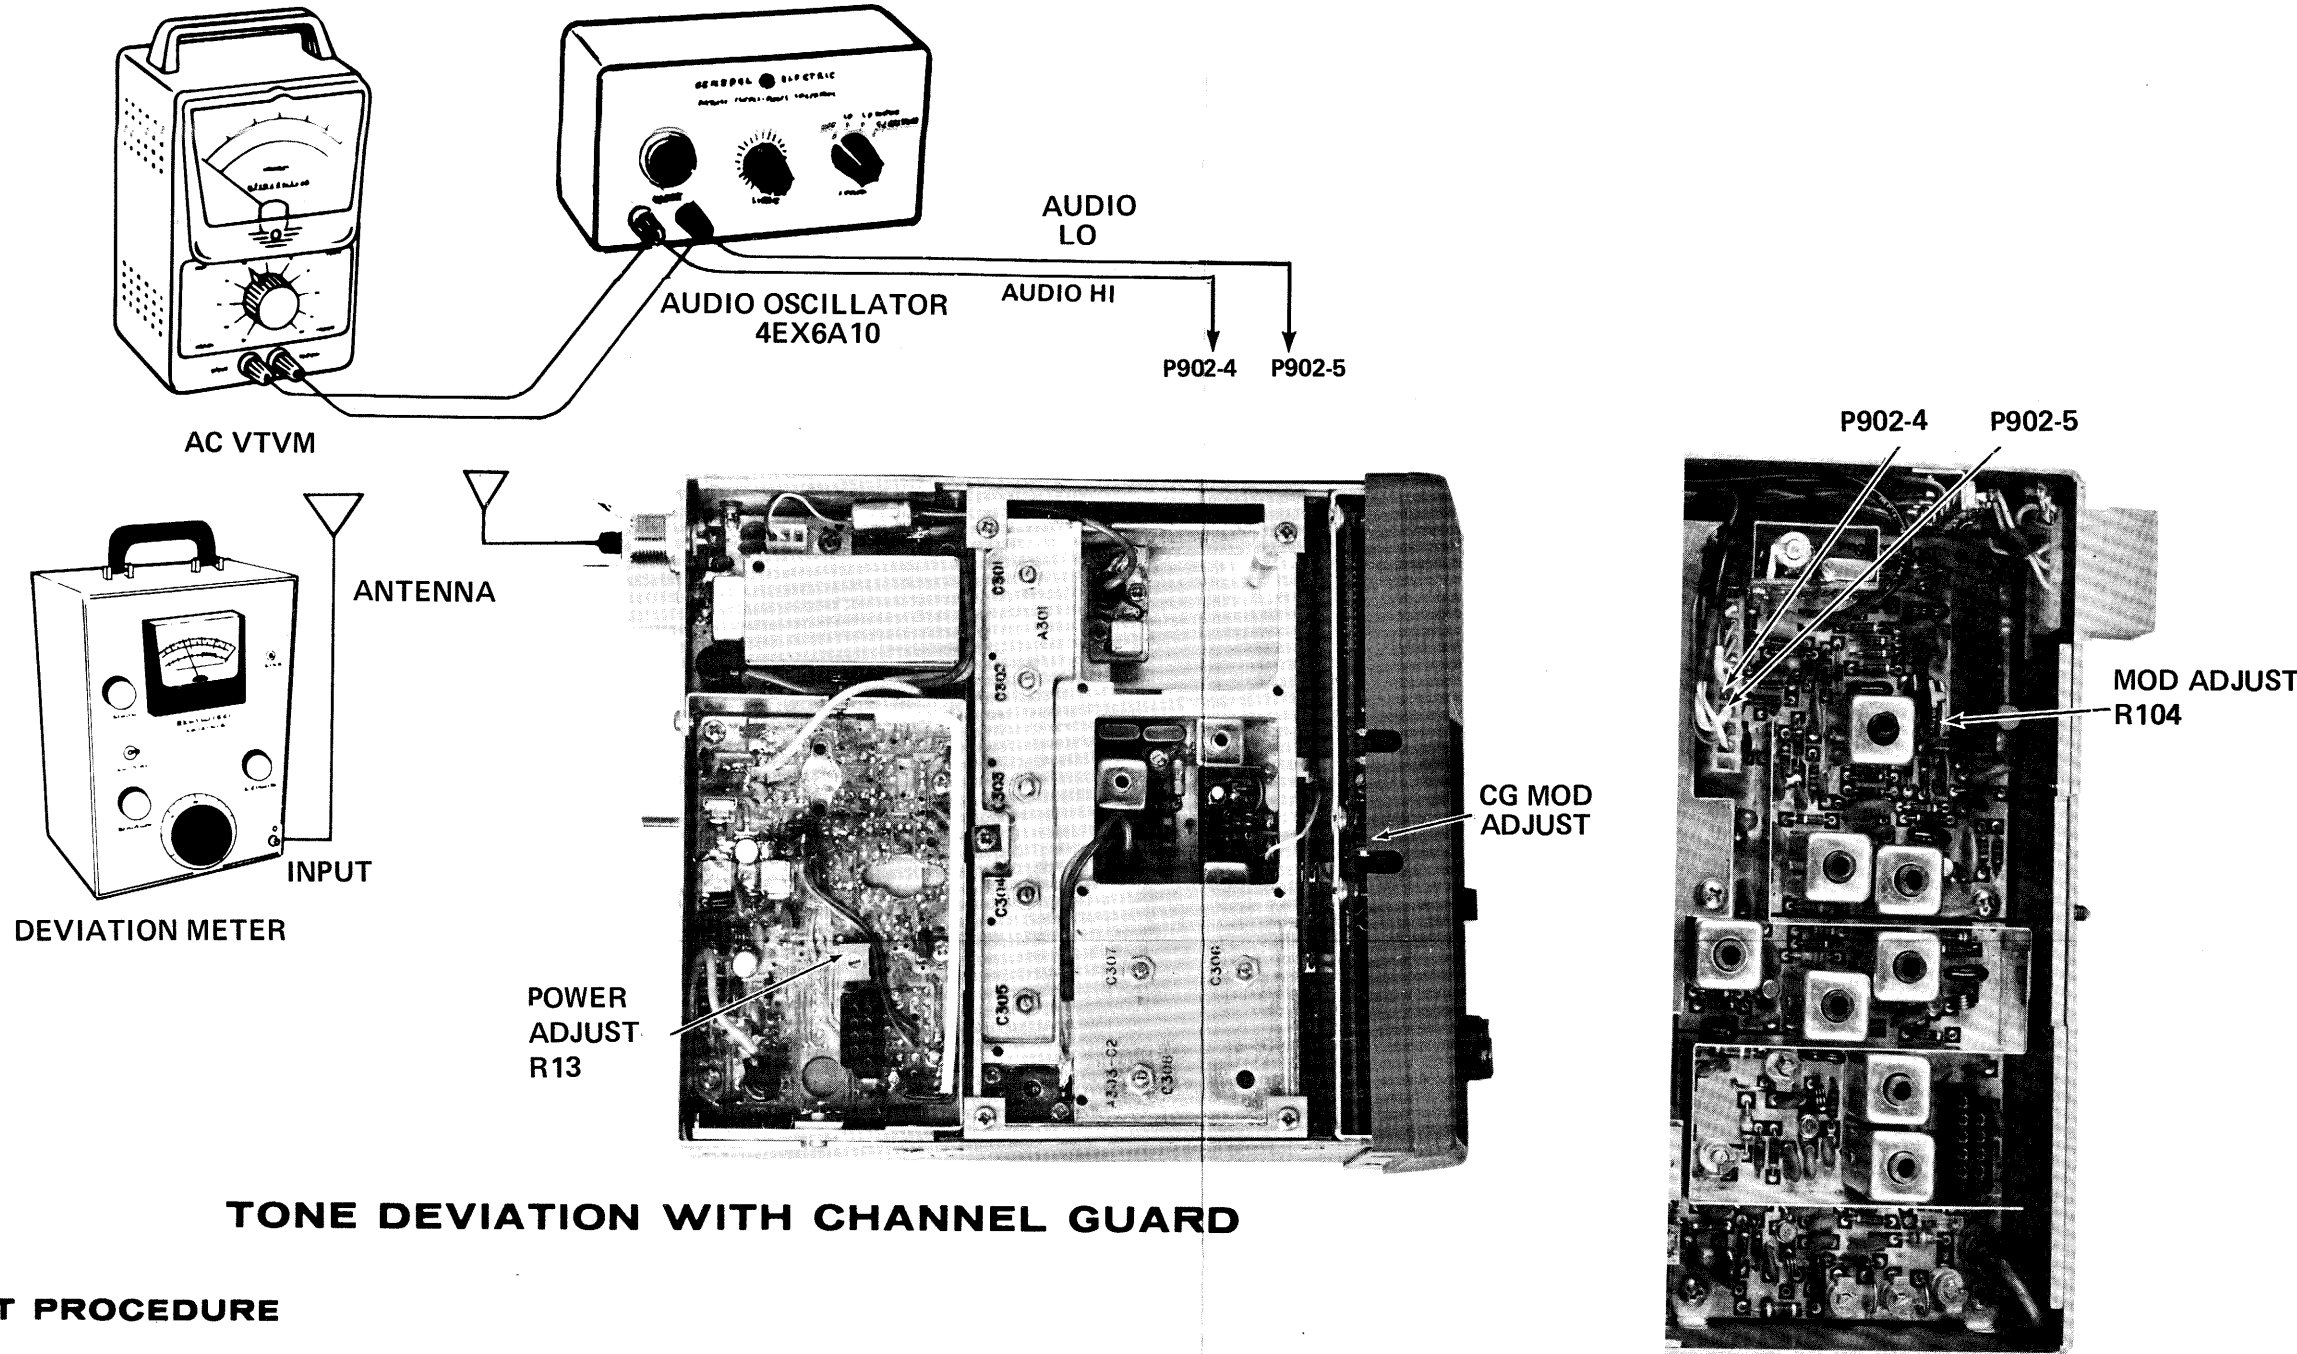

TONE DEVIATION WITH CHANNEL GUARD

TEST PROCEDURE

1. Set up the deviation meter and monitor the output of the transmitter.
2. Remove the 1000 Hz signal from the audio generator.
3. Key the transmitter and check for 0.75 kHz deviation. If the reading is low or high, adjust Channel Guard MOD ADJUST for a reading of 0.75 kHz.

NOTES:


1. On units supplied with Channel Guard, the Phase Modulator Tuning should be adjusted carefully to insure proper performance. (Refer to Steps 1 and 2 in the Transmitter Alignment Chart).
2. The Tone Deviation Test Procedures should be repeated every time the Tone Frequency is changed.

STEP I - QUICK CHECKS

METER POSITION GE TEST SET	PROBABLE DEFECTIVE STAGE		
	HIGH METER READING	LOW METER READING	ZERO METER READING
EXCITER			
B (MULT-1)	Q102, Q103, T102	Q102, Q103, T102	Q102, Q103, T102
C (MULT-2)	Q104, T105	T102, T103, Q104, T104	T102, T104, Q104, T105, T103
D (MULT-3)	Q105, T107	T105, T106, Q105	T105, T106, Q105, T107
F (MULT-4)	Q106, C155	Q106, T107, T108	Q106, T107, T108, L104
G (AMPL-1)	Q107, L113	Q107, C155, C157	Q107, C155, C157
A (Power Out)	W201	CR181, C190, Q107	CR181, C190, Q107, C167, C171, C175
POWER AMPLIFIER			
C (Power Control & PA)	Q1, Q202, Q215, R13	Q1, Q202, Q215, R13	Q215, R13
"D" (AMPL-1 INPUT)		Low Output from Exciter, CR1, C5	No output from Exciter, CR1, C5
"F" (PA CURRENT)	Q202	Low Output from Q1	Q202, Q1. Check Pos. C & D


STEP 3
CHECK AUDIO AC VOLTAGES

EQUIPMENT REQUIRED
● AUDIO OSCILLATOR
● AC VTVM

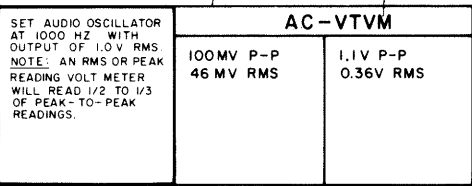



STEP 4
AUDIO & OSC WAVEFORMS

EQUIPMENT REQUIRED
● AUDIO OSCILLATOR
● OSCILLOSCOPE

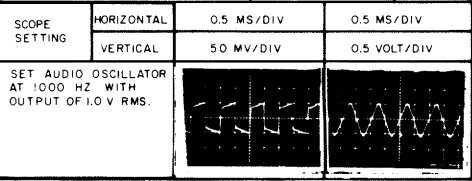

STEP 2
CHECK TYPICAL DC VOLTAGES

EQUIPMENT REQUIRED
● G.E. TEST MODEL 4E3A11
OR
● 20,000 OHM-PER-VOLT METER
NOTE: ALL DC READINGS TAKEN WITH THE TRANSMITTER KEYS.

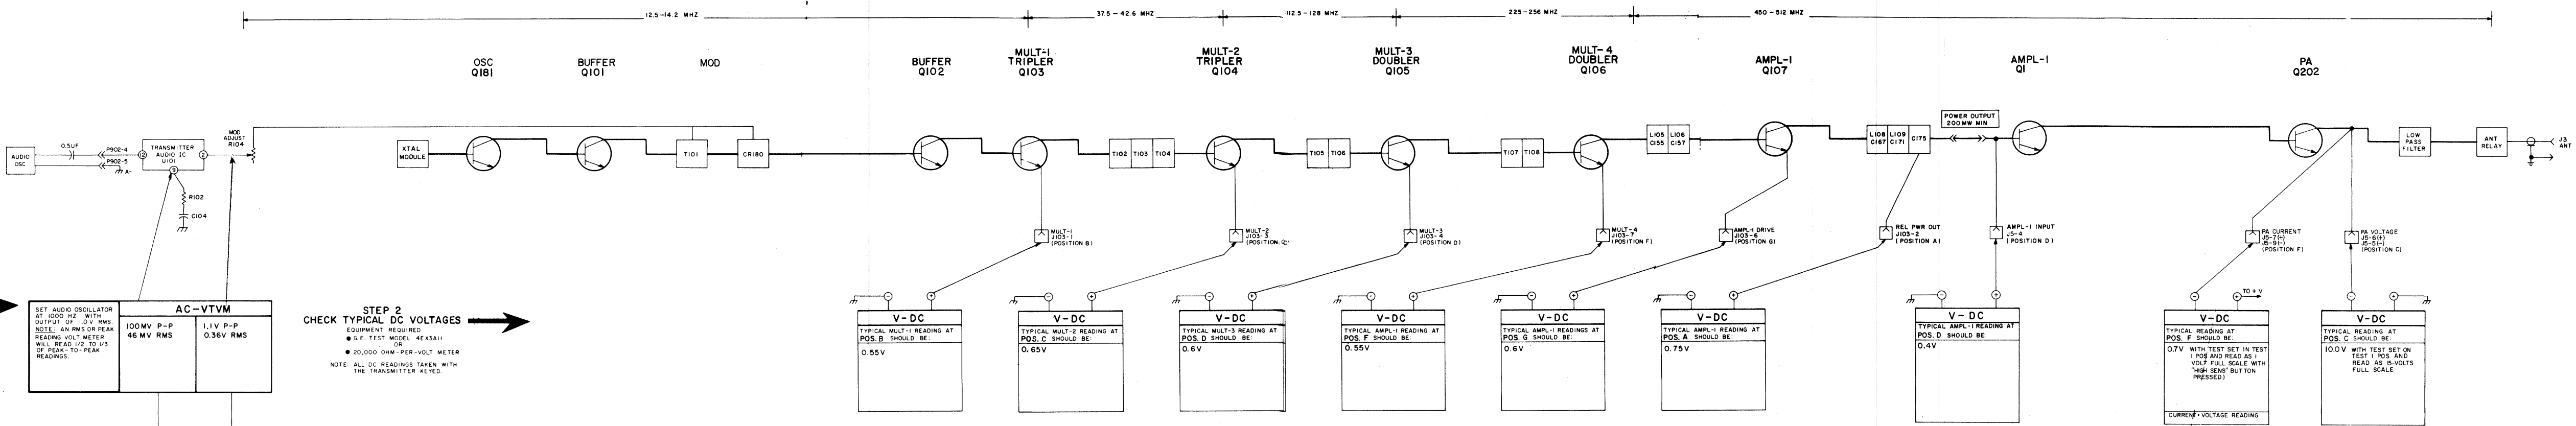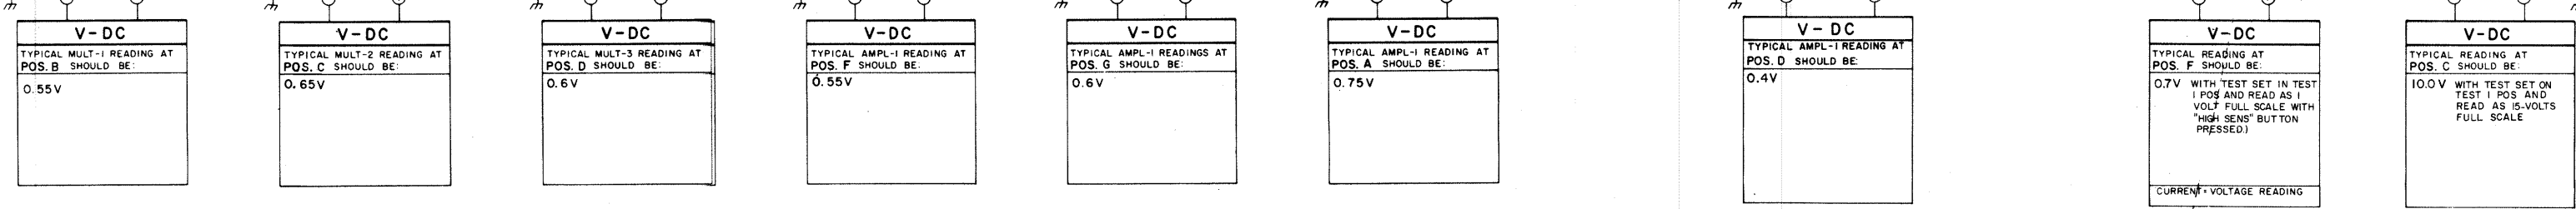

TROUBLESHOOTING PROCEDURE

END OF DOCUME

450-512 MHz, 5-WATT TRANSMITTER